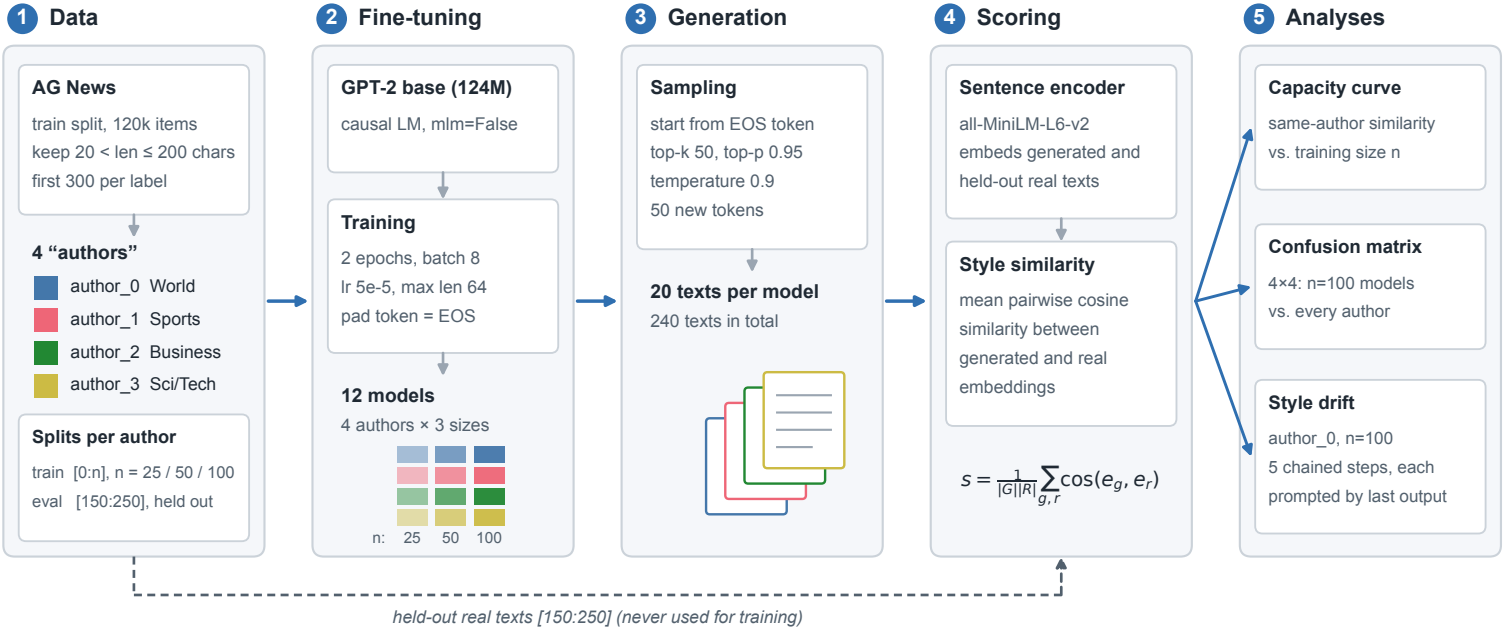

1 Data
AG News
train split, 120k items
keep 20 < len ≤ 200 chars
first 300 per label
4 “authors”
author_0 World
author_1 Sports
author_2 Business
author_3 Sci/Tech
Splits per author
train [0:n], n = 25 / 50 / 100
eval [150:250], held out
2 Fine-tuning
GPT-2 base (124M)
causal LM, mlm=False
Training
2 epochs, batch 8
lr 5e-5, max len 64
pad token = EOS
12 models
4 authors × 3 sizes
n: 25 50 100
3 Generation
Sampling
start from EOS token
top-k 50, top-p 0.95
temperature 0.9
50 new tokens
20 texts per model
240 texts in total
4 Scoring
Sentence encoder
all-MiniLM-L6-v2
embeds generated and
held-out real texts
Style similarity
mean pairwise cosine
similarity between
generated and real
embeddings
$s = \frac{1}{|G||R|}\sum_{g,r}\cos(e_g, e_r)$
5 Analyses
Capacity curve
same-author similarity
vs. training size n
Confusion matrix
4×4: n=100 models
vs. every author
Style drift
author_0, n=100
5 chained steps, each
prompted by last output
held-out real texts [150:250] (never used for training)