

In []: `#omkar shinde`


```
In [1]: import pandas as pd
import numpy as np
import seaborn as sns
import matplotlib.pyplot as plt

df = pd.read_csv("C:/Users/avcoe/Downloads/train.csv")
df
```

Out[1]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.250
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.283
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.925
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.100
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.050
...
886	887	0	2	Montvila, Rev. Juozas	male	27.0	0	0	211536	13.000
887	888	1	1	Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.000
888	889	0	3	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.450
889	890	1	1	Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.000
890	891	0	3	Dooley, Mr. Patrick	male	32.0	0	0	370376	7.750

891 rows × 12 columns



In [2]: `df.head()`

Out[2]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250
3	4	1	1	Futelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500

In [3]: `cols = df.columns`
`cols`

Out[3]: Index(['PassengerId', 'Survived', 'Pclass', 'Name', 'Sex', 'Age', 'SibSp', 'Parch', 'Ticket', 'Fare', 'Cabin', 'Embarked'], dtype='object')

In [5]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId     891 non-null    int64
1   Survived        891 non-null    int64
2   Pclass          891 non-null    int64
3   Name            891 non-null    object
4   Sex             891 non-null    object
5   Age            714 non-null    float64
6   SibSp           891 non-null    int64
7   Parch           891 non-null    int64
8   Ticket          891 non-null    object
9   Fare           891 non-null    float64
10  Cabin           204 non-null    object
11  Embarked        889 non-null    object
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

In [6]: `df.describe()`

Out[6]:

	PassengerId	Survived	Pclass	Age	SibSp	Parch	Fare
count	891.000000	891.000000	891.000000	714.000000	891.000000	891.000000	891.000000
mean	446.000000	0.383838	2.308642	29.699118	0.523008	0.381594	32.204208
std	257.353842	0.486592	0.836071	14.526497	1.102743	0.806057	49.693429
min	1.000000	0.000000	1.000000	0.420000	0.000000	0.000000	0.000000
25%	223.500000	0.000000	2.000000	20.125000	0.000000	0.000000	7.910400
50%	446.000000	0.000000	3.000000	28.000000	0.000000	0.000000	14.454200
75%	668.500000	1.000000	3.000000	38.000000	1.000000	0.000000	31.000000
max	891.000000	1.000000	3.000000	80.000000	8.000000	6.000000	512.329200

In [7]: `df.isnull().sum()`

Out[7]: PassengerId 0
Survived 0
Pclass 0
Name 0
Sex 0
Age 177
SibSp 0
Parch 0
Ticket 0
Fare 0
Cabin 687
Embarked 2
dtype: int64

In []: *#fill missing values with avg of age*

In [8]: `average_Age= df['Age'].mean()
df['Age']= df['Age'].replace(np.nan, average_Age)`


In [9]: `df.isnull().sum()`

Out[9]: PassengerId 0
Survived 0
Pclass 0
Name 0
Sex 0
Age 0
SibSp 0
Parch 0
Ticket 0
Fare 0
Cabin 687
Embarked 2
dtype: int64

In []: *#bivariate /multivarivate*


```
In [10]: sns.boxplot(x=df['Sex'], y=df['Age'])
```

```
Out[10]: <Axes: xlabel='Sex', ylabel='Age'>
```

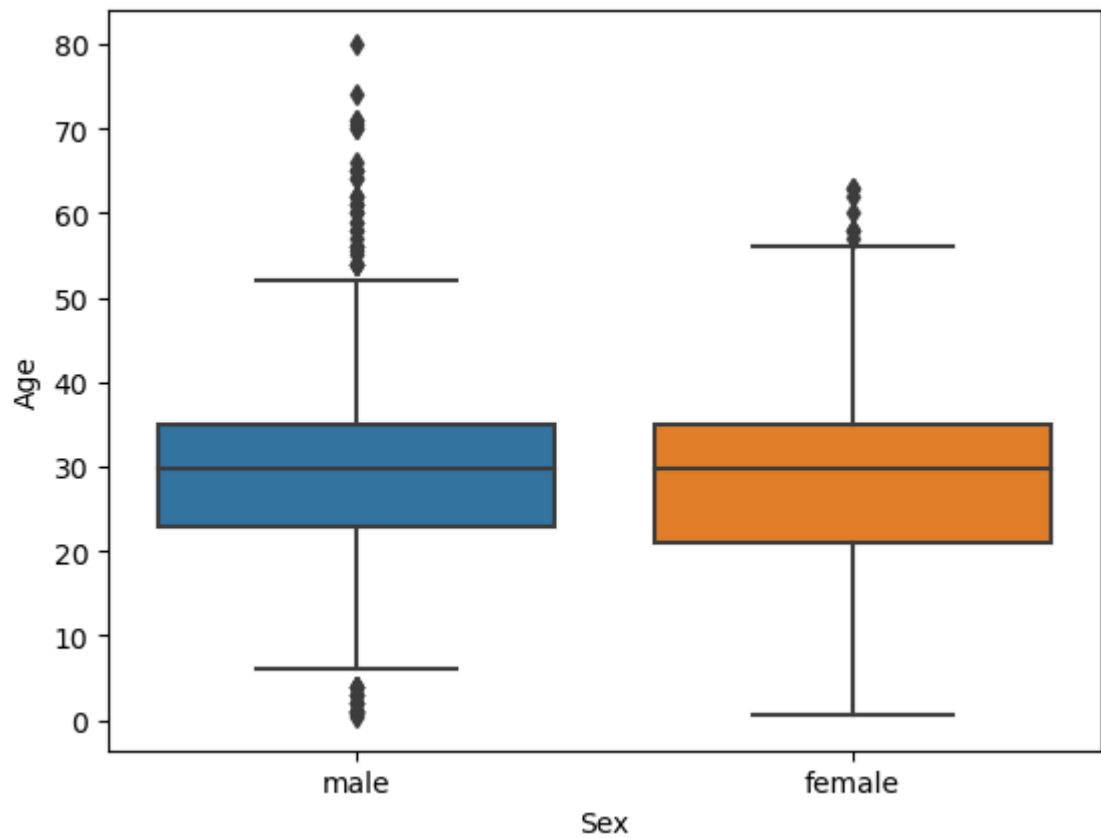

```
In [11]: sns.boxplot(x=df['Sex'], y=df['Age'], hue=df['Survived'])
```

```
Out[11]: <Axes: xlabel='Sex', ylabel='Age'>
```

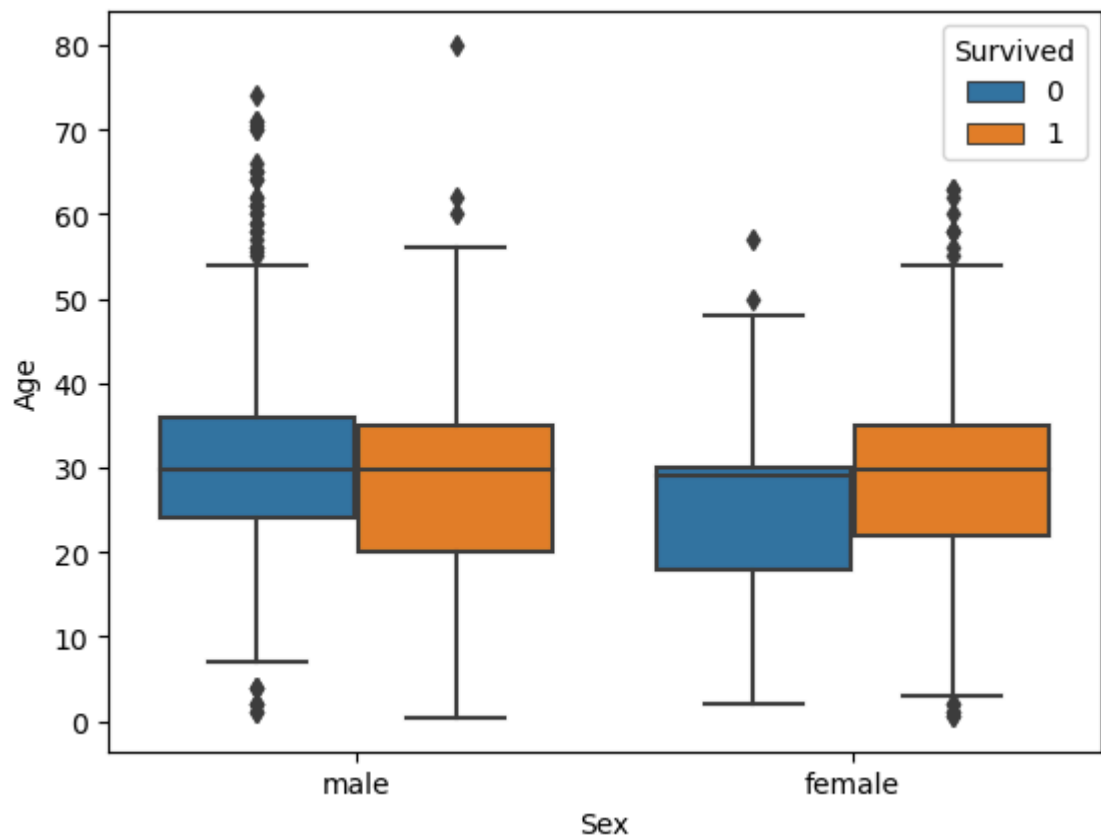

```
In [ ]:
```