


One repetition of the SRQFM / BSCM / SG-BSCM feature map (4-qubit example, qubit-pair (0,1) shown)

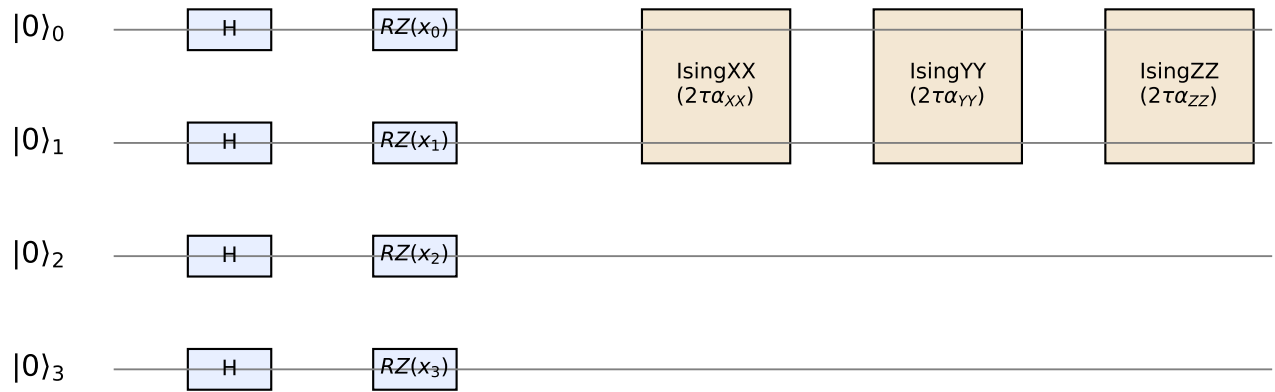

Per repetition r : $H \rightarrow RZ(x_i) \rightarrow \prod \text{IsingXX} \cdot \text{IsingYY} \cdot \text{IsingZZ}$ over connectivity pairs

SRQFM: only $\text{IsingZZ}(\sin^2((x_i - x_j)/2))$. BSCM-uniform: only XX, YY ($\alpha_{zz} \equiv 0$). SG-BSCM: above $\times \sin^2((x_i - x_j)/2)$.