


Langflow Input schema

Navigate to input Schema from Api access -> Input schema

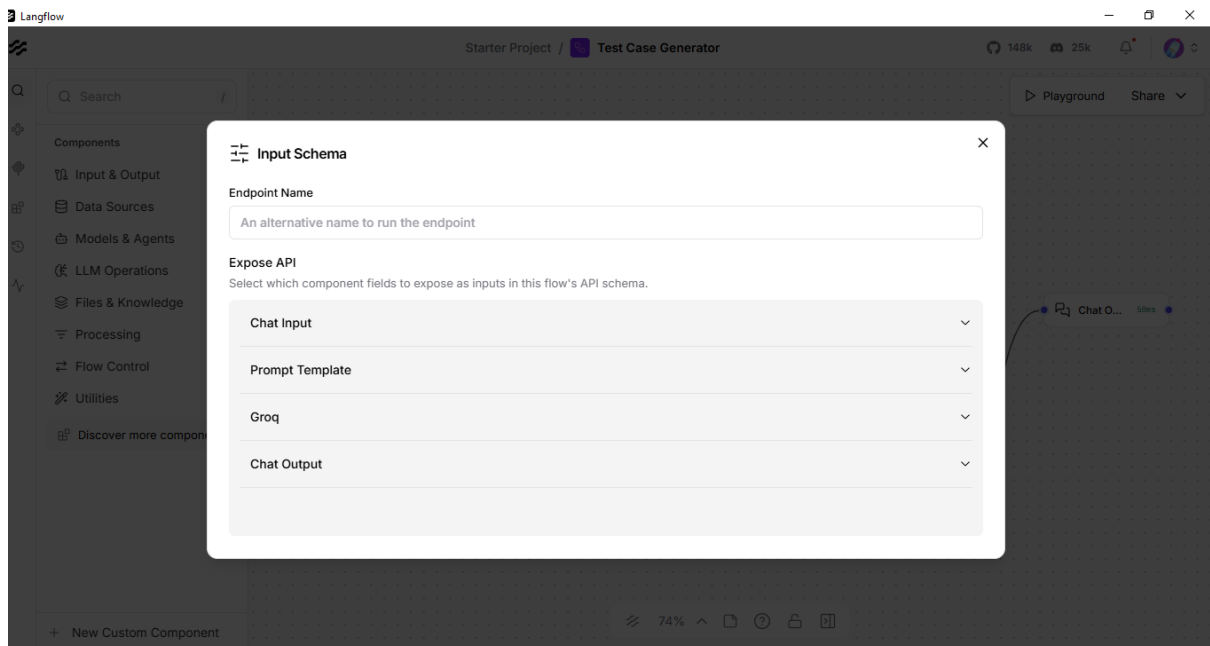

Pyload before adding the input schema

```
import requests
```

```
import os
```

```
import uuid
```

```
api_key = 'YOUR_API_KEY_HERE'
```

```
url = "http://localhost:7860/api/v1/run/a5ea2660-0a0f-4cb5-a00c-23020151142b" # The complete  
API endpoint URL for this flow
```

```
# Request payload configuration
```

```
payload = {  
    "output_type": "chat",  
    "input_type": "chat",  
    "input_value": "hello world!"  
}
```

```
payload["session_id"] = str(uuid.uuid4())
```

```
headers = {"x-api-key": api_key}
```

try:

```
# Send API request
response = requests.request("POST", url, json=payload, headers=headers)
response.raise_for_status() # Raise exception for bad status codes

# Print response
print(response.text)
```

except requests.exceptions.RequestException as e:

```
    print(f"Error making API request: {e}")
```

except ValueError as e:

```
    print(f"Error parsing response: {e}")
```

Add the input schema :

 **Input Schema** ×

Endpoint Name

Expose API
Select which component fields to expose as inputs in this flow's API schema.

	Store Messages	Store the message in the history.	☒
	Sender Type	Type of sender.	User
	Sender Name	Name of the sender.	User
	Session ID	The session ID of the chat. If empty, the current session ID parameter will be used.	Type something...
	Context ID	The context ID of the chat. Adds an extra layer to the local	Type something...

Input Schema

Endpoint Name

An alternative name to run the endpoint

Expose API

Select which component fields to expose as inputs in this flow's API schema.

	Groq API Base	Base URL path for API requests, leave blank if not using a proxy or service emulator.	https://api.groq.com
	Max Output Tokens	The maximum number of tokens to generate.	Integer number
	Temperature	Run inference with this temperature. Must be in the closed interval [0.0, 1.0].	0.10 Precise Creative
		Number of chat completions to generate for each prompt. Note	0

Input schema Added:

</> API access

Input Schema (2)

API access requires an API key. You can [create an API key](#) in settings.

Python

JavaScript

cURL

```

5 api_key = 'YOUR_API_KEY_HERE'
6 url = "http://localhost:7860/api/v1/run/a5ea2660-0a0f-4cb5-a00c-23020151142b" # The complete API endpoint URL
7
8 # Request payload configuration
9 payload = {
10     "output_type": "chat",
11     "input_type": "chat",
12     "input_value": "hello world!",
13     "tweaks": {
14         "ChatInput-FGw2E": {
15             "sender_name": "User"
16         },
17         "GroqModel-4A7g6": {
18             "temperature": 0.1
19         }
20     }
21 }

```

Payload after adding the input schema

import requests

import os

import uuid

api_key = 'YOUR_API_KEY_HERE'

```
url = "http://localhost:7860/api/v1/run/a5ea2660-0a0f-4cb5-a00c-23020151142b" # The complete
API endpoint URL for this flow
```

```
# Request payload configuration
```

```
payload = {
    "output_type": "chat",
    "input_type": "chat",
    "input_value": "hello world!",
    "tweaks": {
        "ChatInput-FGw2E": {
            "sender_name": "User"
        },
        "GroqModel-4A7g6": {
            "temperature": 0.1
        }
    }
}
payload["session_id"] = str(uuid.uuid4())
```

```
headers = {"x-api-key": api_key}
```

```
try:
```

```
    # Send API request
```

```
    response = requests.request("POST", url, json=payload, headers=headers)
```

```
    response.raise_for_status() # Raise exception for bad status codes
```

```
    # Print response
```

```
    print(response.text)
```


```
except requests.exceptions.RequestException as e:
```

```
    print(f"Error making API request: {e}")
```

except ValueError as e:

```
print(f"Error parsing response: {e}")
```

Adding Endpoint Name

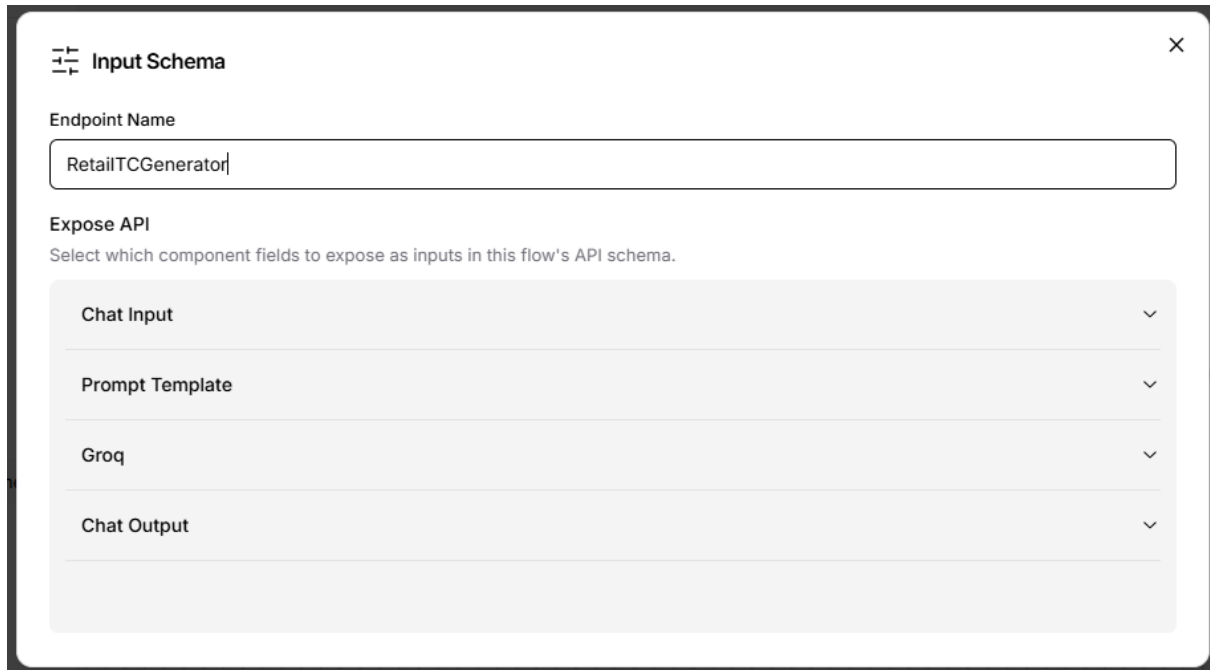

Input Schema

Endpoint Name


RetailTCGenerator

Expose API

Select which component fields to expose as inputs in this flow's API schema.

- Chat Input
- Prompt Template
- Groq
- Chat Output

Endpoint URL :

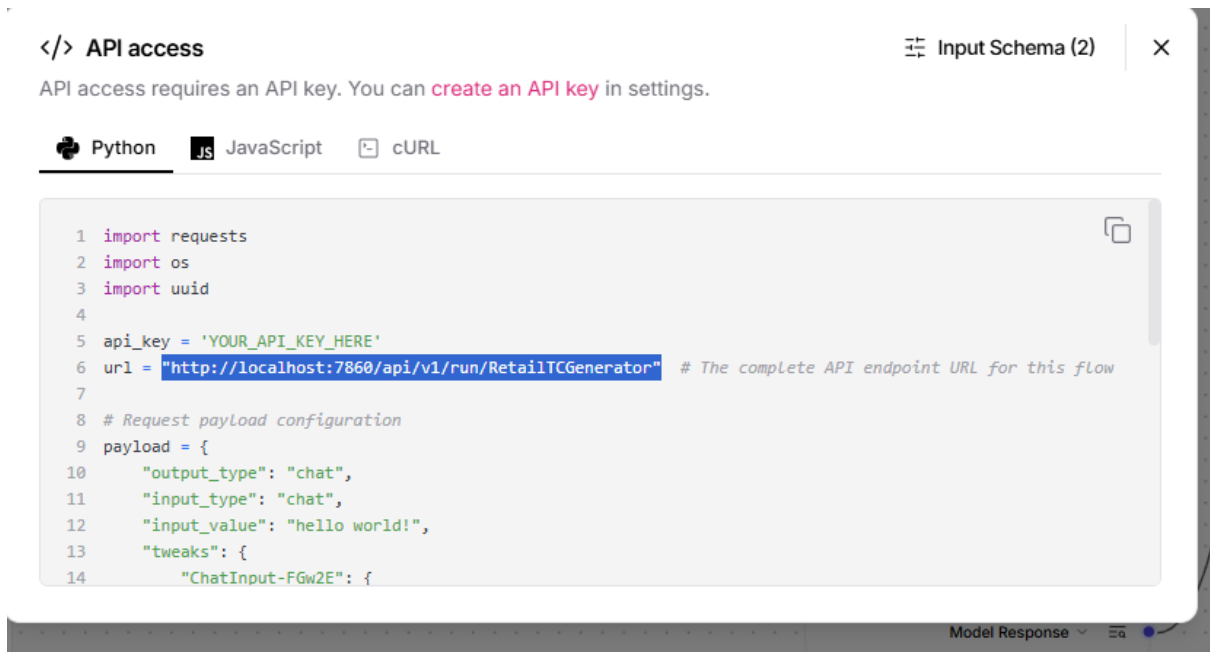

</> API access

API access requires an API key. You can [create an API key](#) in settings.

Python JavaScript cURL

```
1 import requests
2 import os
3 import uuid
4
5 api_key = 'YOUR_API_KEY_HERE'
6 url = "http://localhost:7860/api/v1/run/RetailTCGenerator" # The complete API endpoint URL for this flow
7
8 # Request payload configuration
9 payload = {
10     "output_type": "chat",
11     "input_type": "chat",
12     "input_value": "hello world!",
13     "tweaks": {
14         "ChatInput-FGw2E": {
```

Running the API in postman with the new endpoint name

Prathiba · Prathina's Team

Enterprise Trial ending in 25 days

Langflow API > LangflowAPI Copy

POST `http://localhost:7860/api/v1/run/RetailTCGenerator`

Overview Params Authorization Headers 9 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "Test Case Generator for Retail"
5 }
```

Body Cookies Headers 4 Test Results

200 OK · 1.44 s · 13.29 KB

Save Response

JSON Preview Visualize

```
1 {
2   "session_id": "a5ea2660-0a0f-4cb5-a00c-23020151142b",
3   "outputs": [
4     {
5       "inputs": {
6         "input_value": "Test Case Generator for Retail"
7       },
8       "outputs": [
9         {
10          "results": {
11            "message": {
12              "text_key": "text",
13              "data": {
14                "timestamp": "2026-05-07 04:22:28 UTC",

```

COLLECTIONS

GenAI-March

GenAI-March-Home Work

JiraCollection

jiraTest Copy

Langflow API

POST LangflowAPI Copy

Langflow API Copy

New Collection

ENVIRONMENTS

SPECS

SDKS

FLAWS

Online Console Terminal

Globals Vault Tools