

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

“JnanaSangama”, Belgaum -590014, Karnataka.



LAB REPORT
on

MACHINE LEARNING (20CS6PCMAL)

Submitted by

Prathik Vittal(1BM19CS117)

in partial fulfillment for the award of the degree of
BACHELOR OF ENGINEERING
in
COMPUTER SCIENCE AND ENGINEERING



B.M.S. COLLEGE OF ENGINEERING
(Autonomous Institution under VTU)
BENGALURU-560019
May-2022 to July-2022

B. M. S. College of Engineering,
Bull Temple Road, Bangalore 560019
(Affiliated To Visvesvaraya Technological University, Belgaum)
Department of Computer Science and Engineering



CERTIFICATE

This is to certify that the Lab work entitled “**MACHINE LEARNING**” carried out by **Prathik Vittal(1BM19CS117)**, who is bonafide student of **B. M. S. College of Engineering**. It is in partial fulfillment for the award of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belgaum during the year 2022. The Lab report has been approved as it satisfies the academic requirements in respect of a **Machine Learning - (20CS6PCMAL)**work prescribed for the said degree.

Saritha A N
Assistant Professor
Department of CSE
BMSCE, Bengaluru

Dr. Jyothi S Nayak
Professor and Head
Department of CSE
BMSCE, Bengaluru

PROGRAM TO IMPLEMENT FIND S ALGORITHM

```
In [28]: import pandas as pd
import numpy as np
```

```
In [29]: data=pd.read_csv('file.csv')
```

```
In [30]: print(data)
```

	SKY	AIRTEMP	HUMIDITY	WIND	WATER	FORECAST	ENJOYSPORT
0	Sunny	Warm	Normal	Strong	Warm	Same	Yes
1	Sunny	Warm	High	Strong	Warm	Same	Yes
2	Rainy	Cold	High	Strong	Warm	Change	No
3	Sunny	Warm	High	Strong	Cool	Change	Yes

```
In [31]: d=np.array(data)[:,-1]
```

```
In [32]: print(d)
```

```
[[ 'Sunny' 'Warm' 'Normal' 'Strong' 'Warm' 'Same']
 [ 'Sunny' 'Warm' 'High' 'Strong' 'Warm' 'Same']
 [ 'Rainy' 'Cold' 'High' 'Strong' 'Warm' 'Change']
 [ 'Sunny' 'Warm' 'High' 'Strong' 'Cool' 'Change']]
```

```
In [33]: target=np.array(data)[:,-1]
```

```
In [34]: print(target)
```

```
['Yes' 'Yes' 'No' 'Yes']
```

```
In [35]: h=[]
```

```
In [36]: for i in range(len(target)):
if(target[i]=='Yes'):
    h=d[i]
    break
```

```
In [37]: print(h)
```

```
['Sunny' 'Warm' 'Normal' 'Strong' 'Warm' 'Same']
```

```
In [42]: for i in range(len(d)):
if(target[i]=='Yes'):
    for j in range(len(d[i])):
        if(d[i][j].strip()==h[j]):
            pass
        else:
            h[j]='?'

print(h)
```

```
['Sunny' 'Warm' '?' 'Strong' '?' '?']
```

PROGRAM TO IMPLEMENT CANDIDATE ELIMINATION ALGORITHM

```
In [121] import numpy as np

In [122] data=pd.read_csv('file.csv')

In [123] print(data)

   SKY AIRTEMP HUMIDITY  WIND WATER FORECAST ENJOYSPORT
0  Sunny   Warm   Normal  Strong  Warm   Same       Yes
1  Sunny   Warm   High    Strong  Warm   Same       Yes
2  Rainy   Cold   High    Strong  Warm   Change      No
3  Sunny   Warm   High    Strong  Cool   Change       Yes

In [124] d=np.array(data)[:,-1]

In [125] print(d)

[['Sunny' 'Warm' 'Normal' 'Strong' 'Warm' 'Same']
 ['Sunny' 'Warm' 'High' 'Strong' 'Warm' 'Same']
 ['Rainy' 'Cold' 'High' 'Strong' 'Warm' 'Change']
 ['Sunny' 'Warm' 'High' 'Strong' 'Cool' 'Change']]

In [126] target=np.array(data)[:,-1]

In [127] print(target)

['Yes' 'Yes' 'No' 'Yes']

In [128] for i in range(len(target)):
          if(target[i].strip()=='Yes'):
              specific_h=d[i].copy()
              break

In [129] generic_h=['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']

In [130] for i in range(len(target)):
          if(target[i].strip()=='Yes'):
              print('INSTANCE IS POSITIVE')
              for j in range(len(d[i])):
                  if specific_h[j].strip()!=d[i][j].strip():
                      specific_h[j]='?'
                      generic_h[j][j]='?'
              print('After Iteration ' + str(i+1) + ' Specific Hypothesis ' + str(specific_h))
              print('After Iteration ' + str(i+1) + ' Generic Hypothesis ' + str(generic_h))
          else:
              print('Instance is negative')
              for j in range(len(d[i])):
                  if specific_h[j].strip()!=d[i][j].strip():
                      generic_h[j][j]=specific_h[j].strip()
                  else:
                      generic_h[j][j]='?'
              print('After Iteration ' + str(i+1) + ' Specific Hypothesis ' + str(specific_h))
              print('After Iteration ' + str(i+1) + ' Generic Hypothesis ' + str(generic_h))

          ind=[i for i,v in enumerate(generic_h) if v==['?', '?', '?', '?', '?', '?']]

          for i in ind:
              generic_h.remove(['?', '?', '?', '?', '?', '?'])

          print('FINAL SPECIFIC HYPOTHESIS ' + str(specific_h))
          print('GENERAL HYPOTHESIS ' + str(generic_h))
```

```
print('FINAL SPECIFIC HYPOTHESIS ' + str(specific_h))
print('GENERAL HYPOTHESIS '+ str(generic_h))
```

```
INSTANCE IS POSITIVE
After Iteration 1 Specific Hypothesis ['Sunny' 'Warm' 'Normal' 'Strong' 'Warm' 'Same']
After Iteration 1 Generic Hypothesis [['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'],
['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
INSTANCE IS POSITIVE
After Iteration 2 Specific Hypothesis ['Sunny' 'Warm' '?' 'Strong' 'Warm' 'Same']
After Iteration 2 Generic Hypothesis [['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'],
['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
Instance is negative
After Iteration 3 Specific Hypothesis ['Sunny' 'Warm' '?' 'Strong' 'Warm' 'Same']
After Iteration 3 Generic Hypothesis [['Sunny', '?', '?', '?', '?', '?'], ['?', 'Warm', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'],
['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
INSTANCE IS POSITIVE
After Iteration 4 Specific Hypothesis ['Sunny' 'Warm' '?' 'Strong' '?' '?']
After Iteration 4 Generic Hypothesis [['Sunny', '?', '?', '?', '?', '?'], ['?', 'Warm', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'],
['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
FINAL SPECIFIC HYPOTHESIS ['Sunny' 'Warm' '?' 'Strong' '?' '?']
GENERAL HYPOTHESIS [['Sunny', '?', '?', '?', '?', '?'], ['?', 'Warm', '?', '?', '?', '?']]
```

1:

1:

PROGRAM TO IMPLEMENT ID-3 ALGORITHM

```
In [ ]: import numpy as np
```

```
In [ ]: import pandas as pd
from sklearn.tree import DecisionTreeClassifier # Import Decision Tree Classifier
from sklearn.model_selection import train_test_split # Import train_test_split function
from sklearn import metrics #Import scikit-learn metrics module for accuracy calculation
```

```
In [4]: col_names = ['pregnant', 'glucose', 'bp', 'skin', 'insulin', 'bmi', 'pedigree', 'age', 'label']
pima = pd.read_csv("/content/drive/MyDrive/diabetes.csv", header=None, names=col_names)
```

```
In [5]: pima.head()
```

```
Out[5]:
```

	pregnant	glucose	bp	skin	insulin	bmi	pedigree	age	label
0	6	148	72	35	0	33.6	0.627	50	1
1	1	85	66	29	0	26.6	0.351	31	0
2	8	183	64	0	0	23.3	0.672	32	1
3	1	89	66	23	94	28.1	0.167	21	0
4	0	137	40	35	168	43.1	2.288	33	1

```
In [6]: feature_cols = ['pregnant', 'insulin', 'bmi', 'age', 'glucose', 'bp', 'pedigree']
X = pima[feature_cols] # Features
y = pima.label # Target variable
```

```
In [7]: X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=2)
```

```
In [8]: clf = DecisionTreeClassifier()
clf = clf.fit(X_train, y_train)
y_pred = clf.predict(X_test)
print("Accuracy:", metrics.accuracy_score(y_test, y_pred))
```


```
clf = clf.fit(X_train, y_train)
y_pred = clf.predict(X_test)
print("Accuracy:", metrics.accuracy_score(y_test, y_pred))
```

Accuracy: 0.7467532467532467

```
In [9]: from sklearn.tree import export_graphviz
from six import StringIO
from IPython.display import Image
import pydotplus

dot_data = StringIO()
export_graphviz(clf, out_file=dot_data,
                filled=True, rounded=True,
                special_characters=True, feature_names = feature_cols, class_names=['0', '1'])
graph = pydotplus.graph_from_dot_data(dot_data.getvalue())
graph.write_png('diabetes.png')
Image(graph.create_png())
```

```
Out[9]:
```

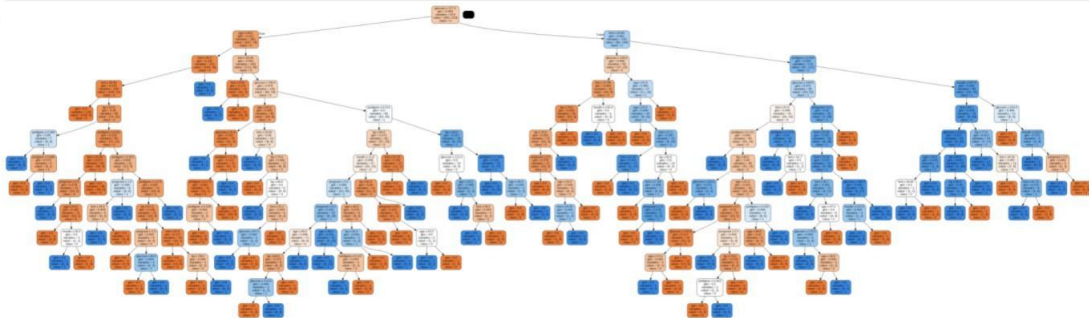

```
In [ ]:
```

PROGRAM TO IMPLEMENT LINEAR REGRESSION

```
In [1]: import numpy as np
import matplotlib.pyplot as plt
import pandas as pd
```

```
In [28]: dataset = pd.read_csv('Salary_Data.csv')
dataset.head()
```

```
Out[28]:
```

	YearsExperience	Salary
0	1.1	39343.0
1	1.3	46205.0
2	1.5	37731.0
3	2.0	43525.0
4	2.2	39891.0

```
In [19]: X = dataset.iloc[:, :-1].values
print(X)

<class 'numpy.ndarray'>
```

```
In [6]: y = dataset.iloc[:, -1].values
```

```
In [10]: dataset.head()
```

```
Out[10]:
```

	YearsExperience	Salary
0	1.1	39343.0
1	1.3	46205.0
2	1.5	37731.0
3	2.0	43525.0
4	2.2	39891.0

```
In [11]: from sklearn.model_selection import train_test_split
```

```
In [12]: X_train, X_test, y_train, y_test = train_test_split(X, y, test_size = 1/3, random_state = 0)
```

```
In [14]: from sklearn.linear_model import LinearRegression
regressor = LinearRegression()
regressor.fit(X_train, y_train)
```

```
Out[14]: LinearRegression(copy_X=True, fit_intercept=True, n_jobs=None, normalize=False)
```

```
In [15]: y_pred = regressor.predict(X_test)
plt.scatter(X_train, y_train, color = 'red')
plt.plot(X_train, regressor.predict(X_train), color = 'blue')
plt.title('Salary vs Experience (Training set)')
plt.xlabel('Years of Experience')
plt.ylabel('Salary')
plt.show()
```

```
In [16]: pd.DataFrame(data={'Actuals': y_test, 'Predictions': y_pred})
```

```
Out[16]:
```

	Actuals	Predictions
0	37731.0	40835.105909
1	122391.0	123079.399408
2	57081.0	65134.556261
3	63218.0	63265.367772
4	116969.0	115602.645454
5	109431.0	108125.891499
6	112635.0	116537.239698
7	55794.0	64199.962017
8	83088.0	76349.687193

no setup...

```
7  55794.0  64199.962017
8  83088.0  76349.687193
9 101302.0 100649.137545
```

```
In [17]: plt.scatter(X_train, y_train, color = 'red')
plt.plot(X_train, regressor.predict(X_train), color = 'blue')
plt.title('Salary vs Experience (Training set)')
plt.xlabel('Years of Experience')
plt.ylabel('Salary')
plt.show()
```



In []:

PROGRAM TO IMPLEMENT NAIVE BAYES

m/shreenankulkarni907/MACHINE-LEARNING-SEM-6-7/DI0D/main/Naive%20Bayes/Gaussian%20Naive%20Bayes/Naive_Bayes.ipynb

to Setup...

```
In [99]: import csv
import random
import math
import pandas as pd
```

```
In [100]: def loadcsv(filename):
dataset=pd.read_csv(filename)
n=len(dataset['Pregnancies'].values)
dataframe=[]
for i in range(n):
    dataframe.append(dataset.iloc[i].values.tolist())

return dataframe
```

```
In [101]: def splitdataset(dataset, splitratio):
#67% training size
trainsize = int(len(dataset) * splitratio);
trainset = []
copy = list(dataset);
while len(trainset) < trainsize:
#generate indices for the dataset list randomly to pick training data
    index = random.randrange(len(copy));
    trainset.append(copy.pop(index))
return [trainset, copy]
```

```
In [102]: def separatebyclass(dataset):
separated = {}
for i in range(len(dataset)):
    vector = dataset[i]
    if (vector[-1] not in separated):
        separated[vector[-1]] = []
    separated[vector[-1]].append(vector)
return separated
```

```
In [103]: def mean(numbers):
return sum(numbers)/float(len(numbers))
```

```
def stdev(numbers):
avg = mean(numbers)
variance = sum((pow(x-avg,2) for x in numbers))/float(len(numbers)-1)
return math.sqrt(variance)
```

```
In [104]: def summarize(dataset): #creates a dictionary of classes
summaries = [(mean(attribute), stdev(attribute)) for attribute in zip(*dataset)];
del summaries[-1]#excluding labels +ve or -ve
print(summaries[-1])
return summaries
```

```
In [105]: def summarizebyclass(dataset):
separated = separatebyclass(dataset);
# print(separated)
summaries = {}
for classvalue, instances in separated.items():
    summaries[classvalue] = summarize(instances) #summarize is used to cal to mean and std
return summaries
```

```
In [106]: def calculateprobability(x, mean, stdev):
exponent = math.exp(-(math.pow(x-mean,2)/(2*math.pow(stdev,2))))
return (1 / (math.sqrt(2*math.pi) * stdev)) * exponent
```

```
In [107]: def calculateclassprobabilities(summaries, inputvector):
probabilities = {} #probabilities contains the all prob of all class of test data
for classvalue, classsummaries in summaries.items():#class and attribute information as mean and sd
    probabilities[classvalue] = 1
    for i in range(len(classsummaries)):
        mean, stdev = classsummaries[i] #take mean and sd of every attribute for class 0 and 1 seprately
        x = inputvector[i] #testvector's first attribute
        probabilities[classvalue] *= calculateprobability(x, mean, stdev);#use normal dist
return probabilities
```

```
In [108]: def predict(summaries, inputvector): #training and test data is passed
probabilities = calculateclassprobabilities(summaries, inputvector)
# print(probabilities)
bestLabel, bestProb = None, -1
```

o Setup...

```
In [110]: def getaccuracy(testset, predictions):
          correct = 0
          for i in range(len(testset)):
              if testset[i][1] == predictions[i]:
                  correct += 1
          return (correct/float(len(testset))) * 100.0
```

```
In [111]: def main():
          filename = 'bayes.csv'
          splitratio = 0.67
          dataset = loadcsv(filename);

          trainingset, testset = splitdataset(dataset, splitratio)
          print('Split {0} rows into train={1} and test={2} rows'.format(len(dataset), len(trainingset), len(testset)))
          # prepare model
          summaries = summarizebyclass(trainingset);
          #print(summaries)
          # test model
          predictions = getpredictions(summaries, testset) #find the predictions of test data with the training data
          accuracy = getaccuracy(testset, predictions)
          print('Accuracy of the classifier is : {0}%'.format(accuracy))
```

```
In [112]: main()

Split 767 rows into train=513 and test=254 rows
(37.30107526881721, 10.837657018394614)
(31.38532110091743, 11.32474481914113)
Accuracy of the classifier is : 76.37795275590551%
```

```
In [ ]:
```

rw to Setup...

```
            if bestLabel is None or probability > bestProb:
                bestProb = probability
                bestLabel = classvalue
            return bestLabel
```

```
In [109]: def getpredictions(summaries, testset):
          predictions = []
          for i in range(len(testset)):
              result = predict(summaries, testset[i])
              predictions.append(result)
          # print(result)
          return predictions
```

```
In [110]: def getaccuracy(testset, predictions):
          correct = 0
          for i in range(len(testset)):
              if testset[i][1] == predictions[i]:
                  correct += 1
          return (correct/float(len(testset))) * 100.0
```

```
In [111]: def main():
          filename = 'bayes.csv'
          splitratio = 0.67
          dataset = loadcsv(filename);

          trainingset, testset = splitdataset(dataset, splitratio)
          print('Split {0} rows into train={1} and test={2} rows'.format(len(dataset), len(trainingset), len(testset)))
          # prepare model
          summaries = summarizebyclass(trainingset);
          #print(summaries)
          # test model
          predictions = getpredictions(summaries, testset) #find the predictions of test data with the training data
          accuracy = getaccuracy(testset, predictions)
          print('Accuracy of the classifier is : {0}%'.format(accuracy))
```

```
In [112]: main()

Split 767 rows into train=513 and test=254 rows
```

