



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

Experiment No. 2
Implement Multilayer Perceptron algorithm to simulate XOR gate
Date of Performance: 01/08/23
Date of Submission: 08/08/23



# Vidyavardhini's College of Engineering and Technology


## Department of Artificial Intelligence & Data Science

**Aim:** Implement Multilayer Perceptron algorithm to simulate XOR gate.

**Objective:** Ability to perform experiments on different architectures of multilayer perceptrons.

### Theory:

a multilayer artificial neuron network is an integral part of deep learning. And this lesson will help you with an overview of multilayer ANN along with overfitting and underfitting.

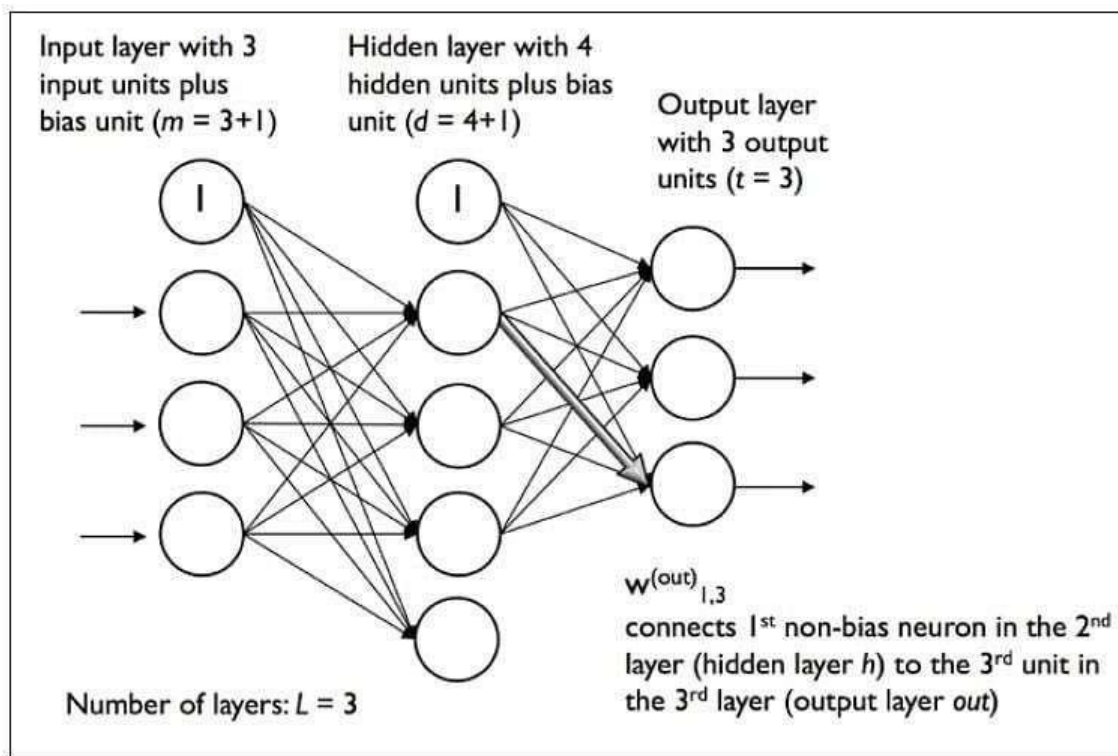

A fully connected multi-layer neural network is called a Multilayer Perceptron (MLP).

At has 3 layers including one hidden layer. If it has more than 1 hidden layer, it is called a deep ANN. An MLP is a typical example of a feedforward artificial neural network. In this figure, the  $i$ th activation unit in the  $l$ th layer is denoted as  $a_i(l)$ .



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

The number of layers and the number of neurons are referred to as hyperparameters of a neural network, and these need tuning. Cross-validation techniques must be used to find ideal values for these.

The weight adjustment training is done via backpropagation. Deeper neural networks are better at processing data. However, deeper layers can lead to vanishing gradient problems. Special algorithms are required to solve this issue.

A multilayer perceptron (MLP) is a feed forward artificial neural network that generates a set of outputs from a set of inputs. An MLP is characterized by several layers of input nodes connected as a directed graph between the input nodes connected as a directed graph between the input and output layers. MLP uses backpropagation for training the network. MLP is a deep learning method.

### Code: -

```
import numpy as np

def unitStep(v):
    if v >= 0:
        return 1
    else:
        return 0

def perceptronModel(x, w, b):
    v = np.dot(w, x) + b
    y = unitStep(v)
    return y

def NOT_logicFunction(x):
    wNOT = -1
```



```
bNOT = 0.5
```

```
return perceptronModel(x, wNOT, bNOT)
```

```
def AND_logicFunction(x):
```

```
    w = np.array([1, 1])
```

```
    bAND = -1.5
```

```
    return perceptronModel(x, w, bAND)
```

```
def OR_logicFunction(x):
```

```
    w = np.array([1, 1])
```

```
    bOR = -0.5
```

```
    return perceptronModel(x, w, bOR)
```

```
def XOR_logicFunction(x):
```

```
    y1 = AND_logicFunction(x)
```

```
    y2 = OR_logicFunction(x)
```

```
    y3 = NOT_logicFunction(y1)
```

```
    final_x = np.array([y2, y3])
```

```
    finalOutput = AND_logicFunction(final_x)
```

```
    return finalOutput
```

```
test1 = np.array([0, 1])
```

```
test2 = np.array([1, 1])
```

```
test3 = np.array([0, 0])
```

```
test4 = np.array([1, 0])
```

```
print("XOR({}, {}) = {}".format(0, 1, XOR_logicFunction(test1)))
```

```
print("XOR({}, {}) = {}".format(1, 1, XOR_logicFunction(test2)))
```

```
print("XOR({}, {}) = {}".format(0, 0, XOR_logicFunction(test3)))
```

```
print("XOR({}, {}) = {}".format(1, 0, XOR_logicFunction(test4)))
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

### Output: -

```
PS C:\Users\admin> & C:/Users/admin/AppData/Local/Microsoft/WindowsApps/python3.11.exe c:/Users/admin/Documents/Priyanshu_ai/xor.py
XOR(0, 1) = 1
XOR(1, 1) = 0
XOR(0, 0) = 0
XOR(1, 0) = 1
PS C:\Users\admin>
```

### Conclusion:

Through these practical I get to know about how to implement the Multilayer Perceptron algorithm to simulate XOR gate which provides insights into the capabilities of neural networks and their ability to handle problems that cannot be solved by linear models.