

EXPERIMENT-8

Aim:

To discover live hosts using Nmap scans (ARP, ICMP, TCP/UDP) on the TryHackMe platform.

Theory:



Nmap (Network Mapper) is a network scanning tool used to discover active hosts and identify open ports and services in a network. It supports different scanning methods, including ARP, ICMP, TCP, and UDP scans.


Procedure:

1. Open the TryHackMe platform and enter the Nmap host discovery room.
2. Start the provided AttackBox or lab environment.
3. Identify the target IP address or network range provided in the lab.
4. Perform host discovery using the following commands on the authorized lab targets.

Scan type	Nmap command
Basic host discovery	<code>nmap -sn TARGET</code>
ARP scan	<code>nmap -PR -sn TARGET</code>
ICMP scan	<code>nmap -PE -sn TARGET</code>
TCP scan	<code>nmap -PS80,443 -sn TARGET</code>
UDP scan	<code>nmap -PU53 -sn TARGET</code>

5. Observe the scan results and identify which hosts are live.
6. Record the discovered IP addresses and the scan method used.

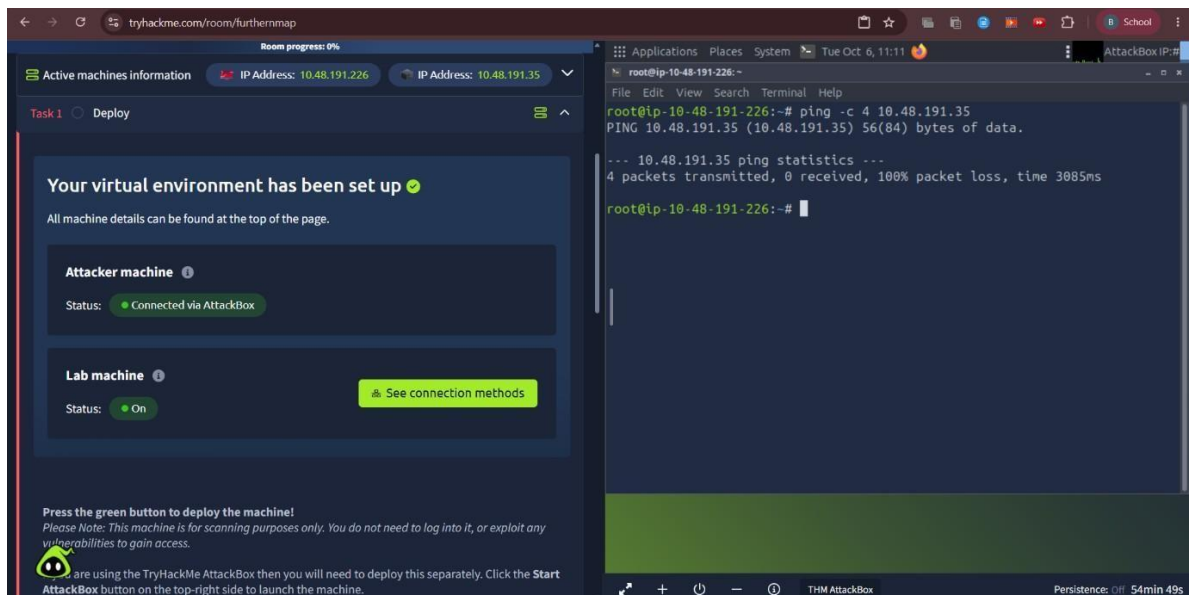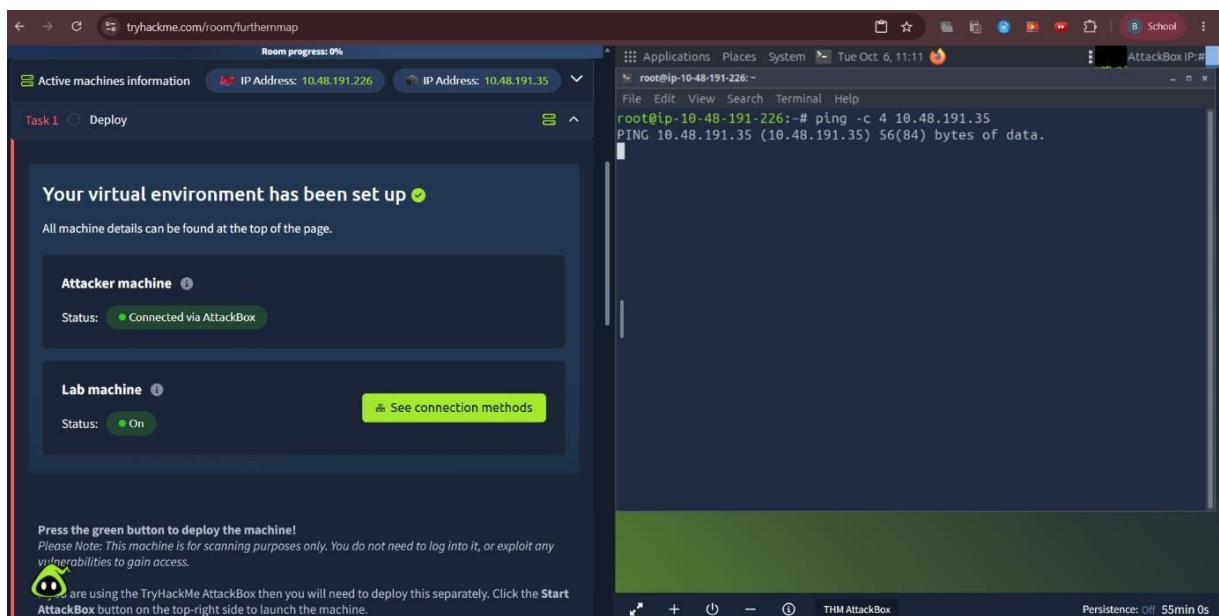

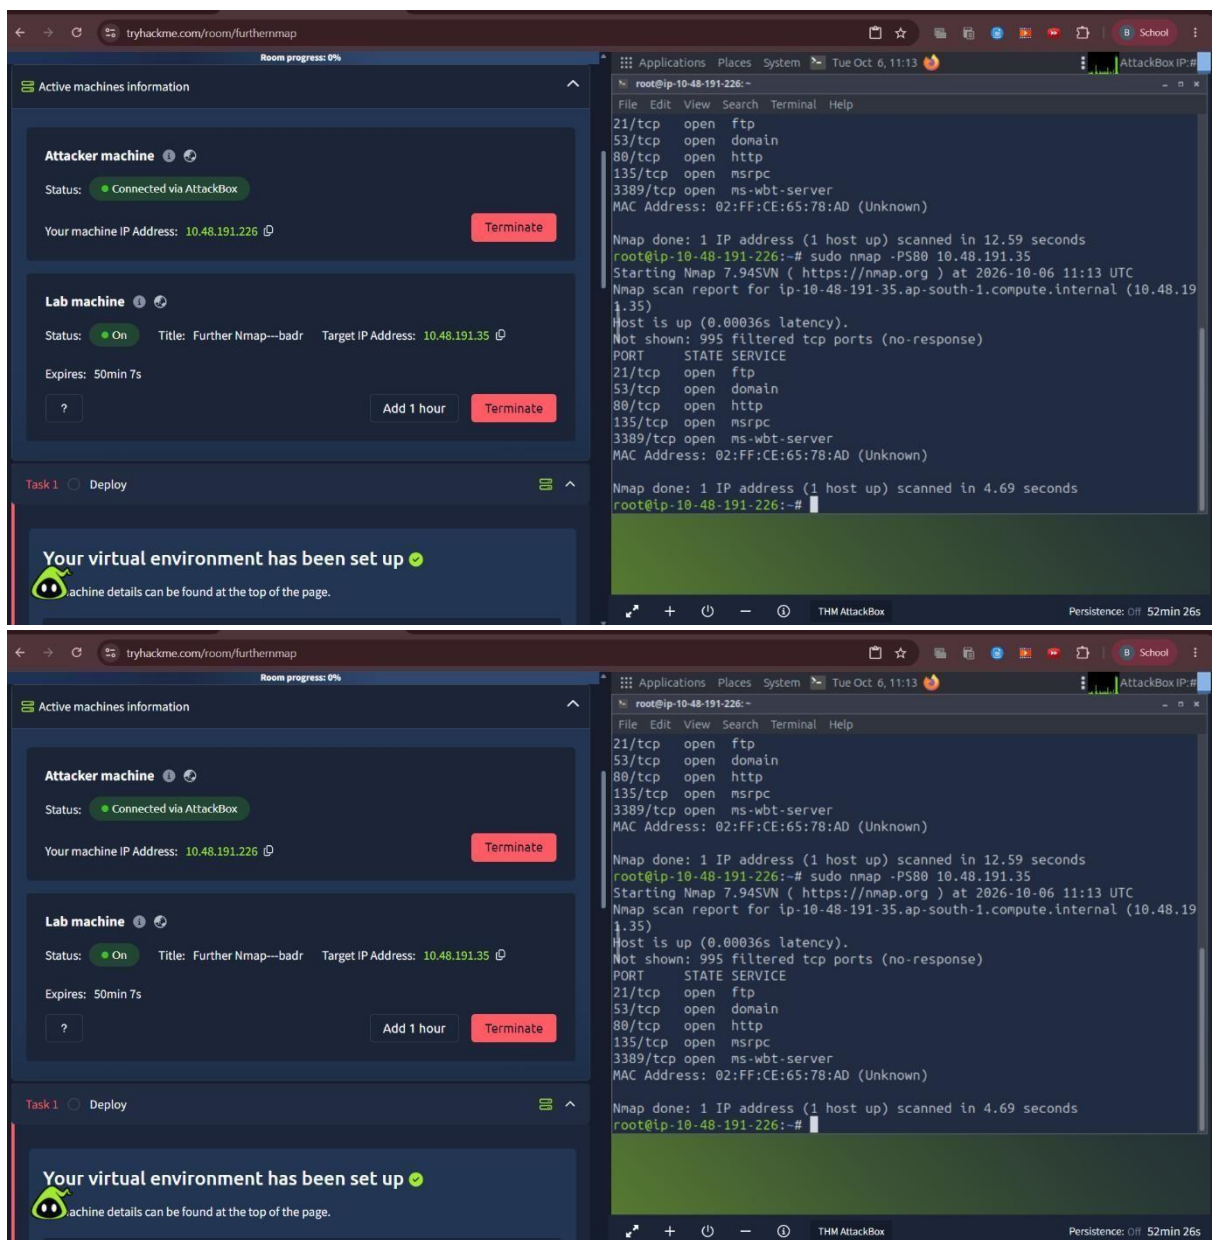

tryhackme.com/room/furthernmap

Room progress: 0%

Active machines information

Attacker machine

Status: Connected via AttackBox

Your machine IP Address: 10.48.191.226 [🔗](#) Terminate

Lab machine

Status: On Title: Further Nmap--badr Target IP Address: 10.48.191.35 [🔗](#)

Expires: 50min 59s ? Add 1 hour Terminate

Task 1 ☐ Deploy

Your virtual environment has been set up 🟢

Machine details can be found at the top of the page.

```

root@ip-10-48-191-226:~#
File Edit View Search Terminal Help
PORT      STATE SERVICE
22/tcp    open  ssh
53/tcp    open  domain
7777/tcp   filtered cbt
7778/tcp   filtered interwise
8443/tcp   open  https-alt

Nmap done: 1 IP address (1 host up) scanned in 1.35 seconds
root@ip-10-48-191-226:~# sudo nmap -PE 10.48.191.35
Starting Nmap 7.94SVN ( https://nmap.org ) at 2026-10-06 11:12 UTC
Nmap scan report for ip-10-48-191-35.ap-south-1.compute.internal (10.48.191.35)
Host is up (0.00036s latency).
Not shown: 995 filtered tcp ports (no-response)
PORT      STATE SERVICE
21/tcp    open  ftp
53/tcp    open  domain
80/tcp    open  http
135/tcp   open  msrpc
3389/tcp  open  ms-wbt-server
MAC Address: 02:FF:CE:65:78:AD (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 12.59 seconds
root@ip-10-48-191-226:~#
  
```

THM AttackBox Persistence: Off 53min 18s

```

root@ip-10-48-191-226:~# sudo nmap -PU53 10.48.191.35
Starting Nmap 7.94SVN ( https://nmap.org ) at 2026-10-06 11:15 UTC
Nmap scan report for ip-10-48-191-35.ap-south-1.compute.internal (10.48.191.35)
Host is up (0.00034s latency).
Not shown: 995 filtered tcp ports (no-response)
PORT      STATE SERVICE
21/tcp    open  ftp
53/tcp    open  domain
80/tcp    open  http
135/tcp   open  msrpc
3389/tcp  open  ms-wbt-server
MAC Address: 02:FF:CE:65:78:AD (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 4.79 seconds
root@ip-10-48-191-226:~#
  
```

```
root@ip-10-48-191-226:~# nmap 10.48.191.226
Starting Nmap 7.94SVN ( https://nmap.org ) at 2026-10-06 11:15 UTC
Nmap scan report for ip-10-48-191-226.ap-south-1.compute.internal (10.48.191.226)
Host is up (0.000013s latency).
Not shown: 995 closed tcp ports (reset)
PORT      STATE      SERVICE
22/tcp    open      ssh
53/tcp    open      domain
7777/tcp  filtered  cbt
7778/tcp  filtered  interwise
8443/tcp  open      https-alt

Nmap done: 1 IP address (1 host up) scanned in 1.32 seconds
root@ip-10-48-191-226:~#
```

Result: Live hosts were discovered using Nmap with ARP, ICMP, TCP, and UDP host-discovery scans.