


“At most once a week, VINO organises a tasting session. At each session, the **attending members** taste **several bottles**. Each member records for each bottle his or her **evaluation** of the quality (very good, good, average, mediocre, bad, very bad) of each wine that she or he tastes. The evaluation may differ for the same wine from one drinker to another. Actual quality and therefore evaluation also varies from one to another bottle of a given wine. Every bottle that is opened during the tasting session is finished during that session.”

bottle is another entity set, and is related to **member** by a relationship called **tasted**: **Members taste bottles** in different sessions to give **ratings**.

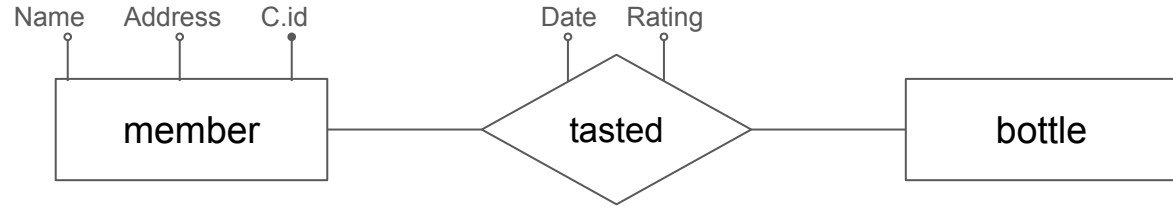

We do not yet know the attributes of the **bottle** entity. But essentially necessary attributes from **member** and **bottle** will be borrowed by the relationship **tasted**.