Cucumber Report

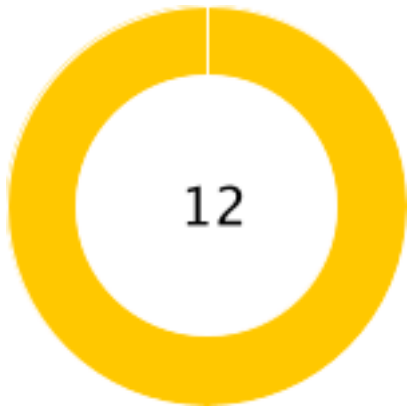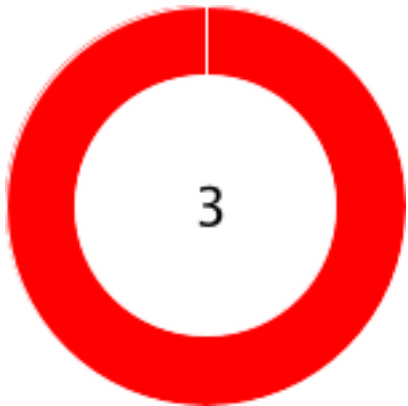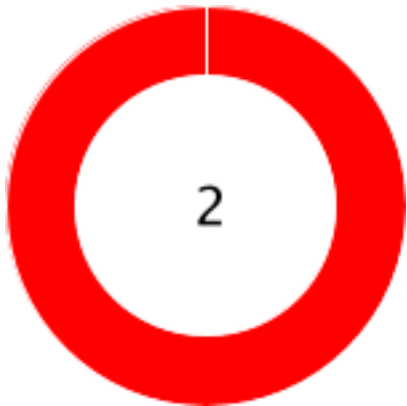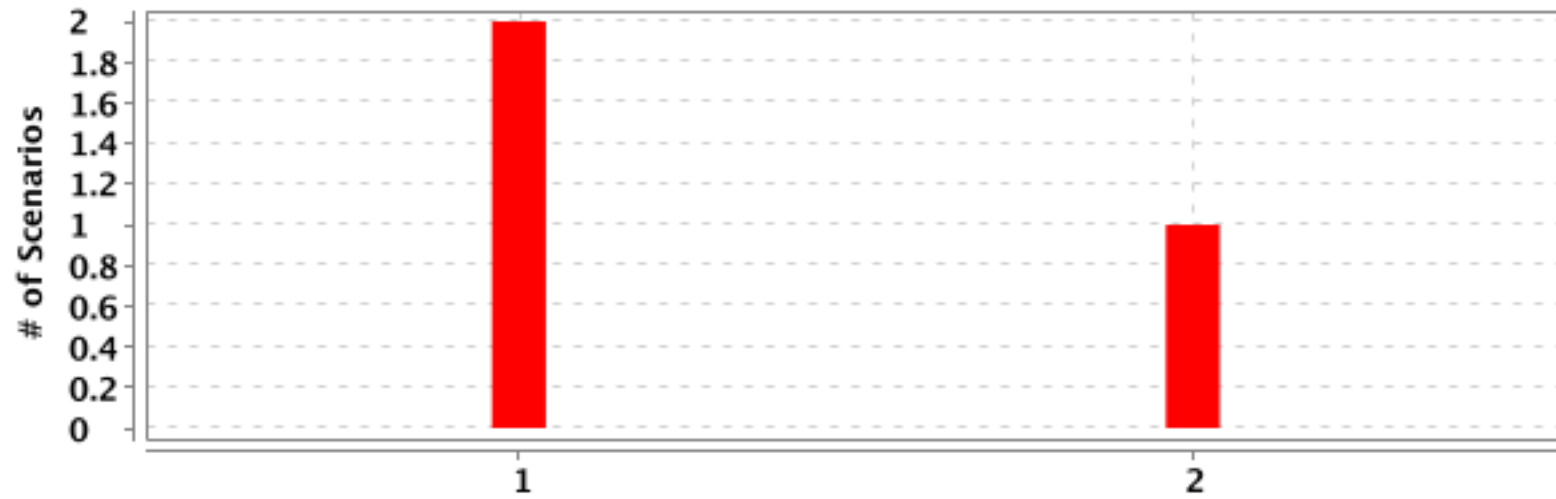| **Start : Sep. 06, 6:09:10.794 p.m.**	**End : Sep. 06, 6:09:37.128 p.m.**	**Duration : 26.334 s**
Features	Scenarios	Steps
PASSED - 0 FAILED - 2 SKIPPED - 0	PASSED - 0 FAILED - 3 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 12
2	3	12

#	Feature Name	T	P	F	S	Duration
1	test afterSignInPage	2	0	2	0	26.334 s
2	Crm login	1	0	1	0	26.328 s
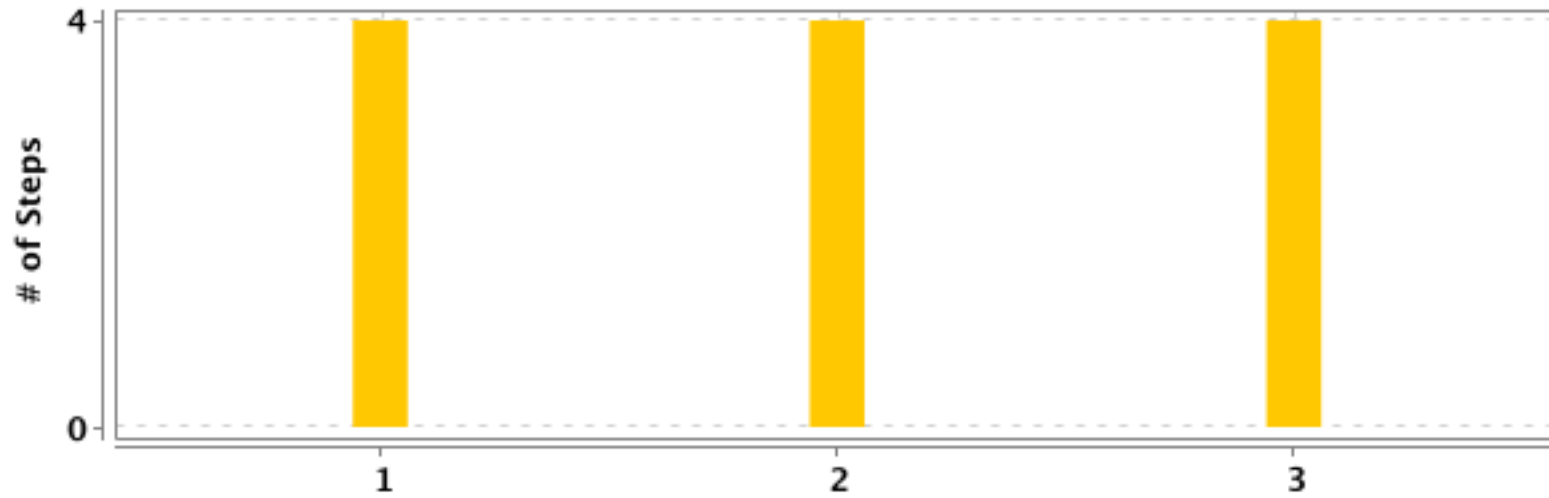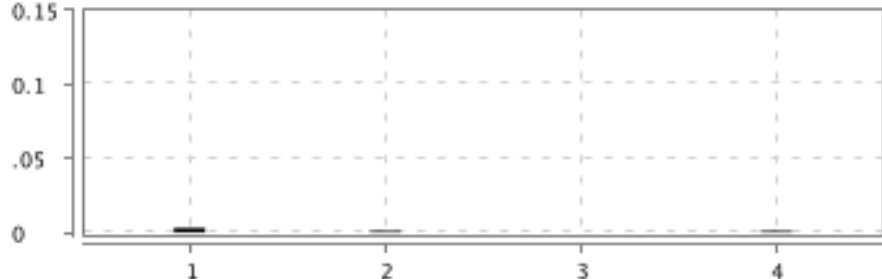
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	test afterSignInPage	test contacts page	4	0	0	4	26.331 s
2	test afterSignInPage	test deals page	4	0	0	4	26.331 s
3	Crm login	login into crm account	4	0	0	4	26.328 s

(F)- test afterSignInPage

FAILED	DURATION - 26.334 s	Scenarios		Steps	
		Total - 2		Total - 8	
/ 6:09:10.794 p.m. // 6:09:37.128 p.m. /		Pass - 0	2	Pass - 0	8
		Fail - 2		Fail - 0	
		Skip - 0		Skip - 8	
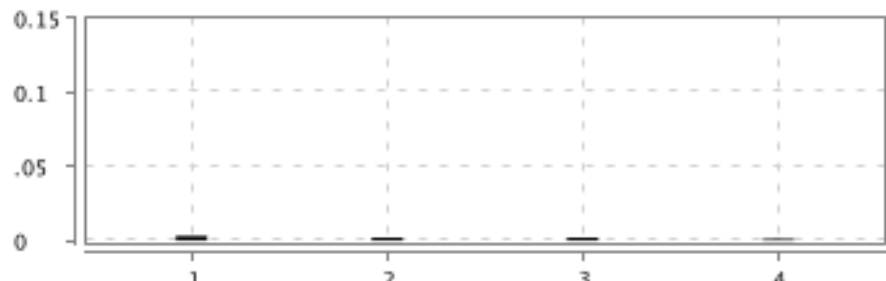
(S)- test contacts page

FAILED	DURATION - 26.331 s		Steps	
			Total - 4	
/ 6:09:10.795 p.m. // 6:09:37.126 p.m. /			Pass - 0	4
test afterSignInPage			Fail - 0	
			Skip - 4	

#	Step / Hook Details	Status	Duration
	BEFORE - parallelExecution.Hooks.launchBrowser()	FAILED	26.301 s
	org.openqa.selenium.SessionNotCreatedException: Could not create a session: The automation session ended unexpected while attempting to pair with it. Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'Pratiks-MacBook-Pro.local', ip: '2605:8d80:681:714e:536:6d4c:1a46:e44e%en0', os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.5.1', java.version: '11.0.19' Driver info: driver.version: SafariDriver remote stacktrace:		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490)		
	at org.openqa.selenium.remote.W3CHandshakeResponse.lambda$errorHandler$0(W3CHandshakeResponse.java:62)		
	at org.openqa.selenium.remote.HandshakeResponse.lambda$getResponseFunction$0(HandshakeResponse.java:30)		
	at org.openqa.selenium.remote.ProtocolHandshake.lambda$createSession$0(ProtocolHandshake.java:126)		
	at java.base/java.util.stream.ReferencePipeline$3$1.accept(ReferencePipeline.java:195)		
	at java.base/java.util.Spliterators$ArraySpliterator.tryAdvance(Spliterators.java:958)		
	at java.base/java.util.stream.ReferencePipeline.forEachWithCancel(ReferencePipeline.java:127)		
	at java.base/java.util.stream.AbstractPipeline.copyIntoWithCancel(AbstractPipeline.java:502)		
	at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:488)		
	at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:474)		
	at java.base/java.util.stream.FindOps$FindOp.evaluateSequential(FindOps.java:150)		

| #	Step / Hook Details	Status	Duration
	at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.findFirst(ReferencePipeline.java:543) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:128) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:74) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:136) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:81) at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:63) at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:41) at com.base.BaseClass.init_driver(BaseClass.java:97) at parallelExecution.Hooks.launchBrowser(Hooks.java:41)		
1	Given - Given user is already logged in 	username	password
pratiksandhu6162@gmail.com	Pratik@123		SKIPPED	0.003 s
2	Given - Given user is on AfterSignInPage	SKIPPED	0.001 s
3	When - When user clicks on contacts	SKIPPED	0.000 s
4	Then - Then contacts page is opened	SKIPPED	0.001 s
	AFTER - parallelExecution.Hooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException at parallelExecution.Hooks.tearDown(Hooks.java:56)	FAILED	0.002 s
	AFTER - parallelExecution.Hooks.quitBrowser() java.lang.NullPointerException at parallelExecution.Hooks.quitBrowser(Hooks.java:48)	FAILED	0.001 s

(S)- test deals page

FAILED	DURATION - 26.331 s		Steps
/ 6:09:10.797 p.m. // 6:09:37.128 p.m. /			Total - 4
test afterSignInPage			Pass - 0
@Deals			Fail - 0
			Skip - 4

4

#	Step / Hook Details	Status	Duration
	BEFORE - parallelExecution.Hooks.launchBrowser()	FAILED	26.302 s

	org.openqa.selenium.SessionNotCreatedException: Could not create a session: The automation session ended unexpected while attempting to pair with it. Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'Pratiks-MacBook-Pro.local', ip: '2605:8d80:681:714e:536:6d4c:1a46:e44e%en0', os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.5.1', java.version: '11.0.19' Driver info: driver.version: SafariDriver remote stacktrace:
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490)
	  at org.openqa.selenium.remote.W3CHandshakeResponse.lambda$errorHandler$0(W3CHandshakeResponse.java:62)
	  at org.openqa.selenium.remote.HandshakeResponse.lambda$getResponseFunction$0(HandshakeResponse.java:30)
	  at org.openqa.selenium.remote.ProtocolHandshake.lambda$createSession$0(ProtocolHandshake.java:126)
	  at java.base/java.util.stream.ReferencePipeline$3$1.accept(ReferencePipeline.java:195)
	  at java.base/java.util.Spliterators$ArraySpliterator.tryAdvance(Spliterators.java:958)
	  at java.base/java.util.stream.ReferencePipeline.forEachWithCancel(ReferencePipeline.java:127)
	  at java.base/java.util.stream.AbstractPipeline.copyIntoWithCancel(AbstractPipeline.java:502)
	  at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:488)
	  at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:474)
	  at java.base/java.util.stream.FindOps$FindOp.evaluateSequential(FindOps.java:150)
	  at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234)
	  at java.base/java.util.stream.ReferencePipeline.findFirst(ReferencePipeline.java:543)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:128)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:74)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:136)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)
	  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:213)
	  at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131)
	  at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:81)
	  at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:63)
	  at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:41)
	  at com.base.BaseClass.init_driver(BaseClass.java:97)
	  at parallelExecution.Hooks.launchBrowser(Hooks.java:41)		

1	Given - Given user is already logged in	SKIPPED	0.003 s
	username — pratiksandhu6162@gmail.com / password — Pratik@123		
2	Given - Given user is on AfterSignInPage	SKIPPED	0.002 s
3	When - When user clicks on deals	SKIPPED	0.002 s
4	Then - Then deals page is opened	SKIPPED	0.001 s
	AFTER - parallelExecution.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	java.lang.NullPointerException at parallelExecution.Hooks.tearDown(Hooks.java:56)		
	AFTER - parallelExecution.Hooks.quitBrowser()	FAILED	0.001 s
	java.lang.NullPointerException at parallelExecution.Hooks.quitBrowser(Hooks.java:48)		

(F)- Crm login

FAILED	DURATION - 26.328 s		Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Steps Total - 4 Pass - 0 Fail - 0 Skip - 4	4
/ 6:09:10.799 p.m. // 6:09:37.127 p.m. /						

(S)- login into crm account

FAILED	DURATION - 26.328 s		Steps Total - 4 Pass - 0 Fail - 0 Skip - 4	4
/ 6:09:10.799 p.m. // 6:09:37.127 p.m. /				
Crm login				

#	Step / Hook Details	Status	Duration
	BEFORE - parallelExecution.Hooks.launchBrowser()	FAILED	26.300 s

	org.openqa.selenium.WebDriverException: A command failed due to an internal error: The remote session was terminated. Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'Pratiks-MacBook-Pro.local', ip: '2605:8d80:681:714e:536:6d4c:1a46:e44e%en0', os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.5.1', java.version: '11.0.19' Driver info: driver.version: SafariDriver remote stacktrace:
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490)
	   at org.openqa.selenium.remote.W3CHandshakeResponse.lambda$errorHandler$0(W3CHandshakeResponse.java:62)
	   at org.openqa.selenium.remote.HandshakeResponse.lambda$getResponseFunction$0(HandshakeResponse.java:30)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.lambda$createSession$0(ProtocolHandshake.java:126) at java.base/java.util.stream.ReferencePipeline$3$1.accept(ReferencePipeline.java:195) at java.base/java.util.Spliterators$ArraySpliterator.tryAdvance(Spliterators.java:958) at java.base/java.util.stream.ReferencePipeline.forEachWithCancel(ReferencePipeline.java:127) at java.base/java.util.stream.AbstractPipeline.copyIntoWithCancel(AbstractPipeline.java:502) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:488) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:474) at java.base/java.util.stream.FindOps$FindOp.evaluateSequential(FindOps.java:150) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.findFirst(ReferencePipeline.java:543) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:128) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:74) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:136) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:213) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:131) at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:81) at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:63) at org.openqa.selenium.safari.SafariDriver.<init>(SafariDriver.java:41) at com.base.BaseClass.init_driver(BaseClass.java:97) at parallelExecution.Hooks.launchBrowser(Hooks.java:41)		
1	Given - Given user is on home page	SKIPPED	0.002 s
2	When - When user clicks on LogIN	SKIPPED	0.002 s
3	When - When user enters username "Pratiksandhu6162@gmail.com" and password "Pratik@123" and clicks on login button	SKIPPED	0.001 s
4	Then - Then user is signed in and verify title.	SKIPPED	0.000 s
	AFTER - parallelExecution.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.000 s
	java.lang.NullPointerException at parallelExecution.Hooks.tearDown(Hooks.java:56)		
	AFTER - parallelExecution.Hooks.quitBrowser()	FAILED	0.001 s
	java.lang.NullPointerException at parallelExecution.Hooks.quitBrowser(Hooks.java:48)		