Sold to
pratik501501@gmail.com

Execution Context

```
function getMessage()
 {
    return 'Hi Simran';
 }


function SayHello()
 {
    return getMessage()
 }
sayHello();
```

↓

Javascript Engine (JE) sees these brackets and says 'OH I need to execute this function, let me create an execution context for it.


Okay... What is execution context ???

codeWithSimran codeWithSimran_

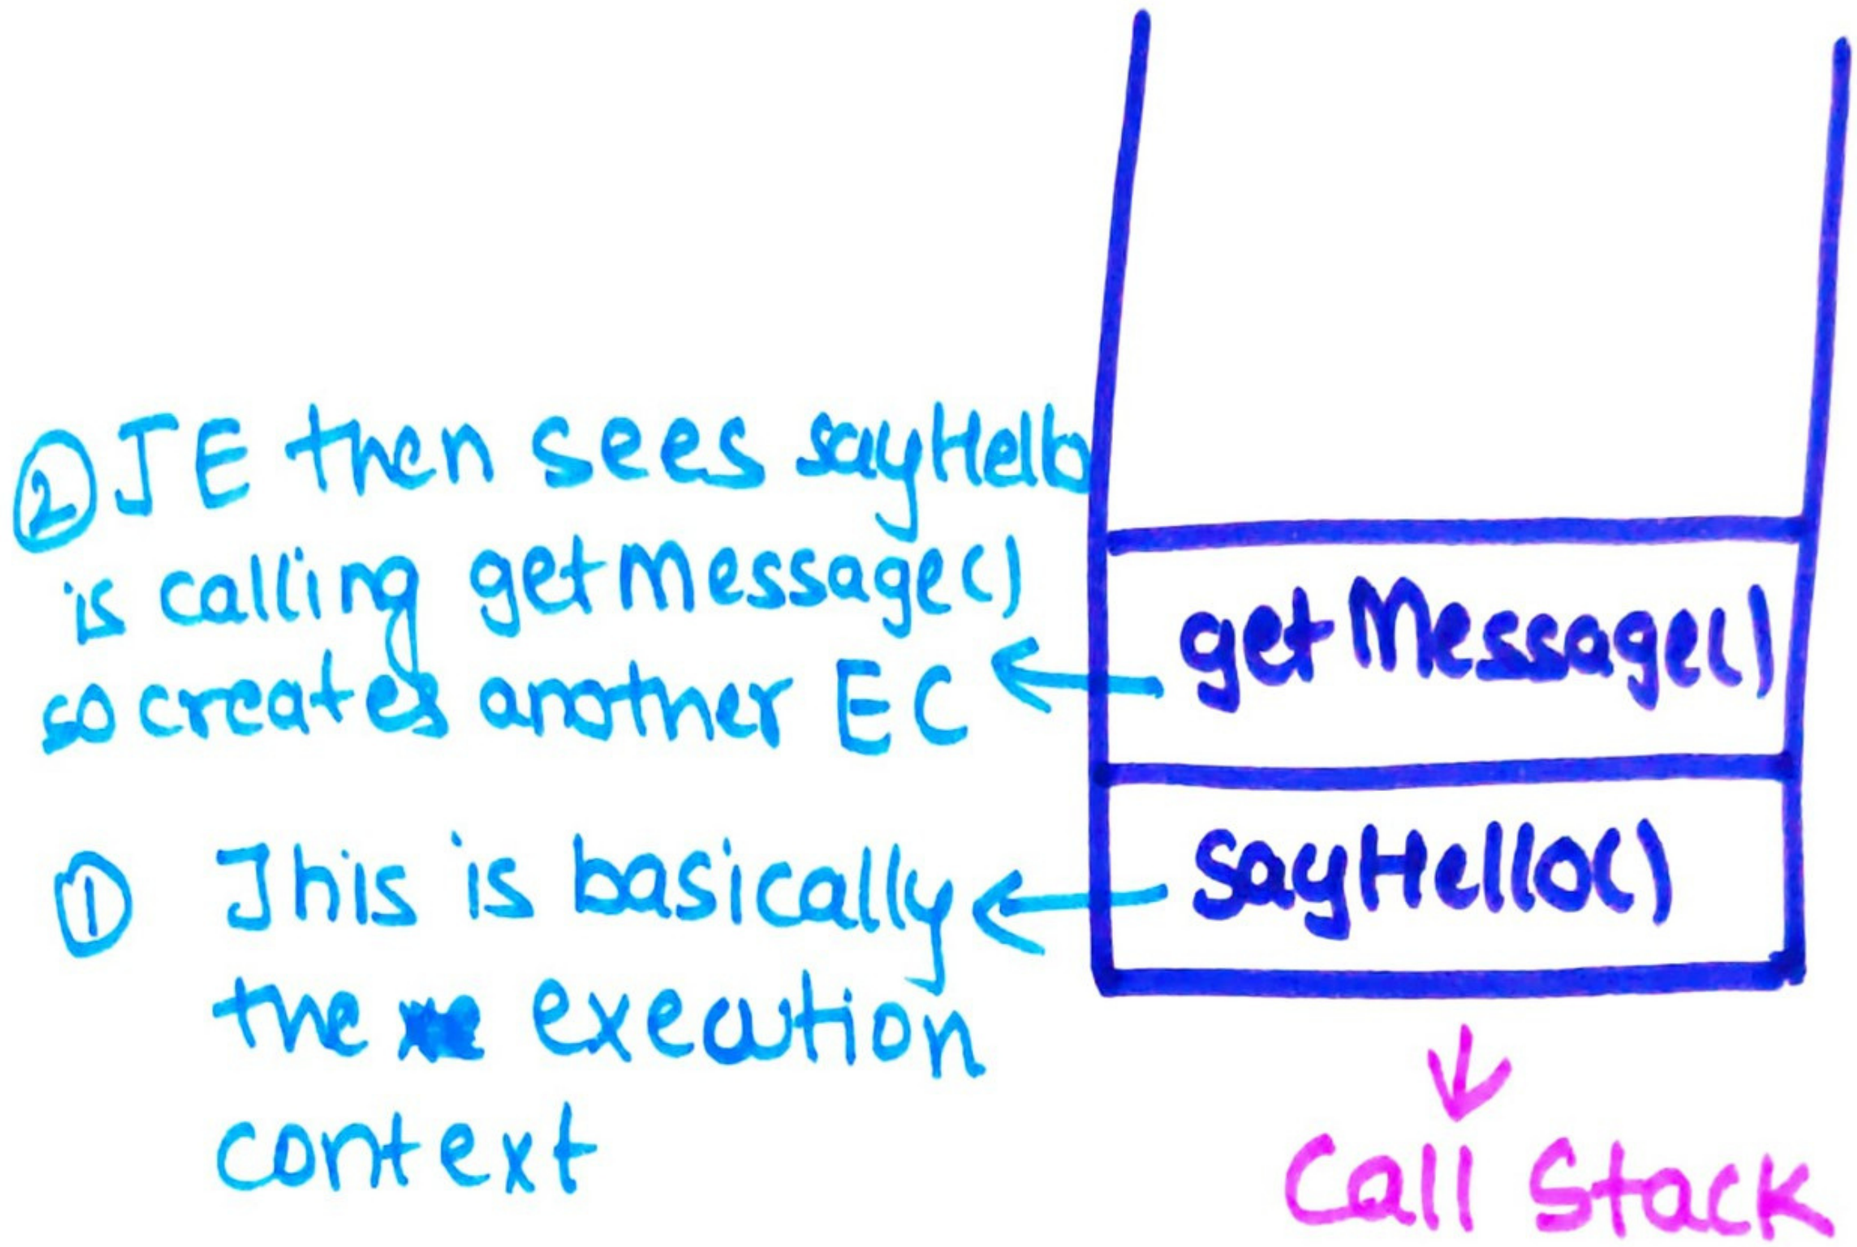

BUT there is a base execution context (global context)

So basically the JE will always first create the global execution context.

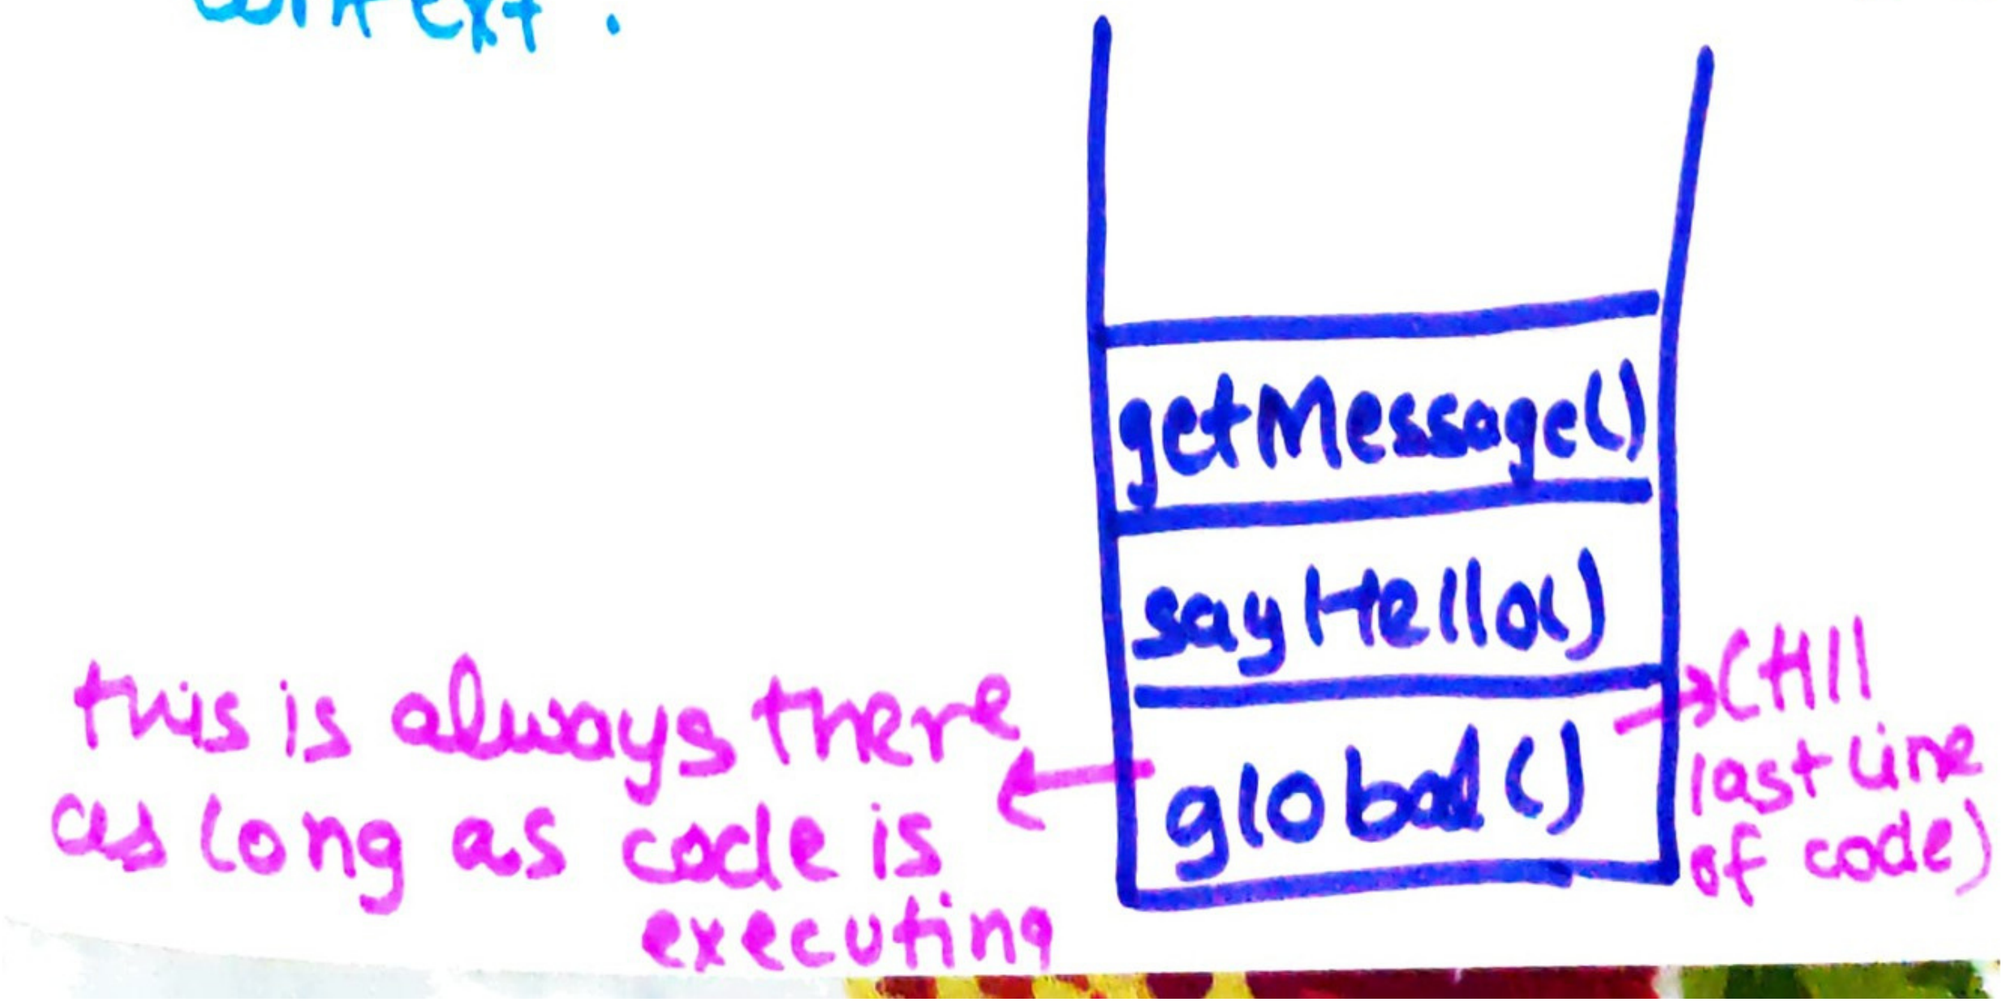

codeWithSimran codeWithSimran_

That means every line of code is part of an execution context (eg. global), ora function)

So what do I do with this global Execution context?

↳ It gives us 2 things

Global execution context

↙ Global Object (which is the window object)

↘ this keyword in JS (the one that everyone loves :)

GO AND CREATE AN EMPTY JS FILE

Go to console and type

> this

→ Window object

codeWithSimran codeWithSimran_

So this prints the global object. In a browser global object is nothing but window object.

SO CHECK

```
this === window // true
```

Are they always going to be same? :/

↳ NO !!! We have a whole new section to understand this keyword. Hold on :D


GO TO CONSOLE AND DECLARE A VARIABLE

```
> var name = "Simran"
> window
{
  name : 'Simran'
}
```

→ try to see window [window object will have name variable]

codeWithSimran codeWithSimran_

There are 2 phases of an execution context

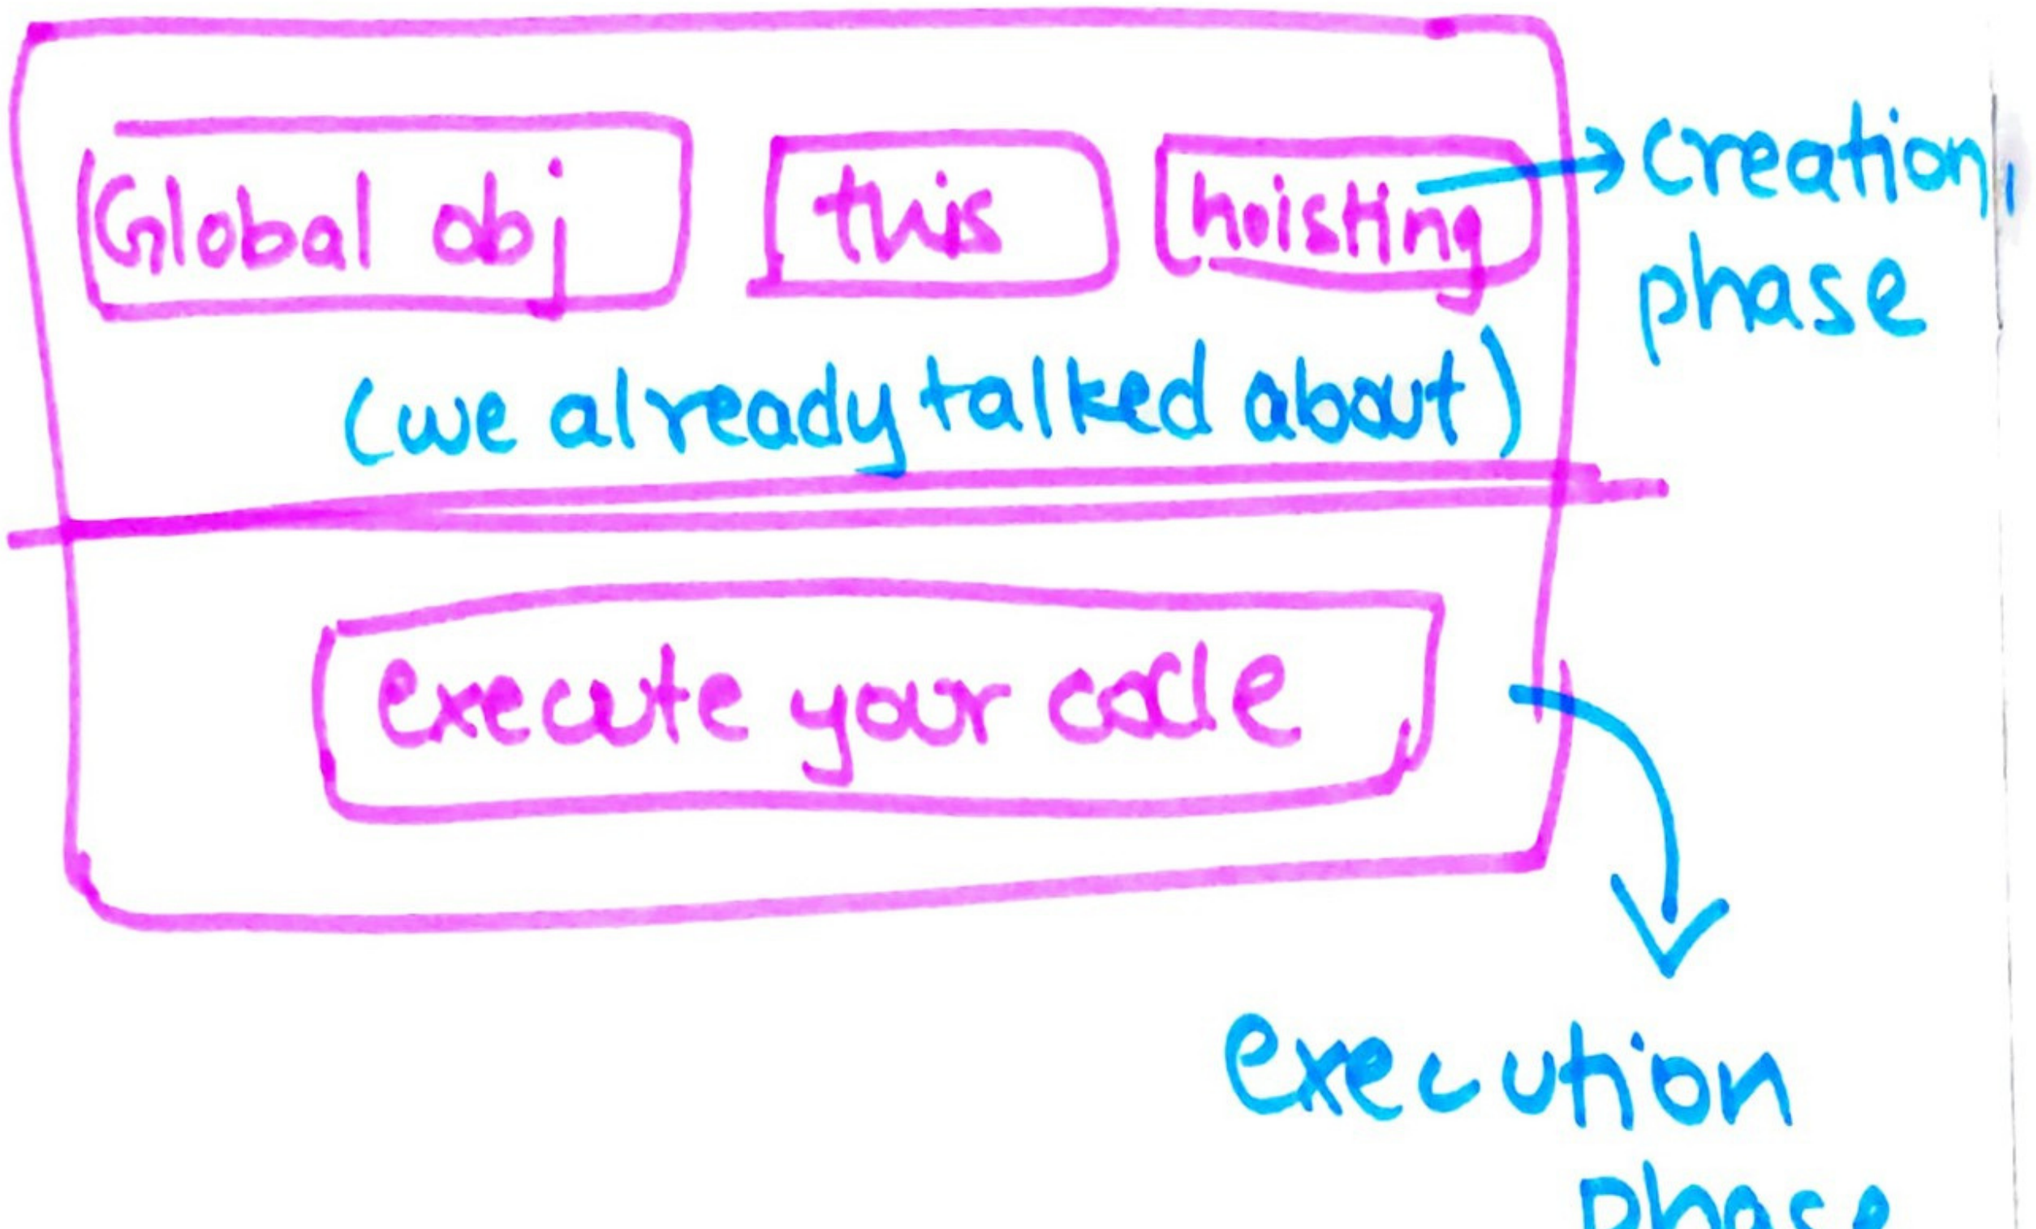

Creation phase → global obj (window)
(happens first) this
hoisting

execution phase → run code
(happens next)

codeWithSimran codeWithSimran_