



SQL PROJECT ON PIZZA SALE



Hello!

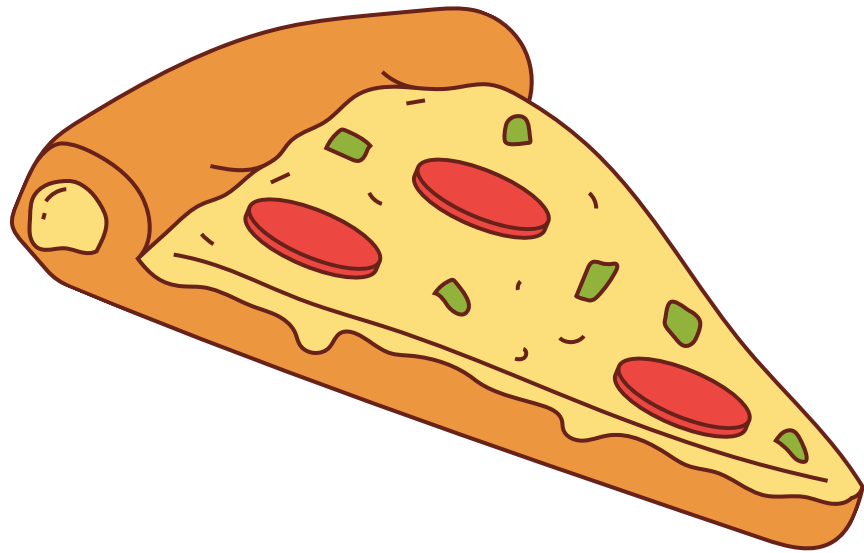

My name is Pratima
kesarwani and in this
project I have utilise SQL
queries to solve the
questions that were
related to pizza sale.

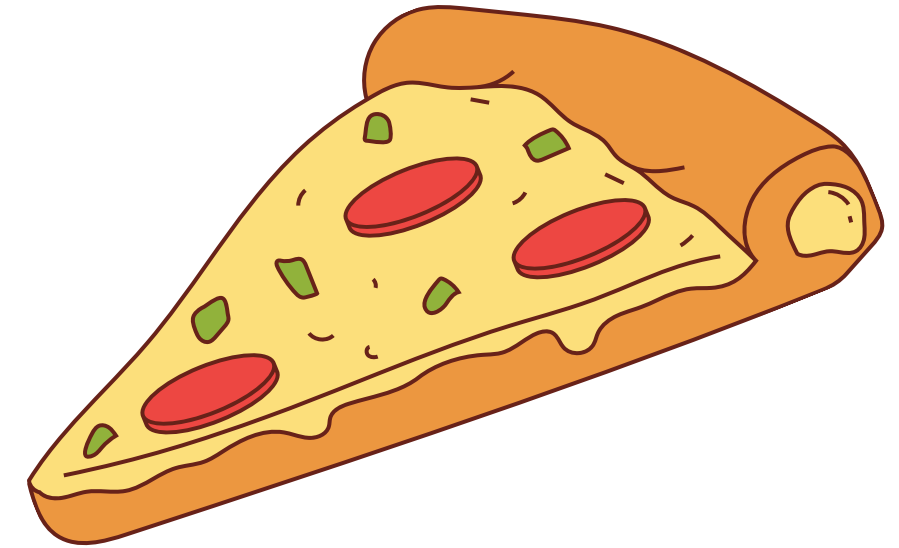

Retrieve the total number of orders placed

```
SELECT
    COUNT(order_id) AS total_order
FROM
    orders;
```

Result Grid	
	total_order
▶	21350

Calculate the total revenue generated from pizza sales.

SELECT

```
ROUND(SUM(order_details.quantity * pizzas.price),  
      2) AS total_sales
```


FROM

```
order_details
```

JOIN

```
pizzas ON pizzas.pizza_id = order_details.pizza_id;
```

Result Grid



total_sales

817860.05

Identify the highest-priced pizza.

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
        pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

Result Grid			Filter Rows
	name	price	
▶	The Greek Pizza	35.95	

Identify the most common pizza size ordered.

```
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid					F
	size	order_count			
▶	L	18526			
	M	15385			
	S	14137			
	XL	544			
	XXL	28			

List the top 5 most ordered pizza types along with their quantities.

```
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid			Filter Rows:
	name	quantity	
▶	The Classic Deluxe Pizza	2453	
	The Barbecue Chicken Pizza	2432	
	The Hawaiian Pizza	2422	
	The Pepperoni Pizza	2418	
	The Thai Chicken Pizza	2371	

Join the necessary tables to find the total quantity of each pizza category ordered.

SELECT



```
    pizza_types.category,  
    SUM(order_details.quantity) AS quantity
```

FROM

```
    pizza_types  
      JOIN  
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
      JOIN  
    order_details ON order_details.pizza_id = pizzas.pizza_id
```



```
GROUP BY pizza_types.category
```

```
ORDER BY quantity DESC;
```

Result Grid					Filter
	category	quantity			
▶	Classic	14888			
	Supreme	11987			
	Veggie	11649			
	Chicken	11050			

Determine the distribution of orders by hour of the day.

```
SELECT
    HOUR(orders.order_time) AS hour,
    COUNT(orders.order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

Result Grid					Filter
	hour	order_count			
▶	11	1231			
	12	2520			
	13	2455			
	14	1472			
	15	1468			
	16	1920			
	17	2336			
	18	2399			
	19	2009			
	20	1642			
	21	1198			
	22	663			
	23	28			



Join relevant tables to find the category-wise distribution of pizzas.

```
SELECT  
    category, COUNT(name)  
FROM  
    pizza_types  
GROUP BY category;
```

Result Grid			Filter Rows
	category	count(name)	
▶	Chicken	6	
	Classic	8	
	Supreme	9	
	Veggie	9	

Group the orders by date and calculate the average number of pizzas ordered per day.

```
SELECT
    ROUND(AVG(quantity), 0) as avg_pizzas_ordered_per_day
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid			 Filter Rows:
	avg_pizzas_ordered_per_day		
▶	138		

Determine the top 3 most ordered pizza types based on revenue.

```
select pizza_types.name ,sum(order_details.quantity * pizzas.price) as revenue
from pizza_types join pizzas
on pizzas.pizza_type_id = pizza_types.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.name order by revenue desc limit 3;
```



Result Grid			Filter Rows:
	name	revenue	
▶	The Thai Chicken Pizza	43434.25	
	The Barbecue Chicken Pizza	42768	
	The California Chicken Pizza	41409.5	

Calculate the percentage contribution of each pizza type to total revenue.

```
select pizza_types.category, round( (sum(order_details.quantity*pizzas.price) /(SELECT  
    ROUND(SUM(order_details.quantity * pizzas.price),  
        2) AS total_sales  
FROM  
    order_details  
    JOIN  
    pizzas ON pizzas.pizza_id = order_details.pizza_id)) * 100,2) as revenue  
from pizza_types join pizzas
```



Result Grid				Filter
	category	revenue		
▶	Classic	26.91		
	Supreme	25.46		
	Chicken	23.96		
	Veggie	23.68		

Analyze the cumulative revenue generated over time.

Result Grid   Filter Rows:		
	order_date	cum_revenue
▶	2015-01-01	2713.85000000000004
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55

Determine the top 3 most ordered pizza types based on revenue for each pizza category.

```
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category,pizza_types.name,
sum(order_details.quantity * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category,pizza_types.name) as a) as b
where rn <= 3;
```

Result Grid					Filter Rows:
	name	revenue			
▶	The Thai Chicken Pizza	43434.25			
	The Barbecue Chicken Pizza	42768			
	The California Chicken Pizza	41409.5			
	The Classic Deluxe Pizza	38180.5			
	The Hawaiian Pizza	32273.25			

"Thank you for taking the time to explore our presentation! If you found this content valuable, please like , share and subscribe... Your support means the world to us! Let's continue this journey together. #ThankYou #Engagement #StayConnected"

