

Benchmark Configuration: benchmark_scaling_2026-02-04-14-56-26.json

Generated: 2026-02-04 14:58:28

Instances per Qubit Count (N): N=6: 10, N=8: 10, N=10: 10

Threads: 16

Configuration Parameters:


```
-----  
adapt_type: greedy  
initial_gamma: 0.01  
hamiltonian_type: exact  
energy_floor: None  
gradient_threshold: 1e-08  
score_stopper_threshold: 1e-06  
parameter_stopper_max: 200  
layer_stopper_max: 5  
slow_stopper_threshold: 0.001  
slow_stopper_patience: 3  
floor_stopper_threshold: 0.05  
optimizer_tolerance: 1e-06  
optimizer_max_iterations: 100  
num_shots: 1000
```

Benchmark Summary Statistics


Variables (N): [6, 8, 10]

N	Time Mean (s)	Time Median (s)	Time Max (s)	Sat Mean %	Sat Median %	Sat Min %	Layers Mean	Layers Median	Layers Max
6	0.73	0.03	7.03	1.0	1.0	1.0	2.0	2.0	2
8	0.49	0.3	2.37	0.99	1.0	0.97	2.9	3.0	4
10	2.2	1.88	4.06	0.99	0.98	0.98	2.9	3.0	4


Execution Time vs Qubits

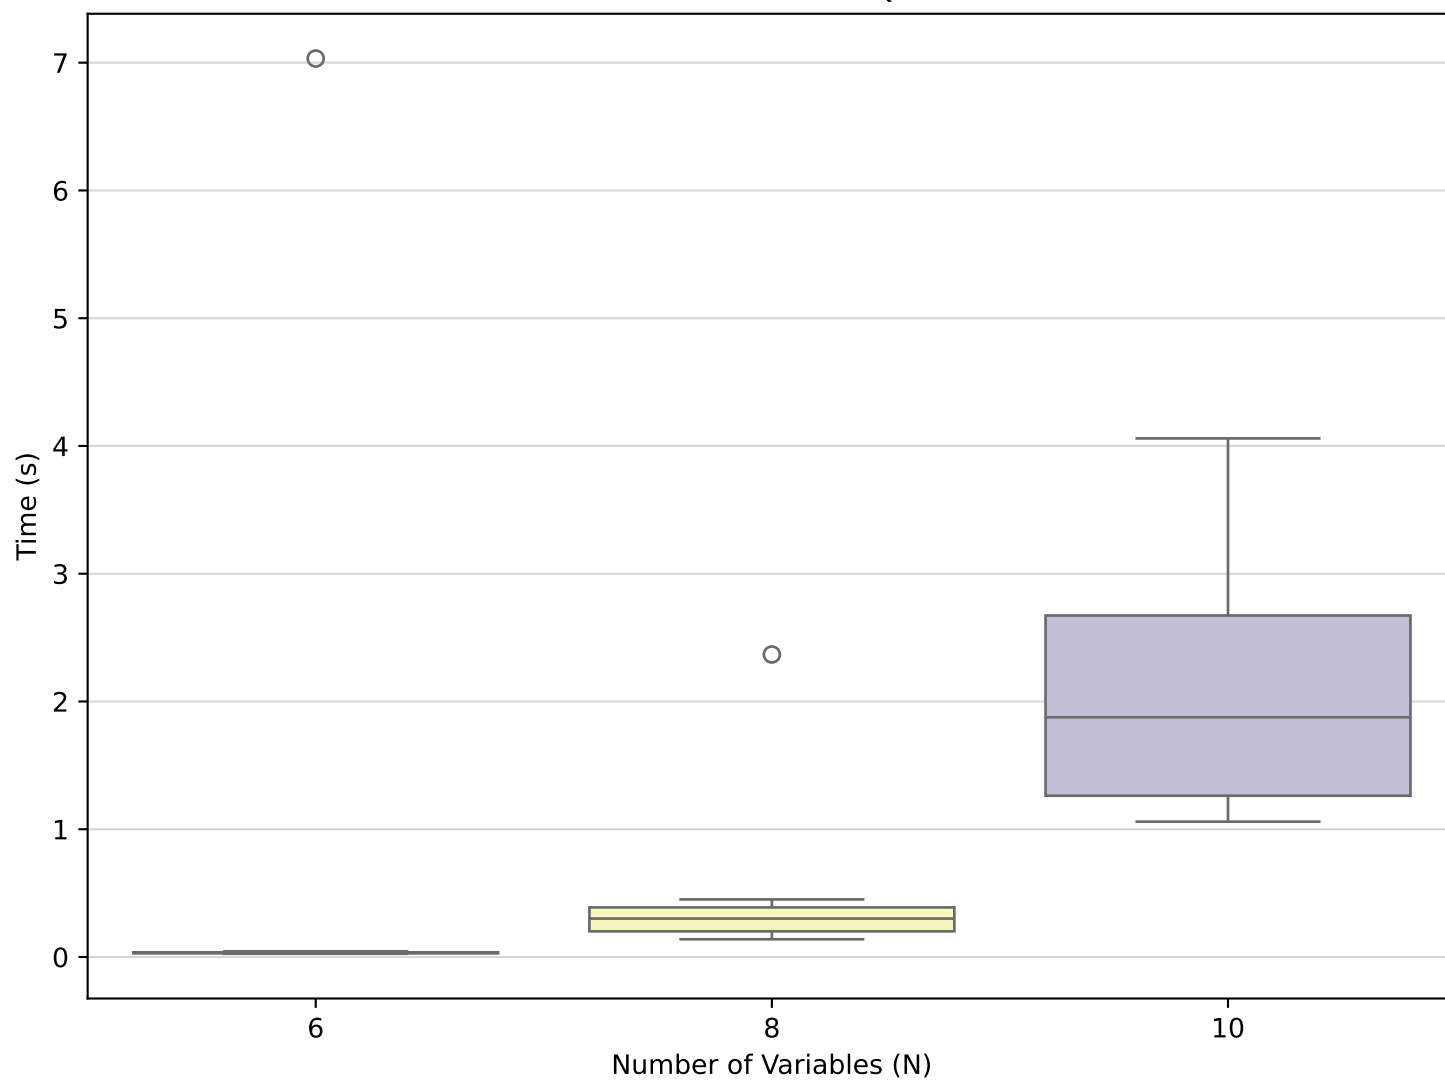

Satisfied Clauses % vs Qubits

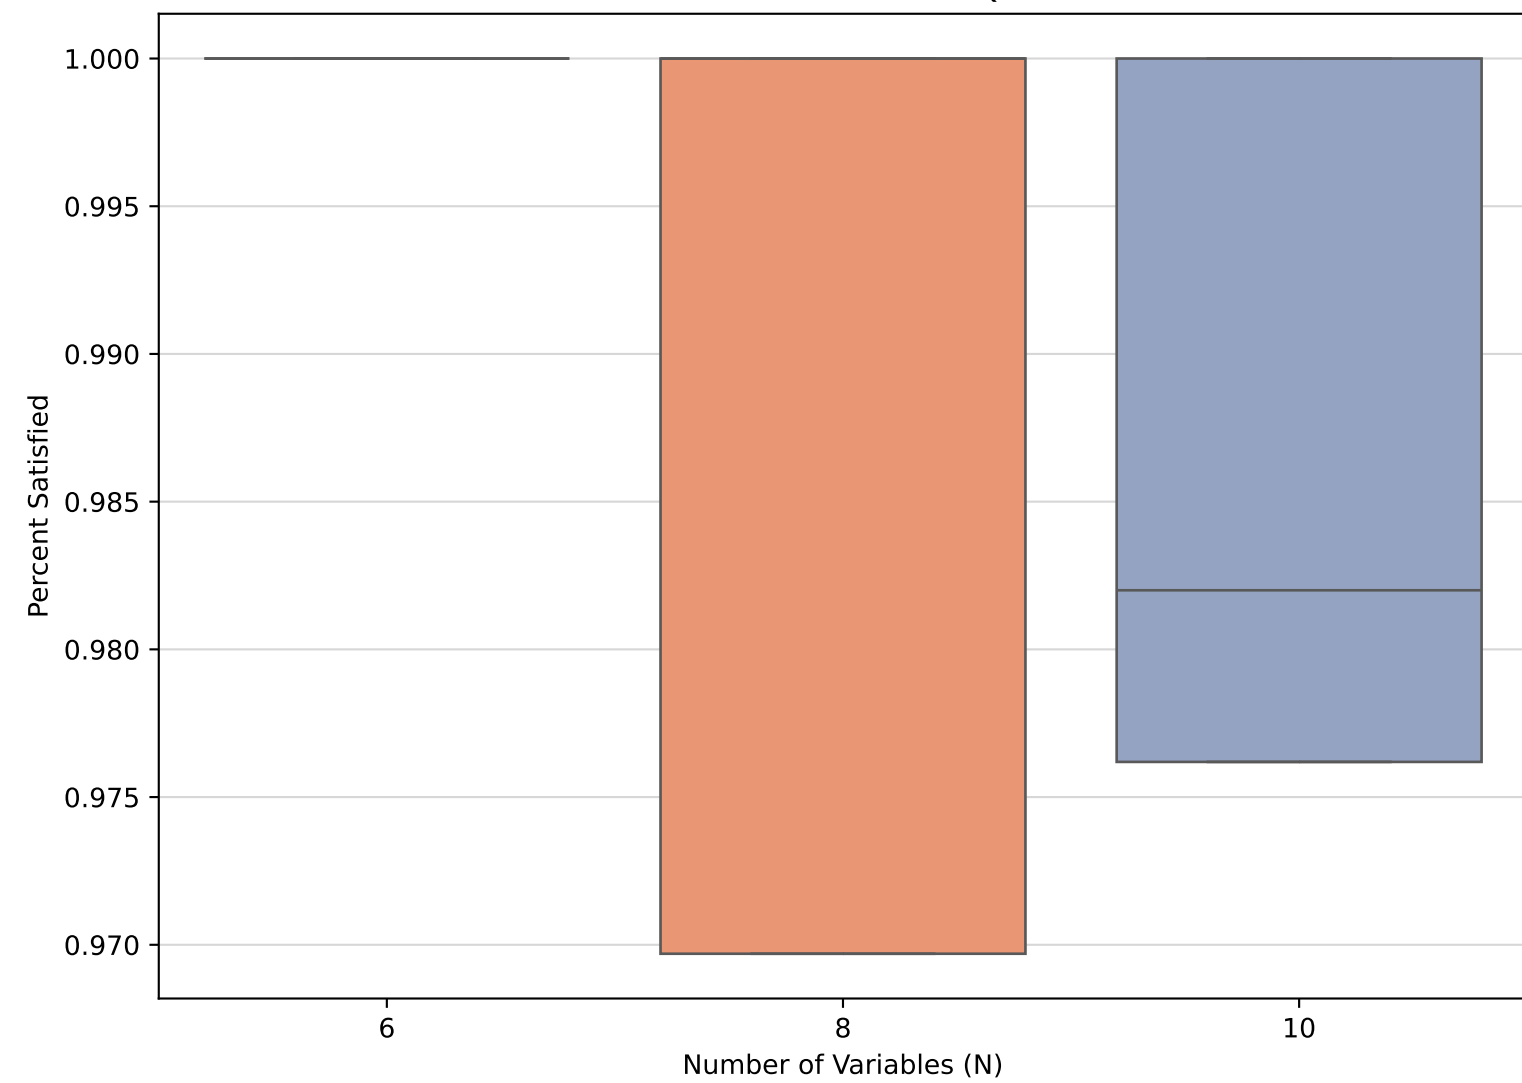


ADAPT Layers vs Qubits

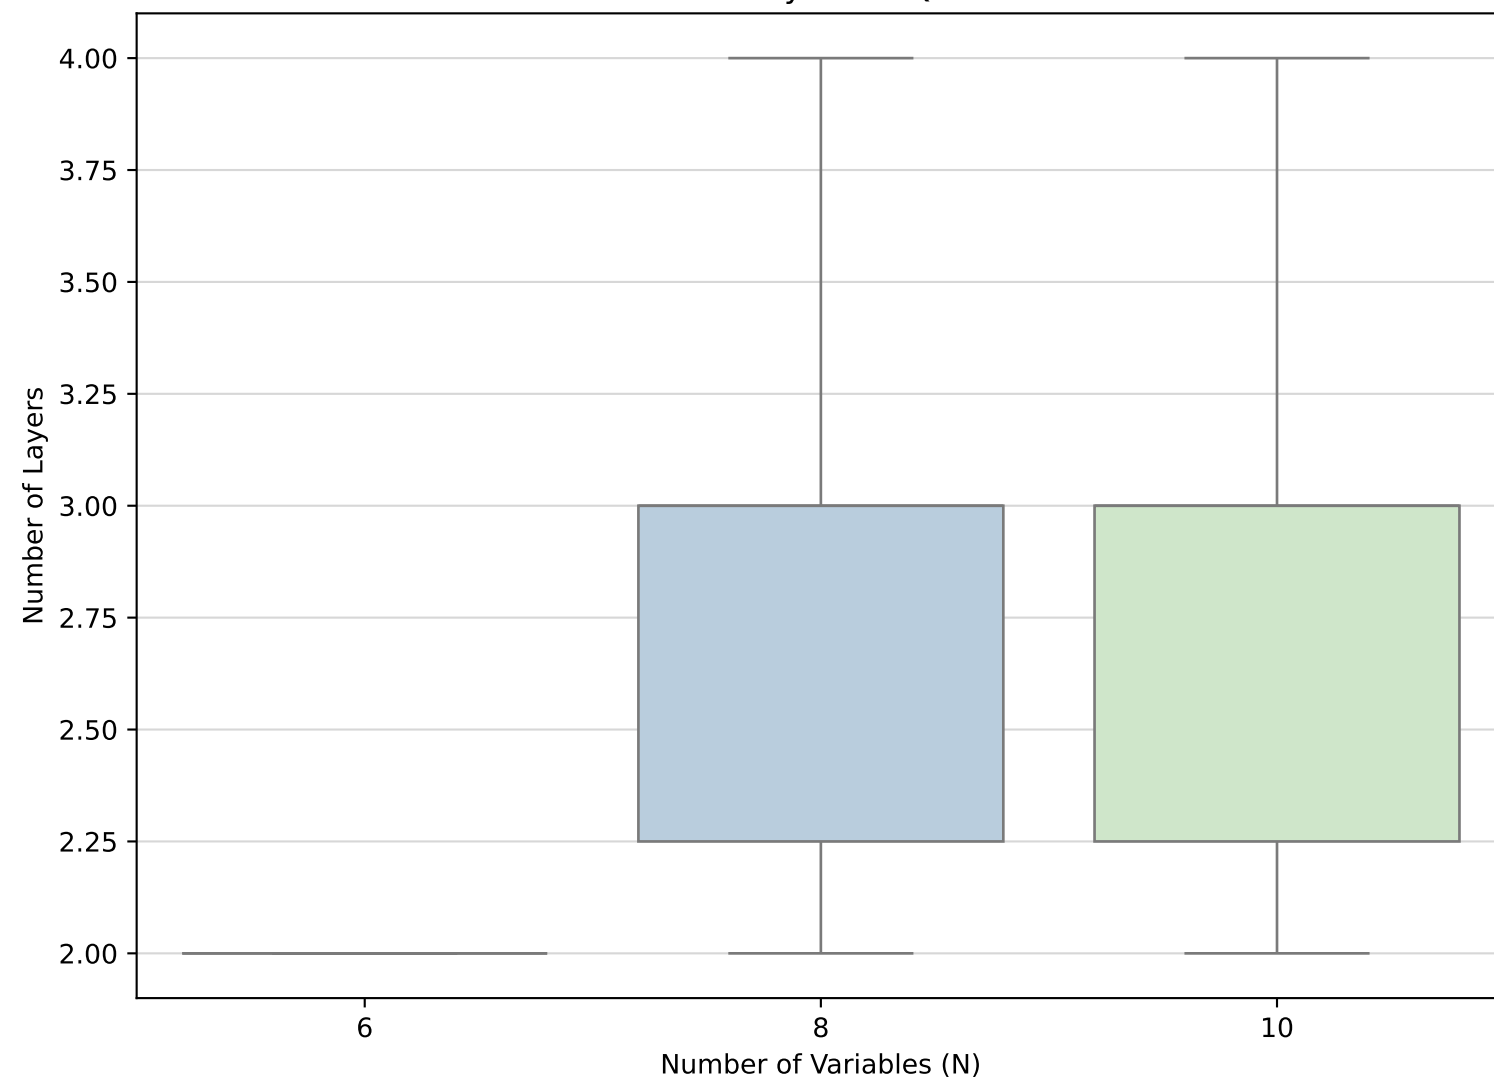

Approximation Data Not Available

Distribution of Stopping Reasons vs Qubits

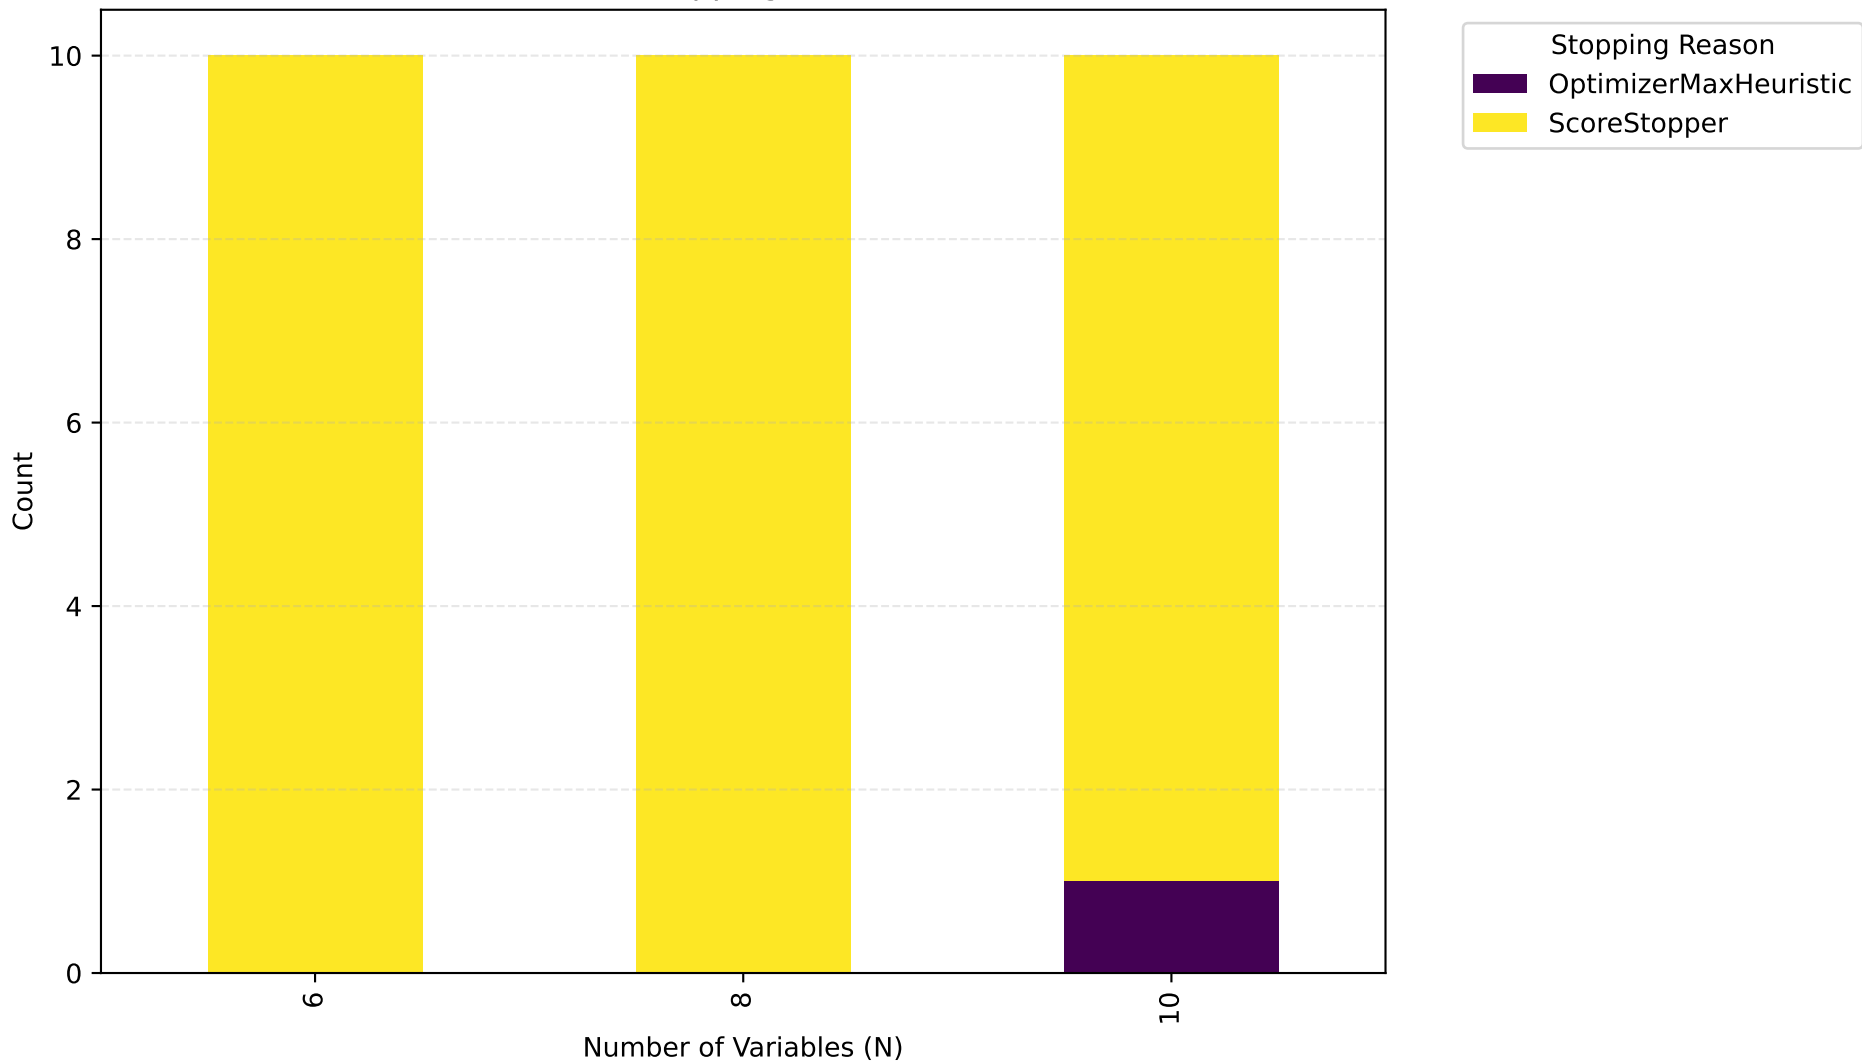

Longest Running Instances per Qubit Count

N	Instance ID	Time (s)	Stop Reason
6	1	7.03	ScoreStopper
8	1	2.37	ScoreStopper
10	6	4.06	OptimizerMaxHeuristic