

Cucumber Report

Nov 7, 2023, 3:08:07 PM

Start : Nov 07, 3:07:54.418 PM

End : Nov 07, 3:08:06.739 PM

Duration : 12.321 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 4



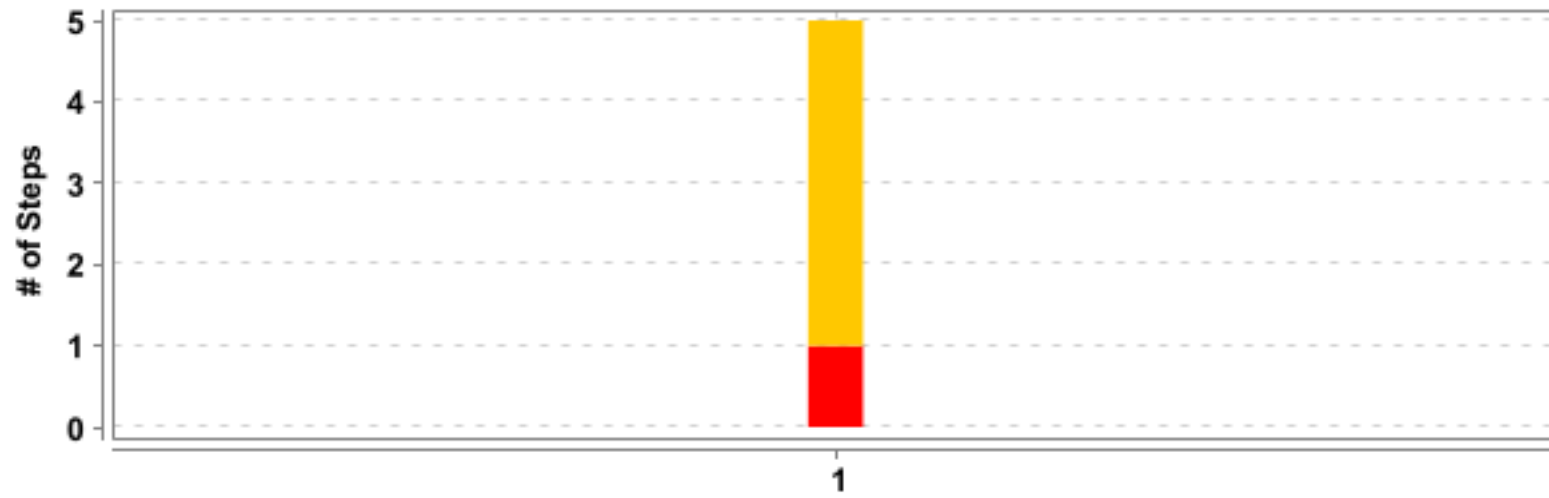
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login an account in Demo.opencart</u>	12.321 s	1	0	1	0	5	0	1	4

#	Feature Name	Scenario Name
1	<u>Login an account in Demo.opencart</u>	<u>Login with valid credentials</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@ValidCredentials	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	Login an account in Demo.opencart	1	0	1	0	12.321 s

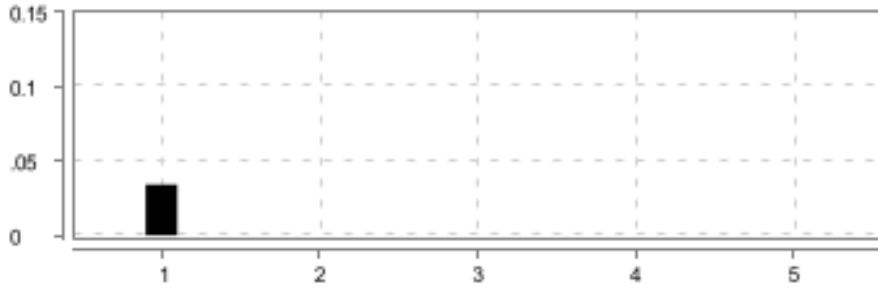



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login an account in Demo.opencart	Login with valid credentials	5	0	1	4	12.317 s

Login an account in Demo.opencart

FAILED	DURATION - 12.321 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 3:07:54.418 PM // 3:08:06.739 PM /					

Login with valid credentials

FAILED	DURATION - 12.317 s		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 3:07:54.422 PM // 3:08:06.739 PM /				
Login an account in Demo.opencart				
@ValidCredentials				

#	Step / Hook Details	Status	Duration
1	<p>Given User landed at demo.opencart HomePage</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class praveen.assesment.loginWebShop at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p>	FAILED	0.034 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "Object.hashCode()" because "key" is null</p> <p>at java.base/java.util.concurrent.ConcurrentHashMap.get(ConcurrentHashMap.java:936)</p> <p>at java.base/java.util.Properties.getProperty(Properties.java:1102)</p> <p>at praveen.assessment.dataProperties.data(dataProperties.java:33)</p>		

#	Step / Hook Details	Status	Duration
	at praveen.assesment.dataProperties.<init>(dataProperties.java:17) at praveen.assesment.loginWebShop.<init>(loginWebShop.java:11)		
2	When User clicks login link	SKIPPED	0.000 s
3	And User enter the username and password	SKIPPED	0.000 s
4	And User clicks login button	SKIPPED	0.000 s
5	Then User see the login succesfull message	SKIPPED	0.000 s
	AFTER - praveen.assesment.HookClass.close(io.cucumber.java.Scenario)	PASSED	0.879 s
	Login with valid credentials		