

Cucumber Report

Nov 28, 2023, 4:49:08 PM

Start : Nov 28, 4:48:18.623 PM

End : Nov 28, 4:49:01.994 PM

Duration : 43.371 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 8

SKIPPED - 0

PASSED - 0



FAILED - 11

SKIPPED - 0

PASSED - 10

FAILED - 10


SKIPPED - 59

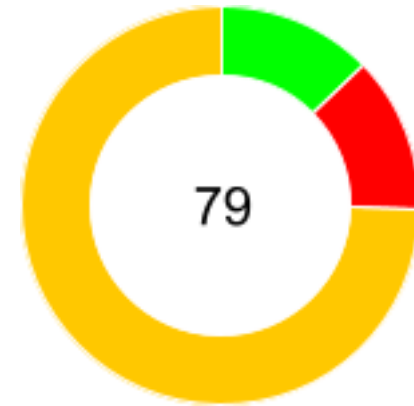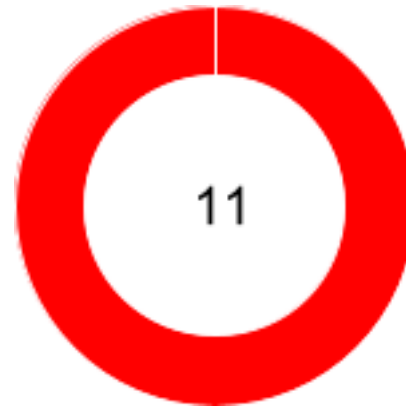


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Entering the Employee details</u>	43.156 s	1	0	1	0	10	10	0	0
<u>Adding the leave reason</u>	0.067 s	1	0	1	0	7	0	1	6
<u>Login an account in user website</u>	0.048 s	4	0	4	0	19	0	4	15
<u>Trying to add new organization structure to orangeHRM</u>	0.006 s	1	0	1	0	11	0	1	10
<u>Acessing the new user</u>	0.005 s	1	0	1	0	7	0	1	6
<u>Login an account in user website</u>	0.005 s	1	0	1	0	9	0	1	8
<u>Login an account in user website</u>	0.005 s	1	0	1	0	9	0	1	8
<u>Login an account in user website</u>	0.004 s	1	0	1	0	7	0	1	6

#	Feature Name	Scenario Name
1	<u>Entering the Employee details</u>	<u>Adding Employee Status</u>
2	<u>Adding the leave reason</u>	<u>Adding the leave details to the category</u>
3	<u>Login an account in user website</u>	<u>Login with valid credentials</u>
4		<u>Login with invalid credentials</u>
5		<u>Login with invalid credentials</u>
6		<u>Login with invalid credentials</u>
7	<u>Trying to add new organization structure to orangeHRM</u>	<u>Adding new Organaization Structure</u>
8	<u>Acessing the new user</u>	<u>Adding new user in PIM</u>
9	<u>Login an account in user website</u>	<u>Adding new skill</u>
10		<u>Adding new customer to project info</u>
11		<u>Checking User Status is Enabled or not</u>


TAG	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@ValidCredentials	1	0	1	0	1	0	1	0
@InvalidCredentials	3	0	3	0	1	0	1	0

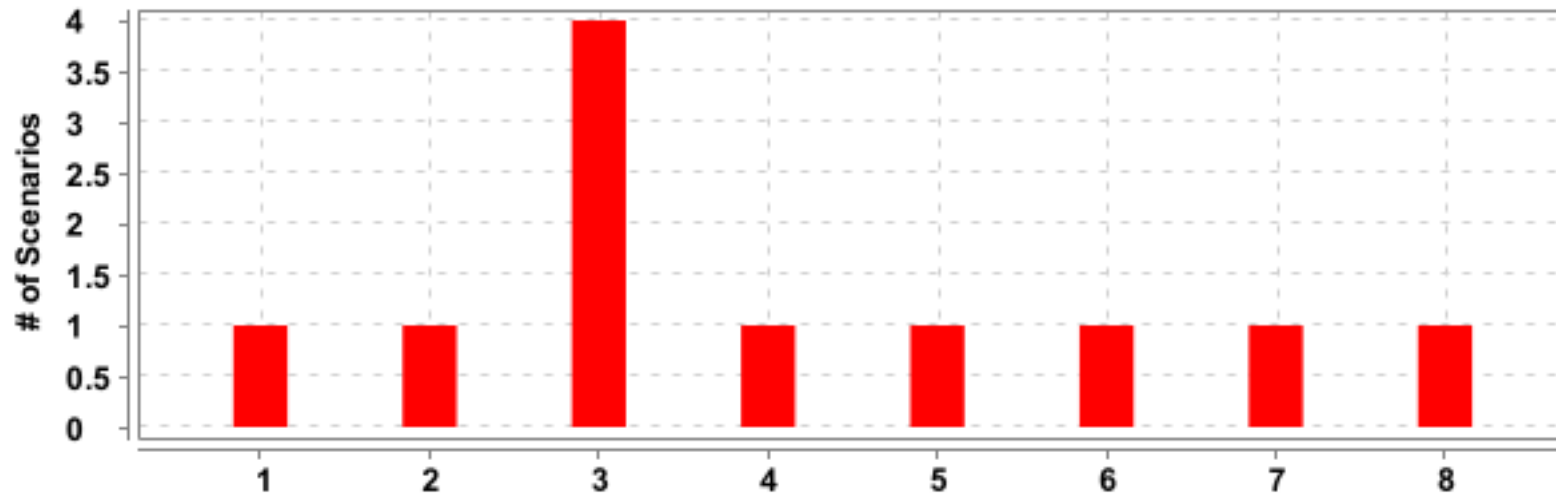

#	Feature Name	T	P	F	S	Duration
1	<u>Entering the Employee details</u>	1	0	1	0	43.156 s
2	<u>Adding the leave reason</u>	1	0	1	0	0.067 s
3	<u>Login an account in user website</u>	4	0	4	0	0.048 s
4	<u>Trying to add new organization structure to orangeHRM</u>	1	0	1	0	0.006 s
5	<u>Acessing the new user</u>	1	0	1	0	0.005 s
6	<u>Login an account in user website</u>	1	0	1	0	0.005 s
7	<u>Login an account in user website</u>	1	0	1	0	0.005 s
8	<u>Login an account in user website</u>	1	0	1	0	0.004 s

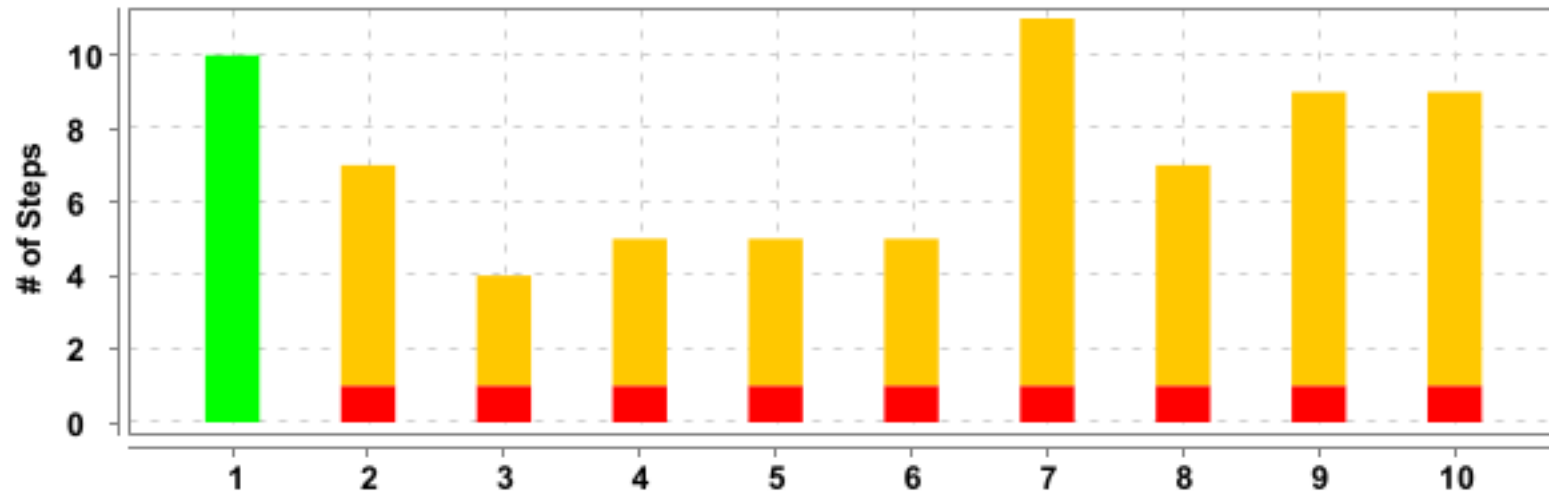



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Entering the Employee details</u>	<u>Adding Employee Status</u>	10	10	0	0	42.839 s
2	<u>Adding the leave reason</u>	<u>Adding the leave details to the category</u>	7	0	1	6	0.014 s
3	<u>Login an account in user website</u>	<u>Login with valid credentials</u>	4	0	1	3	0.008 s
4		<u>Login with invalid credentials</u>	5	0	1	4	0.006 s
5		<u>Login with invalid credentials</u>	5	0	1	4	0.006 s
6		<u>Login with invalid credentials</u>	5	0	1	4	0.005 s
7	<u>Trying to add new organization structure to orangeHRM</u>	<u>Adding new Organaization Structure</u>	11	0	1	10	0.006 s
8	<u>Acessing the new user</u>	<u>Adding new user in PIM</u>	7	0	1	6	0.005 s
9	<u>Login an account in user website</u>	<u>Adding new skill</u>	9	0	1	8	0.005 s
10		<u>Adding new customer to project info</u>	9	0	1	8	0.005 s


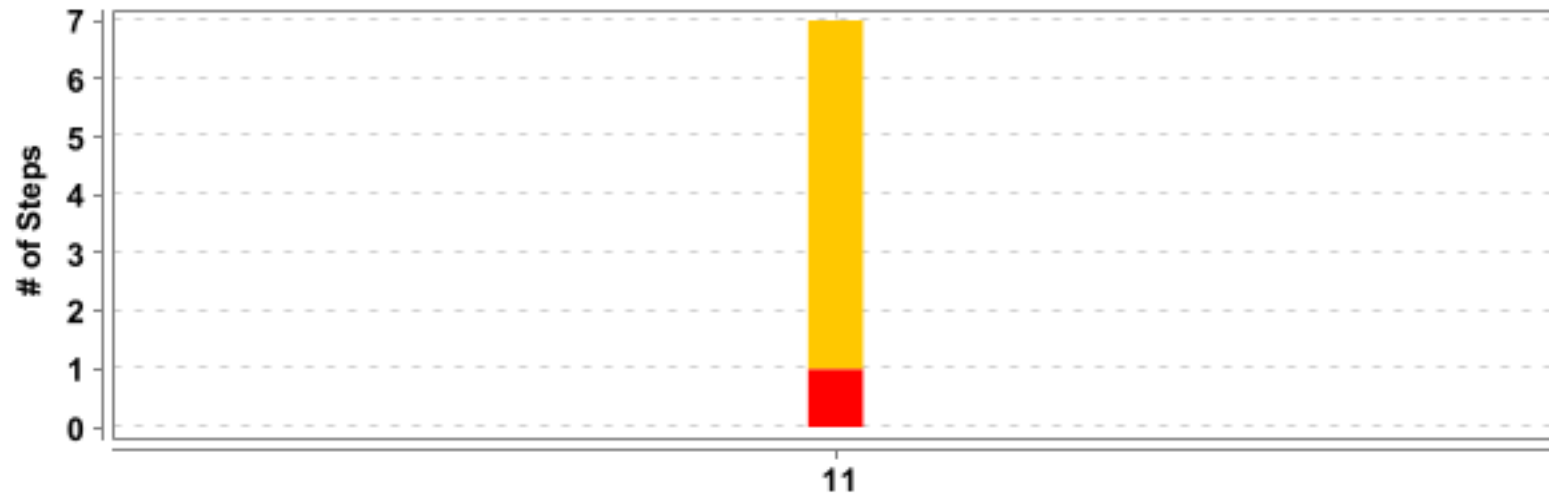


#	Feature Name	Scenario Name	T	P	F	S	Duration
11	Login an account in user website	Checking User Status is Enabled or not	7	0	1	6	0.004 s

Entering the Employee details

FAILED	DURATION - 43.156 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 10 Pass - 10 Fail - 0 Skip - 0	
/ 4:48:18.623 PM // 4:49:01.779 PM /					

Adding Employee Status

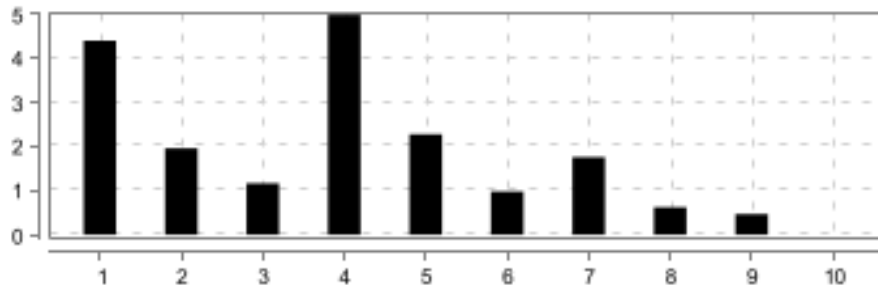

<div>FAILED</div> <div>DURATION - 42.839 s</div>		<div></div>	<div>Steps</div> <div>Total - 10</div> <div>Pass - 10</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 4:48:18.940 PM // 4:49:01.779 PM /</div>				
<div>Entering the Employee details</div>				

#	Step / Hook Details	Status	Duration
1	Given User is on the Website homepage	PASSED	4.398 s
2	When User enters the valid username and password	PASSED	1.957 s
3	And User clicks the login button	PASSED	1.163 s
4	And User clicks admin feature	PASSED	4.986 s
5	And User selects Job	PASSED	2.280 s
6	And User selects Employee Status	PASSED	0.983 s
7	And User Clicks on Add button	PASSED	1.757 s
8	And User Enters the Employee Status	PASSED	0.621 s
9	And User Clicks on Save button	PASSED	0.470 s
10	Then User Receives Successfully Saved message	PASSED	0.001 s
	AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	1.490 s
	org.openqa.selenium.WebDriverException: java.io.IOException: Output closed Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: driver.version: ChromiumDriver at org.openqa.selenium.remote.http.jdk.JdkHttpClient\$5.send(JdkHttpClient.java:305) at org.openqa.selenium.remote.http.jdk.JdkHttpClient\$5.close(JdkHttpClient.java:324)		



#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.devtools.Connection.close(Connection.java:212) at org.openqa.selenium.devtools.DevTools.close(DevTools.java:60) at java.base/java.util.Optional.ifPresent(Optional.java:178) at org.openqa.selenium.remote.RemoteWebDriver.quit(RemoteWebDriver.java:430) at org.openqa.selenium.chromium.ChromiumDriver.quit(ChromiumDriver.java:351) at utility.HelperClass.tearDown(HelperClass.java:64) at stepDefinition.HookClass.tearDown(HookClass.java:23) Caused by: java.io.IOException: Output closed at java.net.http/jdk.internal.net.http.websocket.TransportImpl\$SendTask.tryCompleteWrite(TransportImpl.java:613) at java.net.http/jdk.internal.net.http.websocket.TransportImpl\$SendTask.run(TransportImpl.java:551) at java.net.http/jdk.internal.net.http.common.SequentialScheduler\$CompleteRestartableTask.run(SequentialScheduler.java:149) at java.net.http/jdk.internal.net.http.common.SequentialScheduler\$SchedulableTask.run(SequentialScheduler.java:230) at java.net.http/jdk.internal.net.http.common.SequentialScheduler.runOrSchedule(SequentialScheduler.java:303) at java.net.http/jdk.internal.net.http.common.SequentialScheduler.runOrSchedule(SequentialScheduler.java:256) at java.net.http/jdk.internal.net.http.websocket.TransportImpl.sendClose(TransportImpl.java:271) at java.net.http/jdk.internal.net.http.websocket.WebSocketImpl.sendClose0(WebSocketImpl.java:345) at java.net.http/jdk.internal.net.http.websocket.WebSocketImpl.sendClose(WebSocketImpl.java:315) at org.openqa.selenium.remote.http.jdk.JdkHttpClient\$5.lambda\$send\$3(JdkHttpClient.java:284) at org.openqa.selenium.remote.http.jdk.JdkHttpClient\$5.send(JdkHttpClient.java:295) at org.openqa.selenium.remote.http.jdk.JdkHttpClient\$5.close(JdkHttpClient.java:324) at org.openqa.selenium.devtools.Connection.close(Connection.java:212) at org.openqa.selenium.devtools.DevTools.close(DevTools.java:60) at java.base/java.util.Optional.ifPresent(Optional.java:178) at org.openqa.selenium.remote.RemoteWebDriver.quit(RemoteWebDriver.java:430) at org.openqa.selenium.chromium.ChromiumDriver.quit(ChromiumDriver.java:351) at utility.HelperClass.tearDown(HelperClass.java:64) at stepDefinition.HookClass.tearDown(HookClass.java:23) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) </pre>		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		

Adding the leave reason

FAILED	DURATION - 0.067 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 7 Pass - 0 Fail - 1 Skip - 6	
/ 4:49:01.806 PM // 4:49:01.873 PM /					



Adding the leave details to the category
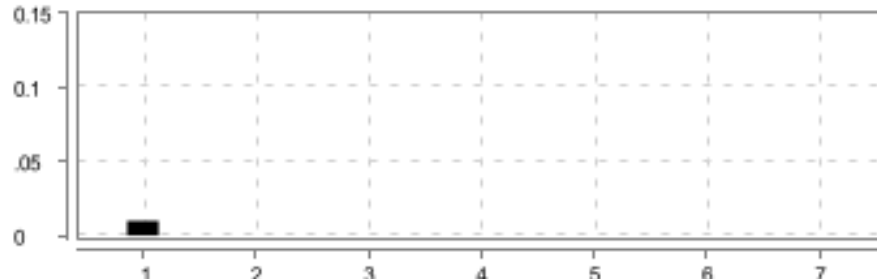
<div><div>FAILED</div><div>DURATION - 0.014 s</div></div>			<div>Steps</div> <div>Total - 7</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 6</div>	
/ 4:49:01.859 PM // 4:49:01.873 PM /				
Adding the leave reason				



#	Step / Hook Details	Status	Duration
1	<p>Given User is on the Website homepage</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Leave.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	0.010 s
2	When User enters the valid username and password	SKIPPED	0.000 s
3	And User clicks the login button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	And User clicks the leave feature	SKIPPED	0.000 s
5	And user clicks to the configure to the field	SKIPPED	0.000 s
6	And user Creates new leave type using sheetname "sheet1" and rownumber 0	SKIPPED	0.000 s
7	Then user sees the adding the leave page switching	SKIPPED	0.000 s
	AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	<p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtoo..., se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20)</p>		

Login an account in user website

FAILED	DURATION - 0.048 s	Scenarios		Steps	
/ 4:49:01.884 PM // 4:49:01.932 PM /		Total - 4		Total - 19	
		Pass - 0		Pass - 0	
		Fail - 4		Fail - 4	
		Skip - 0		Skip - 15	



Login with valid credentials
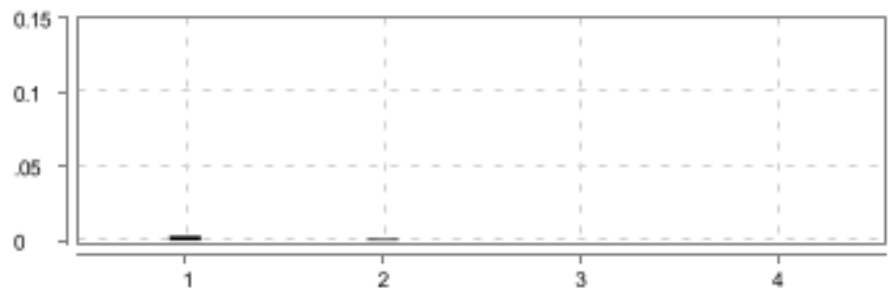
<div>FAILED</div> <div>DURATION - 0.008 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 4:49:01.885 PM // 4:49:01.893 PM /				
Login an account in user website				
@ValidCredentials				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on the Website homepage</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\Local\Temp\scoped_dir1140_5735_199}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtools, se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Login.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	0.003 s
2	When User enters the valid username and password	SKIPPED	0.001 s
3	And User clicks the login button	SKIPPED	0.000 s
4	Then User sees the login successful message	SKIPPED	0.000 s
	<p>AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\Local\Temp\scoped_dir1140_5735_199}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtools, se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true,</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre>webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20)</pre>		



Login with invalid credentials

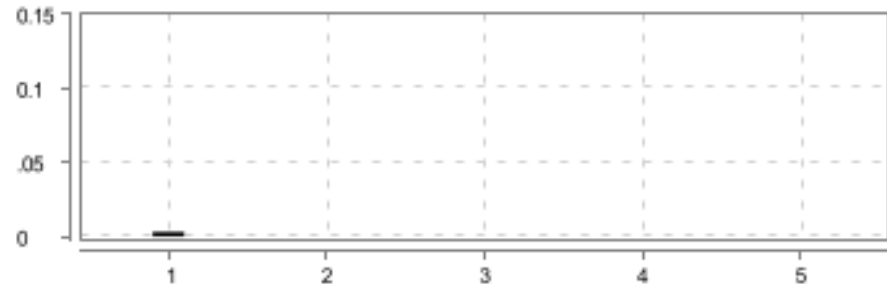FAILED	DURATION - 0.006 s		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 4:49:01.901 PM // 4:49:01.907 PM /				
Login an account in user website				
@InvalidCredentials				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on the Website homepage</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Login.feature:4) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
2	When User enters the invalid username "Admin1"	SKIPPED	0.000 s
3	And User enters the invalid password "admin1"	SKIPPED	0.000 s
4	And User clicks the login button	SKIPPED	0.000 s
5	Then Login is unsuccessful with error messages	SKIPPED	0.000 s
	AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	<p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtoo..., se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20)</p>		



Login with invalid credentials

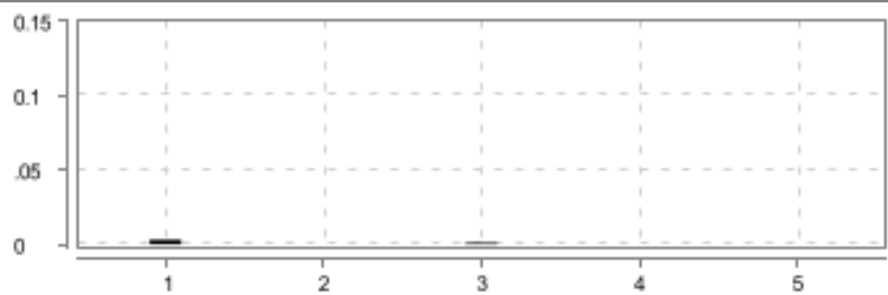FAILED	DURATION - 0.006 s		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 4:49:01.914 PM // 4:49:01.920 PM /				
Login an account in user website				
@InvalidCredentials				

#	Step / Hook Details	Status	Duration
1	Given User is on the Website homepage	FAILED	0.003 s
	<p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities</p>		

#	Step / Hook Details	Status	Duration
	<pre>{acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtoo..., se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Login.feature:4) * Not displayable characters are replaced by '?'. </pre>		
2	When User enters the invalid username "admin123"	SKIPPED	0.000 s
3	And User enters the invalid password "admin"	SKIPPED	0.001 s
4	And User clicks the login button	SKIPPED	0.000 s
5	Then Login is unsuccessful with error messages	SKIPPED	0.000 s
	<p>AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtoo..., se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20) </pre>	FAILED	0.001 s

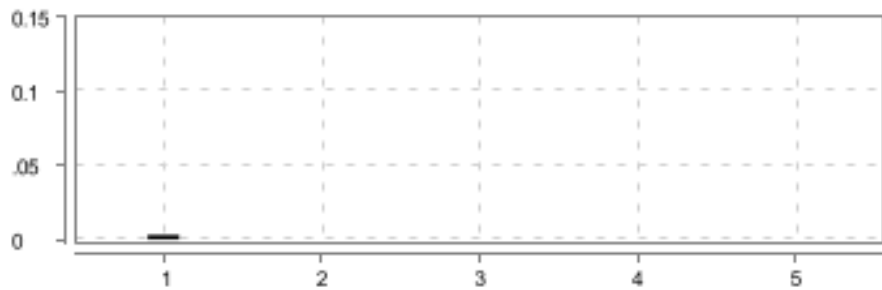

Login with invalid credentials

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 4:49:01.927 PM // 4:49:01.932 PM /				
Login an account in user website				
@InvalidCredentials				



#	Step / Hook Details	Status	Duration
1	<p>Given User is on the Website homepage</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\Local\Temp\WebDriver-114.0.5735.90\chrome\chromedriver.exe}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtools/page/1, se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Login.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	0.003 s
2	When User enters the invalid username "Aaddm"	SKIPPED	0.000 s
3	And User enters the invalid password "min123"	SKIPPED	0.000 s
4	And User clicks the login button	SKIPPED	0.000 s
5	Then Login is unsuccessful with error messages	SKIPPED	0.000 s
	<p>AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\Local\Temp\WebDriver-114.0.5735.90\chrome\chromedriver.exe}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtools/page/1, se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob:</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20) </pre>		

Trying to add new organization structure to orangeHRM

FAILED	DURATION - 0.006 s	Scenarios		Steps	
/ 4:49:01.939 PM // 4:49:01.945 PM /		Total - 1		Total - 11	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 10	

Adding new Organaization Structure

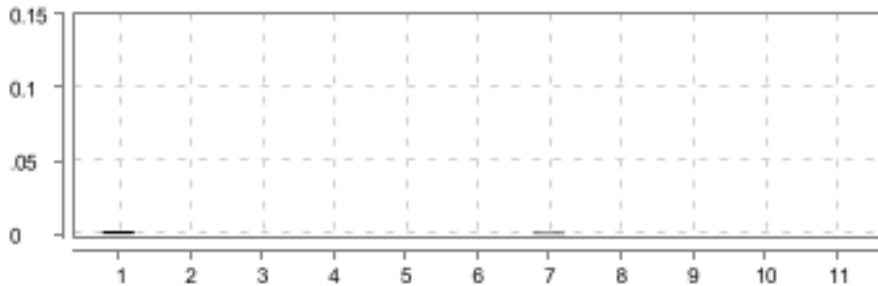

FAILED	DURATION - 0.006 s		Steps	
/ 4:49:01.939 PM // 4:49:01.945 PM /			Total - 11	
Trying to add new organization structure to orangeHRM			Pass - 0	
			Fail - 1	
			Skip - 10	

#	Step / Hook Details	Status	Duration
1	Given User is on the Website homepage	FAILED	0.002 s
	<pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium. chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, </pre>		



#	Step / Hook Details	Status	Duration
	<p>networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Organization.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>		
2	When User enters the valid username and password	SKIPPED	0.000 s
3	And User clicks the login button	SKIPPED	0.000 s
4	And User clicks admin feature	SKIPPED	0.000 s
5	And user selects Organization category	SKIPPED	0.000 s
6	And User selects Structure in organaization category	SKIPPED	0.000 s
7	And User enables Edit function	SKIPPED	0.001 s
8	And User clicks Add button	SKIPPED	0.000 s
9	And User enters unit identification using sheetname "sheet1" and rownumber 0	SKIPPED	0.000 s
10	And user clicks save	SKIPPED	0.000 s
11	Then User should be able to see structure added sucessfully	SKIPPED	0.000 s
	<p>AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at stepDefinition.HookClass.tearDown(HookClass.java:20)		

Accessing the new user

FAILED	DURATION - 0.005 s	Scenarios		Steps	
/ 4:49:01.952 PM // 4:49:01.957 PM /		Total - 1		Total - 7	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 6	



Adding new user in PIM

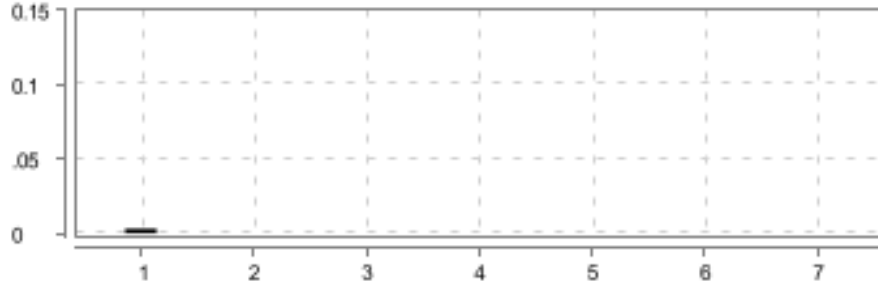FAILED	DURATION - 0.005 s		Steps	
/ 4:49:01.952 PM // 4:49:01.957 PM /			Total - 7	
Accessing the new user			Pass - 0	
			Fail - 1	
			Skip - 6	



#	Step / Hook Details	Status	Duration
1	<p>Given User is on the Website homepage</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtoo..., se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/PIM.feature:4) * Not displayable characters are replaced by '?'.		
2	When User enters the valid username and password	SKIPPED	0.000 s
3	And User clicks the login button	SKIPPED	0.000 s
4	And User select the pim feature	SKIPPED	0.000 s
5	And Select the add employee category	SKIPPED	0.000 s
6	And User fills the add employee details using sheetname "sheet1" and rownumber 0	SKIPPED	0.000 s
7	Then User is able to see the new employee added details	SKIPPED	0.000 s
	AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtoo..., se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20)	FAILED	0.001 s

Login an account in user website

FAILED	DURATION - 0.005 s	Scenarios		Steps	
/ 4:49:01.968 PM // 4:49:01.973 PM /		Total - 1		Total - 9	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	



Adding new skill
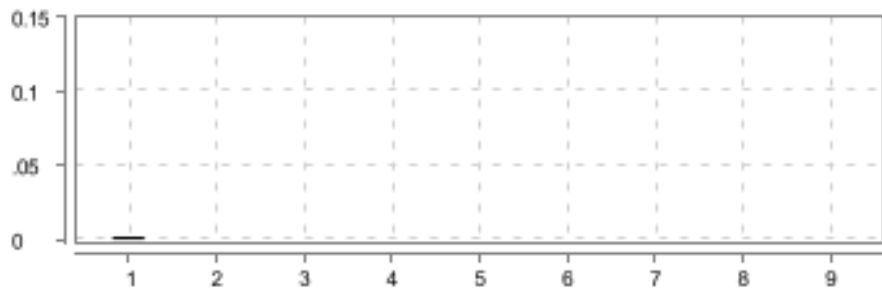
<div>FAILED</div> <div>DURATION - 0.005 s</div>		<div></div>	<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	<div></div>
/ 4:49:01.968 PM // 4:49:01.973 PM /				
Login an account in user website				



#	Step / Hook Details	Status	Duration
1	<p>Given User is on the Website homepage</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Skill.feature:4)</p> <p>* Not displayable characters are replaced by '?'. </p>	FAILED	0.002 s
2	When User enters the valid username and password	SKIPPED	0.000 s
3	And User clicks the login button	SKIPPED	0.000 s
4	And User clicks admin feature	SKIPPED	0.000 s
5	And user select the qualification category	SKIPPED	0.000 s
6	And user select the add skills category	SKIPPED	0.000 s
7	And user enter the details using sheetname "sheet1" and rownumber 0	SKIPPED	0.000 s
8	And user click save button	SKIPPED	0.000 s
9	Then user is able to see the added skilled details	SKIPPED	0.000 s
	AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision:		

#	Step / Hook Details	Status	Duration
	<p>'03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20)</p>		

Login an account in user website

FAILED	DURATION - 0.005 s	Scenarios		Steps	
/ 4:49:01.979 PM // 4:49:01.984 PM /		Total - 1		Total - 9	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	

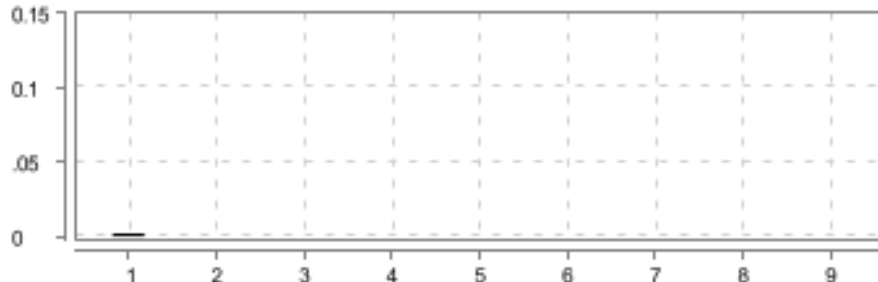

Adding new customer to project info

FAILED	DURATION - 0.005 s		Steps	
/ 4:49:01.979 PM // 4:49:01.984 PM /			Total - 9	
Login an account in user website			Pass - 0	
			Fail - 1	
			Skip - 8	



#	Step / Hook Details	Status	Duration
1	Given User is on the Website homepage org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/Time.feature:4) * Not displayable characters are replaced by '?'. 	FAILED	0.002 s
2	When User enters the valid username and password	SKIPPED	0.000 s
3	And User clicks the login button	SKIPPED	0.000 s
4	When user selects the time feature	SKIPPED	0.000 s
5	When user selects the projectinfo category	SKIPPED	0.000 s
6	When user selects the customer option	SKIPPED	0.000 s
7	When user clicks the add button	SKIPPED	0.000 s
8	When user adds the addcustomer name, description, and clicks the save button	SKIPPED	0.000 s
9	Then user sees the added customer details	SKIPPED	0.000 s
	AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20) </pre>		

Login an account in user website

FAILED	DURATION - 0.004 s	Scenarios		Steps	
/ 4:49:01.990 PM // 4:49:01.994 PM /		Total - 1	1	Total - 7	7
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 6	

Checking User Status is Enabled or not

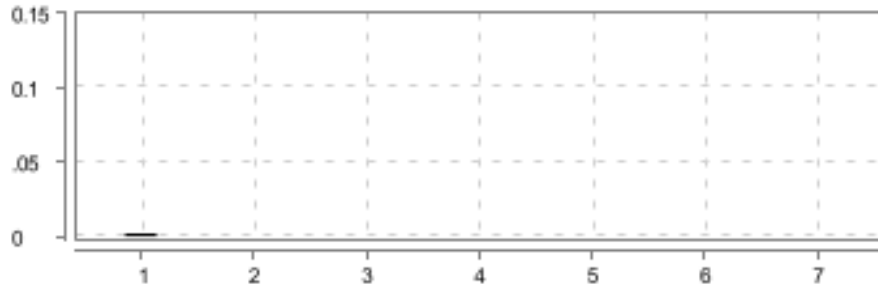FAILED	DURATION - 0.004 s		Steps	
/ 4:49:01.990 PM // 4:49:01.994 PM /			Total - 7	
Login an account in user website			Pass - 0	
			Fail - 1	
			Skip - 6	

#	Step / Hook Details	Status	Duration
1	<p>Given User is on the Website homepage</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, get {url=https://opensource-demo.orangehrmlive.com/web/index.php/auth/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:53189/devtoo..., se.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) </pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) at stepDefinition.StepDefinitionOfWebsite.user_is_on_the_orangehrm_com_homepage(StepDefinitionOfWebsite.java:38) at ?.User is on the Website homepage(file:///C:/Team2/Team2/Venture_Vultures/src/test/resources/Feature/User.feature:4) * Not displayable characters are replaced by '?'.		
2	When User enters the valid username and password	SKIPPED	0.000 s
3	And User clicks the login button	SKIPPED	0.000 s
4	And User clicks admin feature	SKIPPED	0.000 s
5	And User the enters the username to Search	SKIPPED	0.000 s
6	And User the Clciks the savebutton	SKIPPED	0.000 s
7	Then User is Checking the Status of user is Enabled or not	SKIPPED	0.000 s
	AFTER - stepDefinition.HookClass.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\PMANOH~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:53189}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53189/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at stepDefinition.HookClass.tearDown(HookClass.java:20)	FAILED	0.001 s