

Session-15: Custom Comparators & Sorting Logic –

Sort Characters by Frequency –

Program:

```
class Solution {  
    public String frequencySort(String s) {  
        Map<Character, Integer> freqMap = new HashMap<>();  
        for (char c : s.toCharArray()) {  
            freqMap.put(c, freqMap.getOrDefault(c, 0) + 1);  
        }  
        PriorityQueue<Map.Entry<Character, Integer>> maxHeap =  
            new PriorityQueue<>((a, b) -> b.getValue() - a.getValue());  
        maxHeap.addAll(freqMap.entrySet());  
        StringBuilder sb = new StringBuilder();  
        while (!maxHeap.isEmpty()) {  
            Map.Entry<Character, Integer> entry = maxHeap.poll();  
            char c = entry.getKey();  
            int count = entry.getValue();  
            for (int i = 0; i < count; i++) {  
                sb.append(c);  
            }  
        }  
        return sb.toString();  
    }  
}
```

Output:

Description | Accepted × | Editorial | Submissions | Solutions

← All Submissions

Accepted

33 / 33 testcases passed

Time taken: 1d 23hrs 59m

46s

Analysis

Solution

Praveen_1437

submitted at Sep 18, 2026 11:15

₹583.25/mo

Save over 56%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

13 ms | Beats 74.46%

Memory

46.62 MB | Beats 50.21%

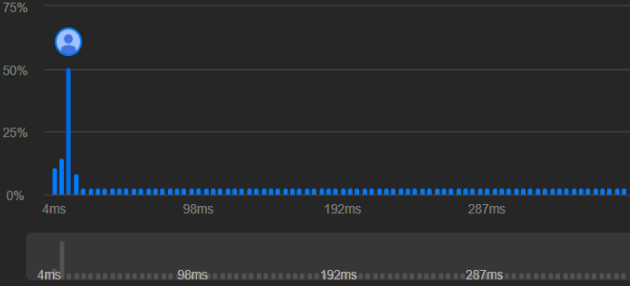

Code | Java

```
1 class Solution {
2     public String frequencySort(String s) {
3         Map<Character, Integer> freqMap = new HashMap<>();
4         for (char c : s.toCharArray()) {
```

Code

Java ▾ | Auto

```
1 class Solution {
2     public String frequencySort(String s) {
3         Map<Character, Integer> freqMap = new HashMap<>();
4         for (char c : s.toCharArray()) {
5             freqMap.put(c, freqMap.getOrDefault(c, 0) + 1);
6         }
7         PriorityQueue<Map.Entry<Character, Integer>> maxHeap =
8             new PriorityQueue<>((a, b) -> b.getValue() - a.getValue());
9
10        maxHeap.addAll(freqMap.entrySet());
11        StringBuilder sb = new StringBuilder();
12        while (!maxHeap.isEmpty()) {
```

Saved

Testcase | Test Result

Accepted Runtime: 1 ms

Case 1

Case 2

Case 3

Input

s =
"tree"

Output

"eert"

Expected

"eert"