

Ex. No.: 4a)

EMPLOYEE AVERAGE PAY

Aim:

To find out the average pay of all employees whose salary is more than 6000 and no. of days worked is more than 4.

Algorithm:

1. Create a flat file emp.dat for employees with their name, salary per day and number of days

worked and save it.

2. Create an awk script emp.awk

3. For each employee record do

a. If Salary is greater than 6000 and number of days worked is more than 4, then print name and

salary earned

b. Compute total pay of employee

4. Print the total number of employees satisfying the criteria and their average pay.

```
1 BEGIN{}
2 {
3     if($2>6000 && $3>4)
4     {
5         print $1, " ", $2*$3
6         pay += $2*$3
7         count +=1
8     }
9 }
10 END{
11     print "No. of Employees are:", count
12     print "Total pay: ", pay
13     print "Average pay: ", pay/count
14 }
```

```
Activities Text Editor May 3 13:09
data.txt
~/awk
Open Save
1 1 JOE 8000 5
2 2 RAM 6000 5
3 3 TIM 5000 6
4 4 BEN 7000 7
5 5 AMY 6500 6
Plain Text Tab Width: 8 Ln 1, Col 1 INS
```

```
[PraveenKumar212@localhost ~]$ mkdir awk
[PraveenKumar212@localhost ~]$ cd awk
[PraveenKumar212@localhost awk]$ touch data.txt
[PraveenKumar212@localhost awk]$ vi data.txt
[PraveenKumar212@localhost awk]$ cat data.txt
1 JOE 8000 5
2 RAM 6000 5
3 TIM 5000 6
4 BEN 7000 7
5 AMY 6500 6
[PraveenKumar212@localhost awk]$ vi pay.awk
[PraveenKumar212@localhost awk]$ awk -f pay.awk data.txt
1 0
2 0
3 0
4 0
5 0
No.of Employees are: 5
Total pay: 0
Average pay: 0
[PraveenKumar212@localhost awk]$ vi data2.txt
[PraveenKumar212@localhost awk]$ vi marks.awk
[PraveenKumar212@localhost awk]$ awk -f marks.awk data2.txt
awk: marks.awk:2: print "Name","SUB-1 ","SUB-2 ","SUB-3 ","SUB-4 ","SUB-5 ","SUB-6 ","STATUS"
^ unterminated string
awk: marks.awk:2: print "Name","SUB-1 ","SUB-2 ","SUB-3 ","SUB-4 ","SUB-5 ","SUB-6 ","STATUS"
^ syntax error
[PraveenKumar212@localhost awk]$ awk -f marks.awk data2.txt
Name SUB-1 SUB-2 SUB-3 SUB-4 SUB-5 SUB-6 STATUS
12 Tom 60 67 84 92 90 PASS

3 Ram 90 95 84 87 56 PASS

4 Jim 60 70 65 78 90 PASS
[PraveenKumar212@localhost awk]$
```

Ex. No.: 4b)


RESULTS OF EXAMINATION

Aim:

To print the pass/fail status of a student in a class.

Algorithm:

1. Read the data from file
2. Get a data from each column
3. Compare the all subject marks column
 - a. If marks less than 45 then print Fail
 - b. else print Pass

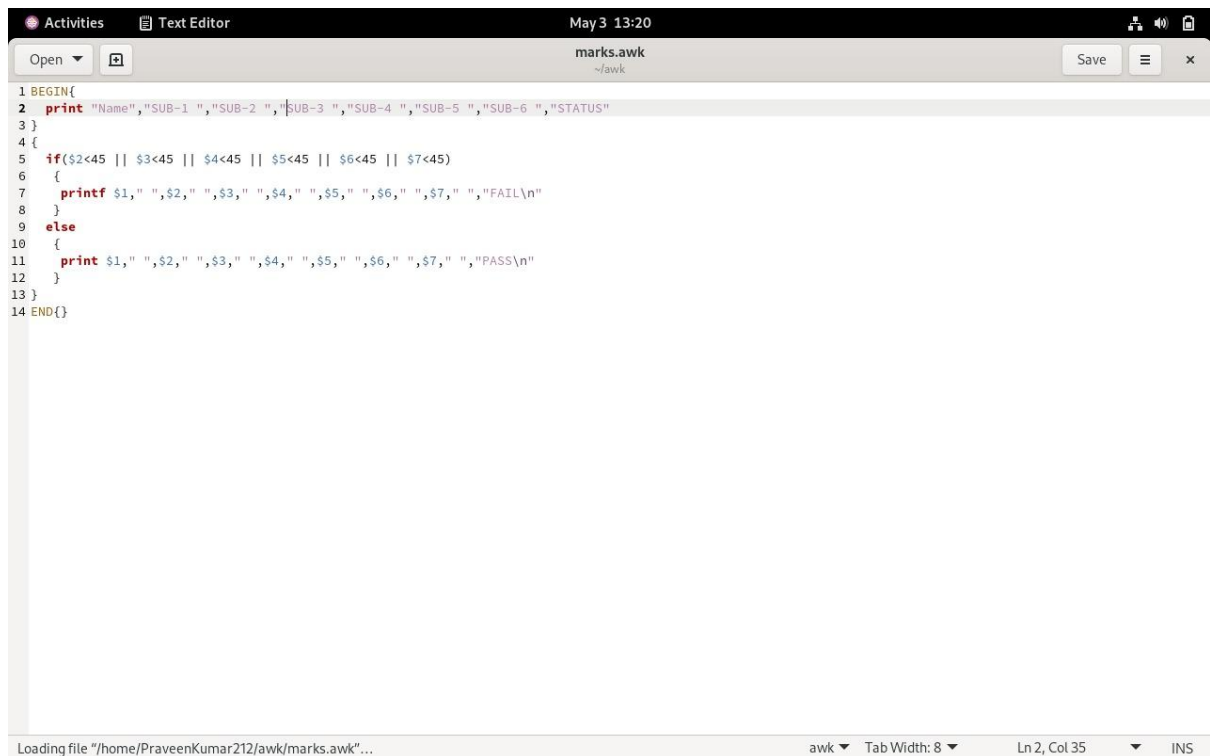

```
1 BEGIN{
2   print "Name", "SUB-1 ", "SUB-2 ", "SUB-3 ", "SUB-4 ", "SUB-5 ", "SUB-6 ", "STATUS"
3 }
4 {
5   if($2<45 || $3<45 || $4<45 || $5<45 || $6<45 || $7<45)
6   {
7     printf $1, " ", $2, " ", $3, " ", $4, " ", $5, " ", $6, " ", $7, " ", "FAIL\n"
8   }
9   else
10  {
11    print $1, " ", $2, " ", $3, " ", $4, " ", $5, " ", $6, " ", $7, " ", "PASS\n"
12  }
13 }
14 END{}
```

Loading file "/home/PraveenKumar212/awk/marks.awk"...

awk Tab Width: 8 Ln 2, Col 35 INS



```
[PraveenKumar212@localhost ~]$ mkdir awk
[PraveenKumar212@localhost ~]$ cd awk
[PraveenKumar212@localhost awk]$ touch data.txt
[PraveenKumar212@localhost awk]$ vi data.txt
[PraveenKumar212@localhost awk]$ cat data.txt
1 JOE 8000 5
2 RAM 6000 5
3 TIM 5000 6
4 BEN 7000 7
5 AMY 6500 6
[PraveenKumar212@localhost awk]$ vi pay.awk
[PraveenKumar212@localhost awk]$ awk -f pay.awk data.txt
1 0
2 0
3 0
4 0
5 0
No.of Employees are: 5
Total pay: 0
Average pay: 0
[PraveenKumar212@localhost awk]$ vi data2.txt
[PraveenKumar212@localhost awk]$ vi marks.awk
[PraveenKumar212@localhost awk]$ awk -f marks.awk data2.txt
awk: marks.awk:2: print "Name","SUB-1 ","SUB-2 ","SUB-3 ","SUB-4 ","SUB-5 ","SUB-6 ","STATUS"
                                     ^ unterminated string
awk: marks.awk:2: print "Name","SUB-1 ","SUB-2 ","SUB-3 ","SUB-4 ","SUB-5 ","SUB-6 ","STATUS"
                                     ^ syntax error
[PraveenKumar212@localhost awk]$ awk -f marks.awk data2.txt
Name SUB-1 SUB-2 SUB-3 SUB-4 SUB-5 SUB-6 STATUS
12 Tom 60 67 84 92 90 PASS
3 Ram 90 95 84 87 56 PASS
4 Jim 60 70 65 78 90 PASS
[PraveenKumar212@localhost awk]$
```