

Setup Oracle GoldenGate Veridata 12c (12.2.1.4.220831)

- Overview
 - 1. Preparation for Veridata Console
 - 1.1. Create Goldengate Hub as Veridata server
 - 1.2. Create a RDS as Veridata repository db
 - 1.3. Setup the environment
 - 1.4. Copy scripts and software
 - 2. Installation
 - 2.1 Setup JDK
 - 2.2 Setup Weblogic Server
 - 2.3 Setup Oracle GoldenGate Veridata
 - 2.4 Create Repository
 - 2.5 Configure Domain for Oracle GoldenGate Veridata
 - 2.5a Setup up WebLogic ELB
 - 2.5c Create Veridata user data
 - 2.6a Manual Settings
 - 2.6b Setup up Veridata ELB
 - 2.8 Setup Veridata profile sort_profile_new
 - 2.9 Setup https on WebLogic and Veridata
 - 3. Prepare for Veridata Agents Host in AWS
 - 4. Common Issues

Overview

1. IMPORTANT : Most of the scripts have hardcoded dbname, hostname , username and password.

a) 5 myDomain-ds.properties. files*

>>Change these lines based on the VIP, DB Name and VD prefix:

b) passwordfile.txt (1st line is for sys password)

c) create_domain_7001.py

>>Change these lines based on the domain path, hostname , weblogic user password , weblogic port

```
readTemplate('/u01/veridata/oradata/verirep/wls/wlserver/common/templates/wls/wls.jar') cmo.setPassword('welcome123') cmo.setListenPort(7001) cmo.setListenAddress('ggpsppf501.ie.intuit.net') writeDomain('/u01/veridata/oradata/verirep/wls/user_projects/domains/base_domain')
```

1. Preparation for Veridata Console

1.1. Create Goldengate Hub as Veridata server

Change InstanceTypes for prod to m4.2xlarge in goldengate-hub-ha.json file as below:

```
"InstanceTypes": {
  "GoldenGate": {
    "qa": "m4.large",
    "e2e": "m4.large",
    "prf": "m4.large",
    "stg": "m4.large",
    "sbx": "m4.large",
    "prod": "m4.xlarge"
  }
},
to
"InstanceTypes": {
  "GoldenGate": {
    "qa": "m4.large",
    "e2e": "m4.large",
    "prf": "m4.large",
    "stg": "m4.large",
    "sbx": "m4.large",
    "prod": "m4.4xlarge"
  }
},
```

```
./create_gg_hub_ha_new.sh psp prod pspvd2pt us-west-2 vpc-2 no m4.16xlarge 6000
```

1.2. Create a RDS as Veridata repository db

`./create_rds.sh e2e epsvdpdt us-west-2 vpc-3`

Create the below Tablespaces for Veridata:

```
CREATE TABLESPACE VERIDATA DATAFILE SIZE 5G AUTOEXTEND ON NEXT 1G MAXSIZE UNLIMITED;  
CREATE TEMPORARY TABLESPACE VERIDATA_TEMP TEMPFILE SIZE 1G AUTOEXTEND ON NEXT 1G MAXSIZE UNLIMITED;
```

1.3. Setup the environment

#1. Ensure we have an Oracle DB setup for Veridata

#2. Required Dir path exists as per the need

```
mkdir -p /u01/veridata/wls  
mkdir -p /u01/veridata/oraInventory  
mkdir -p /u01/veridata/jdk1.8  
mkdir /u01/setup_veridata_srv
```

1.4. Copy scripts and software

#1 Copy files from S3 to gg hub.

#2. Untar the files on the new Veridata Console server.

```
cd /tmp/setup_veridata_srv
tar -xvf setup_veridata_srv.tar
```

#3. On the new Veridata server, you should have the following files in the temp dir-

```
[oracle@ggppspf501 setup_veridata_srv]$ ls -ltr
```

```
total 4728360
-r-xr-xr-x. 1 oracle oinstall 1563217124 Oct  9  2016 fmw_12.2.1.2.0_infrastructure.jar
-rw-r--r--. 1 oracle oinstall      8986 Oct 11  2016 fmw_12212_readme.htm
-r-xr-xr-x. 1 oracle oinstall  446021430 Oct 11  2016 fmw_12.2.1.2.0_ogg.jar
-rw-----. 1 oracle oinstall  445820174 May 27 12:57 fmw_12.2.1.2.0_ogg_Disk1_1of1.zip
-rw-----. 1 oracle oinstall 1563100157 May 27 12:57 FWM_122120_infra_V779122-01.zip
-rw-----. 1 oracle oinstall  445820174 May 27 12:57 V789398-01.zip
-rw-----. 1 oracle oinstall    410 May 27 13:07 create_domain_7001.py
-rw-----. 1 oracle oinstall    337 May 27 13:07 enable_domain_7001.py
-rw-----. 1 oracle oinstall    342 May 27 13:07 enable_domain_7001_1.py
-rw-----. 1 oracle oinstall    338 May 27 13:07 enable_domain_7001_2.py
-rw-----. 1 oracle oinstall 377784320 May 27 13:07 jdk-1.8-u131-x64.tar
-rw-----. 1 oracle oinstall    428 May 27 13:07 myDomain-ds.properties.opsaudDBDS
-rw-----. 1 oracle oinstall    428 May 27 13:07 myDomain-ds.properties.opsaudviewDS
-rw-----. 1 oracle oinstall    416 May 27 13:07 myDomain-ds.properties.opss
-rw-----. 1 oracle oinstall    428 May 27 13:07 myDomain-ds.properties.stb
-rw-----. 1 oracle oinstall    421 May 27 13:07 myDomain-ds.properties.veridata
-rw-----. 1 oracle oinstall     61 May 27 13:07 oraInst.loc
-rw-----. 1 oracle oinstall     75 May 27 13:07 passwordfile.txt
-rw-----. 1 oracle oinstall   3013 May 27 13:16 create_data_source.py
-rwx-----. 1 oracle oinstall    599 May 28 11:31 veridata_srv_resp
-rwx-----. 1 oracle oinstall   1310 May 28 11:36 fusion_middleware_resp
```

#4. Correct Golden Gate Hub host name and RDS Repository instance connect string in below files

```
create_domain_7001.py
myDomain-*
```

```
# Change all myDomain-* files properly
You would need to change
```

#5. Make sure the below 2 lines are commented out in create_data_source.py:

```
\\
cd('/SystemResources/' + dsName)
set('Targets',jarray.array(\[ObjectName('com.bea:Name=' + dsTargetName + ',Type=' + dsTargetType)\],
ObjectName))
```

#6. Update the '<password>' & <wl-password> in all myDomain-* files (weblogic and Veridata users)

```
admin.password=<wl-password>
ds.password=<password>
```

2. Installation

2.1 Setup JDK

```
cd /u01/setup_veridata_srv
unzip FWM_122120_infra_V779122-01.zip
unzip fmw_12.2.1.2.0_ogg_Disk1_10f1.zip
cp jdk-1.8-u131-x64.tar.gz /u01/veridata/jdk1.8/
/u01/veridata/jdk1.8/

tar -xvf /tmp/setup_veridata_srv/jdk-1.8-u131-x64.tar

update /l/<SID> file to add JAVA_HOME environment variable and add it to PATH and LD_LIBRARY_PATH variable

export JAVA_HOME=/u01/veridata/jdk1.8/jdk1.8.0_131
export PATH=${JAVA_HOME}/bin:${ORACLE_HOME}/bin:${ORACLE_HOME}:${PATH}:/l:/usr/sbin

export
LD_LIBRARY_PATH=${JAVA_HOME}/jre/lib/amd64/server:${ORACLE_HOME}/lib32:${ORACLE_HOME}/lib:${ORACLE_HOME}/jdbc
/lib:/usr/openwin/lib:/usr/dt/lib

Source DB profile file
. /l/<SID> or . /l/orcl (aws)
```

2.2 Setup Weblogic Server

```

export temp_dir=/u01/setup_veridata_srv
export MW_HOME=/u01/veridata/wls
export WLS_HOME=$MW_HOME/wlserver

cd $temp_dir
export _JAVA_OPTIONS="-Djava.io.tmpdir=$temp_dir"

java -jar fmw_12.2.1.4.0_infrastructure.jar -silent -responseFile $temp_dir/fusion_middleware_resp -invPtrLoc $temp_dir/oraInst.loc

##### Output should be like below on completion ##### [oracle@ggpspibob1 setup_veridata_srv]$ java -jar
fmw_12.2.1.4.0_infrastructure.jar -silent -responseFile $temp_dir/fusion_middleware_resp -invPtrLoc $temp_dir
/oraInst.loc
Launcher log file is /tmp/OraInstall2023-04-18_03-28-31AM/launcher2023-04-18_03-28-31AM.log.
Extracting the installer . . . . . Done
Checking if CPU speed is above 300 MHz.   Actual 2300.066 MHz   Passed
Checking swap space: must be greater than 512 MB.   Actual 1023 MB   Passed
Checking if this platform requires a 64-bit JVM.   Actual 64   Passed (64-bit not required)
Checking temp space: must be greater than 300 MB.   Actual 31051 MB   Passed
Preparing to launch the Oracle Universal Installer from /tmp/OraInstall2023-04-18_03-28-31AM
Log: /tmp/OraInstall2023-04-18_03-28-31AM/install2023-04-18_03-28-31AM.log
Copyright (c) 1996, 2019, Oracle and/or its affiliates. All rights reserved.
Reading response file..
Skipping Software Updates
Starting check : CertifiedVersions
Expected result: One of oracle-6, oracle-7, redhat-7, redhat-6, SuSE-11, SuSE-12, SuSE-15
Actual Result: redhat-7.4
Check complete. The overall result of this check is: Passed
CertifiedVersions Check: Success.

Starting check : CheckJDKVersion
Problem: This JDK version was not certified at the time it was made generally available. It may have been
certified following general availability.

Recommendation: Check the Supported System Configurations Guide (http://www.oracle.com/technetwork/middleware/ias/downloads/fusion-certification-100350.html) for further details. Press "Next" if you wish to continue.

Expected result: 1.8.0_191
Actual result: 1.8.0_131
Warning: Check:CheckJDKVersion completed with warnings.

Validations are enabled for this session.
Verifying data
Copying Files
Percent Complete : 10
Percent Complete : 20
Percent Complete : 30
Percent Complete : 40
Percent Complete : 50
Percent Complete : 60
Percent Complete : 70
Percent Complete : 80
Percent Complete : 90
Percent Complete : 100

The installation of Oracle Fusion Middleware 12c Infrastructure 12.2.1.4.0 completed successfully.
Logs successfully copied to /u01/veridata/oraInventory/logs.

```

2.3 Setup Oracle GoldenGate Veridata

```

export temp_dir=/u01/setup_veridata_srv
export MW_HOME=/u01/veridata/wls
export WLS_HOME=$MW_HOME/wlserver
cd $temp_dir

export _JAVA_OPTIONS="-Djava.io.tmpdir=$temp_dir"
java -jar fmw_12.2.1.4.0_ogg.jar -silent -responseFile $temp_dir/veridata_srv_resp -invPtrLoc $temp_dir/oraInst.loc

##### Output should be like below on completion #####
[oracle@ggppspibob1 setup_veridata_srv]$ java -jar fmw_12.2.1.4.0_ogg.jar -silent -responseFile $temp_dir/veridata_srv_resp -invPtrLoc $temp_dir/oraInst.loc
Launcher log file is /tmp/OraInstall2023-04-18_03-57-46AM/launcher2023-04-18_03-57-46AM.log.
Extracting the installer . . . . Done
Checking if CPU speed is above 300 MHz.    Actual 2300.066 MHz    Passed
Checking swap space: must be greater than 512 MB.    Actual 1023 MB    Passed
Checking if this platform requires a 64-bit JVM.    Actual 64    Passed (64-bit not required)
Checking temp space: must be greater than 300 MB.    Actual 32339 MB    Passed
Preparing to launch the Oracle Universal Installer from /tmp/OraInstall2023-04-18_03-57-46AM
Log: /tmp/OraInstall2023-04-18_03-57-46AM/install2023-04-18_03-57-46AM.log
Copyright (c) 1996, 2019, Oracle and/or its affiliates. All rights reserved.
Reading response file..
Skipping Software Updates
Starting check : CertifiedVersions
Expected result: One of oracle-6, oracle-7, redhat-7, redhat-6, SuSE-11, SuSE-12, SuSE-15
Actual Result: redhat-7.4
Check complete. The overall result of this check is: Passed
CertifiedVersions Check: Success.

Starting check : CheckJDKVersion
Problem: This JDK version was not certified at the time it was made generally available. It may have been
certified following general availability.

Recommendation: Check the Supported System Configurations Guide (http://www.oracle.com/technetwork/middleware/ias/downloads/fusion-certification-100350.html) for further details. Press "Next" if you wish to continue.

Expected result: 1.8.0_191
Actual result: 1.8.0_131
Warning: Check:CheckJDKVersion completed with warnings.

Validations are enabled for this session.
Verifying data
Copying Files
Percent Complete : 10
Percent Complete : 20
Percent Complete : 30
Percent Complete : 40
Percent Complete : 50
Percent Complete : 60
Percent Complete : 70
Percent Complete : 80
Percent Complete : 90
Percent Complete : 100

The installation of Oracle Fusion Middleware 12c GoldenGate Veridata 12.2.1.4.0 completed successfully.
Logs successfully copied to /u01/veridata/oraInventory/logs.
#####

MANUAL WORK (THIS WAS NOT REQUIRED)
#Add the last third line in the listed sql file below the mentioned ALTER SESSION stmt

#vi $MW_HOME/oracle_common/common/sql/opss/scripts/opss_tables.sql
#ALTER SESSION SET CURRENT_SCHEMA=&&1 ;
#alter session set NLS_LENGTH_SEMANTICS=BYTE;

```

2.4 Create Repository

NOTE: 1. "-schemaPrefix " will add the specified prefix to the db usernames that will be added as part of installation. For example by giving VD1, we will have VD1_VERIDATA user in the db.

2. \$temp_dir/passwordfile.txt file has 7 passwords: first is sys db user password; second is for weblogic user password; next 5 passwords are for the new users being created at this step. Please make sure that sys and weblogic users' passwords are correct.

3. If any of these below steps fails, rename wls directory under /u01/veridata/ and restart from step #2.2

```
cd $MW_HOME/oracle_common/bin
```

```
./rcu -silent -createRepository -databaseType ORACLE -connectString pspsys01.sbg-ppp-a.intuit.com:1521:
pspsys01 -dbUser intuadmin -schemaPrefix VD \
-component IAU -tablespace VERIDATA -tempTablespace VERIDATA_TEMP \
-component IAU_APPEND -tablespace VERIDATA -tempTablespace VERIDATA_TEMP \
-component IAU_VIEWER -tablespace VERIDATA -tempTablespace VERIDATA_TEMP \
-component OPSS -tablespace VERIDATA -tempTablespace VERIDATA_TEMP \
-component VERIDATA -tablespace VERIDATA -tempTablespace VERIDATA_TEMP \
-component STB -tablespace VERIDATA -tempTablespace VERIDATA_TEMP -f < $temp_dir/passwordfile.txt
```

```
##### Output should be like below on completion ##### [oracle@ggppibob1
bin]$ ./rcu -silent -createRepository -databaseType ORACLE -connectString pspsys01.sbg-ppp-a.intuit.com:
1521:pspsys01 -dbUser intuadmin -schemaPrefix VD -component UCSUMS -tablespace VERIDATA -temptablespace
VERIDATA_TEMP -component MDS -tablespace VERIDATA -temptablespace VERIDATA_TEMP -component WLS -tablespace
VERIDATA -temptablespace VERIDATA_TEMP -component IAU -tablespace VERIDATA -tempTablespace VERIDATA_TEMP -
component IAU_APPEND -tablespace VERIDATA -tempTablespace VERIDATA_TEMP -component IAU_VIEWER -tablespace
VERIDATA -tempTablespace VERIDATA_TEMP -component OPSS -tablespace VERIDATA -tempTablespace VERIDATA_TEMP -
component VERIDATA -tablespace VERIDATA -tempTablespace VERIDATA_TEMP -component STB -tablespace VERIDATA -
tempTablespace VERIDATA_TEMP -f < $temp_dir/passwordfile.txt
Picked up _JAVA_OPTIONS: -Djava.io.tmpdir=/u01/setup_veridata_srv
```

RCU Logfile: /u01/setup_veridata_srv/RCU2023-04-18_04-52_893887307/logs/rcu.log

Processing command line

Repository Creation Utility - Checking Prerequisites

Checking Global Prerequisites

Repository Creation Utility - Checking Prerequisites

Checking Component Prerequisites

Repository Creation Utility - Creating Tablespaces

Validating and Creating Tablespaces

Create tablespaces in the repository database

Repository Creation Utility - Create

Repository Create in progress.

Percent Complete: 10

Executing pre create operations

Percent Complete: 26

Percent Complete: 26

Percent Complete: 27

Percent Complete: 28

Percent Complete: 29

Percent Complete: 29

Percent Complete: 30
Percent Complete: 30
Creating Common Infrastructure Services(STB)
Percent Complete: 38
Percent Complete: 38
Percent Complete: 46
Percent Complete: 46
Percent Complete: 46

Creating Audit Services Append(IAU_APPEND)
Percent Complete: 53
Percent Complete: 53
Percent Complete: 61
Percent Complete: 61
Percent Complete: 61

Creating Audit Services Viewer(IAU_VIEWER)
Percent Complete: 68
Percent Complete: 68
Percent Complete: 69
Percent Complete: 69
Percent Complete: 70
Percent Complete: 70

Creating Metadata Services(MDS)
Percent Complete: 78
Percent Complete: 78
Percent Complete: 78
Percent Complete: 79
Percent Complete: 79
Percent Complete: 80
Percent Complete: 80
Percent Complete: 80

Creating Weblogic Services(WLS)
Percent Complete: 85
Percent Complete: 85
Percent Complete: 86
Percent Complete: 87
Percent Complete: 89
Percent Complete: 91
Percent Complete: 91
Percent Complete: 91

Creating User Messaging Service(UCSUMS)
Percent Complete: 95
Percent Complete: 95
Percent Complete: 98
Percent Complete: 98
Percent Complete: 100

Creating Audit Services(IAU)
Creating Oracle Platform Security Services(OPSS)
Creating Veridata Repository(VERIDATA)
Executing post create operations

Repository Creation Utility: Create - Completion Summary

Database details:

Host Name : pspsys01.sbg-ppd.a.intuit.com
Port : 1521
Service Name : PSPSYS01
Connected As : intuadmin
Prefix for (prefixable) Schema Owners : VD
RCU Logfile : /u01/setup_veridata_srv/RCU2023-04-18_04-52_893887307/logs/rcu.
log

Component schemas created:

Component	Status	Logfile
Common Infrastructure Services	Success	/u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/stb.log		
Oracle Platform Security Services	Success	/u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/opss.log		
Veridata Repository	Success	/u01/setup_veridata_srv/RCU2023-04-18_04-


```

52_893887307/logs/veridata.log
User Messaging Service          Success      /u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/ucsums.log
Audit Services                  Success      /u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/iau.log
Audit Services Append           Success      /u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/iau_append.log
Audit Services Viewer           Success      /u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/iau_viewer.log
Metadata Services              Success      /u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/mds.log
WebLogic Services              Success      /u01/setup_veridata_srv/RCU2023-04-18_04-
52_893887307/logs/wls.log

Repository Creation Utility - Create : Operation Completed

#####

```

2.5 Configure Domain for Oracle GoldenGate Veridata

```

cd $MW_HOME/oracle_common/common/bin/
nohup ./wlst.sh $temp_dir/create_domain_7001.py &

cd $MW_HOME/oracle_common/common/bin/
nohup ./wlst.sh $temp_dir/enable_domain_7001_1.py &

cd $MW_HOME/user_projects/domains/base_domain/bin/
nohup ./startWebLogic.sh >startWebLogic.log 2>&1 &

export DOMAIN_HOME=$MW_HOME/user_projects/domains/base_domain
. $DOMAIN_HOME/bin/setDomainEnv.sh

cd $MW_HOME/oracle_common/common/bin/
./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.opss
./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.opsaudviewDS
./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.opsaudDBDS
./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.veridata
./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.stb

##### Output would like similar to below with username changes as shown in
screenshot ###
[oracle@ggpppf501 base_domain]$ java weblogic.WLST $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.
properties.opss

Initializing WebLogic Scripting Tool (WLST) ...
Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

properties= /tmp/setup_veridata_srv/myDomain-ds.properties.opss
adminUsername= weblogic
adminPassword= welcome123
adminURL= t3://ggpsppf501.sbg-ppsp-ppd.a.intuit.com:7001
dsName= opss-data-source
dsJNDIName= jdbc/OpssDataSource
dsURL= jdbc:oracle:thin:@psppfib1.sbg-ppsp-ppd.a.intuit.com:1521:psppfib1
dsDriver= oracle.jdbc.xa.client.OracleXADataSource
dsUsername= vd_opss
dsPassword= welcome123
dsTargetType= Cluster
dsTargetName= AdminServer
Connecting to t3://ggpsppf501.sbg-ppsp-ppd.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.

```

This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Saving all your changes ...
Saved all your changes successfully.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
Disconnected from weblogic server: AdminServer

Exiting WebLogic Scripting Tool.

#####

```
export temp_dir=/u01/setup_veridata_srv
export MW_HOME=/u01/veridata/wls
export WLS_HOME=$MW_HOME/wlserver

cd $MW_HOME/oracle_common/common/bin/
nohup ./wlst.sh $temp_dir/enable_domain_7001_2.py &
```

```
java weblogic.WLST $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.opss
Picked up _JAVA_OPTIONS: -Djava.io.tmpdir=/u01/setup_veridata_srv
```

Initializing WebLogic Scripting Tool (WLST) ...

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/ora_util.py" caused an error "Traceback (innermost last):

```
File "<string>", line 1, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?
File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
  at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
  at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
  at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
  at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
  at java.lang.reflect.Method.invoke(Method.java:498)
```

```
java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
```

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/ora_help.py" caused an error "Traceback (innermost last):

```
File "<string>", line 1, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_help.py", line 12, in ?
File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
  at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
  at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
  at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
  at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
  at java.lang.reflect.Method.invoke(Method.java:498)
```

```
java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
```

```
java.lang.ClassNotFoundException: com.oracle.cie.domain.script.jython.WLST_offline
  at java.net.URLClassLoader.findClass(URLClassLoader.java:381)
  at java.lang.ClassLoader.loadClass(ClassLoader.java:424)
  at java.lang.ClassLoader.loadClass(ClassLoader.java:357)
  at java.lang.Class.forName0(Native Method)
```

```

at java.lang.Class.forName(Class.java:348)
at weblogic.management.scripting.utils.WLSTUtil.initOfflineContext(WLSTUtil.java:500)
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
at org.python.core.PyReflectedFunction.__call__(Unknown Source)
at org.python.core.PyReflectedFunction.__call__(Unknown Source)
at org.python.core.PyObject.__call__(Unknown Source)
at org.python.core.PyObject.invoke(Unknown Source)
at wlstModule$py.f$0(/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar
/weblogic/management/scripting/utils/modules/wlstModule.py:22)
at wlstModule$py.call_function(/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management
scripting.jar/weblogic/management/scripting/utils/modules/wlstModule.py)
at org.python.core.PyTableCode.call(Unknown Source)
at org.python.core.PyCode.call(Unknown Source)
at org.python.core.imp.createFromCode(imp.java:275)
at org.python.core.imp.createFromSource(imp.java:247)
at org.python.core.ZipFileImporter$ZipFileLoader.load_module(Unknown Source)
at sun.reflect.GeneratedMethodAccessor73.invoke(Unknown Source)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
at org.python.core.PyReflectedFunction.__call__(Unknown Source)
at org.python.core.PyMethod.__call__(Unknown Source)
at org.python.core.PyObject.__call__(Unknown Source)
at org.python.core.imp.loadFromLoader(imp.java:436)
at org.python.core.imp.find_module(imp.java:396)
at org.python.core.imp.import_next(imp.java:602)
at org.python.core.imp.import_name(imp.java:704)
at org.python.core.imp.importName(imp.java:750)
at org.python.core.ImportFunction.load(Unknown Source)
at org.python.core.ImportFunction.__call__(Unknown Source)
at org.python.core.PyObject.__call__(Unknown Source)
at org.python.core.__builtin__.__import__(Unknown Source)
at org.python.core.imp.importOneAs(imp.java:775)
at ora_mbs$py.f$0(/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar
/wlstScriptDir/lib/ora_mbs.py:17)
at ora_mbs$py.call_function(/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare
pyjar.jar/wlstScriptDir/lib/ora_mbs.py)
at org.python.core.PyTableCode.call(Unknown Source)
at org.python.core.PyCode.call(Unknown Source)
at org.python.core.imp.createFromCode(imp.java:275)
at org.python.core.imp.createFromSource(imp.java:247)
at org.python.core.ZipFileImporter$ZipFileLoader.load_module(Unknown Source)
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
at org.python.core.PyReflectedFunction.__call__(Unknown Source)
at org.python.core.PyMethod.__call__(Unknown Source)
at org.python.core.PyObject.__call__(Unknown Source)
at org.python.core.imp.loadFromLoader(imp.java:436)
at org.python.core.imp.find_module(imp.java:396)
at org.python.core.imp.import_next(imp.java:602)
at org.python.core.imp.import_name(imp.java:704)
at org.python.core.imp.importName(imp.java:750)
at org.python.core.ImportFunction.load(Unknown Source)
at org.python.core.ImportFunction.__call__(Unknown Source)
at org.python.core.PyObject.__call__(Unknown Source)
at org.python.core.__builtin__.__import__(Unknown Source)
at org.python.core.imp.importOne(imp.java:759)
at org.python.pycode._pyx37.f$0(<string>:1)
at org.python.pycode._pyx37.call_function(<string>)
at org.python.core.PyTableCode.call(Unknown Source)
at org.python.core.PyCode.call(Unknown Source)
at org.python.core.Py.runCode(Py.java:1226)
at org.python.core.Py.exec(Py.java:1252)
at org.python.util.PythonInterpreter.exec(Unknown Source)
at weblogic.management.scripting.utils.WLSTInterpreter.execJarUserModules(WLSTInterpreter.java:801)
at weblogic.management.scripting.utils.WLSTInterpreter.setModules(WLSTInterpreter.java:393)
at weblogic.management.scripting.utils.WLSTInterpreter.<init>(WLSTInterpreter.java:254)

```

```

    at weblogic.management.scripting.WLST.main(WLST.java:134)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)
    at weblogic.WLST.main(WLST.java:47)
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/OracleLibOVD_handler.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/OracleLibOVD_handler.py", line 28, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_help.py", line 12, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/igfConfig_handler.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/igfConfig_handler.py", line 15, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_help.py", line 12, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/Opss_common.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/Opss_common.py", line 13, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/Opss_handler.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/Opss_handler.py", line 12, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_help.py", line 12, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

```

```

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/PdkHandler.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/PdkHandler.py", line 14, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/WebCenterBaseHelper.py", line 12, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utls/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utls.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/PortletClientHandler.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/PortletClientHandler.py", line 4, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/WebCenterBaseHelper.py", line 12, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utls/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utls.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/ProducerHelperHandler.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ProducerHelperHandler.py", line 16, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/WebCenterBaseHelper.py", line 12, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utls/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utls.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
    at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/WebCenterBaseHelper.py" caused an error "Traceback (innermost last):
  File "<string>", line 1, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/WebCenterBaseHelper.py", line 12, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utls/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.utls.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)

```

```
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
```

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/WebCenterBaseLifecycleHandler.py" caused an error "Traceback (innermost last):

```
File "<string>", line 1, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/WebCenterBaseLifecycleHandler.py", line 2, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/WebCenterBaseHelper.py", line 12, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
```

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/WebCenterBaseLifecycleUtils.py" caused an error "Traceback (innermost last):

```
File "<string>", line 1, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/WebCenterBaseLifecycleUtils.py", line 8, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/WebCenterBaseHelper.py", line 12, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
```

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/WsrpHandler.py" caused an error "Traceback (innermost last):

```
File "<string>", line 1, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/WsrpHandler.py", line 7, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
```

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/lib/MDS_handler.py" caused an error "Traceback (innermost last):

```
File "<string>", line 1, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/MDS_handler.py", line 55, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
```

```
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
```

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/wsmManage.py" caused an error "Traceback (innermost last):

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/wsmManage.py", line 52, in ?
ImportError: no module named xml

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/OracleLibOVD.py" caused an error "Traceback (innermost last):

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/OracleLibOVD.py", line 19, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/OracleLibOVD_handler.py", line 28, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_help.py", line 12, in ?

File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/igfConfig.py" caused an error "Traceback (innermost last):

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/igfConfig.py", line 19, in ?
File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/igfConfig_handler.py", line 15, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_help.py", line 12, in ?

File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/Opss.py" caused an error "Traceback (innermost last):

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/Opss.py", line 14, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/Opss_handler.py", line 12, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_help.py", line 12, in ?

File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/Pdk.py" caused an error "Traceback (innermost last):

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/Pdk.py", line 2, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir

```

/WebCenterBaseWLSTHelper.py", line 10, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/Utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.Utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.
jar!/wlstScriptDir/PortletClient.py" caused an error "Traceback (innermost last)":
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir
/PortletClient.py", line 3, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir
/WebCenterBaseWLSTHelper.py", line 10, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/Utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.Utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.
jar!/wlstScriptDir/Producer.py" caused an error "Traceback (innermost last)":
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir
/Producer.py", line 2, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir
/WebCenterBaseWLSTHelper.py", line 10, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/Utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.Utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.
jar!/wlstScriptDir/WebCenterBaseLifecycle.py" caused an error "Traceback (innermost last)":
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir
/WebCenterBaseLifecycle.py", line 3, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir
/WebCenterBaseWLSTHelper.py", line 10, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/Utils/modules/wlstModule_core.py", line 20, in ?
    at weblogic.management.scripting.core.Utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
    at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)
    at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class
"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.
jar!/wlstScriptDir/WebCenterBaseWLSTHelper.py" caused an error "Traceback (innermost last)":
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir
/WebCenterBaseWLSTHelper.py", line 10, in ?
  File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib
/ora_util.py", line 15, in ?
  File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management
/scripting/core/Utils/modules/wlstModule_core.py", line 20, in ?

```



```
at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)
at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)
at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
at java.lang.reflect.Method.invoke(Method.java:498)
```

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/Wsrp.py" caused an error "Traceback (innermost last):

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/Wsrp.py", line 2, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/WebCenterBaseWLSTHelper.py", line 10, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?

File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?

at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)

at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)

at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)

at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

"
Error execing the Python script "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/mdsWLSTCommands.py" caused an error "Traceback (innermost last):

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar!/wlstScriptDir/mdsWLSTCommands.py", line 103, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/MDS_handler.py", line 55, in ?

File "/u01/veridata/wls/oracle_common/modules/internal/clients/oracle.fmwshare.pyjar.jar/wlstScriptDir/lib/ora_util.py", line 15, in ?

File "/u01/veridata/wls/wlserver/modules/com.oracle.weblogic.management.scripting.jar/weblogic/management/scripting/core/utils/modules/wlstModule_core.py", line 20, in ?

at weblogic.management.scripting.core.utils.WLSTCoreUtil.getOfflineWLSTScriptPath(WLSTCoreUtil.java:86)

at sun.reflect.GeneratedMethodAccessor81.invoke(Unknown Source)

at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)

at java.lang.reflect.Method.invoke(Method.java:498)

java.lang.RuntimeException: java.lang.RuntimeException: Could not find the OffLine WLST class

"
Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

```
properties= /u01/setup_veridata_srv/myDomain-ds.properties.opss
adminUsername= weblogic
adminPassword= welcome123
adminURL= t3://ggpspibob1.sbg-psp-ppd.a.intuit.com:7001
dsName= opss-data-source
dsJNDIName= jdbc/OpssDataSource
dsURL= jdbc:oracle:thin:@pspsys01.sbg-psp-ppd.a.intuit.com:1521:pspsys01
dsDriver= oracle.jdbc.xa.client.OracleXADataSource
dsUsername= vd_opss
dsPassword= welcome123
dsTargetType= Cluster
dsTargetName= AdminServer
Connecting to t3://ggpspibob1.sbg-psp-ppd.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".
```

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Saving all your changes ...

Saved all your changes successfully.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
Disconnected from weblogic server: AdminServer

Exiting WebLogic Scripting Tool.

```
[oracle@ggpspiob1 bin]$ ./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.  
opsaudviewDS  
Picked up _JAVA_OPTIONS: -Djava.io.tmpdir=/u01/setup_veridata_srv
```

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

```
properties= /u01/setup_veridata_srv/myDomain-ds.properties.opsaudviewDS  
adminUsername= weblogic  
adminPassword= welcome123  
adminURL= t3://ggpspiob1.sbg-ppd.a.intuit.com:7001  
dsName= opss-audit-viewDS  
dsJNDIName= jdbc/AuditViewDataSource  
dsURL= jdbc:oracle:thin:@pspsys01.sbg-ppd.a.intuit.com:1521:pspsys01  
dsDriver= oracle.jdbc.xa.client.OracleXADataSource  
dsUsername= VD_IAU_VIEWER  
dsPassword= welcome123  
dsTargetType= Cluster  
dsTargetName= AdminServer  
Connecting to t3://ggpspiob1.sbg-ppd.a.intuit.com:7001 with userid weblogic ...  
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".
```

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').
You already have an edit session in progress and hence WLST will
continue with your edit session.

Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Saving all your changes ...
Saved all your changes successfully.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
Disconnected from weblogic server: AdminServer

Exiting WebLogic Scripting Tool.

```
[oracle@ggpspiob1 bin]$ ./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.  
opsaudDBDS  
Picked up _JAVA_OPTIONS: -Djava.io.tmpdir=/u01/setup_veridata_srv
```

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

```
properties= /u01/setup_veridata_srv/myDomain-ds.properties.opsaudDBDS  
adminUsername= weblogic  
adminPassword= welcome123  
adminURL= t3://ggpspiob1.sbg-ppd.a.intuit.com:7001  
dsName= opss-audit-DBDS
```

```

dsJNDIName= jdbc/AuditAppendDataSource
dsURL= jdbc:oracle:thin:@pspsys01.sbg-ppd.a.intuit.com:1521:pspsys01
dsDriver= oracle.jdbc.xa.client.OracleXADataSource
dsUsername= VD_IAU_APPEND
dsPassword= welcome123
dsTargetType= Cluster
dsTargetName= AdminServer
Connecting to t3://ggpspiob1.sbg-ppd.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Saving all your changes ...
Saved all your changes successfully.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
Disconnected from weblogic server: AdminServer

Exiting WebLogic Scripting Tool.

[oracle@ggpspiob1 bin]$ ./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.
veridata
Picked up _JAVA_OPTIONS: -Djava.io.tmpdir=/u01/setup_veridata_srv

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

properties= /u01/setup_veridata_srv/myDomain-ds.properties.veridata
adminUsername= weblogic
adminPassword= welcome123
adminURL= t3://ggpspiob1.sbg-ppd.a.intuit.com:7001
dsName= VeridataDataSource
dsJNDIName= VeridataDataSource
dsURL= jdbc:oracle:thin:@pspsys01.sbg-ppd.a.intuit.com:1521:pspsys01
dsDriver= oracle.jdbc.xa.client.OracleXADataSource
dsUsername= vd_veridata
dsPassword= welcome123
dsTargetType= Cluster
dsTargetName= AdminServer
Connecting to t3://ggpspiob1.sbg-ppd.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Saving all your changes ...
Saved all your changes successfully.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
Disconnected from weblogic server: AdminServer

```

Exiting WebLogic Scripting Tool.

```
[oracle@ggpspiob1 bin]$ ./wlst.sh $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.stb
Picked up _JAVA_OPTIONS: -Djava.io.tmpdir=/u01/setup_veridata_srv
```

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands


```
properties= /u01/setup_veridata_srv/myDomain-ds.properties.stb
adminUsername= weblogic
adminPassword= welcome123
adminURL= t3://ggpspiob1.sbg-ppd.a.intuit.com:7001
dsName= LocalSvcTblDataSource
dsJNDIName= jdbc/LocalSvcTblDataSource
dsURL= jdbc:oracle:thin:@pspsys01.sbg-ppd.a.intuit.com:1521:pspsys01
dsDriver= oracle.jdbc.xa.client.OracleXADataSource
dsUsername= vd_stb
dsPassword= welcome123
dsTargetType= Cluster
dsTargetName= AdminServer
Connecting to t3://ggpspiob1.sbg-ppd.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".
```

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

```
Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Saving all your changes ...
Saved all your changes successfully.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
Disconnected from weblogic server: AdminServer
```

Exiting WebLogic Scripting Tool.

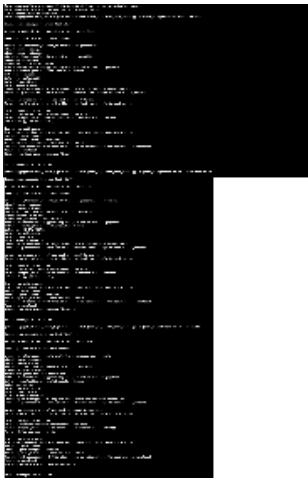

2.5a Setup up WebLogic ELB

- (one time only per environment) Download the script create_veridata_security_group.sh from the end of this Wiki
- (one time only per environment) Run the following command to create the security group for ELB
- Modify the veridata ELB security group by adding <your IP>/32 on http (port 80) temporarily. You can get your IP by running "curl {+}https://api.ipify.org+" from your machine. You should delete this entry after complete the Veridata configuration.
- (one time only per environment) Add ports 7001 and 8830 with the source of the security group created above to the security group prod-goldengate-vpc-3
- Login to the AWS console and choose us-west-2 (Oregon)
- Go to EC2=>Load Balances
- Click Create Load Balance
- Click Create under Classic Load Balance
- Enter "prod-veridata-weblogic" as Load Balancer name
- Select Intuit-vpc-3 as Create LB Inside
- Enter 7001 as Instance Port
- Choose IngressSubnetAz1 and IngressSubnetAz2 subnets
- Unselect default security group and select prod-veridata-vpc-3 security group
- Enter "/console/login/LoginForm.jsp" as Ping Path
- Choose Veridata server EC2 instance goldengate-qbpvd1pt-xxx
- Add Name as Key and "prod-veridata-weblogic" as value on Add Tags section
- Click Review and Create
- Click Create
- After Weblogic is started, go to Ec2=>Load Balances and search newly created load balance
- Click Instances to make sure that the status is "inService". Otherwise, you need to check whether Weblogic is started successfully
- Click Description, copy the DNS Name's value and then past <dns name>/consolelogin/LoginForm.jsp to browser. You will login to Weblogic.

2.5b Verify Data Sources

- Login to WebLogic Server and goto base_domain->Services->Data Sources. You should see the below 5 datasources
- WebLogic Server URL: {+}http://e2e-goldengate-veridata-weblogic-836817812.us-west-2.elb.amazonaws.com/console+

ORACLE WebLogic Server Administration Console 12c

Change Center
View changes and restarts
Configuration editing is enabled. Future changes will automatically be activated as you modify, add or delete items in this domain.

Domain Structure
base_domain
├── Environment
│ ├── Servers
│ ├── Clusters
│ │ ├── Coherence Clusters
│ │ ├── Machines
│ │ ├── Virtual Hosts
│ │ ├── Work Managers
│ │ └── Startup and Shutdown Classes
├── Deployments
├── Services
│ ├── Messaging
│ ├── **Data Sources**
│ └── Persistent Stores
└── How do I...

Home Log Out Preferences Record Help
Welcome, weblogic Connected to: base_dom
Home > myrealm > Users and Groups > Credential Mappings > Users and Groups > Summary of Services > Summary of Deployments > base_domain > Summary of Servers > Summary of Services: JMS > Summary of JDBC Data Sources

Summary of JDBC Data Sources

Configuration Monitoring

A JDBC data source is an object bound to the JNDI tree that provides database connectivity through a pool of JDBC connections. Applications can look up a data source on the JNDI tree and then borrow a database connection from a data source.

This page summarizes the JDBC data source objects that have been created in this domain.

Customize this table

Data Sources (Filtered - More Columns Exist)

Name	Type	JNDI Name	Targets
LocalSvcTbiDataSource	Generic	jdbc/LocalSvcTbiDataSource	AdminServer
opss-audit-DBDS	Generic	jdbc/AuditAppendDataSource	AdminServer, VERIDATA_server1
opss-audit-viewDS	Generic	jdbc/AuditViewDataSource	AdminServer, VERIDATA_server1
opss-data-source	Generic	jdbc/OpssDataSource	AdminServer, VERIDATA_server1
VeridataDataSource	Generic	VeridataDataSource	VERIDATA_server1

Showing 1 to 5 of 5 Previous | Next

2.5c Create Veridata user data

Login to Weblogic Server UI (<http://ggpspiob1.sbg-psp-ppd.a.intuit.com:7001/>)
Security Realms --> myrealm --> User and Groups --> New

Create a New User

User Properties

The following properties will be used to identify your new User.

* Indicates required fields

What would you like to name your new User?

* Name:

How would you like to describe the new User?

Description:

Please choose a provider for the user.

Provider:

The password is associated with the login name for the new User.

* Password:

* Confirm Password:

Users [Groups](#)

This page displays information about each user that has been configured in this security realm.

[Customize this table](#)

Users (Filtered - More Columns Exist)

Showing 1 to 3 of 3 [Previous](#) | [Next](#)

☐ Name	Description	Provider
☐ OracleSystemUser	Oracle application software system user.	DefaultAuthenticator
☐ vdata	vdata	DefaultAuthenticator
☐ weblogic	This user is the default administrator.	DefaultAuthenticator

Showing 1 to 3 of 3 [Previous](#) | [Next](#)

Click 'vdata'
Select 'Groups' Tab and choose Veridata* from Parents Groups and then Save

Settings for vdata

General

Passwords

Attributes

Groups

Save

Use this page to configure group membership for this user.

Parent Groups:

Available:

☐ AdminChannelUsers

☐ Administrators

☐ AppTesters

☐ CrossDomainConnectors

☐ Deployers

☐ Monitors

☐ Operators

☐ OracleSystemGroup

>

>>

<

<<

Chosen:

☐ veridataAdministrator

☐ veridataCommandLineUser

☐ veridataDetailReportViewer

☐ veridataPowerUser

☐ veridataRepairOperator

☐ veridataReportViewer

Save

2.6a Manual Settings

```

-- manual work
----- web logic changes -----
cd $MW_HOME/user_projects/domains/base_domain/bin
cp setStartupEnv.sh setStartupEnv.sh.orig
vi setStartupEnv.sh and look for # Startup parameters for STARTUP_GROUP VERIDATA-MANAGED-SERVERS
>>>under the STARTUP_GROUP VERIDATA-MANAGED-SERVERS change

SERVER_MEM_ARGS_64HotSpot="-Xms256m -Xmx512m -XX:PermSize=128m -XX:MaxPermSize=512m" To:
SERVER_MEM_ARGS_64HotSpot="-Xms32768m -Xmx32768m -XX:PermSize=2048m -XX:MaxPermSize=2048m"

chmod 777 setStartupEnv.sh

>>> Restart the weblogic server

cd $MW_HOME/user_projects/domains/base_domain/bin/
./stopWebLogic.sh
nohup ./startWebLogic.sh >startWebLogic.log 2>&1 &

-----veridata changes -----
cd $MW_HOME/user_projects/domains/base_domain/config/veridata
cp veridata.cfg veridata.cfg.orig
vi veridata.cfg and edit below items
# SERVER PARAMETERS
server.meta_session_handle_timeout 900
server.max_concurrent_jobs 100
server.max_concurrent_comparison_threads default
server.max_sort_memory 17179869184
server.max_comparison_sort_memory 17179869184
server.sort_waiting_threshold 1000
server.concurrent.writers default
server.concurrent.readers default
server.number_sort_threads default

>>>Start the veridata server

cd $MW_HOME/user_projects/domains/base_domain/veridata/bin
./veridataServer.sh start

cd /u01/veridata/wls/user_projects/domains/base_domain/veridata/bin
./veridataServer.sh stop

cd $MW_HOME/user_projects/domains/base_domain/servers/VERIDATA_server1
mkdir security
cd security

>>>Create a text file named "boot.properties" with these two lines and save it
vi boot.properties
username=weblogic
password=welcome123

cd $MW_HOME/user_projects/domains/base_domain/veridata/bin
nohup ./veridataServer.sh start >veridataServer.log 2>&1 &

```

2.6b Setup up Veridata ELB

- Login to the AWS console and choose us-west-2 (Oregon)
- Go to EC2=>Load Balances
- Click Create Load Balance
- Click Create under Classic Load Balance
- Enter "prod-veridata" as Load Balancer name
- Select Intuit-vpc-3 as Create LB Inside
- Enter 8830 as Instance Port
- Choose IngressSubnetAz1 and IngressSubnetAz2 subnets
- Unselect default security group and select prod-veridata-vpc-3 security group
- Enter "/veridata/login.jsf" as Ping Path
- Choose Veridata server EC2 instance goldengate-qbpvd1pt-xxx
- Add Name as Key and "prod-veridata" as value on Add Tags section

- Click Review and Create
- Click Create
- After Veridata is started, go to Ec2=>Load Balances and search newly created load balance
- Click Instances to make sure that the status is "inService". Otherwise, you need to check whether Veridata is started successfully
- Click Description, copy the DNS Name's value and then past <dns name>/veridata/login.jsf to browser. You will login to Veridata

2.8 Setup Veridata profile sort_profile_new

In Veridata UI > Profile Configuration -f> New

New Profile Assistant

Task 1: Profile Name

Please specify profile name and description

☐ Create new profile using copy of existing profile.

From:

Browse

Name

sort_profile_new

Description

sort_profile_new

Cancel

Finish

Save

Profile Details

Name:

sort_profile_new

Description:

Profile Settings

Category

- General
- Sorting Method
- Initial Compare
- Confirm-Out-Of-Sync
- Repair

General

Setting	Use Default	Value
Out-Of-Sync Output Format	☒	Binary
Maximum Size of Each Out-Of-Sync XML Chunk (Rows)	☒	500
Report in-sync rows to report file	☒	☐
Report in-sync after in-flight rows to report file	☒	☐

Save

Profile Settings			
Category - General - Sorting Method - Initial Compare - Confirm-Out-Of-Sync - Repair	Sorting Method		
	Setting	Use Default	Value
	Sort Data Using	☐	Server ▼
	Maximum Memory Usage (MB)	☐	1024 ◆
	Temporary Storage Directory for Source Data	☐	/u01/veridata/veri_s
	Temporary Storage Directory for Target Data	☐	/u01/veridata/veri_s

For Sorting Method,enter the below value for 'Temporary Storage Directory for Source Data' and 'Temporary Storage Directory for Target Data' :
/u01/veridata/veri_sort

Profile Settings			
Category - General - Sorting Method - Initial Compare - Confirm-Out-Of-Sync - Repair	Initial Compare		
	Setting	Use Default	Value
	Max Concurrent Comparison Threads	☐	10 ◆
	Terminate when Maximum Records Out-Of-Sync	☒	100000 ◆
	Output Out-Of-Sync Record Details to Report File	☐	☒
	Update Report file Every (seconds)	☒	0 ◆
	Update Report file Every (records)	☒	0 ◆
	Limit Number of Input Rows	☒	0 ◆
	Source Oracle optimizer hint	☒	
	Target Oracle optimizer hint	☒	
	Event Reporting		
	Setting	Use Default	Value
	Generate Messages	☒	None ▼
	Generate Warning Messages For Out-Of-Sync Rows After (differences)	☒	50 ◆
	Agent		
	Setting	Use Default	Value
	Use Static Listening Port For Agent During Row Hash On Source (0 to use dynamic port list)	☒	0 ◆
	Use Static Listening Port For Agent During Row Hash On Target (0 to use dynamic port list)	☒	0 ◆
	NonStop Process		
	Setting	Use Default	Value
	Source Process Name Starting With (Must start with "\$", followed by two letters, and end with "*". Example: \$AA*)	☒	
	Source Process CPU Number	☒	-1 ◆
	Source Process Priority	☒	0 ◆
	Target Process Name Starting With (Must start with "\$", followed by two letters, and end with "*". Example: \$AA*)	☒	
	Target Process CPU Number	☒	-1 ◆
	Target Process Priority	☒	0 ◆

Profile Settings

Category

- General
- Sorting Method
- Initial Compare
- Confirm-Out-Of-Sync
- Repair

Confirm-Out-Of-Sync

Setting	Use Default	Value
Perform Confirm Out-Of-Sync Step	☐	☒
Run Concurrently With Initial Compare	☐	☒
Delay Confirm-Out-Of-Sync By (seconds)	☒	0
Terminate when Maximum Records Out-Of-Sync	☒	100000
Output Out-Of-Sync Record Details to Report File	☐	☒
Update Report file Every (seconds)	☒	0
Update Report file Every (records)	☒	0
Source Oracle optimizer hint	☒	
Target Oracle optimizer hint	☒	

Event Reporting

Setting	Use Default	Value
Generate Messages	☒	None
Generate Warning Messages For Out-Of-Sync Rows After (differences)	☒	50

Agent

Setting	Use Default	Value
Use Static Listening Port For Agent During Row Hash On Source (0 to use dynamic port list)	☒	0
Use Static Listening Port For Agent During Row Hash On Target (0 to use dynamic port list)	☒	0

NonStop Process

Setting	Use Default	Value
Source Process Name Starting With (Must start with '\$', followed by two letters, and end with '*'. Example: \$AA*)	☒	
Source Process CPU Number	☒	-1
Source Process Priority	☒	0
Target Process Name Starting With (Must start with '\$', followed by two letters, and end with '*'. Example: \$AA*)	☒	
Target Process CPU Number	☒	-1
Target Process Priority	☒	0

Profile Settings

Category

- General
- Sorting Method
- Initial Compare
- Confirm-Out-Of-Sync
- Repair

Repair

Setting	Use Default	Value
Repair Batch Size	☒	10
Repair Transaction Size	☒	1
Number of Concurrent Repair Operations	☒	1
Check Changed Values	☒	☒
Terminate When Maximum Repair Warnings	☒	10000

Repair Reporting

Setting	Use Default	Value
Write Repair Success Messages to Report	☒	☒

Disable DB Triggers Session Based

Setting	Use Default	Value
Disable DB Triggers Session Based	☒	☐

Click 'Save' to save the changes.

2.9 Setup https on WebLogic and Veridata

Generate certificates for Load Balancer and Veridata server (ggpsppf501.sbg-psp-ppd.a.intuit.com for the following instruction)

The certificate for Load Balancer should include the domain name goldengate.sbg-psp-ppd.a.intuit.com, goldengate.sbg-psp-prod.a.intuit.com, goldengate-weblogic.sbg-psp-ppd.a.intuit.com, goldengate-weblogic.sbg-psp-prod.a.intuit.com. The file should include the following sections

```

-----BEGIN CERTIFICATE-----
...
-----END CERTIFICATE-----
-----BEGIN RSA PRIVATE KEY-----
...
-----END RSA PRIVATE KEY-----
Key Chain:
-----BEGIN CERTIFICATE-----
...
-----END CERTIFICATE-----
-----BEGIN CERTIFICATE-----
...
-----END CERTIFICATE-----

```

The certificate for Veridata server should include the following four files

```

ggpsppf501.sbg-psp-ppd.a.intuit.com.crt
ggpsppf501.sbg-psp-ppd.a.intuit.com.key
root.pem
intermediate.pem

```

- Login the Veridata server (ggpsppf501.sbg-psp-ppd.a.intuit.com) and sudo su - oracle.
- Perform the following steps to setup a keystore

Note: Need to replace <password> with the real password you choose

```

[oracle@ggpsppf501 ~]$ cd /u01/veridata/wls/user_projects/domains/base_domain/bin
[oracle@ggpsppf501 bin]$ ./setDomainEnv.sh
[oracle@ggpsppf501 base_domain]$ cd /u01/veridata/wls/
[oracle@ggpsppf501 wls]$ mkdir keystores

```

Copy the certificate files to /u01/veridata/wls/keystores

```

[oracle@ggpsppf501 keystores]$ ls -ltr
total 16
-rw-r--r-- 1 oracle oinstall 2569 May 31 11:39 ggpsppf501.sbg-psp-ppd.a.intuit.com.crt
-rw-r--r-- 1 oracle oinstall 1492 May 31 11:40 root.pem
-rw-r--r-- 1 oracle oinstall 1787 May 31 11:43 intermediate.pem
-rw-r--r-- 1 oracle oinstall 1678 May 31 11:44 ggpsppf501.sbg-psp-ppd.a.intuit.com.key

```

```

[oracle@ggpspibob1 keystores]$ openssl pkcs12 -export -in ggpspibob1.sbg-psp-ppd.a.intuit.com.crt2 -inkey ggpspibob1.sbg-psp-ppd.a.intuit.com.key -
out server.p12 -name ggpspibob1.sbg-psp-ppd.a.intuit.com -CAfile root.pem -caname "Digicert CA Root"
Enter pass phrase for ggpspibob1.sbg-psp-ppd.a.intuit.com.key:
Enter Export Password:
Verifying - Enter Export Password:

```

```

[oracle@ggpspibob1 keystores]$ keytool -importkeystore -deststorepass Intuit12345678 -destkeystore keystore.jks -srckeystore server.p12 -srcstoretype
PKCS12 -srcstorepass Intuit12345678
Entry for alias ggpspibob1.sbg-psp-ppd.a.intuit.com successfully imported.
Import command completed: 1 entries successfully imported, 0 entries failed or cancelled

```

```

[oracle@ggpspibob1 keystores]$ keytool -import -trustcacerts -alias intermediate -file intermediate.pem -keystore keystore.jks -storepass Intuit12345678
Certificate was added to keystore

```

```

keytool -list -v -keystore keystore.jks -storepass Intuit12345678 > out.txt

```

```

[oracle@ggpspibob1 keystores]$ cat out.txt |egrep "Your keystore contains|Alias"
Your keystore contains 2 entries
Alias name: intermediate
Alias name: ggpspibob1.sbg-psp-ppd.a.intuit.com

```

```

[oracle@ggpsppf501 keystores]$ ls -l /u01/veridata/wls/keystores/keystore.jks
-rw-r--r-- 1 oracle oinstall 4317 May 31 13:17 /u01/veridata/wls/keystores/keystore.jks

```

- Add security group for veridata (~~prod-veridata-vpc-2~~) as source with ports 7002 and 8831 to the security group ppd-goldengate-vpc-2 through AWS console

- Configure WebLogic AdminServer to use keystone
 - You may check Configuring Oracle WebLogic Server (10.3.x - 12.1.x) to use SSL in Fusion Middleware 11g/12c (Doc ID 1235653.1) about the following steps
 - Login WebLogic Administration Console (<http://<dns name>/console/login/LoginForm.jsp>)
 - Select 'Environment' -> 'Servers' and click on AdminServer(admin)
 - Select the 'Keystores' tab
 - Select 'Keystore -> 'Change'
 - Select 'Custom Identity and Custom Trust' from the drop down list and click 'Save'
 - Enter the relevant information in the Keystores page:
 - 'Custom Identity Keystore' : /u01/veridata/wls/keystores/keystore.jks
 - 'Custom Identity Keystore Type' : JKS (Note: This has to be UPPERCASE)
 - 'Custom Identity Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - 'Confirm Custom Identity Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - 'Custom Trust Keystore' : /u01/veridata/wls/keystores/keystore.jks
 - 'Custom Trust Keystore Type' : JKS (Note: This has to be UPPERCASE)
 - 'Custom Trust Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - 'Confirm Custom Trust Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - Click 'Save'
 - Select the 'SSL' tab and enter the relevant information:
 - 'Private Key Alias' : ggpsppf501.sbg-ppsp-ppd.a.intuit.com (Veridata server name)
 - 'Private Key Password' : <keypass_pwd> e.g welcome
 - 'Confirm Private Key Password' : <keypass_pwd> e.g welcome
 - Click 'Save'
 - Select 'Environment' -> 'Servers' and click on the Managed Server configured
 - In the 'General' tab:
 - Check 'SSL Listen Port Enabled'
 - 'SSL Listen Port' : 7002
 - Click 'Save'
- Login to the Veridata server and then restart WebLogic

```
[oracle@ggpsppf501 bin]$ cd /u01/veridata/wls/user_projects/domains/base_domain/bin
[oracle@ggpsppf501 bin]$ ./setDomainEnv.sh
[oracle@ggpsppf501 base_domain]$ cd /u01/veridata/wls/user_projects/domains/base_domain/bin
[oracle@ggpsppf501 bin]$ ./stopWebLogic.sh
[oracle@ggpsppf501 bin]$ nohup ./startWebLogic.sh > startWebLogic.log 2>&1 &
```

- Test https on Veridata server

```
[oracle@ggpsppf501 ~]$ curl https://ggpsppf501.sbg-ppsp-ppd.a.intuit.com:7002/console
<html><head><title>302 Moved Temporarily</title></head>
<body bgcolor="#FFFFFF">
<p>This document you requested has moved
temporarily.</p>
<p>It's now at <a href="https://ggpsppf501.sbg-ppsp-ppd.a.intuit.com:7002/console/">https://ggpsppf501.sbg-ppsp-ppd.a.intuit.com:7002/console/</a>.</p>
</body></html>
```

- Import the Load Balancer certificate using AWS Console
 - Go to Certificate Manager
 - Select Import Certificate
 - Click "Review and import". You should see the screen like below.
 - Click Import
- Change WebLogic Load Balancer prod-veridata-webloic configuration
 - Edit Listeners:
 - Load Balancer Protocol: from HTTP to HTTPS
 - Load Balancer Port: from 80 to 443
 - Instance Protocol: from HTTP to HTTPS
 - Instance Port: from 7001 to 7002
 - SSL Certificate: <select imported certificate>
- Edit Health Check:
 - Ping Protocol: from HTTP to HTTPS

- Ping Port: from 7001 to 7002
- Create a Route53 record set through AWS Console
 - Name: goldengate-weblogic.sbg-ppsp-prod.a.intuit.com
 - Type: CNAME
 - Value: prod-veridata-weblogic-498543478.us-west-2.elb.amazonaws.com (this is the Load Balancer prod-veridata's DNS)
- <https://goldengate-weblogic.sbg-ppsp-prod.a.intuit.com/console> is WebLogic URL. Try it on browser
- Configure WebLogic Veridata to use keystone
 - You may check Configuring Oracle WebLogic Server (10.3.x - 12.1.x) to use SSL in Fusion Middleware 11g/12c (Doc ID 1235653.1) about the following steps
 - Login WebLogic Administration Console (<https://<dns name>/console/login/LoginForm.jsp>)
 - Select 'Environment' -> 'Servers' and click on VERIDATA_server1
 - Select the 'Keystores' tab
 - Select 'Keystore -> 'Change'
 - Select 'Custom Identity and Custom Trust' from the drop down list and click 'Save'
 - Enter the relevant information in the Keystores page:
 - 'Custom Identity Keystore' : /u01/veridata/wls/keystores/keystore.jks
 - 'Custom Identity Keystore Type' : JKS (Note: This has to be UPPERCASE)
 - 'Custom Identity Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - 'Confirm Custom Identity Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - 'Custom Trust Keystore' : /u01/veridata/wls/keystores/keystore.jks
 - 'Custom Trust Keystore Type' : JKS (Note: This has to be UPPERCASE)
 - 'Custom Trust Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - 'Confirm Custom Trust Keystore Passphrase' : <storepass_pwd> e.g: welcome
 - Click 'Save'
 - Select the 'SSL' tab and enter the relevant information:
 - 'Private Key Alias' : ggqbpvd1pt.sbg-ppsp-prod.a.intuit.com (Veridata server name)
 - 'Private Key Password' : <keypass_pwd> e.g welcome
 - 'Confirm Private Key Password' : <keypass_pwd> e.g welcome
 - Click 'Save'
 - Select 'Environment' -> 'Servers' and click on the Managed Server configured
 - In the 'General' tab:
 - Check 'SSL Listen Port Enabled'
 - 'SSL Listen Port' : 8831
 - Click 'Save'

- Login to the Veridata server and then restart WebLogic

```
[oracle@ggppspf501 bin]$ cd /u01/veridata/wls/user_projects/domains/base_domain/veridata/bin
[oracle@ggppspf501 bin]$ ./veridataServer.sh stop
[oracle@ggppspf501 bin]$ nohup ./veridataServer.sh start >/dev/null 2>&1 &
```

- Test https on Veridata server

```
[oracle@ggppspf501 ~]$ curl https://ggppspf501.sbg-ppsp-prod.a.intuit.com:8831/veridata/login.jsf
```

- Change WebLogic Load Balancer prod-veridata configuration
 - Edit Listeners:
 - Load Balancer Protocol: from HTTP to HTTPS
 - Load Balancer Port: from 80 to 443
 - Instance Protocol: from HTTP to HTTPS
 - Instance Port: from 8830 to 8831
 - SSL Certificate: <select imported certificate>
 - Edit Health Check:
 - Ping Protocol: from HTTP to HTTPS
 - Ping Port: from 8830 to 8831
- Create a Route53 record set through AWS Console
 - Name: goldengate.sbg-ppsp-prod.a.intuit.com
 - Type: CNAME
 - Value: prod-veridata-2009728932.us-west-2.elb.amazonaws.com (this is the Load Balancer prod-veridata's DNS)
- <https://goldengate.sbg-ppsp-prod.a.intuit.com/veridata/login.jsf> is Veridata URL. Try it on browser

3. Prepare for Veridata Agents Host in AWS

Follow steps in <https://wiki.intuit.com/display/EMSPD/Setup+veridata+agent>

4. Common Issues

1. Error on executing `java weblogic.WLST $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties`.

```
Starting an edit session ...
Started edit session, please be sure to save and activate your
changes once you are done.
This Exception occurred at Wed May 09 10:45:25 PDT 2018.
javax.management.InvalidAttributeValueException: Array has at least one null element
Problem invoking WLST - Traceback (innermost last):
  File "/tmp/setup_veridata_srv/create_data_source.py", line 92, in ?
    File "<iostream>", line 563, in set
    File "<iostream>", line 552, in raiseWLSTException
WLSTException: Error occurred while performing set : Error setting attribute Targets : Array has at least one
null element
Use dumpStack() to view the full stacktrace :
```

Workaround - In `create_data_source.py`, comment out the below two lines-

```
cd('/SystemResources/' + dsName)
set('Targets',jarray.array([ObjectName('com.bea:Name=' + dsTargetName + ',Type=' + dsTargetType)],
ObjectName))
```

2. If the Target field is empty for all Data Sources in weblogic (Step 2.5a Verify Data Source), try adding the target (i.e, AdminServer, VERIDATA_Server_1) manually.
If veridata fails to start then stop the weblogic server, rename the \$MW_HOME (wls to wls.bak) and repeat the steps from 2.2.

3. There could be issue while running command "`java weblogic.WLST $temp_dir/create_data_source.py -p $temp_dir/myDomain-ds.properties.opss`"
Solution : Set CLASSPATH env variable as below
`export CLASSPATH=$CLASSPATH:$JAVA_HOME/lib/tools.jar:$MW_HOME/wlserver/modules/features/wlst.wls.classpath.jar`

4. There could be issue where admin server listening to 127.0.0.1. Change /etc/hosts as below:

```
[oracle@ggpspiob1 scripts]$ cat /etc/hosts
# Your system has configured 'manage_etc_hosts' as True.
# As a result, if you wish for changes to this file to persist
# then you will need to either
# a.) make changes to the master file in /etc/cloud/templates/hosts.redhat.tmpl
# b.) change or remove the value of 'manage_etc_hosts' in
#    /etc/cloud/cloud.cfg or cloud-config from user-data
#
# The following lines are desirable for IPv4 capable hosts
#127.0.0.1 ggpspiob1.sbg-ppd.a.intuit.com ggpspiob1
127.0.0.1 localhost.localdomain localhost
127.0.0.1 localhost4.localdomain4 localhost4

# The following lines are desirable for IPv6 capable hosts
#::1 ggpspiob1.sbg-ppd.a.intuit.com ggpspiob1
::1 localhost.localdomain localhost
::1 localhost6.localdomain6 localhost6
```