

PSP Database access via Olympus Role

- 1. Install eiamCli
- 2. Generate SSH key if not present
- 3. Upload public key to Dev Portal
- 4. Login to eiamCli and get temporary SSH certificate
- 5. Initiate SSH tunnel
- 6. DB Connection
- 7. Next time while connecting to DB

1. Install eiamCli

If you have eiamCli installed in your system then ignore else follow [Install eiamCli](#)

2. Generate SSH key if not present

Change Directory to your SSH directory, and list files

```
$ cd ~/.ssh
$ ls -ltr
```

```
vjoshi4@INTUL173902bb1 .ssh $ ls -ltr
total 88
-rw----- 1 vjoshi4 CORP\Domain Users 5123 Feb 17 2020 known_hosts.old
-rw----- 1 vjoshi4 CORP\Domain Users 267 Jul 9 2020 config
-rw----- 1 vjoshi4 CORP\Domain Users 21310 Aug 19 23:22 known_hosts
-rw----- 1 vjoshi4 CORP\Domain Users 3389 Aug 19 23:49 id_rsa
-rw-r--r-- 1 vjoshi4 CORP\Domain Users 748 Aug 19 23:49 id_rsa.pub
vjoshi4@INTUL173902bb1 .ssh $
```

In above picture you can see SSH Key is present with name **id_rsa**

[Most of us will have this SSH Key in our machine] If you don't have SSH Key created then create using below command.

Just Press Enter when asked for File Name[default name is **id_rsa** will be **chosen**] and Passphrase.

```
$ ssh-keygen -t rsa -b 4096
Generating public/private rsa key pair.
Enter file in which to save the key (/Users/<corp_id>/ssh/id_rsa):
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /Users/<corp_id>/ssh/id_rsa.
Your public key has been saved in /Users/<corp_id>/ssh/id_rsa.pub.
The key fingerprint is:
SHA256:FbUftp4oy0M0lZZZudXWogB2xI+z9RaQPz/4ISj2Fjk <corp_id>@<hostname>
The key's randomart image is:
+---[RSA 4096]---+
|      o+*=+...|
|      . oBo++o +|
|      o..+o* o |
|      . 000=..+ |
|      S .+=..+ |
|      o =.E 000.|
|      = o o.o o|
|      . o . |
|      . |
+-----[SHA256]-----+
```

Verify new SSH Key **id_rsa** is generated successfully


```
$ ls -ltr
-rw----- 1 <corp_id> CORP\Domain Users 3389 Aug 20 00:23 id_rsa      <--- New private key
-rw-r--r-- 1 <corp_id> CORP\Domain Users  748 Aug 20 00:23 id_rsa.pub  <--- New public key
```

3. Upload public key to Dev Portal

Copy the contents of Public Key `id_rsa.pub` and add in DevPortal

```
$ cat id_rsa.pub
```

On the [DevPortal](#), navigate to **My Projects**. Under the **SSH_KEYS** tab, select **Add New SSH Key**

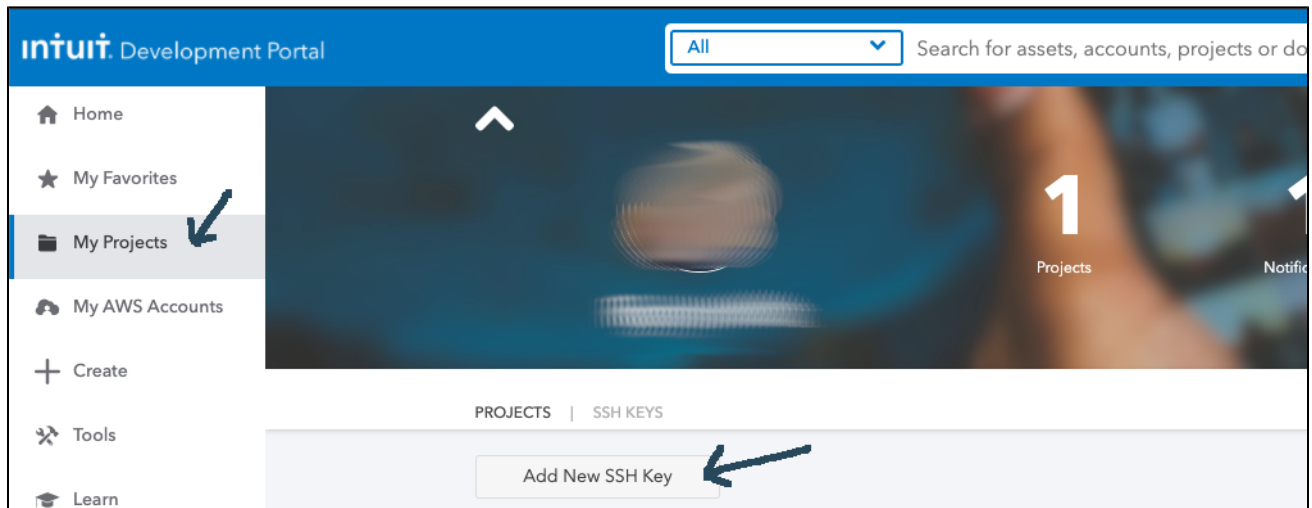

Give the SSH key a name that matches the public key file in your `.ssh` directory for example : `id_rsa.pub`
Paste the contents of the public key file `id_rsa.pub` into the Content text area. Click Add.

All

Search for assets, accounts, projects or documents

Q

X

Add Public SSH Keys

Name:

id_rsa.pub

Human readable key name

Content:

-----BEGIN PUBLIC KEY-----
SIIY6SSWwsj0wliEx0La6ce2o2SFGU/GBSLQWIKD6J9wdJj
tqecDc62vv5OUKXzX0SbiD7Mbq9djYyj66IT8YyuezVoV39
nILfShdyhFCBluWB2ILHYTXthSzElz1uU2kp+TDihDWM2J9
rbA2XOMntQisZXnu67UFljiQ9nIWwnR/KfADncDGqiFDEs
u6wHT7KutoPSIBC0MtMPJJJaFabIJZxe/F7nO1wikQguCHn
TRs53mUk5nPnXAg6D4T8Ech8gVeL0XB8WmAc5UC9b7X
9aL/qhcgUcY1ARTozJTl3L17YIQMYkFh+DhiESLj1l6NqZA
Y/GzhZJ8kPJsrQH2E2pidkvoEL+jrJ6OpfKElfkPVMSGESZe
gKr0/CqQJKgQlnKJU/MNgLLLLF0Q==
vjoshi4@INTUL173902bb1

SSH Key used for AWS access

Close

Add

PROJECTS | SSH KEYS

Add New SSH Key

id_rsa.pub

Delete

Fingerprint:

4096
SHA256:9XLdY8+FQldvQ/yZ3sipCmrPMhobr8hckoQuXobnkYg=
vjoshi4@INTUL173902bb1 (RSA)

Expires

90 days

in:

Timestamp:

1629616195

4. Login to eiamCli and get temporary SSH certificate

Login into eiamCli and get AWSTempSSHCert. Generated temp SSH Cert using below command for respective account is **valid for 1 hr**. Existing tunnels /connection can continue for longer until SSH tunnel (next command) is live.


```
$ eiamCli login
$ eiamCli getAWSTempSSHCert -a <aws_account_number_without_hypen> -p <public_key_name> -d ~/.ssh/
```

<aws_account_number_without_hypen>

Can be found here <https://devportal.intuit.com/app/dp/awsAccounts>

If you want to connect to **Non Prod DB** then use **QBDT Payroll Service Platform** AWS Account number which is Non Prod AWS Account.

If you want to connect to **Prod Read Only DB** then use **QBDT Payroll Platform Svc Prd** AWS Account number which is Prod AWS Account.

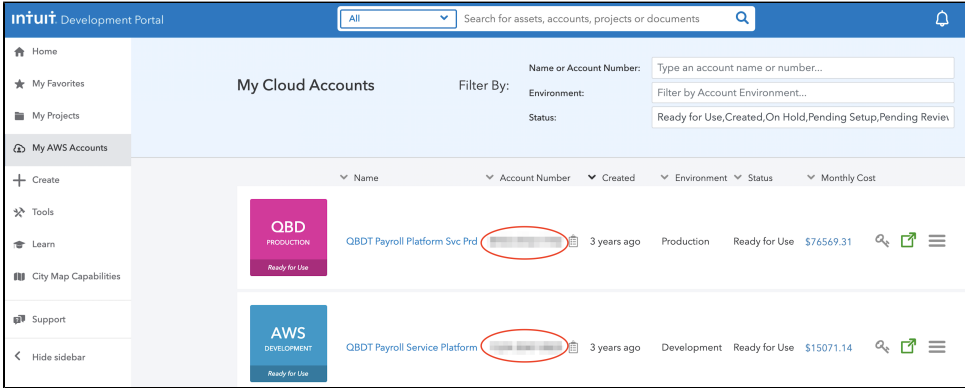

<public_key_name>

PUBLICKEYNAME from devportal Ex: id_rsa.pub

Verify temporary SSH certificate was generated successfully.

```
$ ls -lrt ~/.ssh
...
-rw----- 1 <corp_id> CORP\Domain Users 3389 Aug 20 00:23 id_rsa
-rw-r--r-- 1 <corp_id> CORP\Domain Users 748 Aug 20 00:23 id_rsa.pub
-rw----- 1 <corp_id> CORP\Domain Users 2622 Aug 20 01:11 id_rsa-cert.pub <--- New temporary SSH certificate
```

5. Initiate SSH tunnel

Once you run the below command you will login into Bastion Machine. **Please do not run any commands in this machine.**

```
$ ssh -o ServerAliveInterval=45 -i ~/.ssh/<SSH_Key_name> -L 127.0.0.1:<local_port>:<rds_host_name>:<rds_port> <corp_id>@<bastion_host>
```

<local_port>	You can chose any local port which is not used in your local machine. For below Example PreProd : 10536 For below Example Prod US West : 10537 For below Example Prod US East : 10538
<rds_host_name> and <rds_port>	You can get this from your existing connection string.

For PreProd SYS DB

```
$ ssh -o ServerAliveInterval=45 -i ~/.ssh/id_rsa -L 127.0.0.1:10536:pspsys01.sbg-ppsp-ppd.a.intuit.com:1521 <corp_id>@ec2-52-38-34-141.us-west-2.compute.amazonaws.com
```

```
$ ssh -o ServerAliveInterval=45 -i ~/.ssh/id_rsa -L 127.0.0.1:10537:pspe2euw.ccqjgvvo0rwy.us-west-2.rds.amazonaws.com:1521 <corp_id>@ec2-52-38-34-141.us-west-2.compute.amazonaws.com
```

```
$ ssh -o ServerAliveInterval=45 -i ~/.ssh/<SSH_Key_name> -L 127.0.0.1:10537:<rds_host_name>:<rds_port>
<corp_id>@ec2-52-32-133-73.us-west-2.compute.amazonaws.com
```

```
$ ssh -o ServerAliveInterval=45 -i ~/.ssh/<SSH_Key_name> -L 127.0.0.1:10538:<rds_host_name>:<rds_port>  
<corp_id>@ec2-3-130-125-83.us-east-2.compute.amazonaws.com
```

```

@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@    WARNING: POSSIBLE DNS SPOOFING DETECTED!    @
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
The RSA host key for ec2-52-38-34-141.us-west-2.compute.amazonaws.com has changed,
and the key for the corresponding IP address 52.38.34.141
is unknown. This could either mean that
DNS SPOOFING is happening or the IP address for the host
and its host key have changed at the same time.
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@    WARNING: REMOTE HOST IDENTIFICATION HAS CHANGED!    @
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
IT IS POSSIBLE THAT SOMEONE IS DOING SOMETHING NASTY!
Someone could be eavesdropping on you right now (man-in-the-middle attack)!
It is also possible that a host key has just been changed.
The fingerprint for the RSA key sent by the remote host is
SHA256:3vLWKe6NmQsrK2vES4MgKCW89x18pP/ovnc+S24LG0.
Please contact your system administrator.
Add correct host key in /Users/<corpid>/.ssh/known_hosts to get rid of this message.
Offending RSA key in /Users/<corpid>/.ssh/known_hosts:3
RSA host key for ec2-52-38-34-141.us-west-2.compute.amazonaws.com has changed and you have requested strict
checking.
Host key verification failed.

```

- Then you can open `.ssh/known_hosts` and delete the line number mentioned, for example line number 3 in above case `.ssh/known_hosts:3`
- If you get below error, then the RSA is expired (90 days expiry policy). Kindly renew using step-3.
 - "Requested public key id_rsa can not be used for signing as it is expired"
- If you get "SSH Too Many Authentication Failure" error, add 'IdentitiesOnly=yes' in '~/.ssh/config' file under Host.

6. DB Connection

- Duplicate your existing connection if you have.
- Then edit your connection property in client tool respectively. Below is example of IntelliJ IDEA.

- Ensure host is set to "localhost" and port is set to whatever mentioned in tunnel command. In this example , it was 10536.

Data Sources and Drivers

Name: [Reset](#)

Comment:

General Options SSH/SSL Schemas Advanced

Connection type: [Service Name](#) Driver: [Oracle](#)

Host: Port:

Service: Driver:

User:

Password: Save:

URL:
Overrides settings above

[Update](#) to driver ver. 21.1.0.0

- Ensure to **uncheck** "Use SSH tunnel" which is in use currently and using PEM file.

Data Sources and Drivers

Name: [Reset](#)

Comment:

General Options **SSH/SSL** Schemas Advanced

☐ Use SSH tunnel [key](#) [...](#)

☐ Use SSL

CA file: [...](#)

Client certificate file: [...](#)

Client key file: [...](#)

Mode:

[Update](#) to driver ver. 21.1.0.0

- Test Connection to ensure it's working. You would see **green** status as below.

- Click on "Apply" and followed by "OK".

Data Sources and Drivers

Name: [Reset](#)

Comment:

General Options SSH/SSL Schemas Advanced

Connection type: [Service Name](#) Driver: [Oracle](#)

Host: Port:

Service: Driver:

User:

Password: Save:

URL:

Overrides settings above

[Test Connection](#)

✓ DBMS: Oracle (ver. Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production)
Case sensitivity: plain=upper, delimited=exact
Driver: Oracle JDBC driver (ver. 12.2.0.1.0, JDBC4.2)
Ping: 429 ms

⚠ [Update](#) to driver ver. 21.1.0.0

[Cancel](#) [Apply](#) [OK](#)

- Now you have new connection with Olympus enabled for your user.

7. Next time while connecting to DB

From next time we only need to do following steps

- Logging in using eiamCli login and get AWS Temp Cert for using eiamCli getAWSTempSSHCert Step 4
- Opening SSH Tunnel Step 5
- We should be able to connect to DB.