

Renew certificate for GoldenGate Veridata

Download auto renewed certificate

- Go to <https://netgenie.intuit.com/#/sslCert/VenafiCerts/> & search for "ggpspvd1pt.sbg-ppsp-prod.a.intuit.com". Select "All" in "Expiry Range" drop down.


NetGenie Venafi Certificates

Venafi BU Folder: All Expiry Range: All Show Current Versions Only Reset

Refresh Download Create Certificate

Object DN	Cert Name	Common Name	Serial Number	Due Days	Expiry Date	CSR Type	Download	Action
\\VED\\Policy\\netgenie_automati on\\VeriSign Standard SHA2\\gg pspvd1pt.sbg-ppsp-prod.a.intuit.c om_1925	ggpspvd1pt.sbg-ppsp-pro d.a.intuit.com_1925	ggpspvd1pt.sbg-ppsp-prod. a.intuit.com	035F5740BFA4AD0B18 8C5AE239C8EA9B	310	27/02/2024 11:59 PM	SYSTEM	Download	Renew

- click on Download. Provide "Veridata@123" at download prompt.

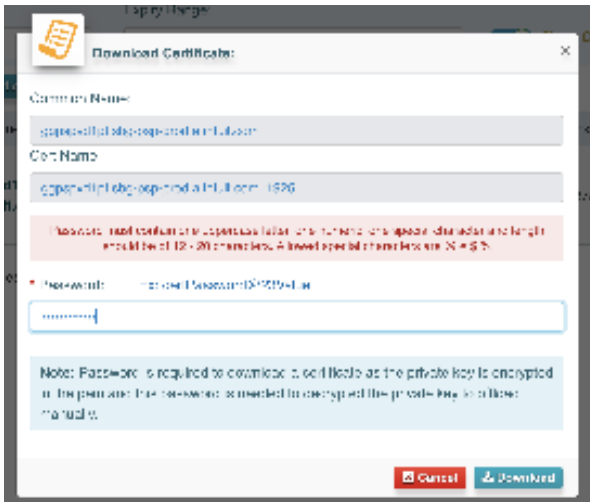

- break downloaded "ggpspvd1pt.sbg-ppsp-prod.a.intuit.com - ggpspvd1pt.sbg-ppsp-prod.a.intuit.com_1925.pem" file into below files. Please refer existing files to break it under location "/u01/veridata/wls/keystores" on **ggpspvd1pt-a.sbg-ppsp-prod.a.intuit.com** server.
 - ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.crt
 - ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.crt2
 - ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.key
 - intermediate.pem
 - root.pem
- Take backup of existing files under keystores folder
 - mkdir 2022 (change it accordingly)
 - cp -rp *.* 2022/

Deploy new certificate on veridata server

- Change ownership to oracle and Copy splitted files from above step to location /u01/veridata/wls/keystores on **ggpspvd1pt-a.sbg-ppsp-prod.a.intuit.com** server.

```

openssl pkcs12 -export -in ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.crt2 -inkey ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.key -out server.p12 -name ggpspvd1pt.sbg-ppsp-prod.a.intuit.com -CAfile root.pem -caname "Digicert CA Root"
--> enter certificate download password(Veridata@123)
--> export password Intuit12345678

keytool -importkeystore -deststorepass Intuit12345678 -destkeystore keystore.jks -srckeystore server.p12 -srcstoretype PKCS12 -srcstorepass Intuit12345678

keytool -import -trustcacerts -alias intermediate -file intermediate.pem -keystore keystore.jks -storepass Intuit12345678

keytool -list -v -keystore keystore.jks -storepass Intuit12345678 > out.txt

cat out.txt |egrep "Your keystore contains|Alias"

ls -l /u01/veridata/wls/keystores/keystore.jks

keytool -delete -alias intermediate -keystore keystore.jks -storepass Veridata@123

keytool -list -v -keystore keystore.jks -storepass Intuit12345678 > /tmp/out.txt
cat /tmp/out.txt |egrep "Your keystore contains|Alias"

curl https://ggpspvd1pt.sbg-ppsp-prod.a.intuit.com:7002/console

certificate pwd: Veridata@123
keystore pwd: Intuit12345678

```

Output

```

[oracle@ggpspvd1pt-a keystores]$ openssl pkcs12 -export -in ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.crt2 -inkey ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.key -out server.p12 -name ggpspvd1pt.sbg-ppsp-prod.a.intuit.com -CAfile root.pem -caname "Digicert CA Root"
Enter pass phrase for ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.key:
Enter Export Password:
Verifying - Enter Export Password:

[oracle@ggpspvd1pt-a keystores]$ keytool -importkeystore -deststorepass Intuit12345678 -destkeystore keystore.jks -srckeystore server.p12 -srcstoretype PKCS12 -srcstorepass Intuit12345678
Entry for alias ggpspvd1pt.sbg-ppsp-prod.a.intuit.com successfully imported.
Import command completed: 1 entries successfully imported, 0 entries failed or cancelled

[oracle@ggpspvd1pt-a keystores]$ keytool -import -trustcacerts -alias intermediate -file intermediate.pem -keystore keystore.jks -storepass Intuit12345678
Certificate was added to keystore

[oracle@ggpspvd1pt-a keystores]$ cat out.txt |egrep "Your keystore contains|Alias"
Your keystore contains 2 entries
Alias name: intermediate
Alias name: ggpspvd1pt.sbg-ppsp-prod.a.intuit.com
[oracle@ggpspvd1pt-a keystores]$

```

On Agent

- Take backup of existing files

```
For pspuwp02 database veridata agent
cd /u01/veridata/vagent/pspuwp02/wls/veridata/agent/config/certs
mkdir 2022 (Change directory name accordingly)
mv *.* 2022/
```

- Copy splitted certificate files to agent certs location

```
cd /u01/veridata/vagent/pspuwp02/wls/veridata/agent/config/certs

cp /u01/veridata/wls/keystores/ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.* .
cp /u01/veridata/wls/keystores/*.pem .
```

Deploy new certificate on veridata Agent

```
[oracle@ggpspvd1pt-a certs]$ pwd
/u01/veridata/vagent/pspuwp02/wls/veridata/agent/config/certs

==> openssl pkcs12 -export -in ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.crt -inkey ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.key -out server.p12 -name ggpspvd1pt.sbg-ppsp-prod.a.intuit.com -CAfile root.pem -caname "Digicert CA Root"
==> keytool -importkeystore -deststorepass Intuit12345678 -destkeystore vdtAgentID.jks -srckeystore server.p12 -srcstoretype PKCS12 -srcstorepass Intuit12345678
==> configure_agent_ssl.sh

keytool -list -v -keystore keystore.jks -storepass Intuit12345678 > server1.txt
cat /tmp/out.txt |egrep "Your keystore contains|Alias"

keytool -list -v -keystore vdtAgentID.jks -storepass Intuit12345678 > agent1.txt
cat /tmp/out.txt |egrep "Your keystore contains|Alias"
```

Output

```
[oracle@ggpspvd1pt-a certs]$ openssl pkcs12 -export -in ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.crt2 -inkey ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.key -out server.p12 -name ggpspvd1pt.sbg-ppsp-prod.a.intuit.com -CAfile root.pem -caname "Digicert CA Root"
Enter pass phrase for ggpspvd1pt.sbg-ppsp-prod.a.intuit.com.key:
Enter Export Password:
Verifying - Enter Export Password:

[oracle@ggpspvd1pt-a certs]$ keytool -importkeystore -deststorepass Intuit12345678 -destkeystore vdtAgentID.jks -srckeystore server.p12 -srcstoretype PKCS12 -srcstorepass Intuit12345678
Entry for alias ggpspvd1pt.sbg-ppsp-prod.a.intuit.com successfully imported.
Import command completed: 1 entries successfully imported, 0 entries failed or cancelled

[oracle@ggpspvd1pt-a certs]$ keytool -import -trustcacerts -alias vdt.agent.id -file intermediate.pem -keystore vdtAgentID.jks -storepass Intuit12345678
Certificate was added to keystore

[oracle@ggpspvd1pt-a certs]$ keytool -export -alias vdt.agent.id -keystore vdtAgentID.jks -storepass Intuit12345678 -file vdtAgentID.crt
Certificate stored in file <vdtAgentID.crt>

[oracle@ggpspvd1pt-a certs]$ keytool -import -v -keystore keystore.jks -storepass Intuit12345678 -file vdtAgentID.crt -alias vdt.agent.id
Owner: CN=DigiCert TLS RSA SHA256 2020 CA1, O=DigiCert Inc, C=US
Issuer: CN=DigiCert Global Root CA, OU=www.digicert.com, O=DigiCert Inc, C=US
Serial number: a3508d55c292b017df8ad65c00ff7e4
Valid from: Wed Sep 23 17:00:00 PDT 2020 until: Mon Sep 23 16:59:59 PDT 2030
Certificate fingerprints:
    MD5: B6:48:52:C8:17:13:42:1B:7E:47:E4:30:2F:97:65:8A
    SHA1: 69:38:FD:4D:98:BA:B0:3F:AA:DB:97:B3:43:96:83:1E:37:80:AE:A1
```

SHA256: 25:76:87:13:D3:B4:59:F9:38:2D:2A:59:4F:85:F3:47:09:FD:2A:89:30:73:15:42:A4:14:6F:FB:24:6B:EC:69
Signature algorithm name: SHA256withRSA
Version: 3

Extensions:

```
#1: ObjectId: 1.3.6.1.5.5.7.1.1 Criticality=false
AuthorityInfoAccess [
  [
    accessMethod: ocsp
    accessLocation: URIName: http://ocsp.digicert.com
  ,
    accessMethod: caIssuers
    accessLocation: URIName: http://cacerts.digicert.com/DigiCertGlobalRootCA.crt
  ]
]

#2: ObjectId: 2.5.29.35 Criticality=false
AuthorityKeyIdentifier [
  KeyIdentifier [
    0000: 03 DE 50 35 56 D1 4C BB   66 F0 A3 E2 1B 1B C3 97   ..P5V.L.f.....
    0010: B2 3D D1 55               .=.U
  ]
]

#3: ObjectId: 2.5.29.19 Criticality=true
BasicConstraints:[
  CA:true
  PathLen:0
]

#4: ObjectId: 2.5.29.31 Criticality=false
CRLDistributionPoints [
  [DistributionPoint:
    [URIName: http://crl3.digicert.com/DigiCertGlobalRootCA.crl]
  , DistributionPoint:
    [URIName: http://crl4.digicert.com/DigiCertGlobalRootCA.crl]
  ]]

#5: ObjectId: 2.5.29.32 Criticality=false
CertificatePolicies [
  [CertificatePolicyId: [2.23.140.1.1]
  [] ]
  [CertificatePolicyId: [2.23.140.1.2.1]
  [] ]
  [CertificatePolicyId: [2.23.140.1.2.2]
  [] ]
  [CertificatePolicyId: [2.23.140.1.2.3]
  [] ]
]

#6: ObjectId: 2.5.29.37 Criticality=false
ExtendedKeyUsages [
  serverAuth
  clientAuth
]

#7: ObjectId: 2.5.29.15 Criticality=true
KeyUsage [
  DigitalSignature
  Key_CertSign
  Crl_Sign
]

#8: ObjectId: 2.5.29.14 Criticality=false
SubjectKeyIdentifier [
  KeyIdentifier [
    0000: B7 6B A2 EA A8 AA 84 8C   79 EA B4 DA 0F 98 B2 C5   .k.....y.....
    0010: 95 76 B9 F4               .v..
  ]
]
```

```
Trust this certificate? [no]: yes
Certificate was added to keystore
[Storing keystore.jks]
```

Delete old keystore in webslogic via WLST and import new one

```
[oracle@ggppspvd1pt-a keystores]$ /u01/veridata/wls/oracle_common/common/bin/wlst.sh

Initializing WebLogic Scripting Tool (WLST) ...

Jython scans all the jar files it can find at first startup. Depending on the system, this process may take a
few minutes to complete, and WLST may not return a prompt right away.

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

wls:/offline> connect(url='t3://ggppspvd1pt.sbg-ppsp-prod.a.intuit.com:7001')
Please enter your username :weblogic
weblogic
Please enter your password :
Connecting to t3://ggppspvd1pt.sbg-ppsp-prod.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

wls:/base_domain/serverConfig/> svc = getOpssService(name='KeyStoreService')
wls:/base_domain/serverConfig/> svc.listKeyStores(appStripe='')
Location changed to domainRuntime tree. This is a read-only tree
with DomainMBean as the root MBean.
For more help, use help('domainRuntime')

system/trust
system/demoidentity
system/castore
system/publiccacerts
opss/trustservice_ts
opss/trustservice_ks
VeridataSec/VeridataWebSymmStore
VeridataSec/VeridataWebIdentityStore
VeridataSec/VeridataWebTrustStore
wls:/base_domain/domainRuntime/> svc.deleteKeyStore(appStripe='VeridataSec', name='VeridataWebTrustStore',
password='welcome123')
Already in Domain Runtime Tree

Keystore deleted

wls:/base_domain/domainRuntime/> svc.importKeyStore(appStripe='VeridataSec', name='VeridataWebTrustStore',
password='Intuit12345678', aliases='vdt.agent.id', keypasswords='Intuit12345678', type='JKS', permission=true,
filepath='/u01/veridata/vagent/pspuwp02/wls/veridata/agent/config/certs/keystore.jks')
Already in Domain Runtime Tree

Keystore imported. Check the logs if any entry was skipped.

wls:/base_domain/domainRuntime/>
```

Restart Veridata Server and Weblogic Server

```

--Stop Veridata Server
cd $MW_HOME/user_projects/domains/base_domain/veridata/bin

[oracle@ggpspvd1pt-a bin]$ ./veridataServer.sh stop
Running /u01/veridata/wls/user_projects/domains/base_domain/veridata/bin/../../bin/stopManagedWebLogic.sh
VERIDATA_server1 t3://ggpspvd1pt.sbg-ppsp-prod.a.intuit.com:7001
Stopping Weblogic Server...

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Connecting to t3://ggpspvd1pt.sbg-ppsp-prod.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Shutting down the server VERIDATA_server1 with force=false while connected to AdminServer ...

Exiting WebLogic Scripting Tool.

Done
Stopping Derby Server...
Derby server stopped.

--Stop Weblogic Server
[oracle@ggpspvd1pt-a bin]$ cd $MW_HOME/user_projects/domains/base_domain/bin/

[oracle@ggpspvd1pt-a bin]$ ./stopWebLogic.sh
Stopping Weblogic Server...

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Connecting to t3://ggpspvd1pt.sbg-ppsp-prod.a.intuit.com:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "base_domain".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Shutting down the server AdminServer with force=false while connected to AdminServer ...
WLST lost connection to the WebLogic Server that you were connected to.
This may happen if the server was shut down or partitioned.
You will have to re-connect to the server once the server is available.
Disconnected from weblogic server: AdminServer
Disconnected from weblogic server: AdminServer

Exiting WebLogic Scripting Tool.

Done
Stopping Derby Server...
Derby server stopped.

```

```
--Start Weblogic Server
[oracle@ggppsvd1pt-a bin]$ cd $MW_HOME/user_projects/domains/base_domain/bin/
[oracle@ggppsvd1pt-a bin]$ nohup ./startWebLogic.sh > startWebLogic.log 2>&1 &
[1] 104246

--from Startup of Weblogic logs
<Apr 23, 2023, 5:28:56,426 AM PDT> <Warning> <JMX> <BEA-149535> <JMX Resiliency Activity Server=All Servers :
Resolving connection list DomainRuntimeServiceMBean>
<Apr 23, 2023, 5:28:56,595 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default" is now listening on
10.95.110.211:7001 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:28:56,619 AM PDT> <Notice> <Security> <BEA-090171> <Loading the identity certificate and
private key stored under the alias ggppsvd1pt.sbg-ppsp-prod.a.intuit.com from the JKS keystore file /u01/veridata
/wls/keystores/keystore.jks.>
<Apr 23, 2023, 5:28:56,623 AM PDT> <Notice> <Security> <BEA-090169> <Loading trusted certificates from the JKS
keystore file /u01/veridata/wls/keystores/keystore.jks.>
<Apr 23, 2023, 5:28:56,625 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure" is now listening on
10.95.110.211:7002 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:28:56,625 AM PDT> <Notice> <WebLogicServer> <BEA-000331> <Started the WebLogic Server
Administration Server "AdminServer" for domain "base_domain" running in development mode.>
<Apr 23, 2023, 5:28:56,626 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default" is now listening on
10.95.110.211:7001 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:28:56,627 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure" is now listening on
10.95.110.211:7002 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:28:56,627 AM PDT> <Notice> <WebLogicServer> <BEA-000360> <The server started in RUNNING mode.>
<Apr 23, 2023, 5:28:56,633 AM PDT> <Notice> <WebLogicServer> <BEA-000365> <Server state changed to RUNNING.>

--Start Veridata Server
[oracle@ggppsvd1pt-a bin]$ cd $MW_HOME/user_projects/domains/base_domain/veridata/bin
[oracle@ggppsvd1pt-a bin]$ nohup ./veridataServer.sh start > veridataServer.log 2>&1 &
[2] 104619

--from Startup of Weblogic logs
<Apr 23, 2023, 5:30:11,627 AM PDT> <Notice> <WebLogicServer> <BEA-000365> <Server state changed to RESUMING.>
<Apr 23, 2023, 5:30:16,565 AM PDT> <Notice> <Security> <BEA-090171> <Loading the identity certificate and
private key stored under the alias ggppsvd1pt.sbg-ppsp-prod.a.intuit.com from the JKS keystore file /u01/veridata
/wls/keystores/keystore.jks.>
<Apr 23, 2023, 5:30:16,570 AM PDT> <Notice> <Security> <BEA-090169> <Loading trusted certificates from the JKS
keystore file /u01/veridata/wls/keystores/keystore.jks.>
<Apr 23, 2023, 5:30:16,583 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure[1]" is now listening
on 10.95.110.237:8831 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:30:16,583 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default[1]" is now listening on
10.95.110.237:8830 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:30:16,583 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default" is now listening on
127.0.0.1:8830 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:30:16,585 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure" is now listening on
127.0.0.1:8831 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:30:16,585 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure[2]" is now listening
on 10.95.110.211:8831 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:30:16,586 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default[2]" is now listening on
10.95.110.211:8830 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:30:16,586 AM PDT> <Notice> <WebLogicServer> <BEA-000332> <Started the WebLogic Server Managed
Server "VERIDATA_server1" for domain "base_domain" running in development mode.>
<Apr 23, 2023, 5:30:16,587 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure[1]" is now listening
on 10.95.110.237:8831 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:30:16,588 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default[1]" is now listening on
10.95.110.237:8830 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:30:16,588 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default" is now listening on
127.0.0.1:8830 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:30:16,589 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure" is now listening on
127.0.0.1:8831 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:30:16,589 AM PDT> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure[2]" is now listening
on 10.95.110.211:8831 for protocols iiops, t3s, ldaps, https.>
<Apr 23, 2023, 5:30:16,591 AM PDT> <Notice> <Server> <BEA-002613> <Channel "Default[2]" is now listening on
10.95.110.211:8830 for protocols iiop, t3, ldap, snmp, http.>
<Apr 23, 2023, 5:30:16,592 AM PDT> <Notice> <WebLogicServer> <BEA-000360> <The server started in RUNNING mode.>
<Apr 23, 2023, 5:30:16,599 AM PDT> <Notice> <WebLogicServer> <BEA-000365> <Server state changed to RUNNING.>
```

Restart Veridata Agent

```
/u01/veridata/vagent/pspuwp02/wls/veridata/agent
[oracle@ggppspvd1pt-a agent]$ ps -ef|grep agent|grep pspuwp02
oracle      17946      1  0 Feb04 ?                13:01:32 /u01/veridata/jdk1.8/jdk1.8.0_131/bin/java -Djava.util.
logging.config.class=oracle.core.ojdl.logging.LoggingConfiguration -Djdk.tls.client.protocols=TLSv1.2 -Doracle.
core.ojdl.logging.config.file=/u01/veridata/vagent/pspuwp02/wls/veridata/agent/config/odl.xml -Dhome=/u01
/veridata/vagent/pspuwp02/wls/veridata/agent -DagentHome=/u01/veridata/vagent/pspuwp02/wls/veridata/agent -XX:
+UseParallelGC -Xmx10240M -Xms10240M -Dagent-manifest.jar=/u01/veridata/vagent/pspuwp02/wls/veridata/agent
/agent-manifest.jar -jar /u01/veridata/vagent/pspuwp02/wls/veridata/agent/JavaAgent.jar
[oracle@ggppspvd1pt-a agent]$
[oracle@ggppspvd1pt-a agent]$ ./agent.sh stop
[VERIAGT-B00T] INFO Looking for home directory.
[VERIAGT-B00T] INFO Found bootstrap class in file:/u01/veridata/vagent/pspuwp02/wls/veridata/agent/JavaAgent.
jar!/com/goldengate/veridata/agent/Bootstrap.class.
[VERIAGT-B00T] INFO Home directory: /u01/veridata/vagent/pspuwp02/wls/veridata/agent
[VERIAGT-B00T] INFO Preparing classpath.
[VERIAGT-B00T] INFO Driver location: /u01/veridata/vagent/pspuwp02/wls/veridata/agent/drivers
[VERIAGT-B00T] INFO Drivers to load: ojdbc7.jar oracle.xdb_12.1.0.jar
[VERIAGT-B00T] WARN oracle.xdb_12.1.0.jar was not found. Skipping...
[VERIAGT-B00T] INFO Classpath:
[VERIAGT-B00T] INFO      /u01/veridata/vagent/pspuwp02/wls/veridata/agent/JavaAgent.jar
[VERIAGT-B00T] INFO      /u01/veridata/vagent/pspuwp02/wls/oracle_common/modules/oracle.jdbc/odbc7.jar
[VERIAGT-B00T] INFO      /u01/veridata/vagent/pspuwp02/wls/veridata/agent/agent-manifest.jar
[VERIAGT-B00T] INFO Initializing.
[VERIAGT-B00T] INFO Invoking startup method: public static void com.goldengate.veridata.agent.VeridataAgent.main
(java.lang.String[])
2023-04-23 05:39:01.538 NOTIFICATION OGGV-60150 Configuring logging.
2023-04-23 05:39:01.580 NOTIFICATION OGGV-60151 Config file for logger is /u01/veridata/vagent/pspuwp02/wls
/veridata/agent/config/odl.xml
2023-04-23 05:39:07.357 NOTIFICATION OGGV-60161 Shutdown request complete: OK
[oracle@ggppspvd1pt-a agent]$
[oracle@ggppspvd1pt-a agent]$ ps -ef|grep agent|grep pspuwp02
[oracle@ggppspvd1pt-a agent]$
[oracle@ggppspvd1pt-a agent]$ ./agent.sh start
[oracle@ggppspvd1pt-a agent]$
[oracle@ggppspvd1pt-a agent]$ ps -ef|grep agent|grep pspuwp02
oracle      106060      1 27 05:39 pts/3      00:00:02 /u01/veridata/jdk1.8/jdk1.8.0_131/bin/java -Djava.util.
logging.config.class=oracle.core.ojdl.logging.LoggingConfiguration -Djdk.tls.client.protocols=TLSv1.2 -Doracle.
core.ojdl.logging.config.file=/u01/veridata/vagent/pspuwp02/wls/veridata/agent/config/odl.xml -Dhome=/u01
/veridata/vagent/pspuwp02/wls/veridata/agent -DagentHome=/u01/veridata/vagent/pspuwp02/wls/veridata/agent -XX:
+UseParallelGC -Xmx10240M -Xms10240M -Dagent-manifest.jar=/u01/veridata/vagent/pspuwp02/wls/veridata/agent
/agent-manifest.jar -jar /u01/veridata/vagent/pspuwp02/wls/veridata/agent/JavaAgent.jar
```

Ensure Veridata Load Balancer

- Remove and Add Veridata host under Load Balancer. EC2 Load Balancers Instances tab Edit Instances

EC2 | [Load balancers](#) | prod-veridata

Load balancer: [prod-veridata](#)

Description **Instances** Health check Listeners Monitoring Tags Migration

Connection Draining: Enabled, 300 seconds ([Edit](#))

[Edit Instances](#)

Instance ID	Name	Availability Zone	Status	Actions
There are no instances registered to this load balancer				

[Edit Availability Zones](#)

Availability Zone	Subnet ID	Subnet CIDR	Instance Count	Healthy?	Actions
us-west-2b	subnet-0190b13cd13716b73	10.95.108.0/24	0	No (Availability Zone contains no healthy targets)	Remove from Load Balancer
us-west-2a	subnet-03c382a1732d29364	10.95.107.0/24	0	No (Availability Zone contains no healthy targets)	Remove from Load Balancer

- Add veridata EC2 as below

Add and Remove Instances

The table below lists all your running EC2 Instances. Check the boxes in the Select column to add those instances to this load balancer.

Warning: Unchecking instances and clicking save will remove these instances from your load balancer.

Add or Remove Instances

☐	Instance	Name	State	Security groups	Zone	Subnet ID	Subnet CIDR
☐	i-0bb2689d48268d767	goldengate-psphp01-20230311-104808	running	prod-goldengate-vpc-2	us-west-2a	subnet-062ec5a...	10.95.110.192/26
☒	i-0d81193e425bd62ee	goldengate-pspvd1pt-a-20200320-005443	running	prod-goldengate-vpc-2	us-west-2a	subnet-062ec5a...	10.95.110.192/26
☐	i-0515e4038bf7d35f	goldengate-pspuwp02-20200814-100423	running	prod-goldengate-vpc-2	us-west-2a	subnet-062ec5a...	10.95.110.192/26
☐	i-0e84bcb154a836519	goldengate-pspuwp01-20200814-100344	running	prod-goldengate-vpc-2	us-west-2a	subnet-062ec5a...	10.95.110.192/26
☐	i-0d1a7e093ec3b2957	goldengate-pspvd1pt-b-20200320-005446	running	prod-goldengate-vpc-2	us-west-2b	subnet-082b656...	10.95.111.0/26

Availability Zone Distribution
1 instance in us-west-2a

[Cancel](#) [Save](#)

- It should show stats as below

[EC2](#) | [Load balancers](#) | prod-veridata

Load balancer: [prod-veridata](#)

[Description](#) [Instances](#) [Health check](#) [Listeners](#) [Monitoring](#) [Tags](#) [Migration](#)

Connection Draining: Enabled, 300 seconds ([Edit](#))

[Edit Instances](#)

Instance ID	Name	Availability Zone	Status	Actions
i-0d81193e425bd62ee	goldengate-pspvd1pt-a-20200320-005443	us-west-2a	InService i	Remove from Load Balancer

- You should be able to login to Veridata console via url <https://goldengate.sbg-psp-prod.a.intuit.com/veridata/prepareWelcome.jsf>.

Validate Connection from Veridata Console

- Validate DataSource Type

Connection Details | Connection Settings | Connection Properties | [Data source type verified. Please continue.](#)

Name: [expm02](#)

Description: [expm02 - us-west](#)

Goldengate Connection

Host Name or IP Address: [expm02f01.dsp-psp-prod.a.intuit.com](#)

Port: [15096](#)

DataSource Type: [Oracle](#) [Verify](#)

[Data source type verified. Please continue.](#)

- Validate DataSource Connection

Connection Configurations > [Edit Connection: expm02](#)

Connection Details | Connection Settings | Connection Properties | [Data source connection was successful.](#)

Name: [expm02](#)

Description: [expm02 - us-west](#)

Goldengate Connection

Host Name or IP Address: [expm02f01.dsp-psp-prod.a.intuit.com](#)

Port: [15096](#)

DataSource Type: [Oracle](#) [Verify](#)

DataSource Connection

User: [GPT_PSP](#)

Password: [*****](#) [Test Connection](#)

[Data source connection was successful.](#)

Deploy certificate For all Remaining Veridata Agents

- Go to certs location /u01/veridata/vagent/<database_name>/wls/veridata/agent/config/certs

```
Take Backup of existing files
cd /u01/veridata/vagent/<database_name>/wls/veridata/agent/config/certs
mkdir 2022
mv *.* 2022/
cp -rp /u01/veridata/vagent/pspuwp02/wls/veridata/agent/config/certs/*.* .
```

- restart agent

```
../../agent.sh stop  
../../agent.sh start
```

- Ensure Veridata agent is able to make successful **DataType Source Validation** and **DataSource Connection** via **Veridata Console**.