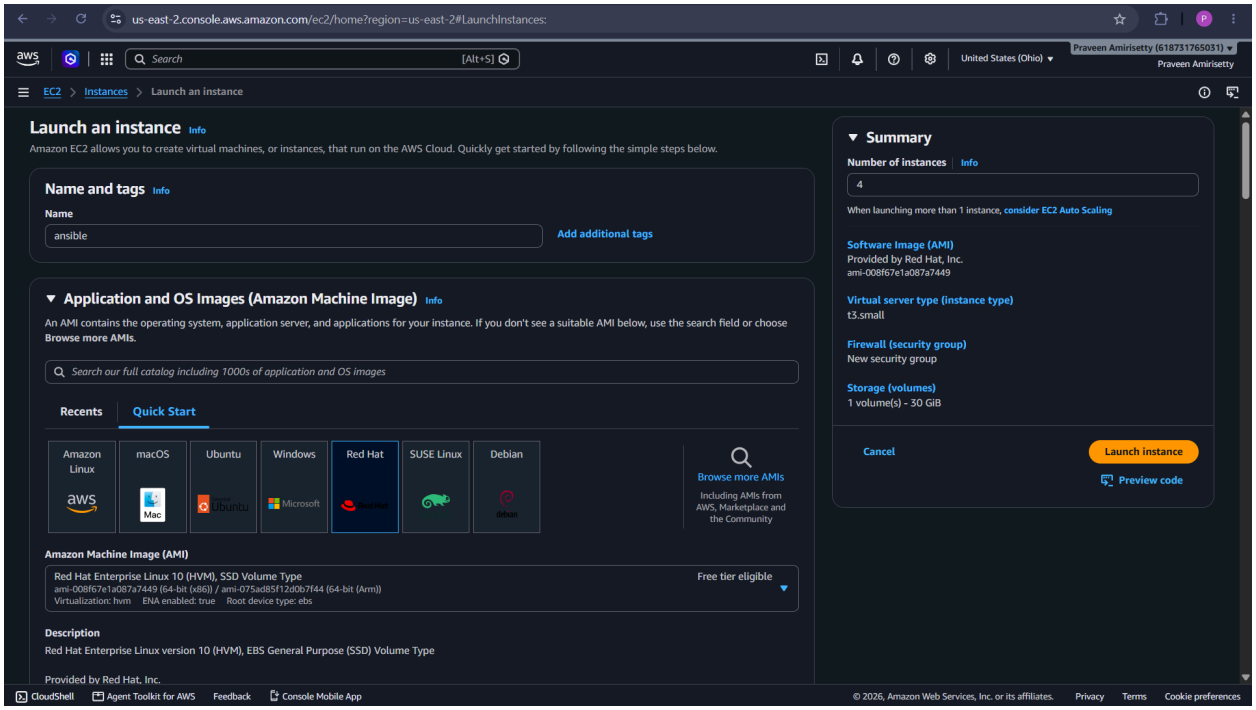
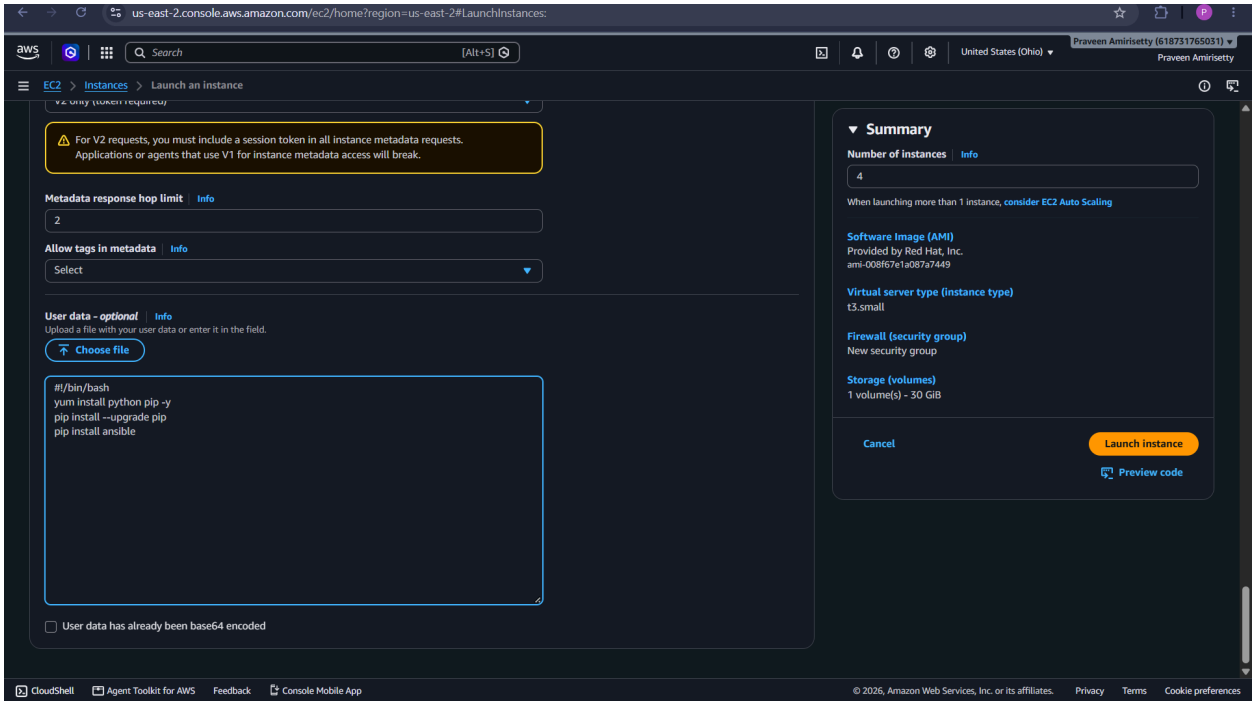
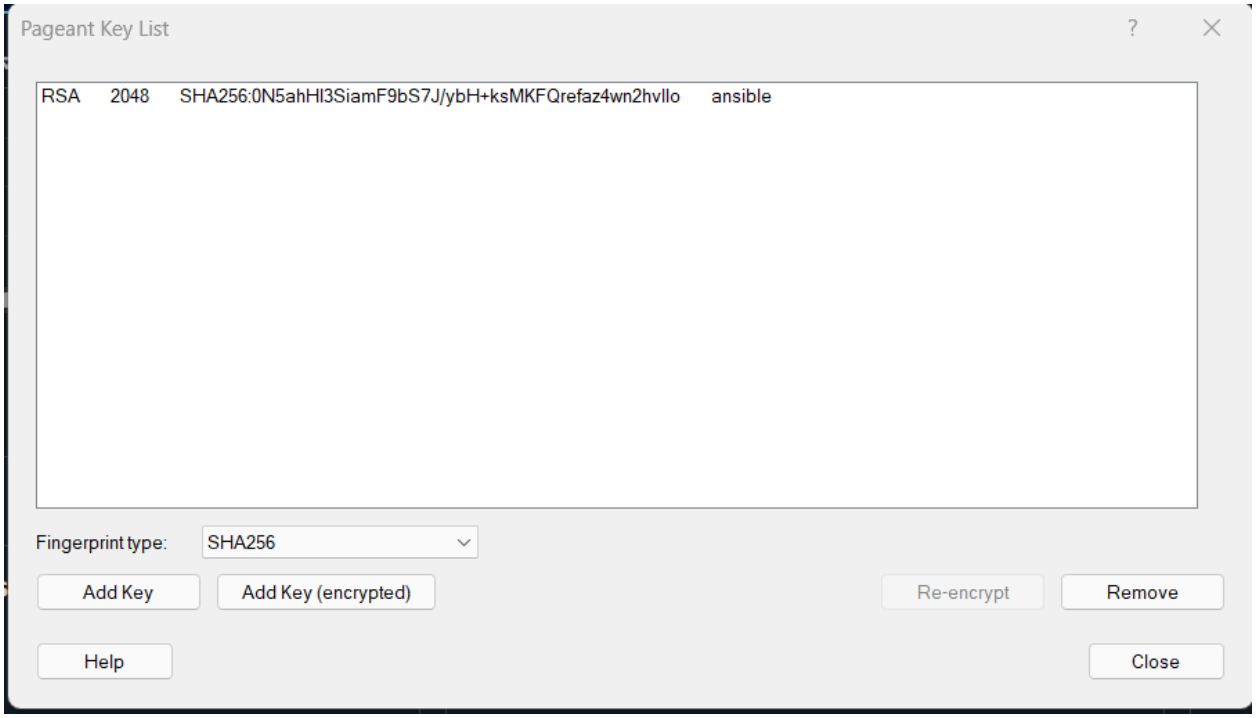
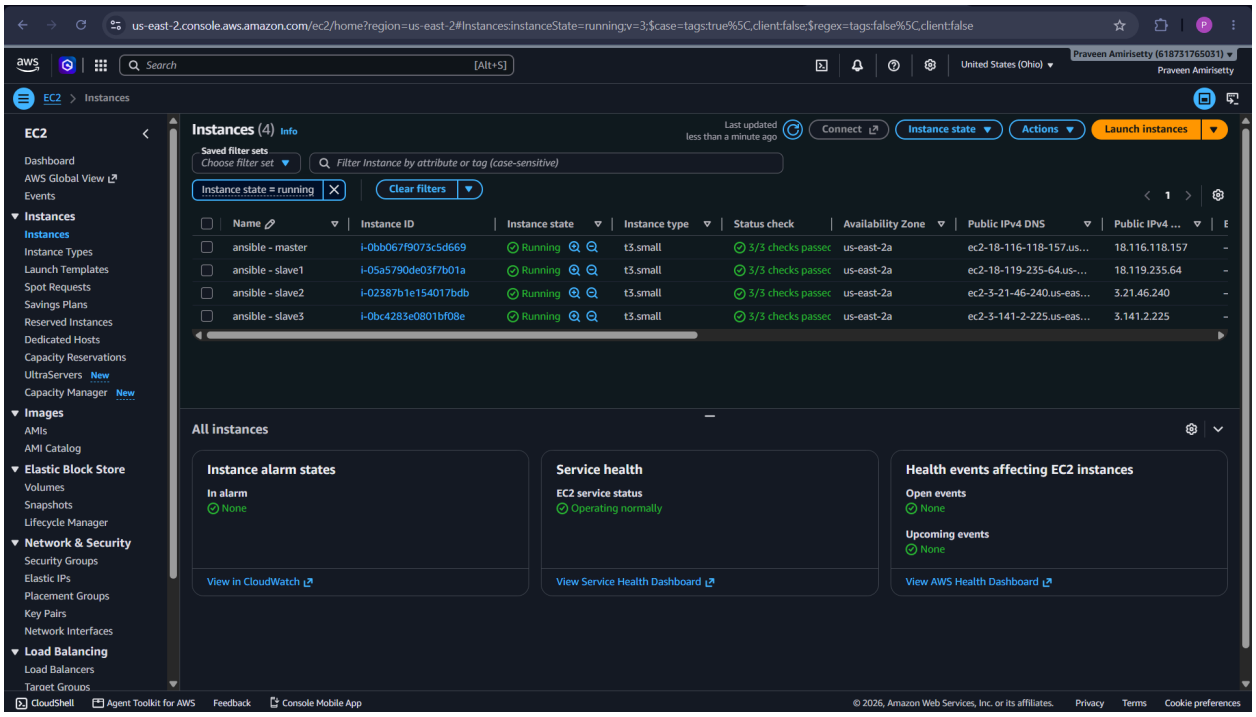

us-east-2.console.aws.amazon.com/ec2/home?region=us-east-2#LaunchInstances:
Search [Alt+S]
United States (Ohio)
Praveen Amirisetty (618731765031)
Praveen Amirisetty
EC2 > Instances > Launch an instance
Launch an instance Info
Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.
Name and tags Info
Name
ansible
Add additional tags
Application and OS Images (Amazon Machine Image) Info
An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose Browse more AMIs.
Search our full catalog including 1000s of application and OS images
Recents
Quick Start
Amazon Linux
macOS
Ubuntu
Windows
Red Hat
SUSE Linux
Debian
Browse more AMIs
Including AMIs from AWS, Marketplace and the Community
Amazon Machine Image (AMI)
Red Hat Enterprise Linux 10 (HVM), SSD Volume Type
ami-008f67e1a087a7449 (64-bit (x86)) / ami-075ad85f12d0b7f44 (64-bit (Arm))
Virtualization: hvm ENA enabled: true Root device type: ebs
Free tier eligible
Description
Red Hat Enterprise Linux version 10 (HVM), EBS General Purpose (SSD) Volume Type
Provided by Red Hat, Inc.
Summary
Number of instances Info
4
When launching more than 1 instance, consider EC2 Auto Scaling
Software Image (AMI)
Provided by Red Hat, Inc.
ami-008f67e1a087a7449
Virtual server type (instance type)
t3.small
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 30 GiB
Cancel
Launch instance
Preview code
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


us-east-2.console.aws.amazon.com/ec2/home?region=us-east-2#LaunchInstances:
Search [Alt+S]
United States (Ohio)
Praveen Amirisetty (618731765031)
Praveen Amirisetty
EC2 > Instances > Launch an instance
For V2 requests, you must include a session token in all instance metadata requests.
Applications or agents that use V1 for instance metadata access will break.
Metadata response hop limit Info
2
Allow tags in metadata Info
Select
User data - optional Info
Upload a file with your user data or enter it in the field.
Choose file
#!/bin/bash
yum install python pip -y
pip install --upgrade pip
pip install ansible
User data has already been base64 encoded
Summary
Number of instances Info
4
When launching more than 1 instance, consider EC2 Auto Scaling
Software Image (AMI)
Provided by Red Hat, Inc.
ami-008f67e1a087a7449
Virtual server type (instance type)
t3.small
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 30 GiB
Cancel
Launch instance
Preview code
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Pageant Key List
RSA 2048 SHA256:0N5ahHl3SiamF9bS7J/ybH+ksMKFQrefaz4wn2hvllo ansible
Fingerprint type:
SHA256
Add Key
Add Key (encrypted)
Re-encrypt
Remove
Help
Close


us-east-2.console.aws.amazon.com/ec2/home?region=us-east-2#Instances:instanceState=running;v=3;$case=tags:true%5C,client:false;$regex=tags:false%5C,client:false
Search
[Alt+S]
United States (Ohio)
Praveen Amirisetty (618731765031)
Praveen Amirisetty
EC2 > Instances
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
UltraServers New
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Snapshots
Lifecycle Manager
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces
Load Balancing
Load Balancers
Target Groups
Instances (4) Info
Last updated less than a minute ago
Connect
Instance state
Actions
Launch instances
Saved filter sets
Choose filter set
Filter instance by attribute or tag (case-sensitive)
Instance state = running
Clear filters
Name
Instance ID
Instance state
Instance type
Status check
Availability Zone
Public IPv4 DNS
Public IPv4 ...
ansible - master i-0bb067f9073c5d669 Running t3.small 3/3 checks passed us-east-2a ec2-18-116-118-157.us... 18.116.118.157
ansible - slave1 i-05a5790de03f7b01a Running t3.small 3/3 checks passed us-east-2a ec2-18-119-235-64.us-... 18.119.235.64
ansible - slave2 i-02387b1e154017bdb Running t3.small 3/3 checks passed us-east-2a ec2-3-21-46-240.us-eas... 3.21.46.240
ansible - slave3 i-0bc4283e0801bf08e Running t3.small 3/3 checks passed us-east-2a ec2-3-141-2-225.us-eas... 3.141.2.225
All instances
Instance alarm states
In alarm
None
View in CloudWatch
Service health
EC2 service status
Operating normally
View Service Health Dashboard
Health events affecting EC2 instances
Open events
None
Upcoming events
None
View AWS Health Dashboard
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

```
ec2-user@ip-172-31-7-16:~
login as: ec2-user
Authenticating with public key "ansible" from agent
Register this system with Red Hat Lightspeed: rhc connect

Example:
# rhc connect --activation-key <key> --organization <org>

The rhc client and Red Hat Lightspeed will enable analytics and additional
management capabilities on your system.
View your connected systems at https://console.redhat.com/insights

You can learn more about how to register your system
using rhc at https://red.ht/registration
Last login: Mon Oct 26 12:35:44 2026 from 14.99.219.164
[ec2-user@ip-172-31-7-16 ~]$ ansible --version
ansible [core 2.21.5]
  config file = None
  configured module search path = ['/home/ec2-user/.ansible/plugins/modules', '/
usr/share/ansible/plugins/modules']
  ansible python module location = /usr/local/lib/python3.12/site-packages/ansib
le
  ansible collection location = /home/ec2-user/.ansible/collections:/usr/share/a
nsible/collections
  executable location = /usr/local/bin/ansible
  python version = 3.12.15 (main, Oct  1 2026, 00:00:00) [GCC 14.3.1 20251022 (R
ed Hat 14.3.1-4)] (/usr/bin/python3)
  jinja version = 3.1.6
  pyyaml version = 6.0.1 (with libyaml v0.2.5)
[ec2-user@ip-172-31-7-16 ~]$ vi slaves.txt
[ec2-user@ip-172-31-7-16 ~]$ cat slaves.txt
172.31.4.228
172.31.5.160
172.31.5.120

[ec2-user@ip-172-31-7-16 ~]$ vi ansible.cfg
[ec2-user@ip-172-31-7-16 ~]$ ansible all -i slaves.ttx -m ping
[WARNING]: Unable to parse /home/ec2-user/slaves.ttx as an inventory source
[WARNING]: No inventory was parsed, only implicit localhost is available
[WARNING]: provided hosts list is empty, only localhost is available. Note that
the implicit localhost does not match 'all'
[ec2-user@ip-172-31-7-16 ~]$ ansible all -i slaves.txt -m ping
[ERROR]: Task failed: Failed to connect to the host via ssh: Host key verificati
on failed.
Origin: <adhoc 'ping' task>

{'action': 'ping', 'args': {}, 'timeout': 0, 'async_val': 0, 'poll': 15}

172.31.5.160 | UNREACHABLE! => {
    "changed": false,
    "msg": "Task failed: Failed to connect to the host via ssh: Host key verific
ation failed.",
    "unreachable": true
}
172.31.4.228 | UNREACHABLE! => {
    "changed": false,
```

```
ec2-user@ip-172-31-7-16:~
    "changed": false,
    "msg": "Task failed: Failed to connect to the host via ssh: Host key verific
ation failed.",
    "unreachable": true
}
172.31.5.120 | UNREACHABLE! => {
    "changed": false,
    "msg": "Task failed: Failed to connect to the host via ssh: Host key verific
ation failed.",
    "unreachable": true
}
[ec2-user@ip-172-31-7-16 ~]$ ssh ec2-user@172.31.4.228
The authenticity of host '172.31.4.228 (172.31.4.228)' can't be established.
ED25519 key fingerprint is SHA256:1jEJIudeO6sDQ7D7pQcKXXlvAsJArn+YtA2hFFN8XGo.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.31.4.228' (ED25519) to the list of known hosts.
Register this system with Red Hat Lightspeed: rhc connect

Example:
# rhc connect --activation-key <key> --organization <org>


The rhc client and Red Hat Lightspeed will enable analytics and additional
management capabilities on your system.
View your connected systems at https://console.redhat.com/insights


You can learn more about how to register your system
using rhc at https://red.ht/registration
[ec2-user@ip-172-31-4-228 ~]$ exit
logout
Connection to 172.31.4.228 closed.
[ec2-user@ip-172-31-7-16 ~]$ ssh ec2-user@172.31.5.160
The authenticity of host '172.31.5.160 (172.31.5.160)' can't be established.
ED25519 key fingerprint is SHA256:JPsF491J2RD9s5qtRjg/PRPqLIM4PEaP+XWJn5nJia4.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.31.5.160' (ED25519) to the list of known hosts.
Register this system with Red Hat Lightspeed: rhc connect


Example:
# rhc connect --activation-key <key> --organization <org>

The rhc client and Red Hat Lightspeed will enable analytics and additional
management capabilities on your system.
View your connected systems at https://console.redhat.com/insights

You can learn more about how to register your system
using rhc at https://red.ht/registration
[ec2-user@ip-172-31-5-160 ~]$ exit
logout
Connection to 172.31.5.160 closed.
[ec2-user@ip-172-31-7-16 ~]$ ssh ec2-user@172.31.5.120
The authenticity of host '172.31.5.120 (172.31.5.120)' can't be established.
ED25519 key fingerprint is SHA256:VJWwib3rhvKtuzS91P+qGxtn0GShnEYF40YJe21ce1E.
This key is not known by any other names.
```

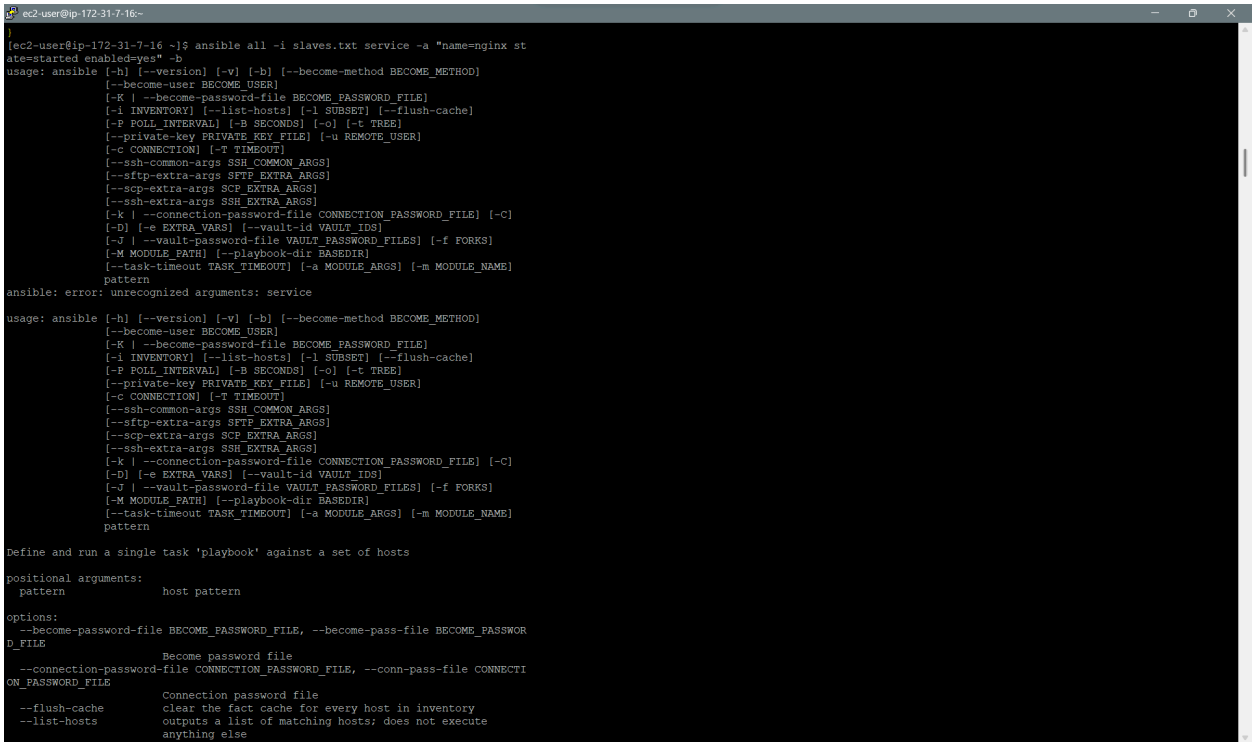
ec2-user@ip-172-31-7-16:~
}
[ec2-user@ip-172-31-7-16 ~]$ ansible all -i slaves.txt service -a "name=nginx st
ate=started enabled=yes" -b
usage: ansible [-h] [--version] [-v] [-b] [--become-method BECOME_METHOD]
[--become-user BECOME_USER]
[-K | --become-password-file BECOME_PASSWORD_FILE]
[-i INVENTORY] [--list-hosts] [-l SUBSET] [--flush-cache]
[-P POLL_INTERVAL] [-B SECONDS] [-o] [-t TREE]
[--private-key PRIVATE_KEY_FILE] [-u REMOTE_USER]
[-c CONNECTION] [-T TIMEOUT]
[--ssh-common-args SSH_COMMON_ARGS]
[--sftp-extra-args SFTP_EXTRA_ARGS]
[--scp-extra-args SCP_EXTRA_ARGS]
[--ssh-extra-args SSH_EXTRA_ARGS]
[-k | --connection-password-file CONNECTION_PASSWORD_FILE] [-C]
[-D] [-e EXTRA_VARS] [--vault-id VAULT_IDS]
[-J | --vault-password-file VAULT_PASSWORD_FILES] [-f FORKS]
[-M MODULE_PATH] [--playbook-dir BASEDIR]
[--task-timeout TASK_TIMEOUT] [-a MODULE_ARGS] [-m MODULE_NAME]
pattern
ansible: error: unrecognized arguments: service
usage: ansible [-h] [--version] [-v] [-b] [--become-method BECOME_METHOD]
[--become-user BECOME_USER]
[-K | --become-password-file BECOME_PASSWORD_FILE]
[-i INVENTORY] [--list-hosts] [-l SUBSET] [--flush-cache]
[-P POLL_INTERVAL] [-B SECONDS] [-o] [-t TREE]
[--private-key PRIVATE_KEY_FILE] [-u REMOTE_USER]
[-c CONNECTION] [-T TIMEOUT]
[--ssh-common-args SSH_COMMON_ARGS]
[--sftp-extra-args SFTP_EXTRA_ARGS]
[--scp-extra-args SCP_EXTRA_ARGS]
[--ssh-extra-args SSH_EXTRA_ARGS]
[-k | --connection-password-file CONNECTION_PASSWORD_FILE] [-C]
[-D] [-e EXTRA_VARS] [--vault-id VAULT_IDS]
[-J | --vault-password-file VAULT_PASSWORD_FILES] [-f FORKS]
[-M MODULE_PATH] [--playbook-dir BASEDIR]
[--task-timeout TASK_TIMEOUT] [-a MODULE_ARGS] [-m MODULE_NAME]
pattern
Define and run a single task 'playbook' against a set of hosts
positional arguments:
pattern host pattern
options:
--become-password-file BECOME_PASSWORD_FILE, --become-pass-file BECOME_PASSWOR
D_FILE
Become password file
--connection-password-file CONNECTION_PASSWORD_FILE, --conn-pass-file CONNECTI
ON_PASSWORD_FILE
Connection password file
--flush-cache clear the fact cache for every host in inventory
--list-hosts outputs a list of matching hosts; does not execute
anything else

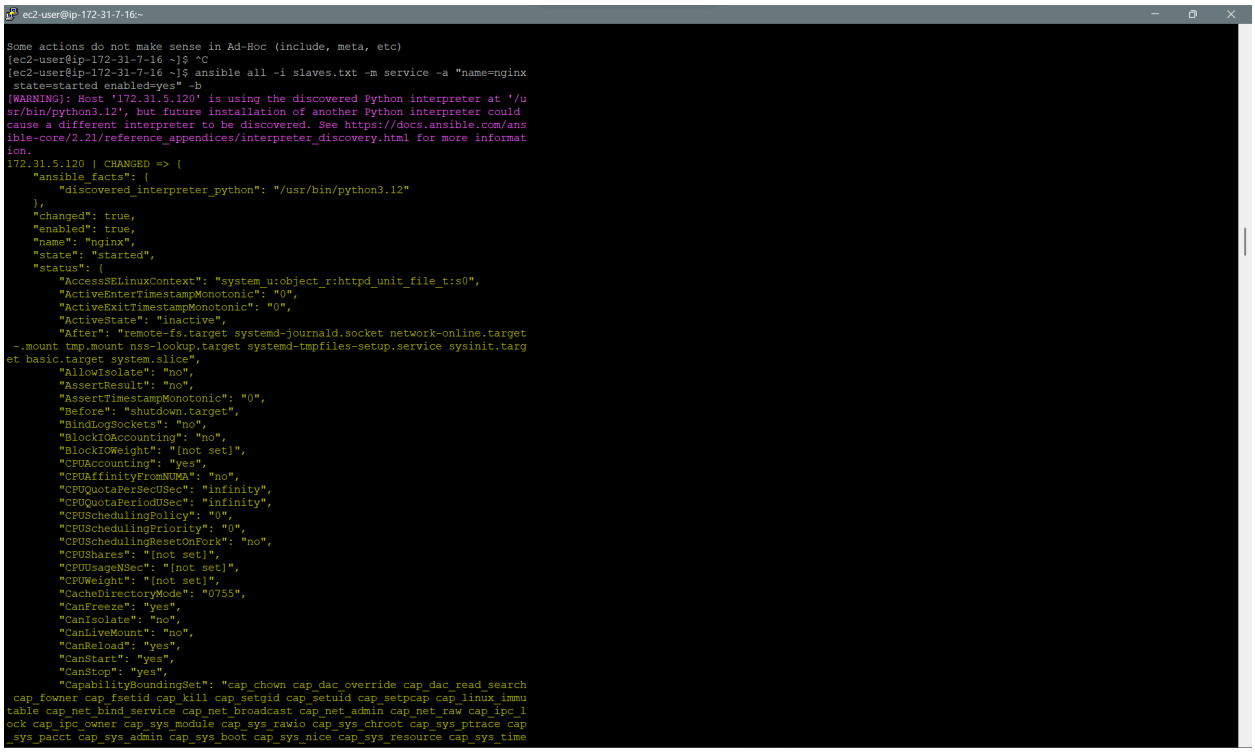
ec2-user@ip-172-31-7-16:~
Some actions do not make sense in Ad-Hoc (include, meta, etc)
[ec2-user@ip-172-31-7-16 ~]$ ^C
[ec2-user@ip-172-31-7-16 ~]$ ansible all -i slaves.txt -m service -a "name=nginx
state=started enabled=yes" -b
[WARNING]: Host '172.31.5.120' is using the discovered Python interpreter at '/u
sr/bin/python3.12', but future installation of another Python interpreter could
cause a different interpreter to be discovered. See https://docs.ansible.com/ans
ible-core/2.21/reference_appendices/interpreter_discovery.html for more informat
ion.
172.31.5.120 | CHANGED => {
"ansible_facts": {
"discovered_interpreter_python": "/usr/bin/python3.12"
},
"changed": true,
"enabled": true,
"name": "nginx",
"state": "started",
"status": {
"AccessSELinuxContext": "system_u:object_r:httpd_unit_file_t:s0",
"ActiveEnterTimestampMonotonic": "0",
"ActiveExitTimestampMonotonic": "0",
"ActiveState": "inactive",
"After": "remote-fs.target systemd-journald.socket network-online.target
-.mount tmp.mount nss-lookup.target systemd-tmpfiles-setup.service sysinit.targ
et basic.target system.slice",
"AllowIsolate": "no",
"AssertResult": "no",
"AssertTimestampMonotonic": "0",
"Before": "shutdown.target",
"BindLogSockets": "no",
"BlockIOAccounting": "no",
"BlockIOWeight": "[not set]",
"CPUAccounting": "yes",
"CPUAffinityFromNUMA": "no",
"CPUQuotaPerSecUSec": "infinity",
"CPUQuotaPeriodUSec": "infinity",
"CPUSchedulingPolicy": "0",
"CPUSchedulingPriority": "0",
"CPUSchedulingResetOnFork": "no",
"CPUShares": "[not set]",
"CPUUsageNSec": "[not set]",
"CPUWeight": "[not set]",
"CacheDirectoryMode": "0755",
"CanFreeze": "yes",
"CanIsolate": "no",
"CanLiveMount": "no",
"CanReload": "yes",
"CanStart": "yes",
"CanStop": "yes",
"CapabilityBoundingSet": "cap_chown cap_dac_override cap_dac_read_search
cap_fowner cap_fsetid cap_kill cap_setgid cap_setuid cap_setpcap cap_linux_immu
table cap_net_bind_service cap_net_broadcast cap_net_admin cap_net_raw cap_ipc_l
ock cap_ipc_owner cap_sys_module cap_sys_rawio cap_sys_chroot cap_sys_ptrace cap
_sys_pacct cap_sys_admin cap_sys_boot cap_sys_nice cap_sys_resource cap_sys_time

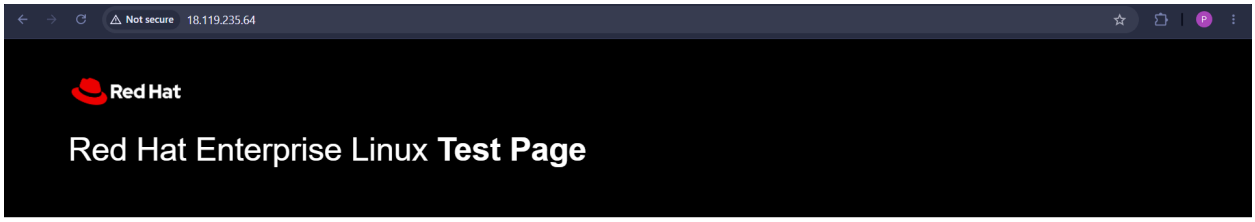

This page is used to test the proper operation of the HTTP server after it has been installed. If you can read this page, it means that the HTTP server installed at this site is working properly.

If you are a member of the general public:

The fact that you are seeing this page indicates that the website you just visited is either experiencing problems, or is undergoing routine maintenance.

If you would like to let the administrators of this website know that you've seen this page instead of the page you expected, you should send them e-mail. In general, mail sent to the name "webmaster" and directed to the website's domain should reach the appropriate person.

For example, if you experienced problems while visiting www.example.com, you should send e-mail to "webmaster@example.com".

For information on Red Hat Enterprise Linux, please visit the Red Hat, Inc. website. The documentation for Red Hat Enterprise Linux is available on the Red Hat, Inc. website.

If you are the website administrator:


You may now add content to the webroot directory. Note that until you do so, people visiting your website will see this page, and not your content.


For systems using the Apache HTTP Server: You may now add content to the directory `/var/www/html/`. Note that until you do so, people visiting your website will see this page, and not your content. To prevent this page from ever being used, follow the instructions in the file `/etc/httpd/conf.d/welcome.conf`.

For systems using NGINX: You should now put your content in a location of your choice and edit the `root` configuration directive in the **nginx** configuration file `/etc/nginx/nginx.conf`.

Red Hat Enterprise Linux | NGINX

Apache™ is a registered trademark of the Apache Software Foundation in the United States and/or other countries.
NGINX™ is a registered trademark of F5 Networks, Inc.

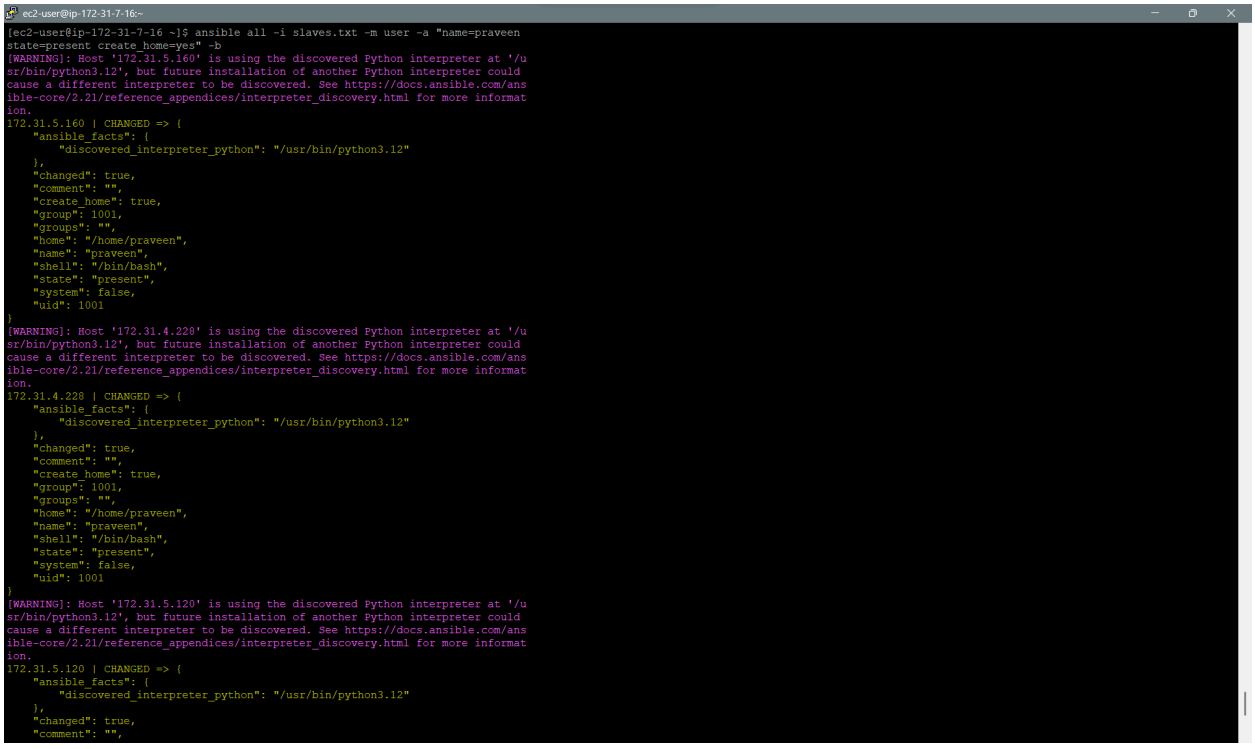

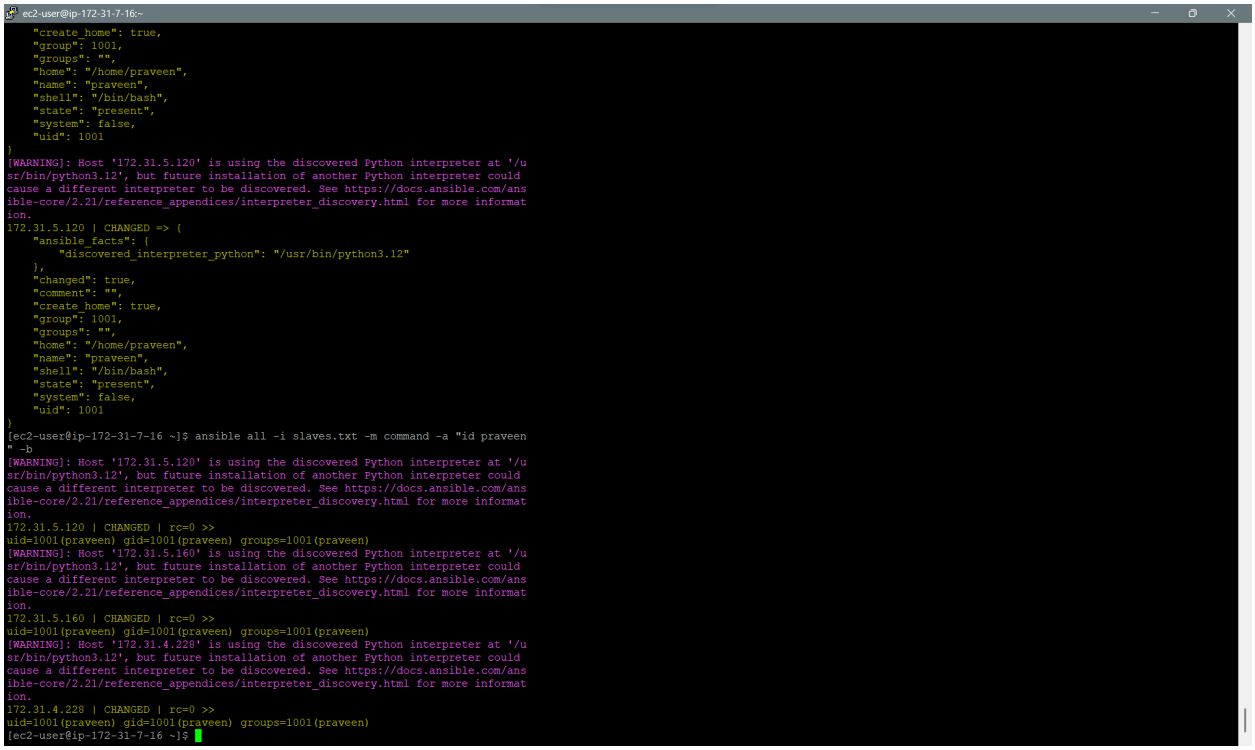
ec2-user@ip-172-31-7-16:~
"create_home": true,
"group": 1001,
"groups": "",
"home": "/home/praveen",
"name": "praveen",
"shell": "/bin/bash",
"state": "present",
"system": false,
"uid": 1001
}
[WARNING]: Host '172.31.5.120' is using the discovered Python interpreter at '/usr/bin/python3.12', but future installation of another Python interpreter could cause a different interpreter to be discovered. See https://docs.ansible.com/ansible-core/2.21/reference_appendices/interpreter_discovery.html for more information.
172.31.5.120 | CHANGED => {
"ansible_facts": {
"discovered_interpreter_python": "/usr/bin/python3.12"
},
"changed": true,
"comment": "",
"create_home": true,
"group": 1001,
"groups": "",
"home": "/home/praveen",
"name": "praveen",
"shell": "/bin/bash",
"state": "present",
"system": false,
"uid": 1001
}
[ec2-user@ip-172-31-7-16 ~]$ ansible all -i slaves.txt -m command -a "id praveen" -b
[WARNING]: Host '172.31.5.120' is using the discovered Python interpreter at '/usr/bin/python3.12', but future installation of another Python interpreter could cause a different interpreter to be discovered. See https://docs.ansible.com/ansible-core/2.21/reference_appendices/interpreter_discovery.html for more information.
172.31.5.120 | CHANGED | rc=0 >>
uid=1001(praveen) gid=1001(praveen) groups=1001(praveen)
[WARNING]: Host '172.31.5.160' is using the discovered Python interpreter at '/usr/bin/python3.12', but future installation of another Python interpreter could cause a different interpreter to be discovered. See https://docs.ansible.com/ansible-core/2.21/reference_appendices/interpreter_discovery.html for more information.
172.31.5.160 | CHANGED | rc=0 >>
uid=1001(praveen) gid=1001(praveen) groups=1001(praveen)
[WARNING]: Host '172.31.4.228' is using the discovered Python interpreter at '/usr/bin/python3.12', but future installation of another Python interpreter could cause a different interpreter to be discovered. See https://docs.ansible.com/ansible-core/2.21/reference_appendices/interpreter_discovery.html for more information.
172.31.4.228 | CHANGED | rc=0 >>
uid=1001(praveen) gid=1001(praveen) groups=1001(praveen)
[ec2-user@ip-172-31-7-16 ~]$