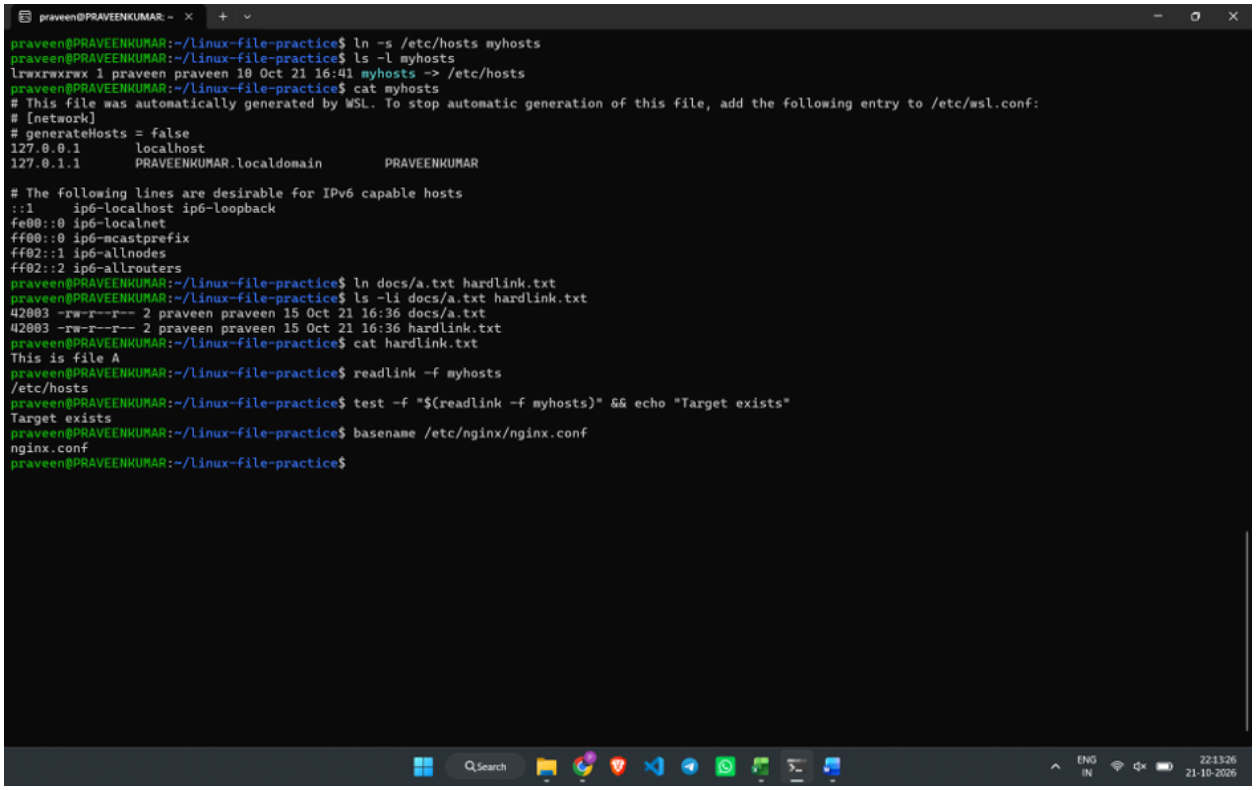
```
praveen@PRAVEENKUMAR:~$ mkdir -p ~/linux-file-practice
praveen@PRAVEENKUMAR:~$ cd ~/linux-file-practice
praveen@PRAVEENKUMAR:~/linux-file-practice$ pwd
/home/praveen/linux-file-practice
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "This is file A" > a.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "This is the old file" > old.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "This is a backup file" > report.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ mkdir -p dir1 dir2 backup docs
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "File 1 inside dir1" > dir1/file1.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "File 2 inside dir1" > dir1/file2.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "Existing file in dir2" > dir2/existing.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l
total 28
-rw-r--r-- 1 praveen praveen   15 Oct 21 16:36 a.txt
drwxr-xr-x 2 praveen praveen 4096 Oct 21 16:37 backup
drwxr-xr-x 2 praveen praveen 4096 Oct 21 16:37 dir1
drwxr-xr-x 2 praveen praveen 4096 Oct 21 16:37 dir2
drwxr-xr-x 2 praveen praveen 4096 Oct 21 16:37 docs
-rw-r--r-- 1 praveen praveen   21 Oct 21 16:37 old.txt
-rw-r--r-- 1 praveen praveen   22 Oct 21 16:37 report.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat a.txt
This is file A
praveen@PRAVEENKUMAR:~/linux-file-practice$ cp a.txt b.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l b.txt
-rw-r--r-- 1 praveen praveen 15 Oct 21 16:38 b.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat b.txt
This is file A
praveen@PRAVEENKUMAR:~/linux-file-practice$ cp -r dir1 dir2
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -R dir2
dir2:
dir1  existing.txt

dir2/dir1:
file1.txt  file2.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat dir2/dir1/file1.txt
File 1 inside dir1
praveen@PRAVEENKUMAR:~/linux-file-practice$ cp -i a.txt b.txt
cp: overwrite 'b.txt'? n
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat b.txt
This is file A
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "New file content" > newfile.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ echo "Old backup content" > backup/newfile.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ sleep 2
praveen@PRAVEENKUMAR:~/linux-file-practice$ touch newfile.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ stat -c '%n %y' newfile.txt backup/newfile.txt
newfile.txt 2026-10-21 16:39:34.673419962 +0000
backup/newfile.txt 2026-10-21 16:39:19.265430737 +0000
```

```
newfile.txt 2026-10-21 16:39:34.673419962 +0000
backup/newfile.txt 2026-10-21 16:39:19.265430737 +0000
praveen@PRAVEENKUMAR:~/linux-file-practice$ cp -u newfile.txt backup/
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat backup/newfile.txt
New file content
praveen@PRAVEENKUMAR:~/linux-file-practice$ cp -u *.txt backup/
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l backup/
total 20
-rw-r--r-- 1 praveen praveen 15 Oct 21 16:39 a.txt
-rw-r--r-- 1 praveen praveen 15 Oct 21 16:39 b.txt
-rw-r--r-- 1 praveen praveen 17 Oct 21 16:39 newfile.txt
-rw-r--r-- 1 praveen praveen 21 Oct 21 16:39 old.txt
-rw-r--r-- 1 praveen praveen 22 Oct 21 16:39 report.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ mv a.txt docs/
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l docs/
total 4
-rw-r--r-- 1 praveen praveen 15 Oct 21 16:36 a.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat docs/a.txt
This is file A
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l a.txt
ls: cannot access 'a.txt': No such file or directory
praveen@PRAVEENKUMAR:~/linux-file-practice$ mv old.txt new.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l new.txt
-rw-r--r-- 1 praveen praveen 21 Oct 21 16:37 new.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat new.txt
This is the old file
praveen@PRAVEENKUMAR:~/linux-file-practice$ ln -s /etc/hosts myhosts
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l myhosts
lrwxrwxrwx 1 praveen praveen 10 Oct 21 16:41 myhosts -> /etc/hosts
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat myhosts
# This file was automatically generated by WSL. To stop automatic generation of this file, add the following entry to /etc/wsl.conf:
# [network]
# generateHosts = false
127.0.0.1       localhost
127.0.1.1       PRAVEENKUMAR.localdomain        PRAVEENKUMAR

# The following lines are desirable for IPv6 capable hosts
::1     ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters
praveen@PRAVEENKUMAR:~/linux-file-practice$ ln docs/a.txt hardlink.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -li docs/a.txt hardlink.txt
42003 -rw-r--r-- 2 praveen praveen 15 Oct 21 16:36 docs/a.txt
42003 -rw-r--r-- 2 praveen praveen 15 Oct 21 16:36 hardlink.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat hardlink.txt
```


praveen@PRAVEENKUMAR: ~
praveen@PRAVEENKUMAR:~/linux-file-practice$ ln -s /etc/hosts myhosts
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -l myhosts
lrwxrwxrwx 1 praveen praveen 10 Oct 21 16:41 myhosts -> /etc/hosts
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat myhosts
This file was automatically generated by WSL. To stop automatic generation of this file, add the following entry to /etc/wsl.conf:
[network]
generateHosts = false
127.0.0.1 localhost
127.0.1.1 PRAVEENKUMAR.localdomain PRAVEENKUMAR
The following lines are desirable for IPv6 capable hosts
::1 ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters
praveen@PRAVEENKUMAR:~/linux-file-practice$ ln docs/a.txt hardlink.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ ls -li docs/a.txt hardlink.txt
42003 -rw-r--r-- 2 praveen praveen 15 Oct 21 16:36 docs/a.txt
42003 -rw-r--r-- 2 praveen praveen 15 Oct 21 16:36 hardlink.txt
praveen@PRAVEENKUMAR:~/linux-file-practice$ cat hardlink.txt
This is file A
praveen@PRAVEENKUMAR:~/linux-file-practice$ readlink -f myhosts
/etc/hosts
praveen@PRAVEENKUMAR:~/linux-file-practice$ test -f "$(readlink -f myhosts)" && echo "Target exists"
Target exists
praveen@PRAVEENKUMAR:~/linux-file-practice$ basename /etc/nginx/nginx.conf
nginx.conf
praveen@PRAVEENKUMAR:~/linux-file-practice$
Search
ENG
IN
22:13:26
21-10-2026