

Full Stack Development

PRAVEEN N ARUL VALAN CIBI

rror_mod.use_z = False operation == "MIRROR Z" rror_mod.use_x = False rror_mod.use_y = False rror_mod.use_z = True election at the end -add ob.select= 1 r ob.select=1 text.scene.objects.action Selected" + str(modifie rror ob.select = 0 bpy.context.selected obj ata.objects[one.name].se int("please select exactl --- OPERATOR CLASSES ---ext.active_object is not

What is Full Stack?

Full Stack Web Developer


A full stack web developer is a person who can develop both **client** and **server** software.


These developers aren't expert in everything but simply have the functional knowledge to finish and develop the entire product.


Frontend Backend


Frontend Backend


Backend

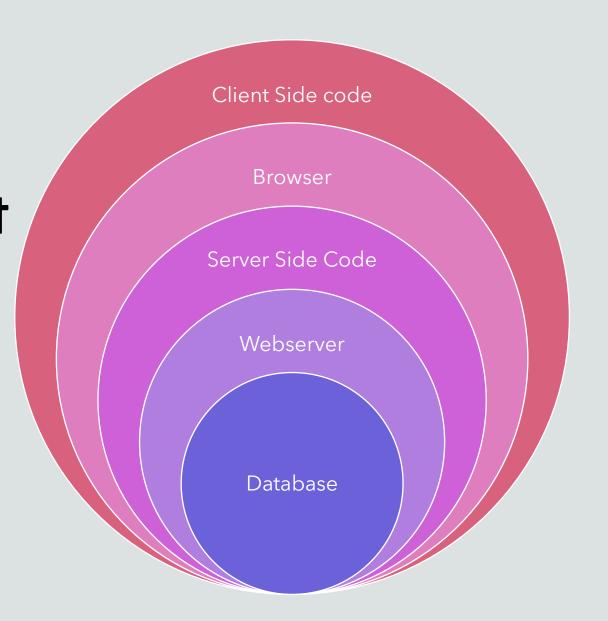


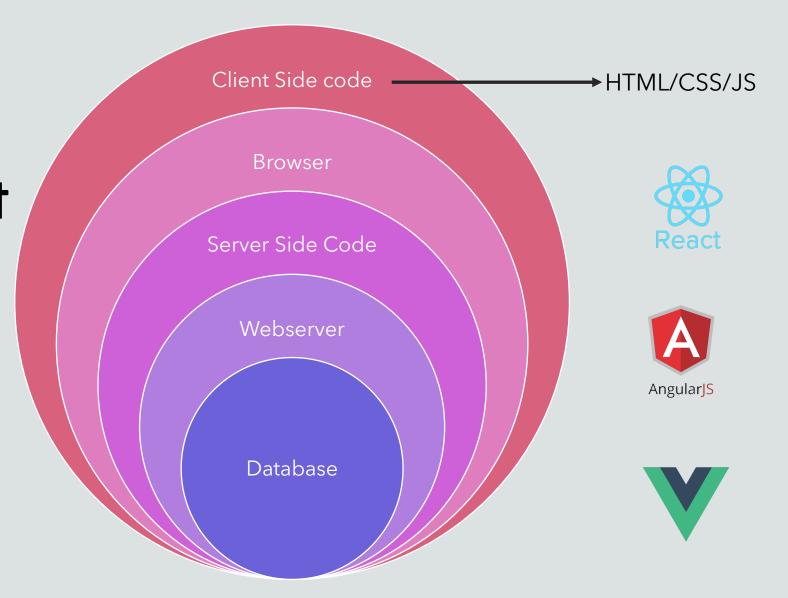


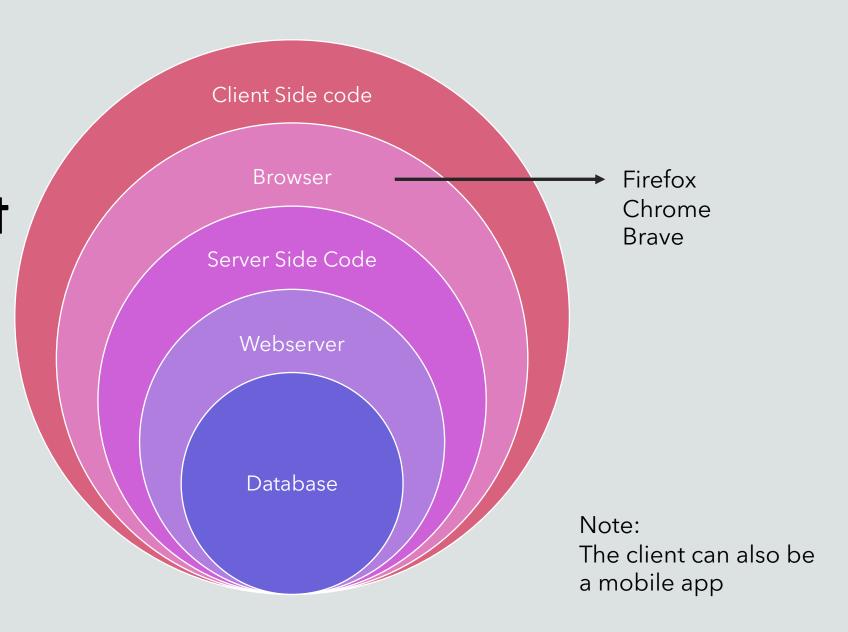

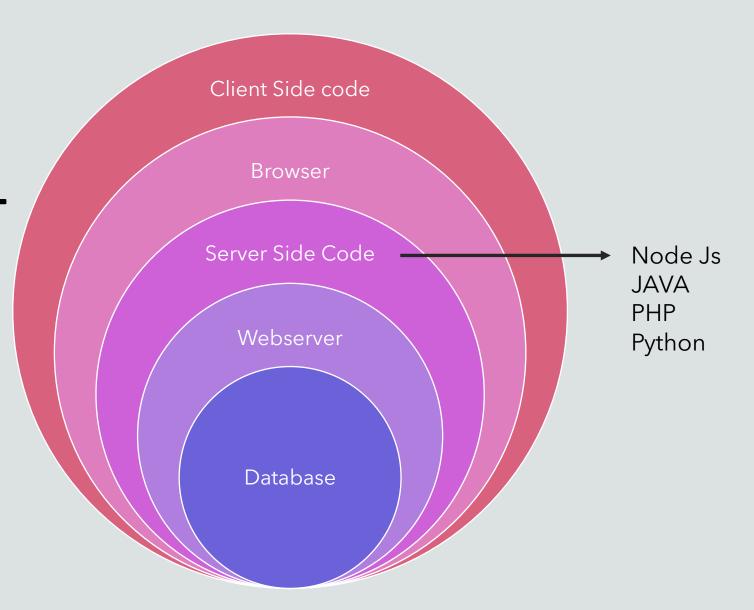

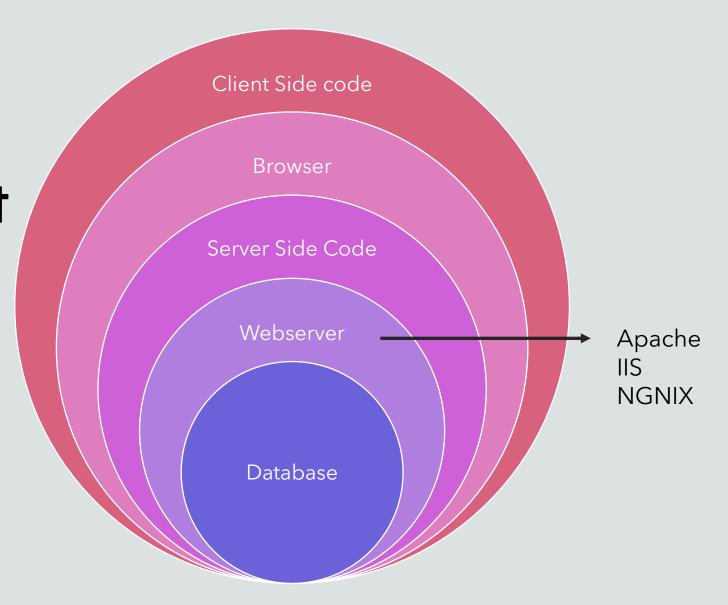

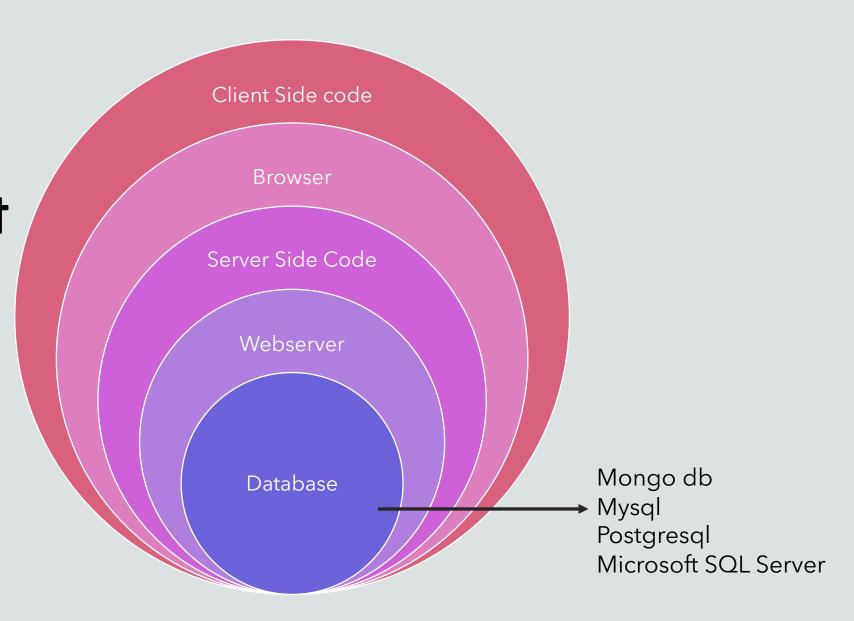


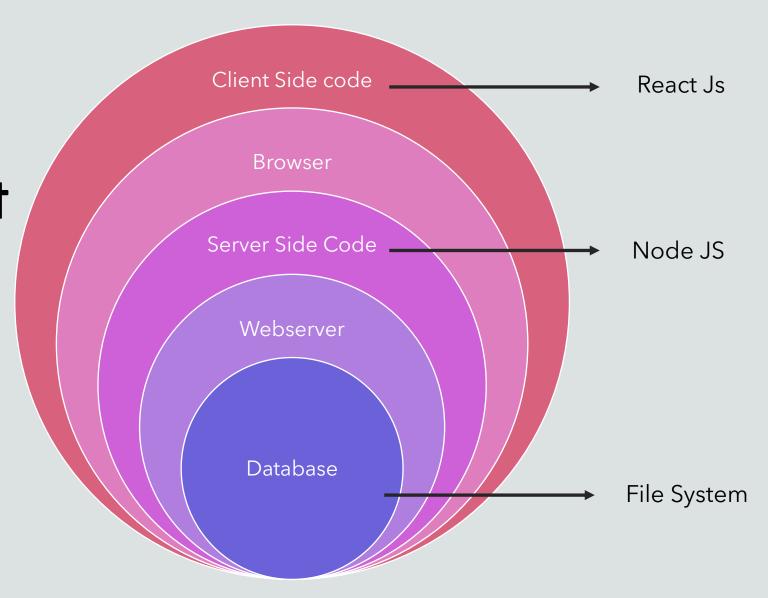

Let's start with React

React is a JavaScript library for building user interfaces.

Why react is needed?

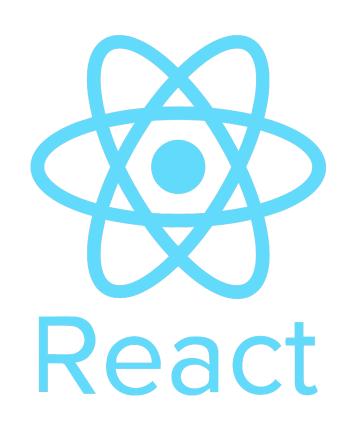

React

JSX / React element

What is JSX?

- It is Javascript meant to imitate JSX
- Minimize the developer effort to define UI structure
- Who else use JSX
- Vue, Solid js, Preact ...

```
React.createElement(

Component,

{ className='card' },

React.createElement(
    'div',
    null,
    'Hello world'

);

React Flement

JSX
```

React 1 Installation

Installation...

Note: Node JS is a dependency

Create react app

npx create-react-app simple-app

cd simple-app

npm start

```
function Welcome(props) {
  return <h1>Hello, {props.name}</h1>;
}
```

Types of Components

Functional Component

```
class Welcome extends React.Component {
    render() {
       return <h1>Hello, {this.props.name}</h1>;
    }
}
```

Class Component

React 2 Components

What is a component?

- Reusable pieces of UI
- Accept arbitrary inputs called **Props**
- Returns React element describing the Html to paint on screen

React 3 Handling Events

How to attach event to the components?

- React events are named using camelCase, rather than lowercase.
- With JSX you pass a function as the event handler, rather than a string.

```
For example, the HTML:
```

```
<button onclick="activateLasers(
   Activate Lasers
</button>
```

is slightly different in React:


```
<button onClick={activateLasers};
  Activate Lasers
</button>
```

React 4 State

- What Is 'State' in ReactJS?
 - A component's memory.
 - A component's state can change over time
 - Whenever state changes, the component rerenders.

Ex: CounterApp

React 5 LifeCycle methods

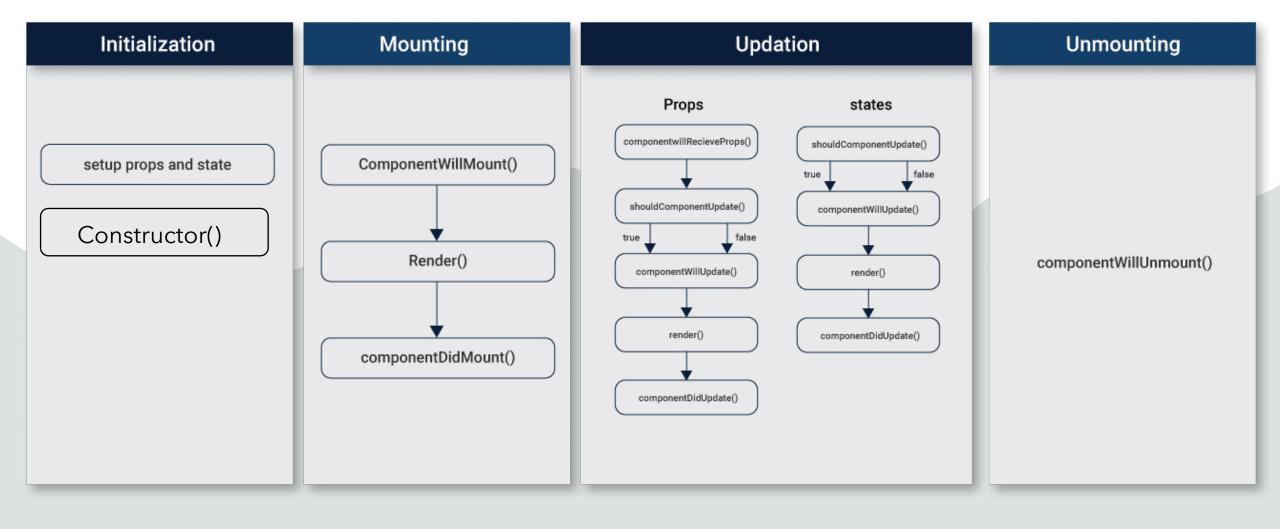

UseState()

The state hook

UseEffect()

The side effect hook

Eg: Odd or even app

React Hooks

React Context


Provides a way to avoid props drilling into the component tree

Example: Context sandbox

Without Context API

props.state props.state props.state props.state

With Context API

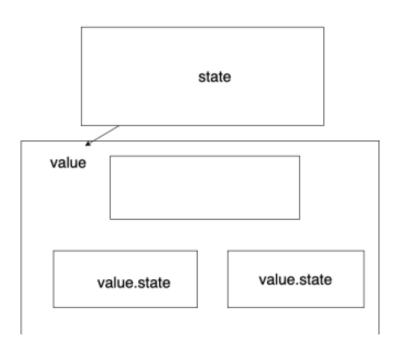

NodeJS

Node.js is a back-end JavaScript runtime environment, runs on the V8 JavaScript Engine, and executes JavaScript code outside a web browser.

Node 1

Installation..

npm init

Simple node JS code

CRUD - API



Create - POST



Read - GET



Update - PATCH



Delete -DELETE

Express

Express JS is a Node.js framework designed to build API's web applications cross-platform mobile apps quickly and make node js easy.

Installation..

Simple Get and React integration

- Simple GET API route
- Fetch it from React
- Display it in React app



fetch()

The global **fetch()** method starts the process of fetching a resource from the network, returning a promise which is fulfilled once the response is available.

The promise resolves to the <u>Response</u> object representing the response to your request.

Using file as DB

Simple form example on using file as DB

- Insert value to file
- Get Value from file

Questions?



Thank You

Praveen N Linked In - <u>linkedin.com/in/np77</u>
Twitter - <u>@np_hinata</u>

Arul Valan Cibi



GitHub repo link https://github.com/praveenn77/workshop-w1