

# Test Run Report




## Test Run Overview

Started 10 Dec 2023, 13:31:19  
Ended 10 Dec 2023, 13:34:49  
Duration (mm:ss) 03:29.925

## Test Results Summary


Passed 3  
Failed 2  
Skipped 0

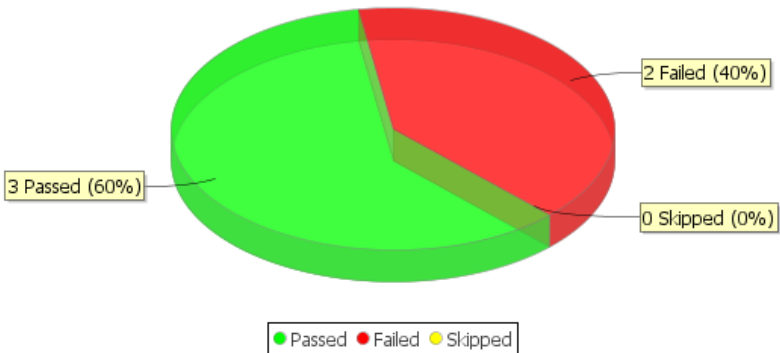






## Test Case Summary



tests	failed
API + UI TestCases	successful
AccountOppoCase1.testcase	successful
API TestCases	failed
API Oppo.testcase	failed
● Connection details not found. Connection Name: PSP	
Callable	failed
Account Creation Callable.testcase	failed
● Connection details not found. Connection Name: PSP	
DataDriven	successful
AccountCreationDataDriven.testcase	successful
Teardown TestCases	pending
UI TestCases	successful
Account Creation.testcase	successful

## Summary


Started 10 Dec 2023, 13:31:19  
Ended 10 Dec 2023, 13:32:37  
Duration (mm:ss) 01:17.407  
Outcome  successful

## Output

-  **Salesforce Connect: PSPConnection (Test)** ⌚ 13:31:19(00:00.027)
  - ① Connecting to Salesforce as PSPConnection
  - ① Successfully connected to Salesforce as PSPConnection
-  **Create Object: Account=>AccountId** ⌚ 13:31:21(00:01.742)
  - ① Creating a new Salesforce object. Connection Name: PSPConnection, Name: Account, field count: 3
  - ① Setting fields:
    - ① =Field=> ParentId = 001WS000001FGGpYAO
    - ① =Field=> Type = Prospect
    - ① =Field=> Name = PSPQTK
  - 📄 Account created successfully. Object Id: 001WS000001FzgZYAC, Result Name: AccountId
  - ① Logging Salesforce Object Id for clean up. Object Name: Account, id: 001WS000001FzgZYAC
-  **Create Object: Opportunity=>OpportunityId** ⌚ 13:31:22(00:02.579)
  - ① Creating a new Salesforce object. Connection Name: PSPConnection, Name: Opportunity, field count: 3
  - ① Setting fields:
    - ① =Field=> StageName = Prospecting
    - ① =Field=> CloseDate = 2023-12-10
    - ① =Field=> Name = PSPOppoHL
  - 📄 Opportunity created successfully. Object Id: 006WS000000eiFJYAY, Result Name: OpportunityId
  - ① Logging Salesforce Object Id for clean up. Object Name: Opportunity, id: 006WS000000eiFJYAY
-  **On SF Opportunity View screen** ⌚ 13:31:22(00:02.935)
  - ① Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Opportunity&action=View
  - ① Opening Chrome webdriver instance to https://login.salesforce.com/
  - ① Successfully opened Chrome webdriver to https://login.salesforce.com/
  - ① Opening Page context. Name: screen, data: null, frame: null
  - ① Opening Salesforce page. Object: Opportunity, RelatedList: null, Action: View, Page URL: /lightning/r/006WS000000eiFJYAY/view, Current URL: data:,
  - ① Opening Salesforce user home page
  - ① Successfully opened user home page
  - ① Activating detailTab tab
  - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
-  **Click the New Case button** ⌚ 13:31:42(00:22.403)

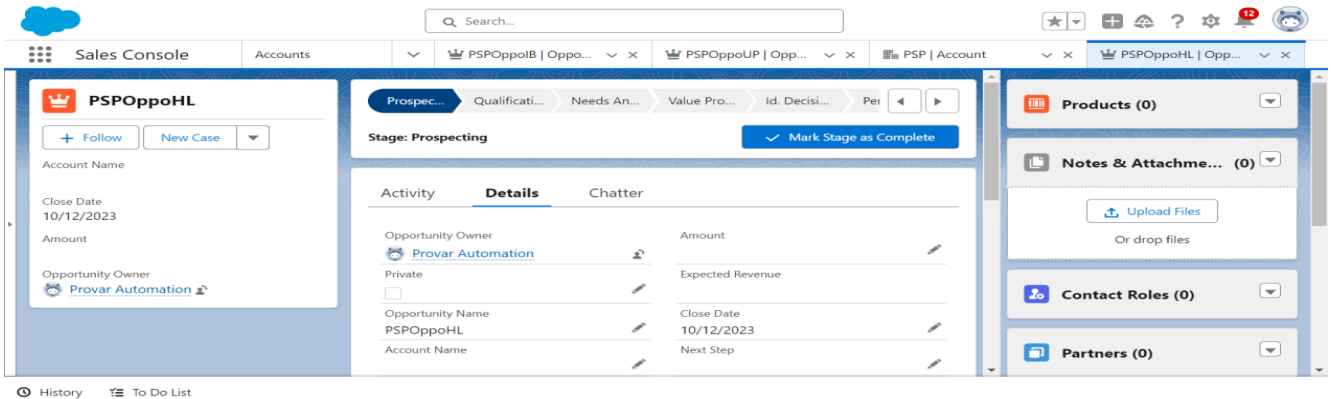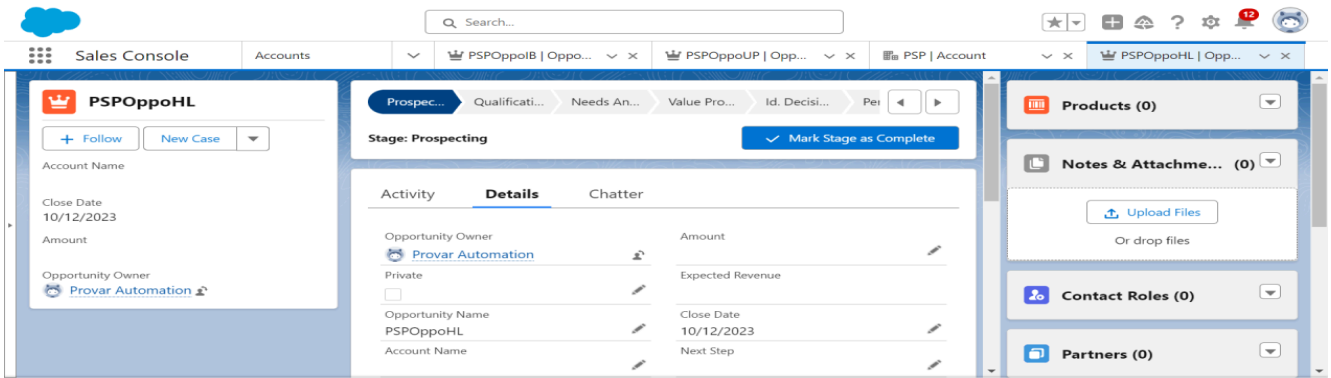

Before Screenshot : 2023/12/10 13:31:42

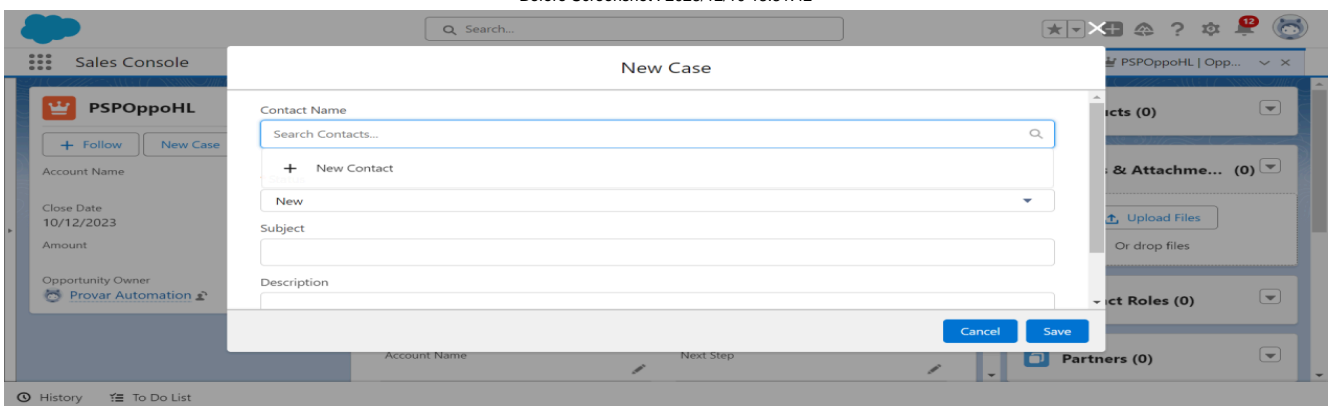

After Screenshot : 2023/12/10 13:31:54

- ① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=NewCase&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26quickAction%3DNewCase, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=NewCase&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26quickAction%3DNewCase
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006WS000000eiFJYAY/view
- ① Interaction: ui:interaction?name=action
- ① Sending screenshot. Data length: 264592
- ① Activating detailTab tab
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Click element using xpath: //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/\*[self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')] or (self::one-record-home-flexipage2)]/[(self::header and (contains(@role, 'banner') or contains(@class, 'forceHighlightsPanel')) or (self::force-highlights2) or (self::records-highlights2)]/li[contains(@class, 'slds-dropdown-trigger') and contains(@class, 'slds-button\_last')]
- ① Hover>Clicking WebElement. WebElement [tag: li, text: 0, text: Show more actions]

① Find action link element using xpath: `((/*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/(self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2))/div[contains(@class, 'actionsContainer')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//runtime_platform_actions-action-renderer[@apiname='NewCase' or @apiname='Global.NewCase']//*[self::a or self::button]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[[ChromeDriver$EnhancerByCGLIB$dace278c: chrome on XP (bbc317024c9ad53e8cc010b2c4b5f374)] -> xpath: ((/*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/(self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2))/div[contains(@class, 'actionsContainer')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//runtime_platform_actions-action-renderer[@apiname='NewCase' or @apiname='Global.NewCase']//*[self::a or self::button]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: New Case]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Sending screenshot. Data length: 78191

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main


① Switched focus to main window. URL: <https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006WS000000eiFJYAY/view>

① Going to update browser window handles.


① Successfully updated browser window handles.

## ● On SF Opportunity Publisher Action New Case screen



① 13:31:59(00:40.212)

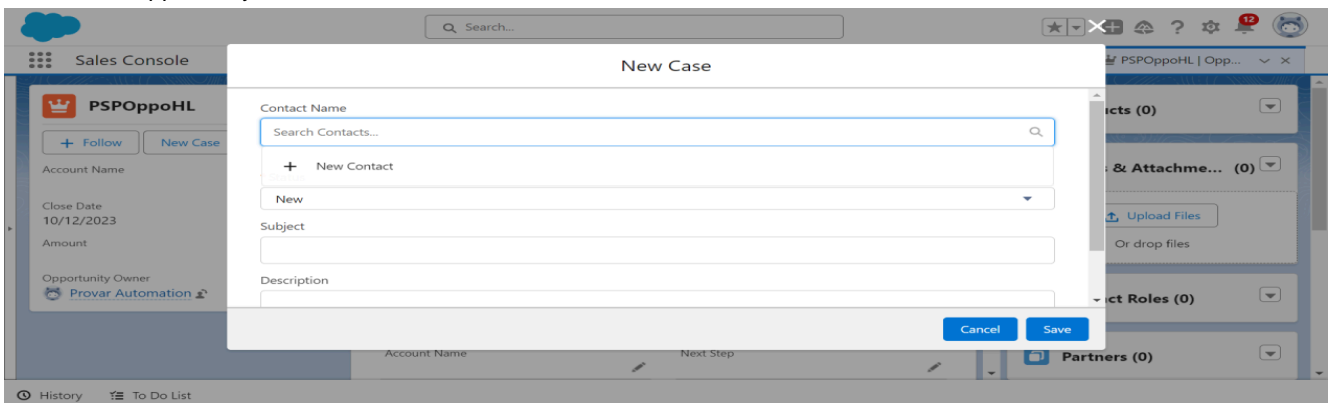

Before Screenshot : 2023/12/10 13:31:59

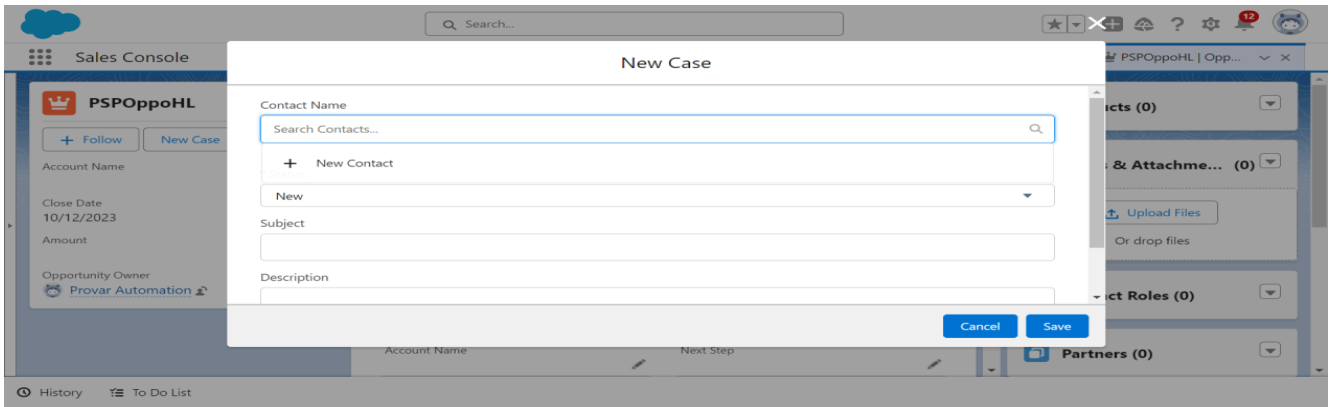

Before Screenshot : 2023/12/10 13:32:03

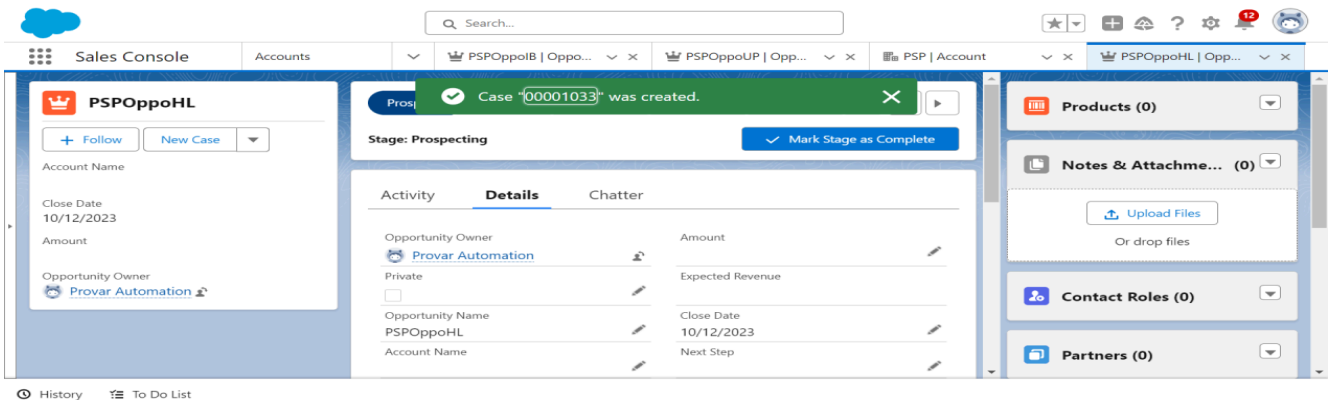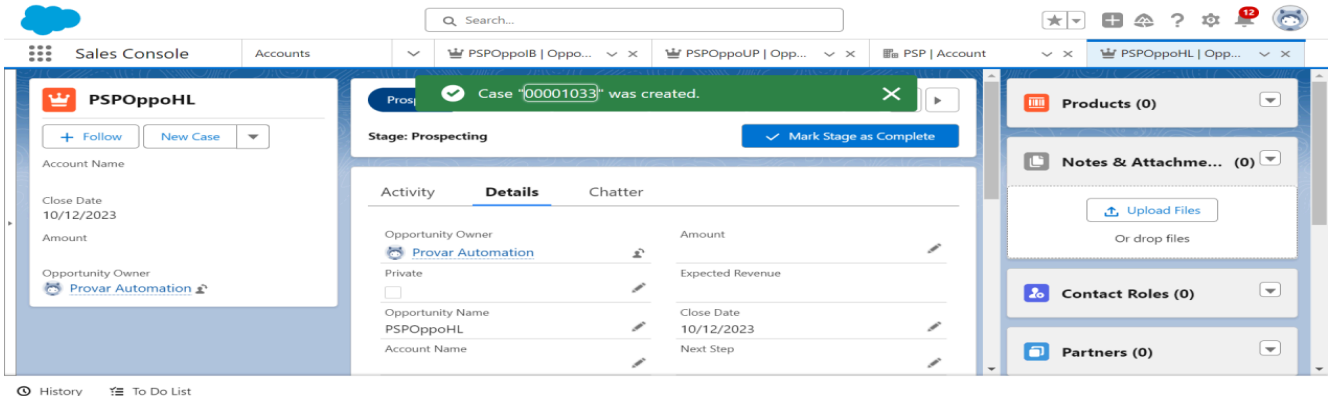

After Screenshot : 2023/12/10 13:32:21

① Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Opportunity&action=QuickAction&quickAction=NewCase

① Sending screenshot. Data length: 78191

① Opening Page context. Name: screen, data: null, frame: null

① Initiating Publisher Action: New Case

① Sending screenshot. Data length: 78191

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Status picklist to New

⌚ 13:32:06(00:46:502)

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006WS000000eiFYAY/view

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'open')] and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]/[contains(@class, 'forceQuickActionLayout')]

or @class='bottomBar']///\*[((self::label and contains(@class,'uiLabel')) or (self::span and contains(@class,'uiPicklistLabel')) and (span/text()=Status'))/ancestor::div[1]

① Find field using relative xpath: ../../self::a or self::input or self::button[contains(@class, 'slds-combobox\_\_input')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@d3d7b569 -> unknown locator]] -> xpath: ../../self::a or self::input or self::button[contains(@class, 'slds-combobox\_\_input')]]]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Subject field to Oppo1Case1

⌚ 13:32:09(00:50.239)

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DSubject, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DSubject

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006WS000000eiFJYAY/view

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/\*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']///\*[((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element\_\_label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element\_\_label')) or (self::div and contains(@class,'test-id\_\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Subject'] or ./text() = 'Subject'))/ancestor::div[1]

① Find field using relative xpath: ../input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@d3d7b570 -> unknown locator]] -> xpath: ../input]

① Got webElement. tagName: INPUT, id: 3393:0, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: Oppo1Case1, blur: false

① Doing after wait. waitUrl: default


① End of <default> wait.

① Going to update browser window handles.



① Successfully updated browser window handles.

## ● Click the Create button

⌚ 13:32:12(00:52.716)

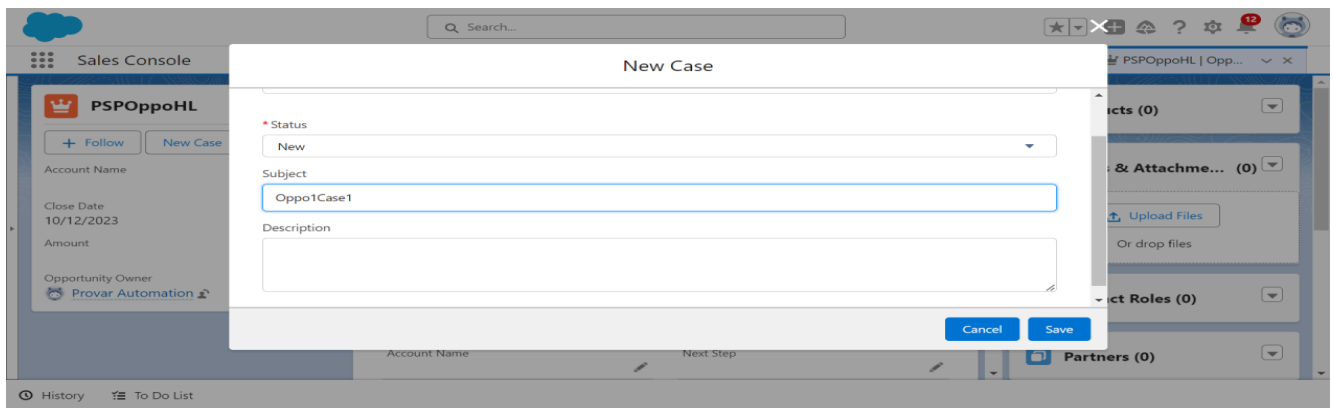

Before Screenshot : 2023/12/10 13:32:12

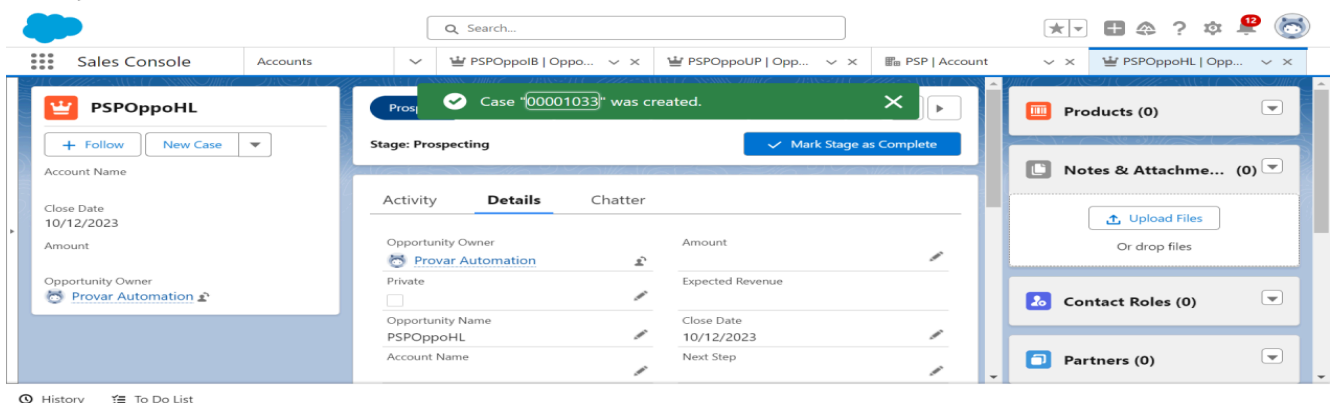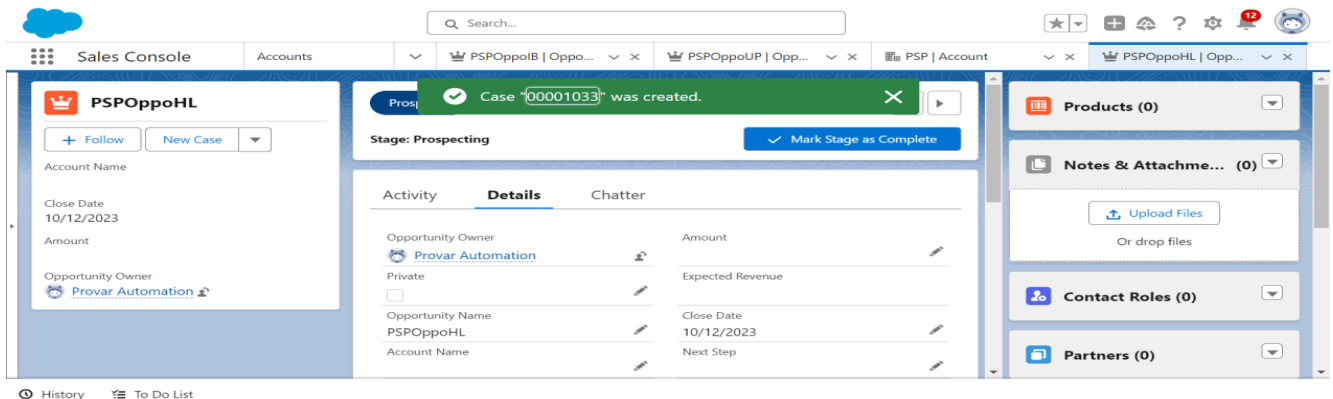

After Screenshot : 2023/12/10 13:32:17

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=publishersharebutton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3Dpublishersharebutton, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=publishersharebutton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3Dpublishersharebutton

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006WS000000eiFJYAY/view

① Interaction: ui:interaction?name=action

① Sending screenshot. Data length: 75050

① Find publishersharebutton using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]/\*[self::div or self::footer][contains(@class, 'bottomBar') or contains(@class, 'slds-modal\_\_footer')]/button[contains(@class, 'publisherShareButton')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[ChromeDriver\$EnhancerByCGLIB\$\$dace278c: chrome on XP (bbc317024c9ad53e8cc010b2c4b5f374)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]/\*[self::div or self::footer][contains(@class, 'bottomBar') or contains(@class, 'slds-modal\_\_footer')]/button[contains(@class, 'publisherShareButton')]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Sending screenshot. Data length: 265766

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Sending screenshot. Data length: 265766

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006WS000000eiFJYAY/view

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● On SF Case View screen

⌚ 13:32:26(01:07.316)

① Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Case&action=View

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Case, RelatedList: null, Action: View, Page URL: /lightning/r/{ID}/view, Current URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006WS000000eiFJYAY/view

① Opening Salesforce user home page

① Successfully opened user home page

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/%7BDID%7D/view

① Going to update browser window handles.

① Successfully updated browser window handles.

① Handling managed resource. Name: PSPConnection

① Salesforce Connection handled successfully. Name: PSPConnection




## API Oppo.testcase

---

### Summary

Started 10 Dec 2023, 13:32:39  
Ended 10 Dec 2023, 13:32:39  
Duration (mm:ss) 00:00.073  
Outcome  failed


### Output

-  Salesforce Connect: PSP (Test) ⌚ 13:32:39(01:20.113)
  -  Connection details not found. Connection Name: PSP
-  Call Account Creation Callable ⌚ 13:32:39(01:20.122)
-  Create Object: Opportunity=>OpportunityId ⌚ 13:32:39(01:20.150)

## Account Creation Callable.testcase

---

### Summary

Started 10 Dec 2023, 13:32:39  
Ended 10 Dec 2023, 13:32:39  
Duration (mm:ss) 00:00.083  
Outcome  failed


### Output

-  Salesforce Connect: PSP (Test) ⌚ 13:32:39(01:20.187)
  -  Connection details not found. Connection Name: PSP
-  On SF Account Home screen ⌚ 13:32:39(01:20.203)
-  On SF Account New screen ⌚ 13:32:39(01:20.227)

## AccountCreationDataDriven.testcase

---

### Summary

Started 10 Dec 2023, 13:32:39  
Ended 10 Dec 2023, 13:34:00  
Duration (mm:ss) 01:20.412  
Outcome  successful

- ⌚ Loading data from Parameter Value Source ...
- ⌚ Loading Parameter Value Source row 1:
  - ⌚ ==Column=> RowNumber = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
  - ⌚ ==Column=> AccountName = PrimitiveValueImpl [ value: PSP11, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
  - ⌚ ==Column=> ParentAccount = PrimitiveValueImpl [ value: PSP, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
  - ⌚ ==Column=> Type = PrimitiveValueImpl [ value: Prospect, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ⌚ Loading Parameter Value Source row 2:
  - ⌚ ==Column=> RowNumber = PrimitiveValueImpl [ value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
  - ⌚ ==Column=> AccountName = PrimitiveValueImpl [ value: PSP12, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
  - ⌚ ==Column=> ParentAccount = PrimitiveValueImpl [ value: PSP, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Type = PrimitiveValueImpl [ value: Technology Partner, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 2 rows from Parameter Value Source.

## Output

### ● DataDrivenAccountcreation 13:32:39(01:20.282)

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> RowNumber = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> AccountName = PrimitiveValueImpl [ value: PSP11, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ParentAccount = PrimitiveValueImpl [ value: PSP, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Type = PrimitiveValueImpl [ value: Prospect, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 2:

① ==Column=> RowNumber = PrimitiveValueImpl [ value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> AccountName = PrimitiveValueImpl [ value: PSP12, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ParentAccount = PrimitiveValueImpl [ value: PSP, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Type = PrimitiveValueImpl [ value: Technology Partner, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 2 rows from Parameter Value Source.

### ● Salesforce Connect: PSPConnection (Test) 13:32:39(01:20.320)

① Connecting to Salesforce as PSPConnection

① Successfully connected to Salesforce as PSPConnection

### ● For Each: {SourceData}=>Row 13:32:41(01:21.487)

① Start of iteration 1 of 2.

#### ● Iteration 1 13:32:41(01:21.565)

##### ● On SF Account Home screen 13:32:41(01:21.566)

① Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Account&action=ObjectHome

① Opening Chrome webdriver instance to https://login.salesforce.com/

① Successfully opened Chrome webdriver to https://login.salesforce.com/

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Account, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/001/list?filterName=Recent, Current URL: data;

① Opening Salesforce user home page

① Successfully opened user home page

① Going to update browser window handles.

① Successfully updated browser window handles.

##### ● Click the New button 13:32:55(01:35.813)

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3DNew, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3DNew

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/list?filterName=Recent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table\_joined') and contains(@class, 'test-listViewManager'))]/\*[self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime\_platform\_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '2498:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

End of &lt;default> wait.

Found element: [[ChromeDriver\$EnhancerByCGLIB\$dace278c: chrome on XP (54f36f08a3e3835b06e99704ea157788)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table\_joined') and contains(@class, 'test-listViewManager'))]/\*[self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime\_platform\_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '2498:0')]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

Doing after wait. waitUrl: default

End of &lt;default> wait.

Going to update browser window handles.

Successfully updated browser window handles.

All Sub-Test Steps were successful.

Closing Page context. Name: screen, data: null, frame: null

Main window reselected. Window: main

Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221517657464501

Going to update browser window handles.

Successfully updated browser window handles.

## On SF Account New screen

13:33:00(01:40.497)

Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Account&action=New&noOverride=true

Opening Page context. Name: screen, data: null, frame: null

Going to update browser window handles.

Successfully updated browser window handles.

## Set the Parent Account reference to PSP

13:33:07(01:48.273)

Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=ParentId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DParentId, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=ParentId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DParentId

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221517657464501

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: /\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/\*[ (self::records-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')) ]/[1]/\*[ (self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element\_\_label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element\_\_label')) or (self::div and contains(@class, 'test-id\_\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Parent Account'] or ./text() = 'Parent Account')/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of &lt;default> wait.

Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f237c402 -> unknown locator]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: combobox-input-342, type: text, class: slds-combobox\_\_input slds-input

Typing value. tagName: INPUT, type: text, value: PSP, blur: false

Clicking WebElement. WebElement [tag: lightning-base-combobox-formatted-text, text: PSP]

Doing after wait. waitUrl: default

End of &lt;default> wait.

📘 Going to update browser window handles.

📘 Successfully updated browser window handles.

## ● Set the Account Name field to PSP11PX

🕒 13:33:12(01:53.061)

📘 Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName, before wait: default, after wait: default, auto retry: default

📘 Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName

📘 Interaction: ui:interaction?name=set

📘 Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221517657464501

📘 Interaction: ui:interaction?name=set

📘 Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[ (self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')) ]/[1]/*[ (self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) ) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) ) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text) and (.//text()[normalize-space()='Account Name'] or .//text() = 'Account Name')]/ancestor::div[1]`

📘 Find field using relative xpath: `./input`

📘 Waiting for element to be present. Timeout(seconds): 10

📘 Doing before wait. waitUrl: default

📘 End of &lt;default&gt; wait.

📘 Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@f237c6c9 -> unknown locator]] -> xpath: ./input]`

📘 Got webElement. tagName: INPUT, id: input-189, type: text, class: slds-input

📘 Typing value. tagName: INPUT, type: text, value: PSP11PX, blur: false

📘 Doing after wait. waitUrl: default

📘 End of &lt;default&gt; wait.

📘 Going to update browser window handles.

📘 Successfully updated browser window handles.

## ● Set the Type picklist to Prospect

🕒 13:33:15(01:55.943)

📘 Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Type&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DType, before wait: default, after wait: default, auto retry: default

📘 Locator: ui:locator?name=Type&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DType

📘 Interaction: ui:interaction?name=set

📘 Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221517657464501

📘 Interaction: ui:interaction?name=set

📘 Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[ (self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')) ]/[1]/*[ (self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) ) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) ) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text) and (.//text()[normalize-space()='Type'] or .//text() = 'Type')]/ancestor::div[1]`

📘 Find field using relative xpath: `//*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

📘 Waiting for element to be present. Timeout(seconds): 10

📘 Doing before wait. waitUrl: default

📘 End of &lt;default&gt; wait.

- ❗ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f237c6cc -> unknown locator]] -> xpath: ../../[self::a or self::input or self::button[contains(@class, 'slds-combobox\_\_input')]]]
- ❗ Got webElement. tagName: BUTTON, id: combobox-button-222, type: button, class: slds-combobox\_\_input slds-input\_faux slds-combobox\_\_input-value
- ❗ Typing value. tagName: BUTTON, type: button, value: Prospect, blur: false
- ❗ Clicking WebElement. WebElement [tag: button, text: --None--]
- ❗ Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Prospect Customer - Direct Customer - Channel Channel Partner / Reseller Installation Partner Technology Partner Other]
- ❗ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- ❗ Doing after wait. waitUrl: default
- ❗ End of &lt;default> wait.
- ❗ Going to update browser window handles.
- ❗ Successfully updated browser window handles.

## ● Click the Save button

🕒 13:33:18(01:59.020)

- ❗ Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DAccount%26action%3Dsave, before wait: default, after wait: default, auto retry: default
- ❗ Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DAccount%26action%3Dsave
- ❗ Interaction: ui:interaction?name=action
- ❗ Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221517657464501
- ❗ Interaction: ui:interaction?name=action
- ❗ Find action link element using xpath: ../../[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::\*[self::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]/runtime\_platform\_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/\*[self::a or self::button]
- ❗ Waiting for element to be present. Timeout(seconds): 10
- ❗ Doing before wait. waitUrl: default
- ❗ End of &lt;default> wait.
- ❗ Found element: [[ChromeDriver\$EnhancerByCGLIB\$\$dace278c: chrome on XP (54f36f08a3e3835b06e99704ea157788)] -> xpath: ../../[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::\*[self::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]/runtime\_platform\_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/\*[self::a or self::button]
- ❗ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ❗ Doing after wait. waitUrl: default
- ❗ End of &lt;default> wait.
- ❗ Going to update browser window handles.
- ❗ Successfully updated browser window handles.
- ❗ All Sub-Test Steps were successful.
- ❗ Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G5HjYAK/view
- ❗ Injecting script to get created object ID from aura component
- 📋 Storing created Salesforce Object ID. Result Name: accountId, created ID: 001WS000001G5HjYAK, location: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G5HjYAK/view
- ❗ Logging Salesforce Object Id for clean up. Object Name: Account, id: 001WS000001G5HjYAK
- ❗ Closing Page context. Name: screen, data: null, frame: null
- ❗ Main window reselected. Window: main

① Successfully updated browser window handles.

Start of iteration 2 of 2.

- Iteration 2

🕒 13:33:23(02:04.022)

- On SF Account Home screen

🕒 13:33:23(02:04.023)

① Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Account&action=ObjectHome

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Account, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/001/list?filterName=Recent, Current URL: <https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G5HjYAK/view>

① Opening Salesforce user home page

① Successfully opened user home page

① Going to update browser window handles.

① Successfully updated browser window handles.

- Click the New button

🕒 13:33:31(02:12.103)

④ Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3DNew, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26action%3DNew

Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/list?filterName=Recent>

Interaction: ui:interaction?name=action

① Find action link element using xpath: (`//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/*[@self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime_platform_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '2153:0')]`)

Waiting for element to be present. Timeout(seconds): 10

 Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on XP (54f36f08a3e3835b06e99704ea157788)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table\_joined') and contains(@class, 'test-listViewManager'))]/\*[self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime\_platform\_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]//a[contains(@data-aura-rendered-by, '2153:0')]]

 Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

End of <default> wait.

④ Going to update browser window handles.

① Successfully updated browser window handles.

 All Sub-Test Steps were successful.

❗ Closing Page context. Name: screen, data: null, frame: null

④ Main window reselected. Window: main

① Switched focus to main window. URL: [https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=170221521288053063](https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=170221521288053063)

④ Going to update browser window handles.

④ Successfully updated browser window handles.

- On SF Account New screen

🕒 13:33:36(02:16.793)

Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Account&action=New&noOverride=true

Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Parent Account reference to PSP

⌚ 13:33:44(02:24.553)

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=ParentId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DParentId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=ParentId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DParentId

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221521288053063

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[ (self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')) ]][1]/*[ (self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Parent Account'] or ./text() = 'Parent Account')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@f3884d7c -> unknown locator]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: combobox-input-474, type: text, class: slds-combobox\_\_input slds-input

① Typing value. tagName: INPUT, type: text, value: PSP, blur: false

① Clicking WebElement. WebElement [tag: lightning-base-combobox-formatted-text, text: PSP]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Account Name field to PSP12RD

⌚ 13:33:49(02:29.394)

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221521288053063

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[ (self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')) ]][1]/*[ (self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Account Name'] or ./text() = 'Account Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.



- Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f388502e -> unknown locator]] -> xpath: ./input]
- Got webElement. tagName: INPUT, id: input-321, type: text, class: slds-input
- Typing value. tagName: INPUT, type: text, value: PSP12RD, blur: false
- Doing after wait. waitUrl: default
- End of &lt;default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

## Set the Type picklist to Technology Partner

13:33:52(02:32.372)

- Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Type&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DType, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Type&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DType
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221521288053063
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[ (self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')) ][1]/*[ (self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Type'] or ./text() = 'Type')]/ancestor::div[1]`
- Find field using relative xpath: `//*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of &lt;default&gt; wait.
- Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f3885046 -> unknown locator]] -> xpath: `//*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`
- Got webElement. tagName: BUTTON, id: combobox-button-354, type: button, class: slds-combobox\_\_input slds-input\_faux slds-combobox\_\_input-value
- Typing value. tagName: BUTTON, type: button, value: Technology Partner, blur: false
- Clicking WebElement. WebElement [tag: button, text: --None--]
- Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Prospect Customer - Direct Customer - Channel Channel Partner / Reseller Installation Partner Technology Partner Other]
- Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- Doing after wait. waitUrl: default
- End of &lt;default&gt; wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

## Click the Save button

13:33:55(02:35.697)

- Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3Dsave, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3Dsave
- Interaction: ui:interaction?name=action
- Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221521288053063
- Interaction: ui:interaction?name=action
- Find action link element using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and`



not(contains(@class, 'wsTabBarHidden'))]] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]])) )]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::\*[self::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]/runtime\_platform\_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/\*[self::a or self::button]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of &lt;default> wait.

ⓘ Found element: [[ChromeDriver\$EnhancerByCGLIB\$dace278c: chrome on XP (54f36f08a3e3835b06e99704ea157788)] - > xpath: /\*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::\*[self::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]/runtime\_platform\_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/\*[self::a or self::button]]

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

ⓘ Doing after wait. waitUrl: default

ⓘ End of &lt;default> wait.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G0edYAC/view

ⓘ Injecting script to get created object ID from aura component

📄 Storing created Salesforce Object ID. Result Name: accountId, created ID: 001WS000001G0edYAC, location: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G0edYAC/view

ⓘ Logging Salesforce Object Id for clean up. Object Name: Account, id: 001WS000001G0edYAC

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G0edYAC/view

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ Reached the end of the List.

ⓘ Handling managed resource. Name: PSPConnection

ⓘ Salesforce Connection handled successfully. Name: PSPConnection

## Account Creation.testcase

### Summary

Started 10 Dec 2023, 13:34:04  
Ended 10 Dec 2023, 13:34:46  
Duration (mm:ss) 00:41.944  
Outcome ● successful

### Output

- Salesforce Connect: PSPConnection (Test) ⌚ 13:34:04(02:45.306)
  - ① Connecting to Salesforce as PSPConnection
  - ① Successfully connected to Salesforce as PSPConnection
- On SF Account Home screen ⌚ 13:34:05(02:46.101)
  - ① Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Account&action=ObjectHome
  - ① Opening Chrome webdriver instance to https://login.salesforce.com/
  - ① Successfully opened Chrome webdriver to https://login.salesforce.com/
  - ① Opening Page context. Name: screen, data: null, frame: null
  - ① Opening Salesforce page. Object: Account, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/001/list?filterName=Recent, Current URL: data:,
  - ① Opening Salesforce user home page
  - ① Successfully opened user home page
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- Click the New button ⌚ 13:34:18(02:59.172)
  - ① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3DNew, before wait: default, after wait: default, auto retry: default
  - ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3DNew
  - ① Interaction: ui:interaction?name=action
  - ① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/list?filterName=Recent
  - ① Interaction: ui:interaction?name=action
  - ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table\_\_joined') and contains(@class, 'test-listViewManager'))]/\*[self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime\_platform\_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '2150:0')]
  - ① Waiting for element to be present. Timeout(seconds): 10
  - ① Doing before wait. waitUrl: default
  - ① End of &lt;default&gt; wait.
  - ① Found element: [[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on XP (ec185cf40c8be67972f1b825c147b8c1)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table\_\_joined') and contains(@class, 'test-listViewManager'))]/\*[self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime\_platform\_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '2150:0')]]
  - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
  - ① Doing after wait. waitUrl: default
  - ① End of &lt;default&gt; wait.
  - ① Going to update browser window handles.
  - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.

❗ Closing Page context. Name: screen, data: null, frame: null

❗ Main window reselected. Window: main

❗ Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221525997986915

❗ Going to update browser window handles.

❗ Successfully updated browser window handles.

## ● On SF Account New screen

⌚ 13:34:23(03:03.804)

❗ Start of With Screen. Connection Name: PSPConnection, target: sf:ui:target?object=Account&action=New&noOverride=true

❗ Opening Page context. Name: screen, data: null, frame: null

❗ Going to update browser window handles.

❗ Successfully updated browser window handles.

## ● Set the Account Name field to PSP2T7C

⌚ 13:34:31(03:11.469)

❗ Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221525997986915

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Account Name'] or ./text() = 'Account Name')/ancestor::div[1]`

❗ Find field using relative xpath: `./input`

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@29fa5de4 -> unknown locator]] -> xpath: ./input]`

❗ Got webElement. tagName: INPUT, id: input-240, type: text, class: slds-input

❗ Typing value. tagName: INPUT, type: text, value: PSP2T7C, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

❗ Going to update browser window handles.

❗ Successfully updated browser window handles.

## ● Set the Parent Account reference to PSP

⌚ 13:34:34(03:14.393)

❗ Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=ParentId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DParentId, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=ParentId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DParentId

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221525997986915

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Account Name'] or ./text() = 'Account Name')/ancestor::div[1]`

```
*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*(((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Parent Account'] or ./text() = 'Parent Account'))/ancestor::div[1]
```

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@29fa5dec -> unknown locator]] -> xpath: `./input`]

① Got webElement. tagName: INPUT, id: combobox-input-393, type: text, class: slds-combobox\_\_input slds-input

① Typing value. tagName: INPUT, type: text, value: PSP, blur: false

① Clicking WebElement. WebElement [tag: lightning-base-combobox-formatted-text, text: PSP]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Set the Type picklist to Prospect

⌚ 13:34:38(03:19.096)

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=Type&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DType, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Type&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DType

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: [https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\\_VIEW&uid=170221525997986915](https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=170221525997986915)

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*(((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Type'] or ./text() = 'Type'))/ancestor::div[1]`

① Find field using relative xpath: `//*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@29fa5e23 -> unknown locator]] -> xpath: `//*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`]

① Got webElement. tagName: BUTTON, id: combobox-button-273, type: button, class: slds-combobox\_\_input slds-input\_faux slds-combobox\_\_input-value

① Typing value. tagName: BUTTON, type: button, value: Prospect, blur: false

① Clicking WebElement. WebElement [tag: button, text: --None--]

① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Prospect Customer - Direct Customer - Channel Channel Partner / Reseller Installation Partner Technology Partner Other]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

## ● Click the Save button

13:34:42(03:22.355)

① Start of Interact. Connection: PSPConnection, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3Dsave, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=170221525997986915

① Interaction: ui:interaction?name=action

① Find action link element using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]/runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/*[self::a or self::button]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[ChromeDriver$EnhancerByCGLIB$$dace278c: chrome on XP (ec185cf40c8be67972f1b825c147b8c1)] -> xpath: //*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]/runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/*[self::a or self::button]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G6qTYAS/view

① Injecting script to get created object ID from aura component

■ Storing created Salesforce Object ID. Result Name: accountId, created ID: 001WS000001G6qTYAS, location: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G6qTYAS/view

① Logging Salesforce Object Id for clean up. Object Name: Account, id: 001WS000001G6qTYAS

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://automation-c-dev-ed.develop.lightning.force.com/lightning/r/Account/001WS000001G6qTYAS/view

① Going to update browser window handles.

① Successfully updated browser window handles.

① Handling managed resource. Name: PSPConnection

① Salesforce Connection handled successfully. Name: PSPConnection