HOL2329 NovaSky Airlines activity guide

Building Enterprise Context and Semantics with AIDP Ontologies
October 28, 2026 · 11:00 a.m. to 12:30 p.m. Las Vegas time

Your mission

A fuel-pump shortage threatens NovaSky flights carrying AI World attendees home from Las Vegas. Your task is to build and review the business context that connects an aircraft problem to maintenance demand, flight exposure, passengers, stock and recovery decisions.

Start with AI Discovery using the 25 business tables and the business glossary CSV, then import the prepared NovaSky ontology. Spend most of the lab in **Design**: follow the disruption path in the **Graph**, inspect details in the **Ontology Editor**, and correct three deliberately weak business terms. Validate your changes. You may then replace the prepared reference with your reviewed version. Finish by asking five short questions through your already available Recovery Desk agent.

All business data is synthetic. The exercise clock is **October 28, 2026, at 11:00 a.m. Las Vegas time / 18:00 UTC**. The next 24 hours end at 18:00 UTC on October 29, excluding that endpoint. A recovery plan or chat instruction does not establish that an operational action happened.

How to read this guide

Bold identifies buttons, tabs and visible business labels, such as **Design**, **Mappings** and **Aircraft**. `Monospace` identifies names to enter exactly, files, source columns and technical identifiers. *Italic text* provides a short explanation or figure caption. A **Checkpoint** states what you should be able to find or explain before moving on.

Replace `NN` with your assigned user number. For example, `aidp_lab59` uses workspace `aidp_lab59` and knowledge graph `aidp_lab59.aiw_novasky_onto`. Do not type `NN` literally.

Your route through the lab

Activity	Time
Instructor introduction and scenario	15 min
1 Sign in and locate the inputs	4 min
2 Run AI Discovery	10 min
3 Review one discovery result	4 min
4 Import the exercise ontology	5 min
5 Explore the disruption in Design	15 min
6 Make the three guided corrections	8 min
7 Inspect Code then validate and optionally deploy	7 min
8 Ask the prepared agent five questions	8 min
Optional: FIBO Products and Services import	12 min
Wrap up	2 min

The 12-minute FIBO Products and Services import is optional. Keep the main focus on understanding and improving NovaSky in Design.

1 Sign in and locate the inputs

Goal: reach your assigned workspace, locate the 25 business tables and prepare the business glossary CSV.

1. Open the HOL2329 access page. Select the username on your participant card and open its **AIDP Workbench** link.
2. Sign in with your assigned username and password. Use tenancy `oaccommunity6` and identity domain `Default` if requested. Your password is on your private participant card.
3. Open **Workspaces** and select your own workspace, `aidp_labNN`. Check the workspace name before creating or editing an ontology.
4. Open **Master catalog → aiw → aiw_novasky → Tables**. Locate `aircraft`, `work_order`, `work_order_material`, `flight_leg`, `booking`, `inventory_position` and `freight_quote`. These are part of the **25 business tables** used in this lab.
5. Open **Master catalog → default → default → Volumes → hol2329**. On the `novasky_business_glossary.csv` row, open its **three-dot menu → Download file**. Wait for the download to finish and save the CSV on your laptop. You will choose this local file in the Discovery wizard.

Checkpoint: you are in your own workspace, can find all 25 business tables and have `novasky_business_glossary.csv` ready locally. The separate `aiw_novasky_verify` schema is for facilitator checks; leave it out of Discovery.


2 Run AI Discovery

Goal: ask AIDP to discover business concepts from the 25 business tables and the supplied business glossary.

Lab setup: Discovery uses the 25 tables plus `novasky_business_glossary.csv`. For the guided editing activity, you will then import a prebuilt ontology containing the reviewed definitions, synonyms, relationships and mappings.

1. Return to your workspace and open **Ontologies**. Select **Create → AI Discovery → Next**.
2. Enter `aiw_novasky_onto_discovery` as the name. Add a brief description, such as “NovaSky flight disruption discovery.” Keep the `_discovery` suffix so this experiment stays separate from the imported exercise.
3. On **Select Catalog sources**, expand **Master catalog → aiw**. Beside **aiw_novasky**, select **+ / Add all tables**. Confirm the selection contains the 25 business tables.
4. Inspect **Selected sources**. Confirm the business schema and its 25 tables appear before selecting **Next**.
5. On **Add Business Glossary**, select **Browse** under **Upload a Business Glossary (optional)**. Choose the downloaded `novasky_business_glossary.csv`, confirm its filename appears and select **Next**.
6. On **Review and create**, check **Structured Data** contains 25 tables and **Business Glossaries** lists `novasky_business_glossary.csv`. No other sources should be added.

7. Select **Create** and wait until the generated ontology opens. Finish Activity 3 before starting the import wizard. Discovery completion can navigate automatically to its result, so let it finish before beginning another wizard.

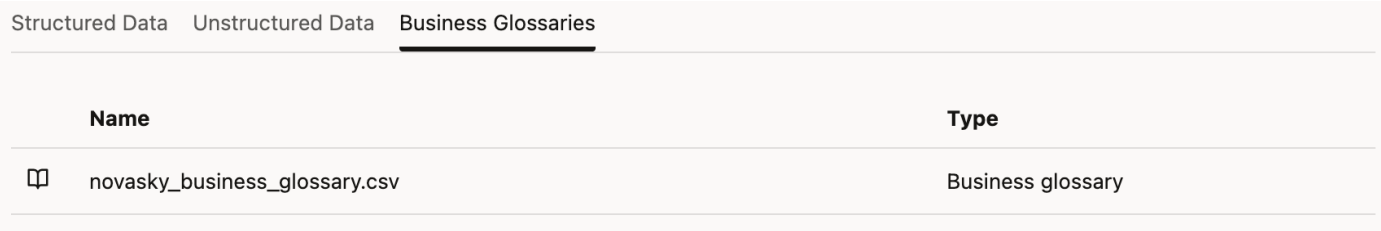

Discovery review confirms the business glossary CSV

The Business Glossaries review tab lists the downloaded CSV before creation.

Checkpoint: your Discovery request is named `aiw_novasky_onto_discovery` and includes **25 business tables plus 1 business glossary CSV**. A progress indicator is not a completed ontology.

3 Review one discovery result

Goal: identify one useful discovery result and one point that needs a business reviewer.

1. Open `aiw_novasky_onto_discovery` and select **Design**. Note the actual class, relationship and attribute counts. Generated labels and counts can vary.
2. In the left **Ontology Browser**, find the class mapped to `WORK_ORDER`. It may be labelled **Maintenance Work Order**, **Work Order** or a similar generated name. Double-click it to open the **Ontology Editor** on the right.
3. Open **Basic Details** and read **Definition**. Look for the distinction between a maintenance work order and a flight. Does the definition explain what makes maintenance relevant to an aircraft disruption?
4. Open **Mappings**, expand its mapping row, and locate the source columns for status and aircraft identity if they are present. If the fully qualified table name is not shown in that panel, confirm the `WORK_ORDER` source in **Data Sources**, then return to **Design**.
5. Open **Business Glossary** and look for **Aircraft**, a term in the supplied CSV. Compare its definition with the discovered model. If the glossary is empty or the term is absent, record that observation and continue. The required synonym correction uses the prepared imported ontology in Activity 6.
6. Record your finding below. Type in the Word table, or use personal notes if you are reading a PDF or browser copy.

Concept and source	What I observed	What needs review

Checkpoint: explain one generated concept, identify its source table, and record one review question. Keep this discovery project separate from your imported ontology.

4 Import the exercise ontology

Goal: open the prepared model that everyone will use for the detailed editor activity.

1. Open **Master catalog** → **default** → **default** → **Volumes** → **hol2329**. Locate the folder `aiw_novasky_onto_import`.

2. Open that folder's **three-dot menu → Download folder**. Keep the catalog page open until the browser finishes downloading `aiw_novasky_onto_import.zip`. Save the whole ZIP with its `concepts` and `mappings` subfolders intact.
3. Return to **your workspace → Ontologies**. Select **Create → Upload from a file** and choose the ZIP.
4. Name the imported ontology `aiw_novasky_onto`. If the wizard proposes `aiw_novasky_onto_import`, remove only `_import` from the ontology name. Keep the package namespace and object identifiers unchanged.
5. In the import wizard, leave the optional additional catalog sources and Business Glossary selections empty; the ZIP already includes the prepared sources and glossary. At the final review, select **Import Zip** and wait for the model to open. The prepared package contains **25 classes, 39 relationships, 181 attributes and 25 table mappings**. The import intentionally contains three wording issues that you will fix in Activity 6.

Purpose	Exact name
Your Discovery experiment	`aiw_novasky_onto_discovery`
Your editable imported ontology	`aiw_novasky_onto`
Prepared reference project already in your workspace	`aiw_novasky_onto_reference`
Knowledge graph used by your agent	`aidp_labNN.aiw_novasky_onto`

The reference project and your import have different project names. The reference is already deployed using the knowledge-graph name your agent expects. You can keep it for the agent activity, or replace it with your corrected import in Activity 7.

> **Checkpoint:** `aiw_novasky_onto` opens in your own workspace and contains the prepared model. If the import name already exists, ask the facilitator to identify that existing project before changing anything.

5 Explore the disruption in the Graph and Ontology Editor

Goal: trace the disruption across connected classes in the Graph, then inspect their definitions, relationships and source mappings in the Editor.


Graph route: Flight → Aircraft ← Maintenance Work Order ← Work Order Material → Part. Arrows show relationship direction; you may navigate either way.

5A Find your way around Design

1. Open your imported `aiw_novasky_onto` and select **Design**.
2. Single-click **Aircraft** in the **Ontology Browser** on the left. The Graph focuses on that class. Use the Browser to locate your starting point or recover your position.
3. Click a connected class in the **Graph** to hop to it. Read each relationship label and arrow as you follow the disruption path.
4. Double-click **Aircraft** to open the right-hand **Ontology Editor** when you need details. Locate **Basic Details**, **Hierarchies**, **Attributes**, **Constraints**, **Relationships** and **Mappings**. Hover over icons to read their labels.
5. Use **Close details** to give the Graph more room. Hop to a connected class, then double-click the class when you need the Editor. Practice closing and reopening once.

6. To read an attribute description, open **Attributes**, select its pencil, read **Description**, then choose **Cancel**. Read the data type from the Attributes list and leave the inspection dialog unchanged.

You may navigate against an incoming arrow without reversing the relationship or creating an inverse property. If lost, single-click your class in the Browser to refocus the Graph.

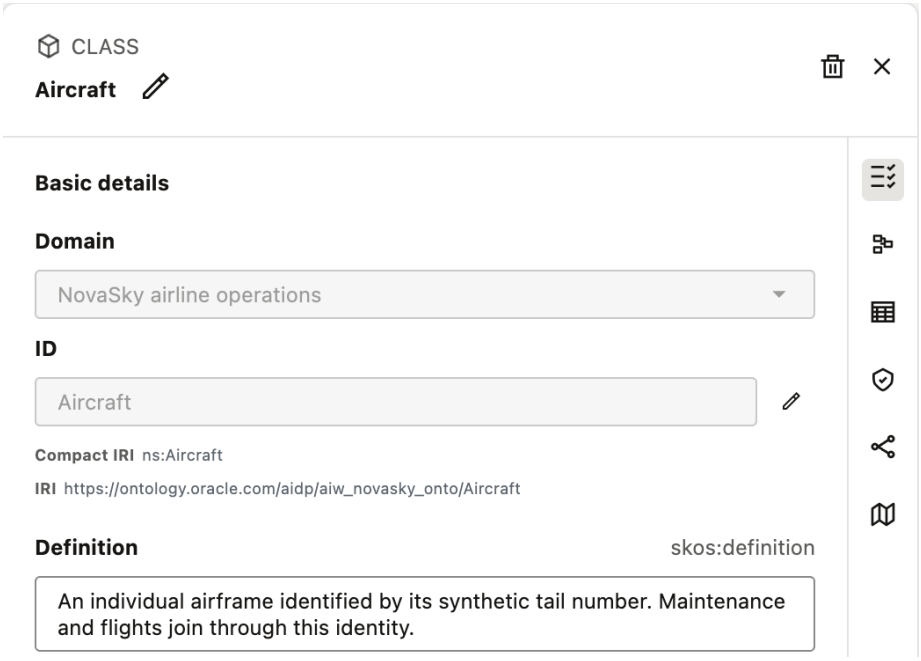

Aircraft Basic Details shows its identifier and business definition

The Aircraft editor keeps the class identifier separate from its business definition.

5B Start with the aircraft

The aircraft is the useful starting point because both flights and maintenance refer to the same individual airframe.

1. With **Aircraft** open, select **Basic Details**. Read **Definition**. It describes an individual airframe identified by its tail number, rather than a fleet model or flight.
2. Find **Synonyms** in Basic Details. Note whether this class has alternate terms. If the field is empty, leave it empty; you will inspect the prepared glossary terms later. A synonym offers another name for the same concept.
3. Open **Attributes**. Locate **aircraft id**, **tail number** and **aircraft status**. Inspect an attribute's name and data type.
4. Open **Hierarchies**, then **Constraints**, to see where class inheritance and constraints are reviewed. An empty section is a useful observation; do not add an artificial hierarchy or constraint. Open **Relationships** and find **has type** leading to **Aircraft Type** and **has base hub** leading to **Operating Hub**. A model type and an individual airframe are different concepts.
5. Open **Mappings** and expand the mapping whose name includes `Aircraft` and `AIRCRAFT`. Trace **aircraft id** → **AIRCRAFT_ID** and **tail number** → **TAIL_NUMBER**. The expanded panel shows attributes and columns; use **Data Sources** or **Code** later to confirm the fully qualified source table.
6. Close details. In the Graph, visit **Flight** and **Maintenance Work Order** from **Aircraft**, then return to Aircraft. Read incoming labels **related to** and **has aircraft**; both arrows point into Aircraft.

Checkpoint: point to the aircraft's business definition, one attribute, one relationship and one mapped source column.

5C Follow maintenance demand to the part

1. In the Graph, hop from **Aircraft** to **Maintenance Work Order** against the incoming **has aircraft** arrow. Open its Editor.
2. Open **Basic Details → Definition**. Read how current work is identified: **OPEN**, **AOG**, opened by the exercise clock and without a closure. A work order outside those conditions should not automatically count as current disruption exposure.
3. Open **Attributes**. Find **work order status**, **severity**, **opened utc** and **closed utc**. Then open **Relationships** and locate **has aircraft**.
4. Open **Mappings** and expand the mapping whose name includes `WORK_ORDER`. Check that **work order status → WORK_ORDER_STATUS** and **severity → SEVERITY**.
5. Close details. From **Maintenance Work Order**, follow incoming **has work order** to **Work Order Material** in the Graph. Read its **Definition** and **Relationships**: **has work order** points to Maintenance Work Order; **has part** points to Part.
6. Open **Attributes**. Locate **required qty**, **issued qty** and **unmet qty**. Read their descriptions. The unmet requirement is the quantity still needed after issued material is accounted for.
7. Open **Mappings**, expand the mapping whose name includes `WORK_ORDER_MATERIAL`, and trace the three quantities to `REQUIRED_QTY`, `ISSUED_QTY` and `UNMET_QTY`.
8. In the Graph, follow **has part** from **Work Order Material** to **Part**. Read its definition and locate **part number**. Part is an interchangeable part type; `FP-7721` is a source value, not a class.

Checkpoint: physically trace **Aircraft ← Maintenance Work Order ← Work Order Material → Part** in the Graph. Read each label and arrow direction. Point to **required qty**, **issued qty** and **unmet qty** on Work Order Material and explain why Aircraft alone cannot give a pump count.

5D Connect the aircraft to flights and people

1. Retrace the Graph from **Part** through **Work Order Material** and **Maintenance Work Order** to **Aircraft**, then follow incoming **related to** to **Flight**. Open Flight's Editor.
2. Read **Basic Details → Definition**. A Flight is one dated flight leg; a Route is an origin-to-destination pair. A repeating flight number alone does not identify one dated operation.
3. Open **Attributes** and locate **departure utc** and **flight status**. These support time-window and status checks.
4. Open **Relationships**. Find the relationship labelled **related to** whose target is **Aircraft**. Its identifier is `flight_has_aircraft`. Note why the label is unhelpful; leave the correction for Activity 6. Also locate **has route**.
5. Open **Mappings** and expand the mapping whose name includes `FLIGHT_LEG`, then trace **aircraft id → AIRCRAFT_ID** and **departure utc → DEPARTURE_UTC**. Flight and maintenance connect through the same aircraft identity.
6. In the Graph, follow incoming **has flight** from **Flight** to **Booking Data**. Read **Definition**. The label is deliberately weak; its class identifier is `Booking`.

7. Inspect Booking Data's **Relationships**. In the Graph, follow **has passenger** to **Passenger**. Read its definition, then hop back to Booking Data.
8. Explain the counting difference: one Booking is one person on one flight leg. A Passenger can have multiple Bookings. Joining through several maintenance or material rows must not count the same Booking repeatedly.

Checkpoint: trace **Booking Data → Flight → Aircraft ← Maintenance Work Order** in the Graph and read the labels. Explain why passenger-segments and distinct people differ.

5E Inspect stock meanings and source mappings

1. Retrace the Graph to **Part**, then follow incoming **has part** to **Inventory Position**. Read **Basic Details → Definition** and **Synonyms**, which may be empty. This class describes hub-part stock at a snapshot.
2. Inspect **Relationships**: **has part → Part** and **has hub → Operating Hub**. If useful, hop along **has hub** to Operating Hub, then return to Inventory Position.
3. Open **Attributes** and locate **snapshot utc**, **available qty** and **releasable qty**. Read each description.
4. Open **Mappings** and expand the mapping whose name includes `InventoryPosition` and `INVENTORY_POSITION`. You will confirm the complete `aiw.aiw_novasky.INVENTORY_POSITION` source in **Data Sources** below.
5. Trace each row in the table below. Compare a business label with its source column, rather than assuming they must use the same spelling.

Attribute in the editor	Source column	Meaning to explain
snapshot utc	`SNAPSHOT_UTC`	When the inventory position was measured, in UTC
available qty	`AVAILABLE_QTY`	On-hand quantity after reservations, floored at zero
releasable qty	`RELEASABLE_QTY`	Quantity available for transfer after reservations and safety stock, floored at zero

6. Open the ontology's **Data Sources** tab and locate `aiw.aiw_novasky.INVENTORY_POSITION` in the structured source inventory. Compare it with the class mapping you just inspected, then return to **Design**. A source inventory says what data is connected; a mapping says how a business object uses it.
7. Explain why the source hub's transfer capacity can be smaller than its available quantity. Local stock available for planned work and stock releasable to another airport answer different questions.

If a relationship row says "Not specified" in the mapping display, do not rewrite it on that basis alone. Use the explicit attribute-column rows for this exercise; relationship join details can also be inspected in Code.

Checkpoint: find all three attributes and source columns. Explain why a supplying airport cannot promise every on-hand unit for transfer.

5F Examine a recovery plan and its approval boundary

1. Retrace the Graph through **Part** and **Work Order Material** to **Maintenance Work Order**. Follow **has recovery quote** to **Freight Quote**. Open Freight Quote's **Ontology Editor**.

2. Read its **Definition**. Open **Attributes** and find **estimated delivery utc**, **quantity capacity** and **freight cost usd**. A quote describes a recorded option; it is not proof of delivery.
3. Open **Relationships**. Find **has origin hub** and **has destination hub**. Confirm where the quoted option starts and ends.
4. Hop back in the Graph to **Maintenance Work Order**. Open **Attributes** and read **planned aircraft release utc** (`PLANNED_RELEASE_UTC`). A planned release is not evidence of completed maintenance or aircraft release.
5. Return to **Freight Quote** in the Graph. Follow **has part** to **Part**, incoming **has part** to **Operational Case**, then incoming **has case** to **Approval**. Read its definition and inspect **has case → Operational Case**.
6. In the Graph, identify the connection you would check before recommending a recovery option. Explain why a case recommendation and its recorded approval are separate.

5G Compare the glossary with the class definition

1. Open the ontology's **Business Glossary** tab. Find **Booking**. The glossary term is Booking even though the imported class currently displays Booking Data.
2. Open the Booking row's **Actions → Edit term** to read **Definition** and **Synonyms**, then choose **Cancel** without saving. The import includes the misleading synonym **Passenger** and the useful synonym **Flight-leg booking**.
3. Return to **Design**, recover **Booking Data** with one Browser click if needed, then open **Basic Details**. Compare its class and glossary definitions: one passenger on one flight leg.
4. Explain why **Passenger** is not an interchangeable synonym for Booking. Keep that reasoning for the correction below.
5. Record two findings. You can type in the table or keep personal notes.

Item I inspected	Supporting definition or source column	What it means for this disruption
Aircraft and maintenance connection		
Available versus releasable quantity		

Checkpoint: you have traced connected classes in the Graph; inspected Basic Details, Synonyms, Attributes, Relationships and Mappings in the Editor; and compared a glossary term with a class definition.

6 Make the three guided corrections

Goal: improve business wording while preserving identifiers, relationships and source mappings.

Correction	Before	After
Class display label	**Booking Data**	**Booking**
Flight-to-Aircraft relationship label	**related to**	**has aircraft**
Booking glossary synonym	**Passenger**	**Passenger booking**

Correction 1 Give Booking a business name

1. In **Design** → **Ontology Browser**, double-click **Booking Data**.
2. Use the pencil beside the class title, **Edit display name**. Change only **Display name** to `Booking`, press **Enter** and confirm the class title updates. Select the page's top **Save** button and wait for **Ontology saved**.
3. Reopen the class if needed. Confirm the identifier is still `Booking` and its definition, **has flight**, **has passenger** and mappings remain present.

Correction 2 Make the aircraft relationship readable

1. Open **Flight** → **Relationships**. Locate **related to** with target **Aircraft** and identifier `flight_has_aircraft`.
2. Select **Edit related to** to open the relationship editor. Select the second **Edit display name** pencil beside the relationship title. Change **Display name** to `has aircraft`, press **Enter**, confirm the title updates and select the page's top **Save** button. Wait for **Ontology saved**.
3. Reopen the relationship and confirm its label is **has aircraft**, its identifier is `flight_has_aircraft`, its source is **Flight** and its target is **Aircraft**.
4. If the label reverts or Save remains disabled, use the Code method below. Open **Code** → **concepts** → **aiw_novasky_onto.ttl** → **Find and replace**, enable **Use Regular Expression** and **Match Case**, find `rdfs:label\s+"related to"`, and replace it with `rdfs:label "has aircraft"`. Confirm there is exactly one match, select **Next match**, then **Replace all**. Use the file toolbar's **Save** and wait for **File saved successfully**. Return to Design and recheck the same relationship.

Correction 3 Distinguish a booking from a passenger

1. Open **Business Glossary** and find the **Booking** row. Read its current synonyms: **Passenger** and **Flight-leg booking**. For this lab environment, make the correction in Code to preserve the existing term identifier.
2. Open **Code** → **concepts** and select `business-glossary.skos.ttl` (or `novasky_business_glossary.skos.ttl` if that filename is shown). Select **Find and replace**. Enable **Use Regular Expression** and **Match Case**.
3. In **Find**, enter `skos:altLabel\s+("Flight-leg booking"@en\s*,\s*)?"Passenger"@en`. In **Replace with**, enter `skos:altLabel $1"Passenger booking"@en`. Copy both strings exactly. This pattern works with either synonym order; `$1` preserves the other synonym when it appears first.

4. Confirm the counter shows **one match**. Select **Next match**, then **Replace all**. Select **Save** in the file toolbar above the source editor. Wait for **File saved successfully**.
5. Open the other concept file, `aiw_novasky_onto.ttl`. Open **Find and replace** for this file, enable **Use Regular Expression** and **Match Case**, and re-enter both strings from step 3. If there is one match, select **Next match → Replace all → file-toolbar Save**. If there are no matches, leave this file unchanged. Checking both files keeps the saved synonym consistent after visual-editor changes.
6. Return to **Business Glossary**. Confirm exactly one **Booking** row, with **Passenger booking** and **Flight-leg booking**. Its definition and original identifier ending in `/glossary/Booking` remain unchanged. If the result differs, stop and ask the facilitator before publishing.

Checkpoint: all three corrections are saved. These edits change business wording; they do not change the source data, quantity calculations or join keys. The supplied FINAL package is a recovery reference if you need to restart.

7 Inspect Code then validate and optionally deploy

Goal: connect the visual editor to its underlying files and make a deliberate deployment choice.

7A Recognize the same objects in Code

1. Select **Code**. Expand `concepts` and open the file ending in `aiw_novasky_onto.ttl`.
2. Use the editor's find control to locate `flight_has_aircraft`. Find its label `has aircraft` and its source and target class declarations, `Flight` and `Aircraft`.
3. Find the `Booking` class declaration and confirm its label is `Booking`. The class remains the same object after its display label changes.
4. Open the glossary Turtle file in `concepts`. It may be named `novasky_business_glossary.skos.ttl` or `business-glossary.skos.ttl`. Find `Passenger booking` and `Flight-leg booking`.
5. Expand `mappings` and open the file ending in `aiw_novasky_onto.rml.ttl`. Find `flight_has_aircraft`, then the nearby `AIRCRAFT_ID` join. The Flight source column joins the Aircraft source key with the same name.
6. Find `oracle://aiw` and `aiw_novasky.FLIGHT_LEG`. These identify the catalog connection and source table. The ontology's namespace is `https://ontology.oracle.com/aidp/aiw_novasky_onto`, with object identifiers below it.

Read the saved source changes from Activity 6. Leave ontology identifiers, source connection names, mapping definitions and join keys unchanged.

7B Validate your reviewed ontology

1. Open **Actions → Validate**. Review the **Validation** tab when the check finishes.
2. Resolve any errors or blockers with the facilitator before deployment. A structurally valid model can still have an unclear label, so confirm the three wording corrections separately.
3. Check the model still contains **25 classes, 39 relationships and 181 attributes**. Use **Data Sources** to check the **25 table mappings**; the fourth Design badge is a domain count. Confirm **25 glossary terms**, including one corrected Booking term. Return to Design and confirm the corrected class and relationship labels.

4. A **VR-IRI-006** warning about the label **agreement id** may appear in this prepared model. Confirm it is a warning and that there are no errors or blockers; leave that unrelated attribute unchanged.

7C Choose whether to replace the prepared reference

Keep the prepared reference: your editor activity is complete after validation. Leave `aiw_novasky_onto_reference` in place and go to Activity 8. Your prepared agent already uses its deployed graph.

Deploy your corrected import: complete the steps below in your own workspace. The reference currently occupies the knowledge-graph name `aidp_labNN.aiw_novasky_onto`; it must be removed before your version can use that name.

1. Return to your workspace's **Ontologies** list and confirm the workspace is `aidp_labNN`. Keep your corrected `aiw_novasky_onto` project.
2. Select **aiw_novasky_onto_reference** and use its **Delete** action. Check that exact name in the confirmation dialog. This is the reference already deployed before the lab; deleting it removes its deployment and frees the knowledge-graph name. No other ontology needs deletion.
3. Wait until the reference has been removed. Open your corrected **aiw_novasky_onto** and select **Publish**. In the publication dialog, confirm **Knowledge Graph Display Name** is `aiw_novasky_onto`, then select **Publish Ontology**.
4. Open **Publish History**. Wait for **Published** and verify **Published ontology** is `aidp_labNN.aiw_novasky_onto`. If the row stays **Publishing**, switch to **Details** and back to **Publish History** to refresh it. Check the full name, not only the authoring project's display name.
5. Continue to Agent Hub only when publication finishes. The agent already targets this workspace-qualified name; no agent editing or registration is needed.

Checkpoint: either the prepared reference remains deployed, or your validated replacement is **Published** as `aidp_labNN.aiw_novasky_onto`. Do not leave the graph undeployed before the agent exercise. If replacement fails, ask the facilitator to restore the FINAL reference.


8 Ask the prepared agent five questions

Goal: see how the reviewed business context supports a short, evidence-based disruption conversation.

Open your agent in Agent Hub

1. Return to Workbench **Home**. Under **Experience Agent Hub**, select **Open Agent Hub**. It opens in a new browser tab. You can also use the **Agent Hub** link for your username on the HOL2329 access page.
2. If Oracle displays an account or session picker, select your assigned `aidp_labNN` account. Verify your username in Agent Hub before continuing.
3. Select **Registry**. Your personal Recovery Desk agent is already deployed and registered: `aidp_labNN_aiw_novasky_recovery_desk_OpenAI`.
4. Select its card. Confirm the message composer contains the matching **@agent** chip for your username. You do not need to create, deploy or register an agent.

5. Send the five prompts below in order, in **one conversation**. Wait for each complete response before sending the next. Focus on the business result and its ontology references, often headed **Ontology used** or **Ontology evidence**. No agent source-code inspection is required.

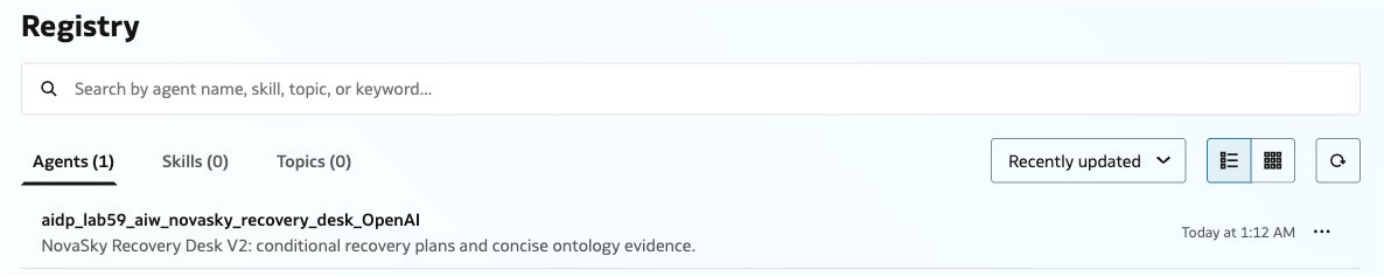

Agent Hub Registry showing one participant's personal Recovery Desk agent

Select the agent bearing your own username. The separate Deep Insights agent is not the Recovery Desk used in these questions.

Question 1 Find the exposed flights

> At the exercise clock, which Las Vegas departures in the next 24 hours are exposed to the FP-7721 shortage? Explain the shortage and show the ontology evidence.

Look for: four distinct exposed flights and the Flight, Aircraft, Maintenance Work Order and Work Order Material path you explored. Exposed does not mean cancelled.

Question 2 Separate passenger segments from people

> For the Las Vegas flights exposed to the FP-7721 shortage at the exercise clock, how many confirmed passenger-segments and distinct people are affected, and how much booked fare is exposed? Do not count a booking twice through maintenance joins. Show the ontology evidence.

Look for: separate measures for passenger-segments, distinct people and booked fare. Connect this distinction to the Booking synonym you corrected.

Question 3 Explain the material shortfall

> At the exercise clock, how many FP-7721 fuel pumps are still required for the eligible Las Vegas AOG work, how many are locally available, and how many additional units must we obtain? Explain available versus releasable stock and show the ontology evidence.

Look for: unmet demand, local available quantity, the additional requirement and LAS releasable quantity. Connect the explanation to **available qty** and **releasable qty** in the editor.

Question 4 Compare the recovery options

> At the exercise clock, is the cheapest recorded transport option sufficient to recover all flights exposed to the FP-7721 shortage? Compare the San Francisco and earlier Los Angeles options using releasable stock, quote capacity, cost, arrival time and flight deadlines. Give a recommendation for human review with ontology evidence.

Look for: quantity, capacity, cost and timing considered together. A premium option may support a conditional recovery plan; a cheaper or earlier quote alone does not prove recovery.

Question 5 Distinguish a plan from a promise

> Can we promise NS410 will depart on time? Check the recorded parts recovery options and approval for case C01. If I say "approve it", does that establish that the transfer, repair and flight recovery have happened? Explain what the evidence supports; do not take any real-world action.

Look for: the recorded approval state, the conditional plan and what still must happen. The premium SFO option and planned aircraft release can support a recommendation; they are not evidence of completed delivery, repair or approval.

Capture one useful connection

In an answer's ontology or evidence section, often headed **Ontology used**, find `aidp_labNN.aiw_novasky_onto` and one class, definition or relationship you inspected earlier. Explain how that business context helped interpret a number or recommendation. Wording may vary between runs.

Question	One result I observed	Definition or relationship that explains it

> **Checkpoint:** you used your own registered agent in one conversation and can connect one answer to the ontology you explored. A failed query is not a zero result. If the answer names another workspace or reports an error, preserve it for the facilitator.

Optional Explore an industry ontology

Goal: recognize that business concepts can be reused from an industry standard.

Use the **FIBO Products and Services** teaching slice: **100 core business classes**, **198 total classes** including support, **11 attributes** and **203 relationships**. This simplified AIDP slice is not equivalent to the full FIBO OWL ontology.

1. Open Industry ontologies on the access page and download fibo_products_services.zip.
2. In **your workspace → Ontologies → Create → Upload from a file**, choose the ZIP. Name it `fibo_products_services`; set **Default Namespace** to `https://ontology.oracle.com/aidp/fibo_products_services/`.
3. Leave optional catalog and glossary inputs empty. Continue with **Next**, then **Import Zip**.
4. In **Design**, double-click **account** in the Ontology Browser. Read **Basic Details → Definition** and its **seven Relationships**, including **has balance**, **has record** and **is held by**.
5. Read the definitions of **individual transaction** and **weighted basket constituent**. Under **Attributes**, find **has transaction description** (**Text**) and **has weight** (**Number**), respectively.
6. In **Code**, find `Account`, `IndividualTransaction` or `WeightedBasketConstituent` and compare its FIBO identifier with Design. Find `hasWeight` and confirm `xsd:decimal`. Run **Actions → Validate**; record one concept and definition.

Keep this separate from NovaSky. Do not publish it or change the NovaSky agent binding.

Completion check

- ☐ I selected the 25 business tables and uploaded `novasky_business_glossary.csv` for AI Discovery, adding no other sources.
- ☐ I recorded one Discovery result or the actual issue encountered.
- ☐ I imported `aiw_novasky_onto_import.zip` as my own `aiw_novasky_onto`.
- ☐ I started with Aircraft and followed maintenance, material, flight, passenger and recovery connections.
- ☐ I traced a connected route in the Graph and used the Ontology Editor to inspect definitions, synonyms, attributes, relationships and mappings.
- ☐ I traced **snapshot utc**, **available qty** and **releasable qty** to their source columns.
- ☐ I saved all three guided wording corrections and recognized them in Code.
- ☐ I validated the model and kept the prepared reference or published my replacement under the expected graph name.
- ☐ I used my already registered Recovery Desk agent and connected one answer to its ontology evidence.

Troubleshooting

What you see	Next step
A workspace, table, glossary CSV or agent is missing	Confirm your username and environment on the access page, then show the facilitator the missing item.
Discovery is still running or opens without a usable model	Wait for Discovery to finish before opening the import wizard. If it fails or the model is unusable, record the state and ask the facilitator to continue with the prepared import.
A class is missing from the focused Graph	Find it in the Ontology Browser and double-click it to open the editor.
The discovered Business Glossary is empty	Confirm the CSV appeared in Review and create, record the observation, and use the prepared import for the required synonym activity.
An import or publication name already exists	Check your workspace and distinguish the imported project, Discovery experiment and deployed reference. Ask the facilitator before replacing an existing project.
Validation has an error or publication fails	Keep the message. Have the facilitator help before removing a working reference or continuing to Agent Hub.
Agent Hub has no personal Recovery Desk card	Confirm the signed-in username and assigned environment; ask the facilitator to check access.
An answer uses another workspace or has no verified result	Save the question and response for the facilitator. Do not treat an error as a zero count.
The answer treats a quote or chat approval as completed recovery	Identify the missing delivery, maintenance, release or recorded-approval evidence.