

Cucumber Report

22 Dec 2023, 01:22:58

Start : Dec 22, 1:21:40.665 am

End : Dec 22, 1:22:57.690 am

Duration : 1 m 17.025 s

Features





PASSED - 0
FAILED - 2
SKIPPED - 0

Scenarios

PASSED - 0
FAILED - 13
SKIPPED - 0

Steps


PASSED - 39
FAILED - 13
SKIPPED - 73

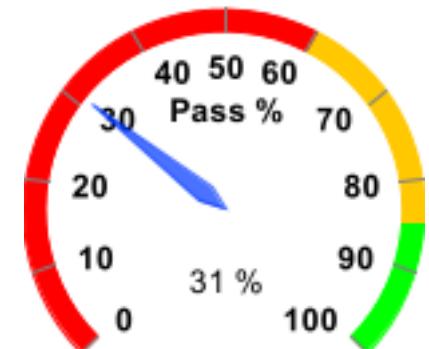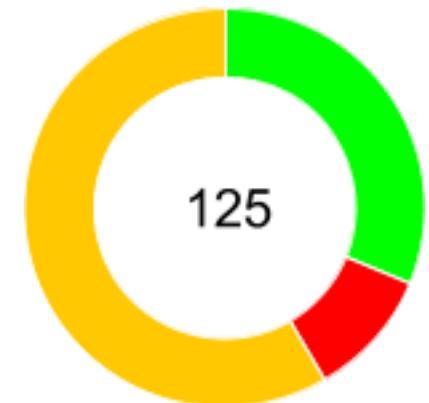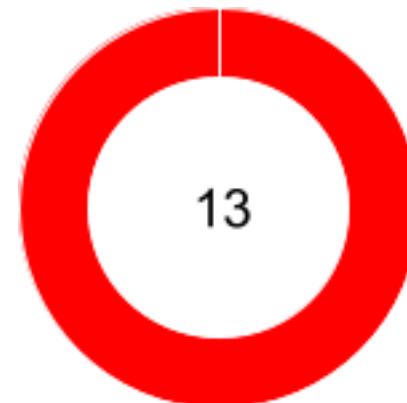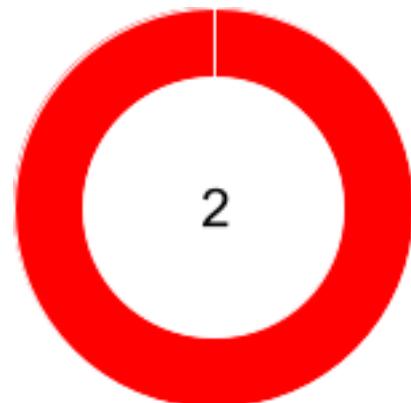


| Feature | | | | Scenario | | | | Step | | | |
|-----------------------------------|-----------------|----------|----------|-----------------|----------|----------|----------|-------------|----------|--|--|
| Name | Duration | T | P | F | S | T | P | F | S | | |
| <u>Search functionality</u> | 1 m 10.322 s | 12 | 0 | 12 | 0 | 120 | 36 | 12 | 72 | | |
| <u>Find the dealer and verify</u> | 6.696 s | 1 | 0 | 1 | 0 | 5 | 3 | 1 | 1 | | |

| # | Feature Name | Scenario Name |
|----|-----------------------------|---------------------------------------|
| 1 | <u>Search functionality</u> | <u>Search the buy car with model</u> |
| 2 | | <u>Search the buy car with model</u> |
| 3 | | <u>Search the buy car with model</u> |
| 4 | | <u>Search the buy car with model</u> |
| 5 | | <u>Search the buy car with model</u> |
| 6 | | <u>Search the buy car with model</u> |
| 7 | | <u>Search the used car with model</u> |
| 8 | | <u>Search the used car with model</u> |
| 9 | | <u>Search the used car with model</u> |
| 10 | | <u>Search the used car with model</u> |


| # | Feature Name | Scenario Name |
|----|-----------------------------------|--|
| 11 | <u>Search functionality</u> | <u>Search the used car with model</u> |
| 12 | | <u>Search the used car with model</u> |
| 13 | <u>Find the dealer and verify</u> | <u>Find the dealers and verify the dealers are in the list</u> |

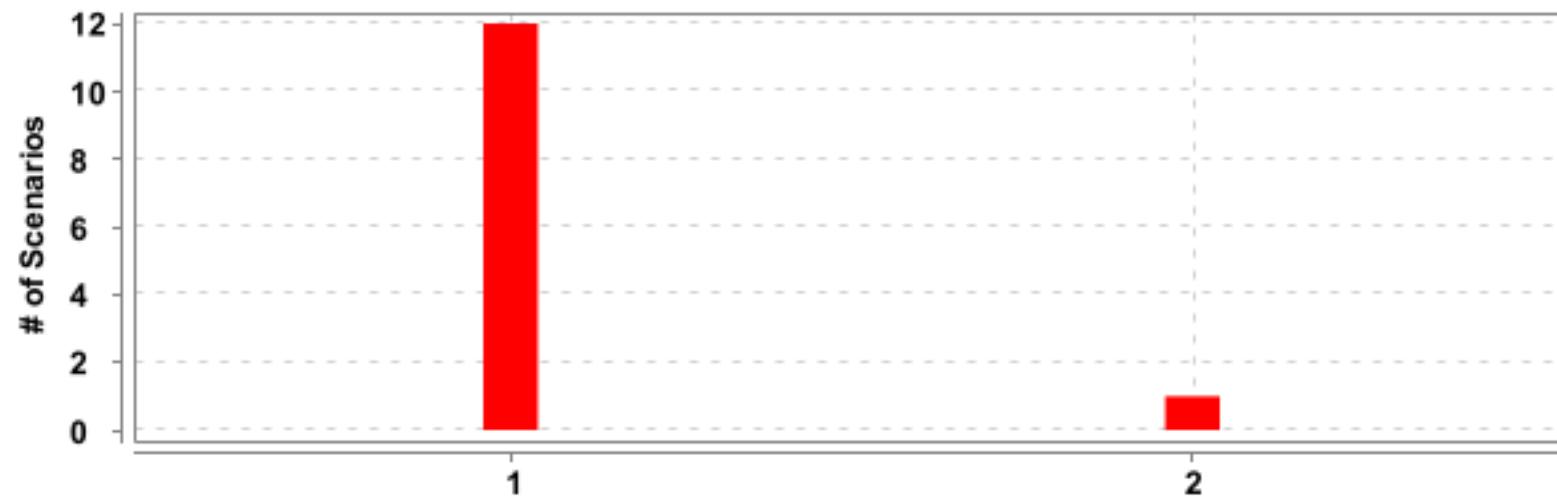

| # | Feature Name | T | P | F | S | Duration |
|---|-----------------------------------|----|---|----|---|--------------|
| 1 | <u>Search functionality</u> | 12 | 0 | 12 | 0 | 1 m 10.322 s |
| 2 | <u>Find the dealer and verify</u> | 1 | 0 | 1 | 0 | 6.696 s |

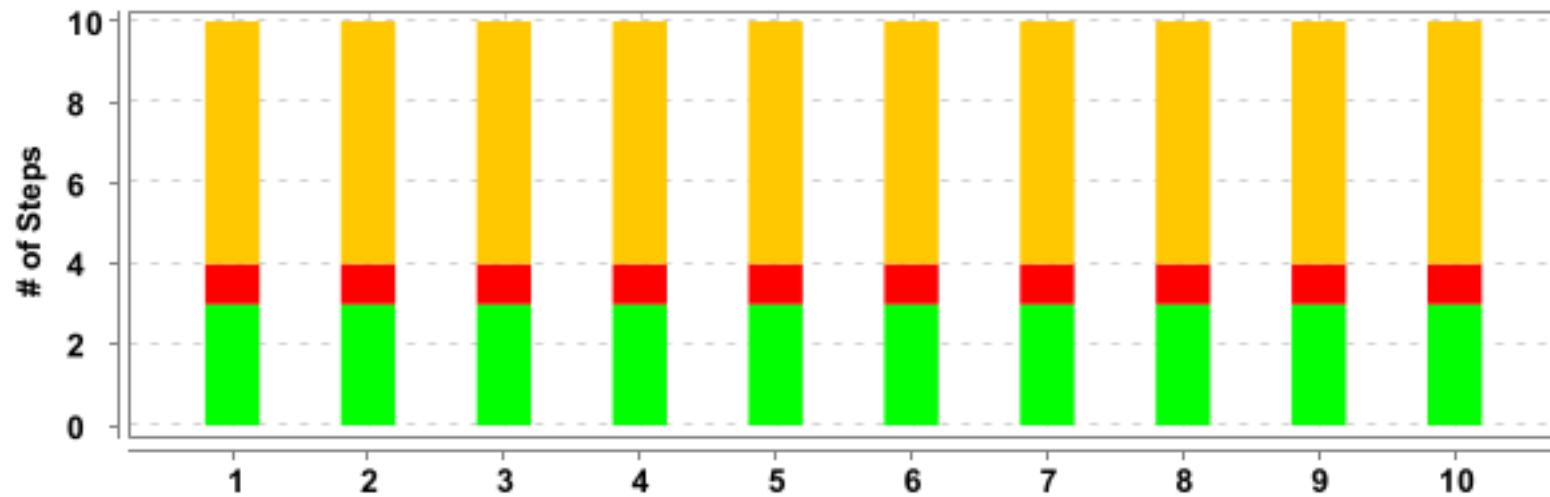

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------|---------------------------------------|----|---|---|---|----------|
| 1 | <u>Search functionality</u> | <u>Search the buy car with model</u> | 10 | 3 | 1 | 6 | 6.396 s |
| 2 | | <u>Search the buy car with model</u> | 10 | 3 | 1 | 6 | 6.145 s |
| 3 | | <u>Search the buy car with model</u> | 10 | 3 | 1 | 6 | 5.268 s |
| 4 | | <u>Search the buy car with model</u> | 10 | 3 | 1 | 6 | 5.761 s |
| 5 | | <u>Search the buy car with model</u> | 10 | 3 | 1 | 6 | 5.859 s |
| 6 | | <u>Search the buy car with model</u> | 10 | 3 | 1 | 6 | 5.912 s |
| 7 | | <u>Search the used car with model</u> | 10 | 3 | 1 | 6 | 6.284 s |
| 8 | | <u>Search the used car with model</u> | 10 | 3 | 1 | 6 | 6.029 s |
| 9 | | <u>Search the used car with model</u> | 10 | 3 | 1 | 6 | 5.162 s |
| 10 | | <u>Search the used car with model</u> | 10 | 3 | 1 | 6 | 6.130 s |

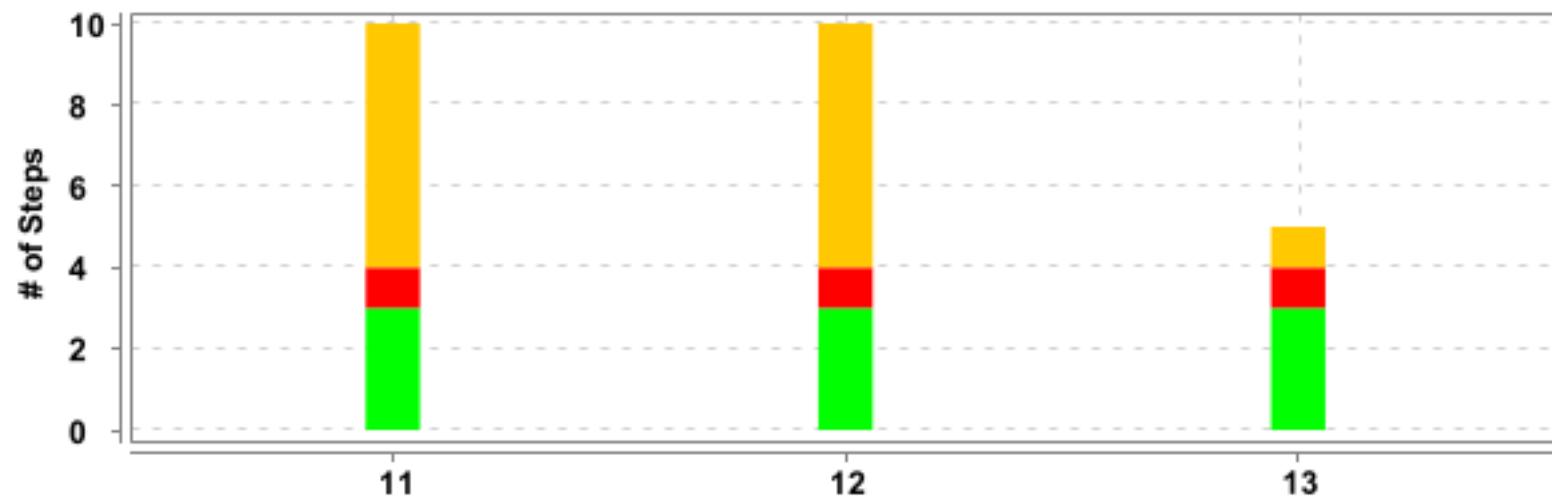


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------------|--|----|---|---|---|----------|
| 11 | <u>Search functionality</u> | <u>Search the used car with model</u> | 10 | 3 | 1 | 6 | 5.335 s |
| 12 | | <u>Search the used car with model</u> | 10 | 3 | 1 | 6 | 5.954 s |
| 13 | <u>Find the dealer and verify</u> | <u>Find the dealers and verify the dealers are in the list</u> | 5 | 3 | 1 | 1 | 6.696 s |

Search functionality



Search the buy car with model

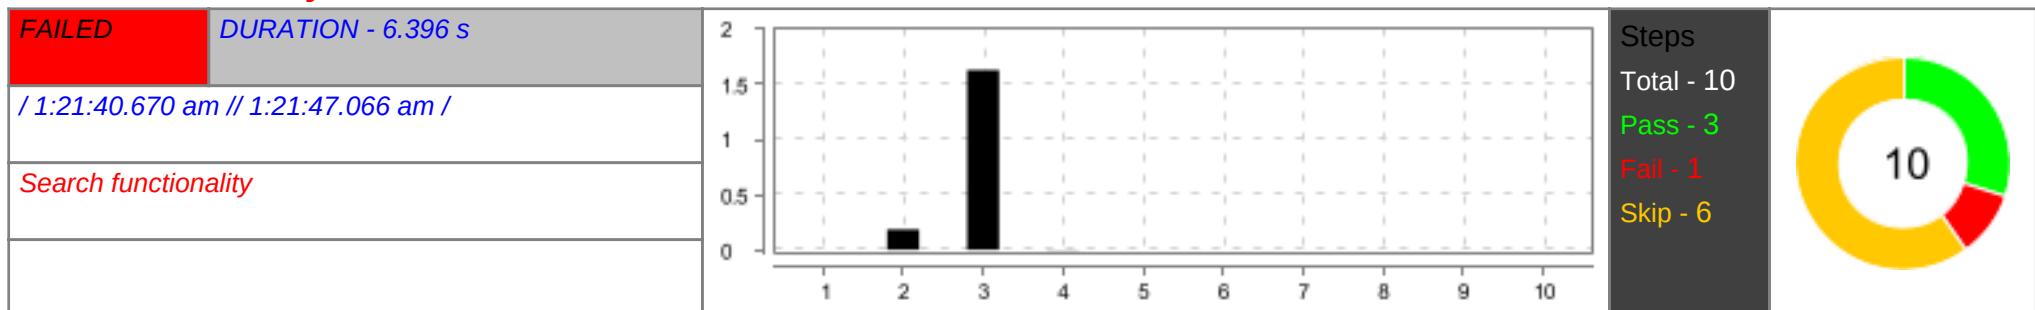


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given I am on homepage | PASSED | 0.001 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.184 s |
| 3 | And I click Search Cars link | PASSED | 1.630 s |
| 4 | Then I navigate to new and used car search page io.cucumber.core.exception.CucumberException: Step [I navigate to new and used car search page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToNewAndUsedCarSearchPage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to new and used car search page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Nissan" | SKIPPED | 0.000 s |
| 6 | And I select model "180SX" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-All" | SKIPPED | 0.000 s |
| 8 | And I select price "\$50,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Nissan" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.464 s |
| | Search the buy car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the buy car with model

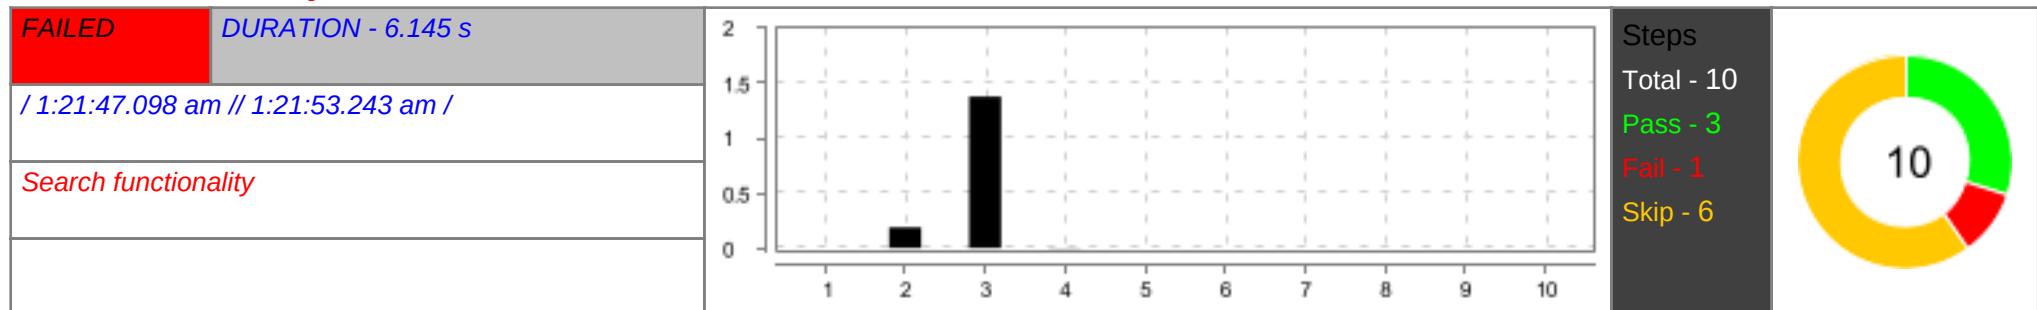


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given I am on homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.187 s |
| 3 | And I click Search Cars link | PASSED | 1.378 s |
| 4 | Then I navigate to new and used car search page io.cucumber.core.exception.CucumberException: Step [I navigate to new and used car search page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToNewAndUsedCarSearchPage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to new and used car search page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "BMW" | SKIPPED | 0.001 s |
| 6 | And I select model "1 Series" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-All" | SKIPPED | 0.001 s |
| 8 | And I select price "\$2,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "BMW" in results | SKIPPED | 0.001 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.357 s |
| | Search the buy car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the buy car with model

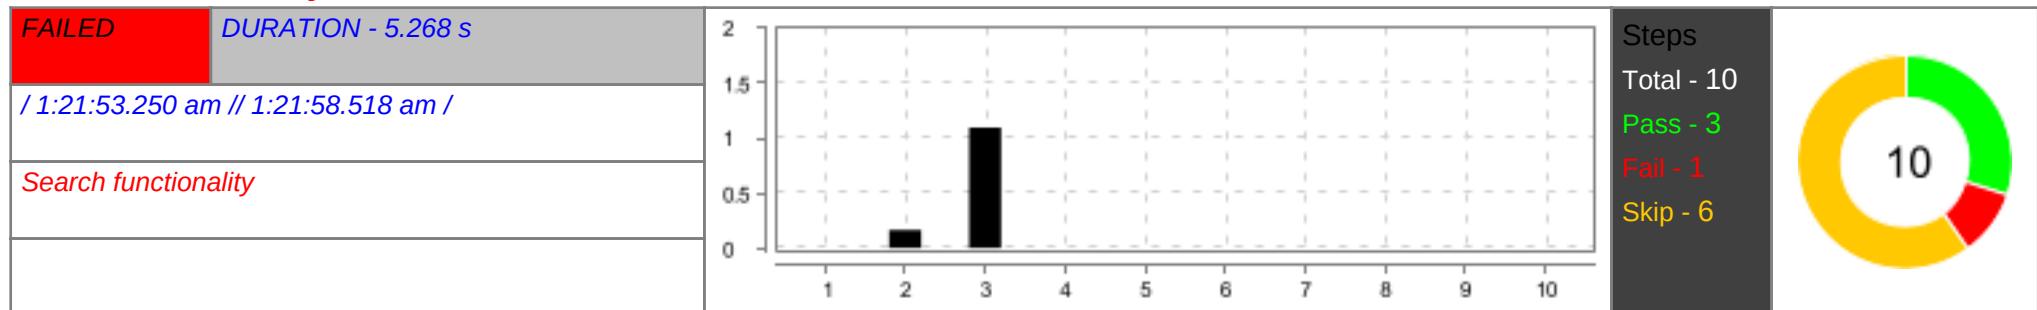


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given I am on homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.163 s |
| 3 | And I click Search Cars link | PASSED | 1.094 s |
| 4 | Then I navigate to new and used car search page io.cucumber.core.exception.CucumberException: Step [I navigate to new and used car search page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToNewAndUsedCarSearchPage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to new and used car search page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Suzuki" | SKIPPED | 0.001 s |
| 6 | And I select model "Baleno" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-All" | SKIPPED | 0.000 s |
| 8 | And I select price "\$35,000" | SKIPPED | 0.001 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Suzuki" in results | SKIPPED | 0.001 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.321 s |
| | Search the buy car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the buy car with model

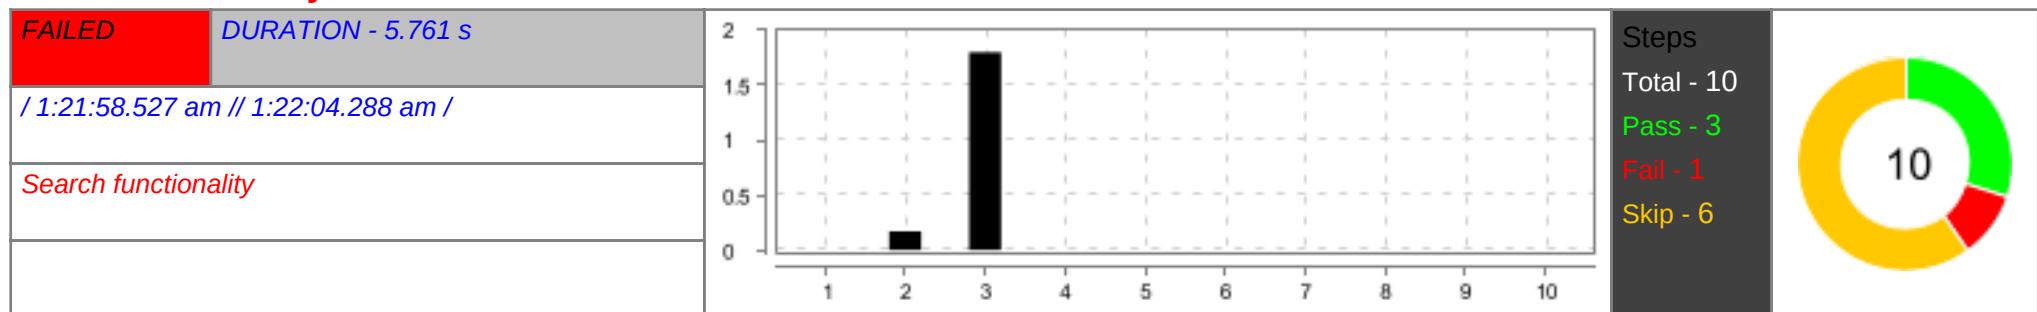


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given I am on homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.170 s |
| 3 | And I click Search Cars link | PASSED | 1.799 s |
| 4 | Then I navigate to new and used car search page io.cucumber.core.exception.CucumberException: Step [I navigate to new and used car search page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToNewAndUsedCarSearchPage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to new and used car search page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Subaru" | SKIPPED | 0.000 s |
| 6 | And I select model "Sambar" | SKIPPED | 0.000 s |
| 7 | And I select location "VIC-Wimmera Mallee" | SKIPPED | 0.000 s |
| 8 | And I select price "\$35,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Subaru" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.376 s |
| | Search the buy car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the buy car with model

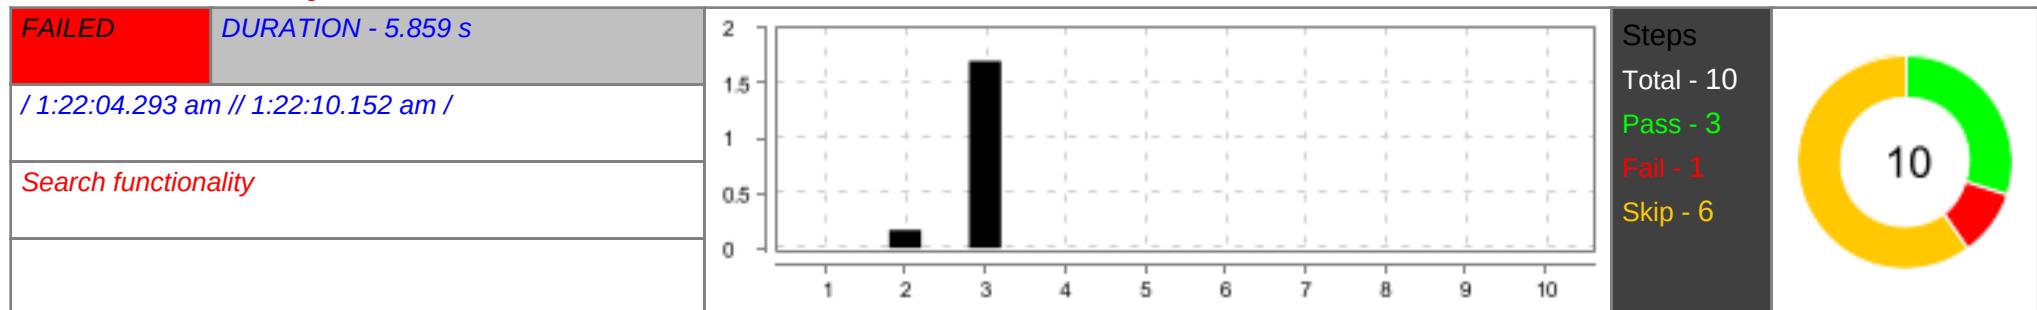


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given I am on homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.164 s |
| 3 | And I click Search Cars link | PASSED | 1.699 s |
| 4 | Then I navigate to new and used car search page io.cucumber.core.exception.CucumberException: Step [I navigate to new and used car search page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToNewAndUsedCarSearchPage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to new and used car search page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Cadillac" | SKIPPED | 0.000 s |
| 6 | And I select model "Escalade" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-Sydney" | SKIPPED | 0.001 s |
| 8 | And I select price "\$90,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Cadillac" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.408 s |
| | Search the buy car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the buy car with model

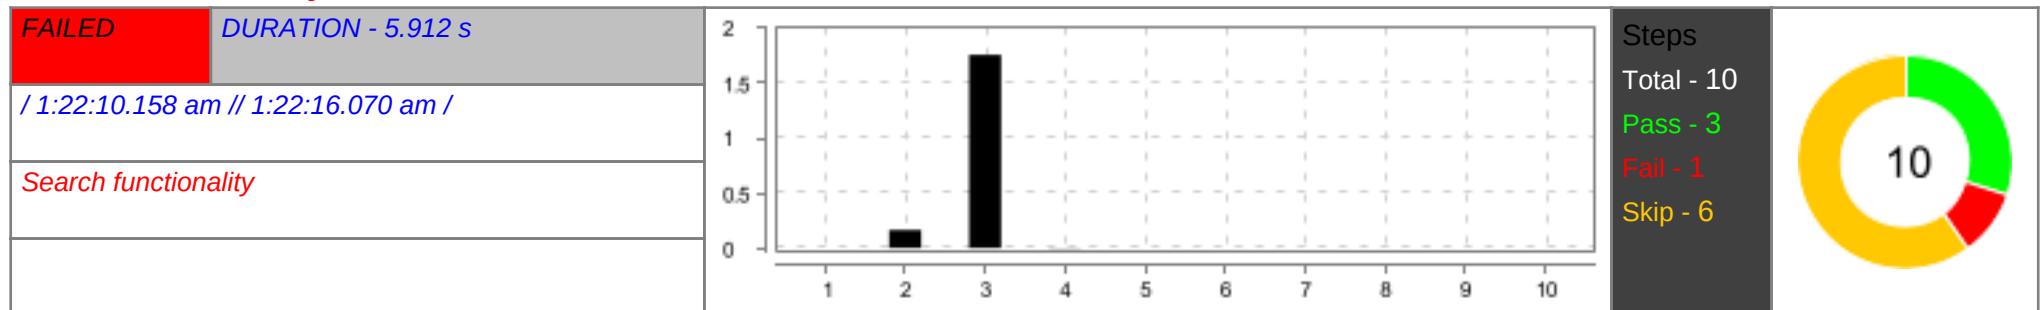


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given I am on homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.163 s |
| 3 | And I click Search Cars link | PASSED | 1.756 s |
| 4 | Then I navigate to new and used car search page io.cucumber.core.exception.CucumberException: Step [I navigate to new and used car search page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToNewAndUsedCarSearchPage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to new and used car search page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Hyundai" | SKIPPED | 0.000 s |
| 6 | And I select model "Accent" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-Sydney" | SKIPPED | 0.000 s |
| 8 | And I select price "\$7,500" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Hyundai" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.369 s |
| | Search the buy car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the used car with model

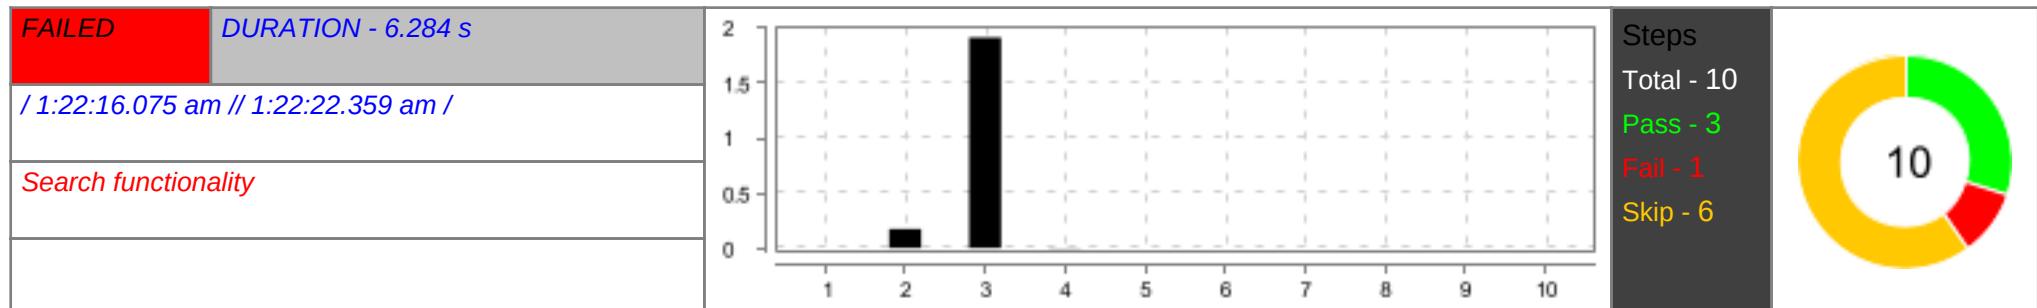


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I am homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.171 s |
| 3 | And I click Used link | PASSED | 1.913 s |
| 4 | Then I navigate to Used Cars For Sale Page io.cucumber.core.exception.CucumberException: Step [I navigate to Used Cars For Sale Page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToUsedCarsForSalePage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to Used Cars For Sale Page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Nissan" | SKIPPED | 0.000 s |
| 6 | And I select model "180SX" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-All" | SKIPPED | 0.000 s |
| 8 | And I select price "\$50,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Nissan" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.386 s |
| | Search the used car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---------------------|--------|----------|
| | | | |

Search the used car with model

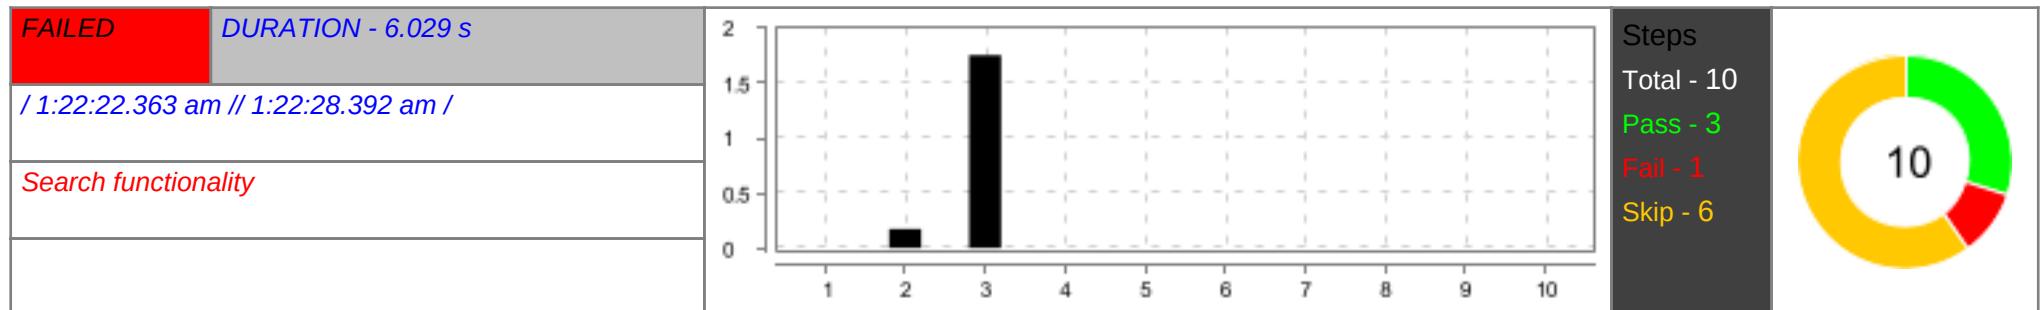


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I am homepage | PASSED | 0.001 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.172 s |
| 3 | And I click Used link | PASSED | 1.753 s |
| 4 | Then I navigate to Used Cars For Sale Page io.cucumber.core.exception.CucumberException: Step [I navigate to Used Cars For Sale Page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToUsedCarsForSalePage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to Used Cars For Sale Page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "BMW" | SKIPPED | 0.000 s |
| 6 | And I select model "1 Series" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-All" | SKIPPED | 0.000 s |
| 8 | And I select price "\$2,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "BMW" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.360 s |
| | Search the used car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---------------------|--------|----------|
| | | | |

Search the used car with model

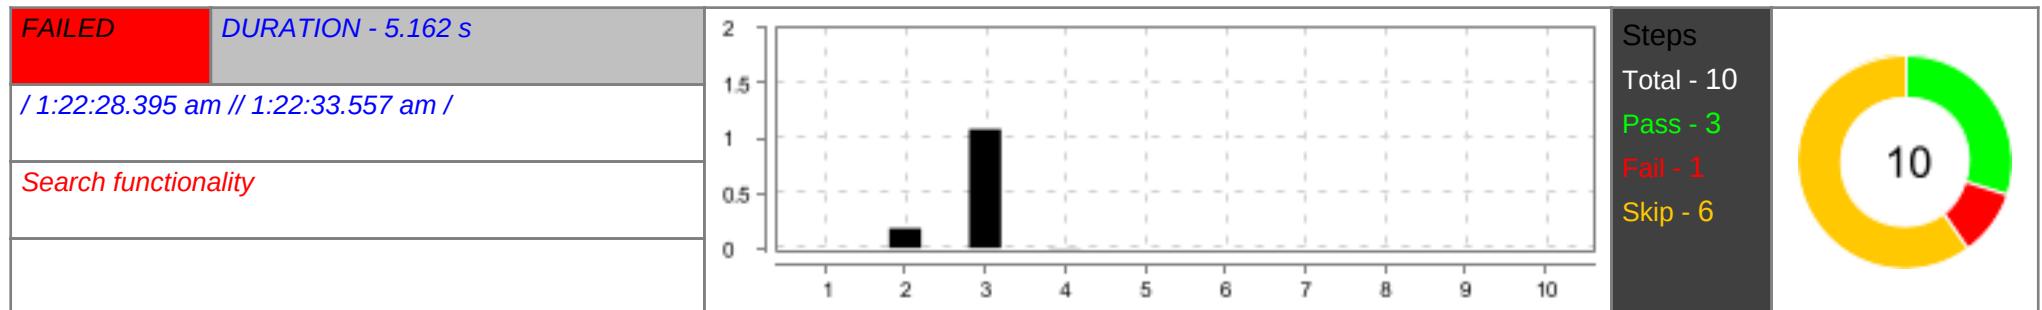


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I am homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.178 s |
| 3 | And I click Used link | PASSED | 1.079 s |
| 4 | Then I navigate to Used Cars For Sale Page io.cucumber.core.exception.CucumberException: Step [I navigate to Used Cars For Sale Page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToUsedCarsForSalePage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to Used Cars For Sale Page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Suzuki" | SKIPPED | 0.000 s |
| 6 | And I select model "Baleno" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-All" | SKIPPED | 0.000 s |
| 8 | And I select price "\$35,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Suzuki" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.323 s |
| | Search the used car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the used car with model

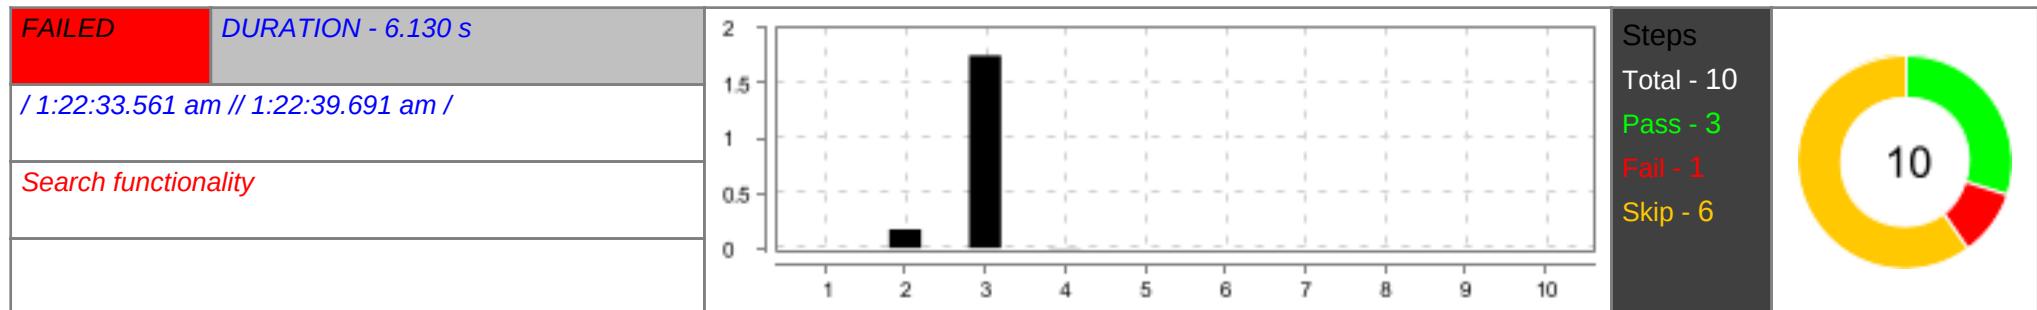


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I am homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.169 s |
| 3 | And I click Used link | PASSED | 1.749 s |
| 4 | Then I navigate to Used Cars For Sale Page io.cucumber.core.exception.CucumberException: Step [I navigate to Used Cars For Sale Page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToUsedCarsForSalePage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to Used Cars For Sale Page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Subaru" | SKIPPED | 0.001 s |
| 6 | And I select model "Sambar" | SKIPPED | 0.000 s |
| 7 | And I select location "VIC-Wimmera Mallee" | SKIPPED | 0.000 s |
| 8 | And I select price "\$35,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Subaru" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.346 s |
| | Search the used car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the used car with model

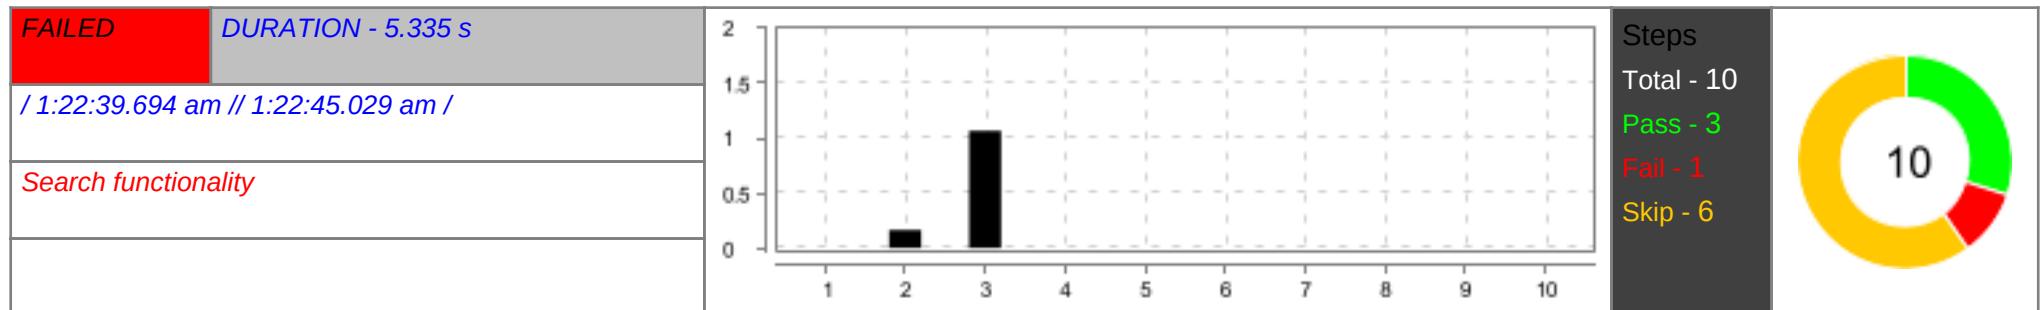


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I am homepage | PASSED | 0.001 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.163 s |
| 3 | And I click Used link | PASSED | 1.064 s |
| 4 | Then I navigate to Used Cars For Sale Page io.cucumber.core.exception.CucumberException: Step [I navigate to Used Cars For Sale Page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToUsedCarsForSalePage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to Used Cars For Sale Page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Cadillac" | SKIPPED | 0.000 s |
| 6 | And I select model "Escalade" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-Sydney" | SKIPPED | 0.000 s |
| 8 | And I select price "\$90,000" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Cadillac" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.337 s |
| | Search the used car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Search the used car with model

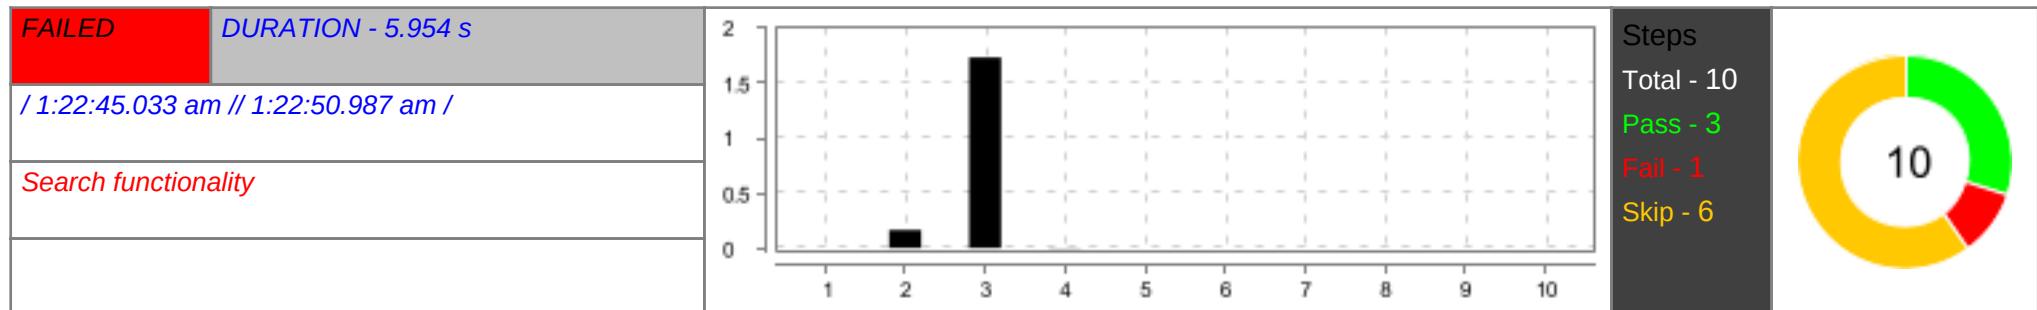


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I am homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell link | PASSED | 0.164 s |
| 3 | And I click Used link | PASSED | 1.734 s |
| 4 | Then I navigate to Used Cars For Sale Page io.cucumber.core.exception.CucumberException: Step [I navigate to Used Cars For Sale Page] is defined with 1 parameters at 'au.com.carsguide.steps.BuySteps.iNavigateToUsedCarsForSalePage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to Used Cars For Sale Page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | FAILED | 0.002 s |


| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I select make "Hyundai" | SKIPPED | 0.000 s |
| 6 | And I select model "Accent" | SKIPPED | 0.000 s |
| 7 | And I select location "NSW-Sydney" | SKIPPED | 0.000 s |
| 8 | And I select price "\$7,500" | SKIPPED | 0.000 s |
| 9 | And I click on Find My Next Car tab | SKIPPED | 0.000 s |
| 10 | Then I should see the make "Hyundai" in results | SKIPPED | 0.000 s |
| | AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.433 s |
| | Search the used car with model | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| |  | | |

Find the dealer and verify

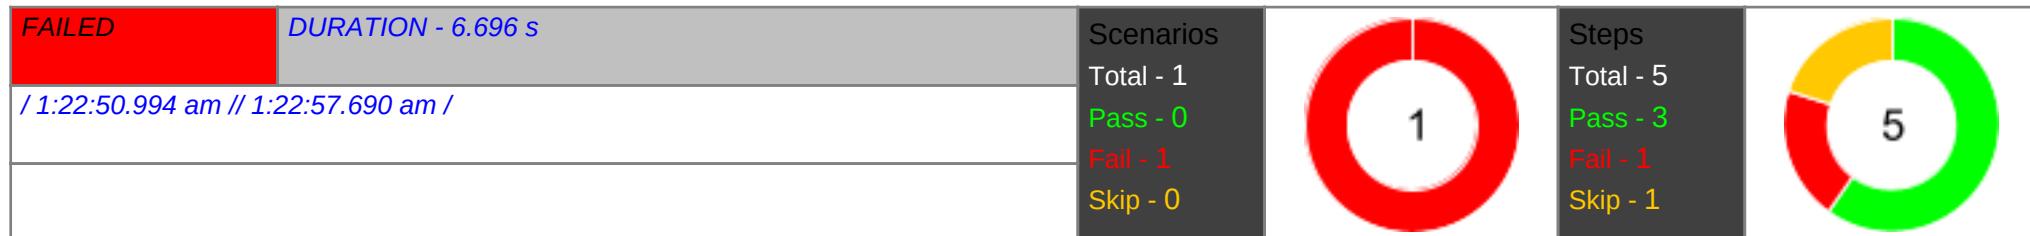

Find the dealers and verify the dealers are in the list

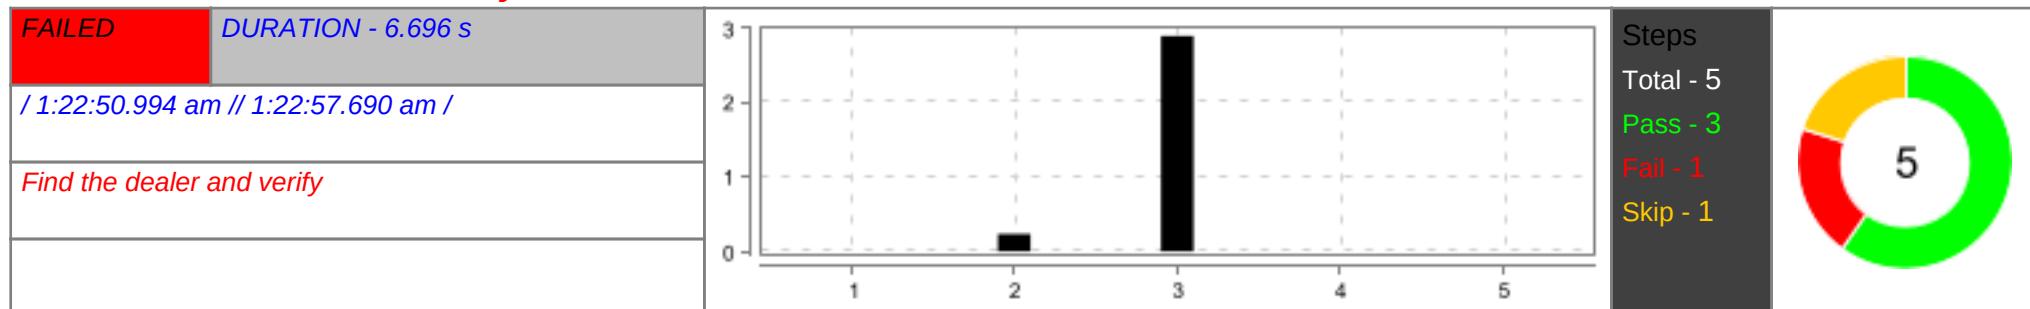

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I am on homepage | PASSED | 0.000 s |
| 2 | When I mouse hover on buy+sell tab | PASSED | 0.232 s |
| 3 | And I click Find a Dealer | PASSED | 2.895 s |
| 4 | Then I navigate to car-dealers page io.cucumber.core.exception.CucumberException: Step [I navigate to car-dealers page] is defined with 1 parameters at 'au.com.carsguide.steps.FindDealerSteps.iNavigateToCarDealersPage(java.lang.String)'. However, the gherkin step has 0 arguments. Step text: I navigate to car-dealers page at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 5 | And I should see the dealer names "<dealersNames>" are display on page <input type="text" value="dealersName"/> | SKIPPED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <p>3 Point Motor Epping</p> <p>4WD Specialist Group</p> <p>5 Star Auto</p> <p>A & M Car Sales Pvt Ltd</p> <p>A1 MOTORS COMPANY</p> <p>ANDREA MOTOR SERVICE</p> <p>Oxford Motors</p> | | |
| | <p>AFTER - au.com.carsguide.steps.Hooks.tearDown(io.cucumber.java.Scenario)</p> <p>Find the dealers and verify the dealers are in the list</p>  | PASSED | 0.318 s |