

PREDA-Toolchain User Manual

Introduction

PREDA-Toolchain (PREDA Language Preview Toolchain) is a local toolkit developed for PREDA. It provides the ability for programmers to compile, deploy, and conduct performance tests for their smart contracts.

Quick start

Welcome to PREDA-Toolchain. Before learning how to use it, please refer to the Installation Guide document to install PREDA-Toolchain.

After installing the PREDA-Toolchain, it is important to become familiar with it, including how to write a smart contract, compile the smart contract, and write a test script to test the smart contract, by going through the following contents:

- Write a smart contract
- Compile the smart contract
- Write a test script to test the smart contract

Write a smart contract

There are some example smart contracts and test scripts in the installation package for learning and reference.

Next, we will take the *Ballot.prd* as an example to demonstrate.

Ballot.prd is a voting smart contract written in PREDA language, it implements voting in parallel on a shard blockchain, of course, we still have a lot of questions for a real practical voting system, but at least we showed how to implement voting logic through PREDA. It has the following functions:

- Initialize proposals
- Vote
- Collect votes

Initialize proposals

```
@address function init(array<string> names) export {
    //__debug.assert(controller == __transaction.get_self_address());
    __debug.assert(!is_voting());
    relay@global (^names){
        __debug.print("global: ", names);
        for (uint32 i = 0u; i < names.length(); i++) {
            Proposal proposal;
            proposal.name = names[i];
            proposal.totalVotedWeight = 0u64;
            proposals.push(proposal);
        }
        current_case++;
        last_result.case = 0u;
        last_result.topVoted = "";
    }
}
```

```

    }
    __debug.print("EOC init: ", names);
}

```

A relay statement is similar to a function call, except that the call is asynchronous. The call data is packaged in a so-called "relay transaction" and relayed to the target address for execution. The relay statement itself returns immediately.

vote

```

@address function bool vote(uint32 proposal_index, uint32 case_num) export {
    if(case_num == current_case && case_num > voted_case &&
proposal_index<proposals.length())
    {
        voted_case = case_num;
        __debug.print("Vote: ", proposal_index);

        /*
        relay@global (^case_num, ^proposal_index, ^weight) {
            if(case_num == current_case)
                proposals[proposal_index].totalVotedWeight += weight;
        }*/
        votedWeights.set_length(proposals.length());
        votedWeights[proposal_index] += weight;
        return true;
    }

    __debug.print("Vote: ", proposal_index, " failed");
    return false;
}

```

Collect votes

```

@address function finalize() export {
    //__debug.assert(controller == __transaction.get_self_address());
    __debug.assert(is_voting());
    relay@global (){
        // ... maybe do something else before scatter-gathering
        __debug.print("In global");
        shardGather_reset();
        relay@shards (){
            // ... maybe do something in each shard
            __debug.print("Shard Vote: ", votedWeights);
            relay@global(auto shardVotes = votedWeights) {
                //BEGIN: code for scattering
                for(uint32 i=0; i<shardVotes.length(); i++)
                {
                    proposals[i].totalVotedWeight += uint64(shardVotes[i]);
                }
                //END

                if(shardGather_gather())
                {
                    __debug.print("votes: ", proposals);
                }
            }
        }
    }
}

```

```

        //BEGIN: code for gathering
        last_result.case = current_case;
        uint64 w = 0u64;
        for(uint32 i=0u; i<proposals.length(); i++)
        {
            if(proposals[i].totalvotedweight > w)
            {
                last_result.topVoted = proposals[i].name;
                w = proposals[i].totalvotedweight;
            }
        }


        __debug.print("result: ", last_result);
        //END
    }
}
}
}

```

For more syntax details, please refer to PREDA Language Specification document.

Compile the smart contract

Right click on the contract file, select the `PREDA:Compile` command to compile the smart contract, this process will check the contract syntax.

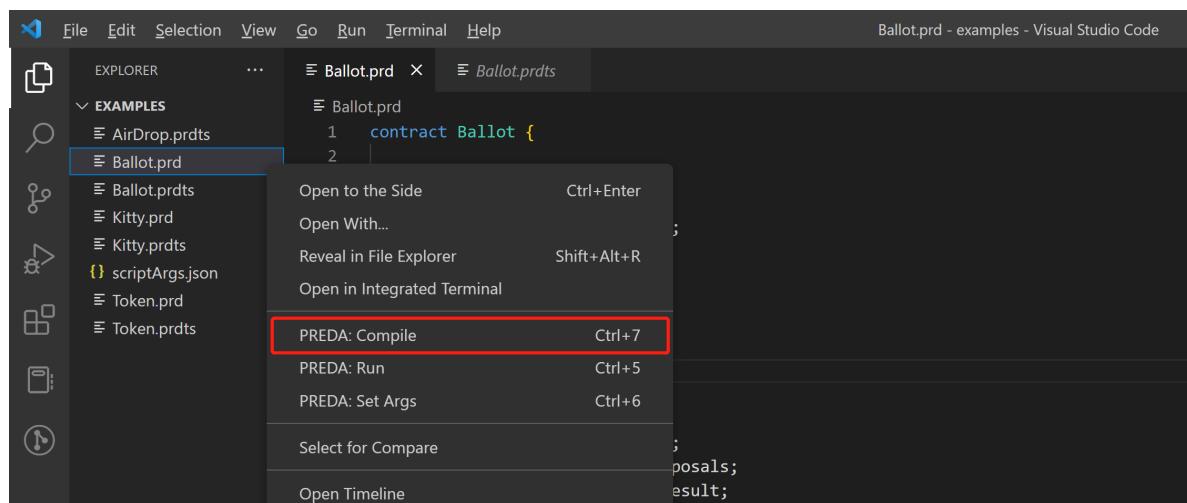

Write a test script to test the smart contract

PREDA-toolchain provides a scripting language for testing smart contracts easily, it mainly includes the following functions:

- deploy smart contract
- set on-chain states
- call a smart contract function
- smart contract performance testing
- chain info visualization

Now we will take the `Ballot.prdt` as an example to demonstrate.

Write a test script

This is the code details of *Ballot.prdts*

```
// set random seed, default value is timestamp
random.reseed

// allocate some address for the test
allocate.address $~count$

// set gas limit
chain.gaslimit 256

// deploy contract
chain.deploy Ballot.prd

// log
log.highlight Token test
log Perparing test transactions

// set state, prepare for the test
state.set address.Ballot @all { weight:$random(1, 20)$, voted_case:0 }

log.highlight Ballot test: Step 1

// call Ballot.init at address_0
txnl = Ballot.init @0 { names: ["Spring", "Yarn", "Combat"] }

// run the chain
chain.run
// print chain info
chain.info

log.highlight Ballot test: Step 2
// call Ballot.vote at all address
txn2[] = Ballot.vote @all { proposal_index: $random(0,2)$, case_num: 1 }
// print chain info
chain.info

log.highlight Ballot test: Step 3
// call Ballot.finalize at address_0 to collect votes
txn3 = Ballot.finalize @0 {}

chain.info
log Executing

// start stopwatch
stopwatch.restart
// run the chain to excute transactions
chain.run
// stop stopwatch to report performance
stopwatch.report

chain.info
```

```

// address visualization
viz.addr @random
viz.addr @3 Ballot
viz.addr @all

// txn visualization
viz.txn txn1
viz.txn txn2[0]

viz.section Finalize
// trace visualization
viz.trace txn3


// profiling visualization
viz.profiling

```


For more syntax details, please refer to PREDA test script syntax Chapter.

Set input parameters of the test script

Right-click on the script file, and select `PREDA: Set Args`

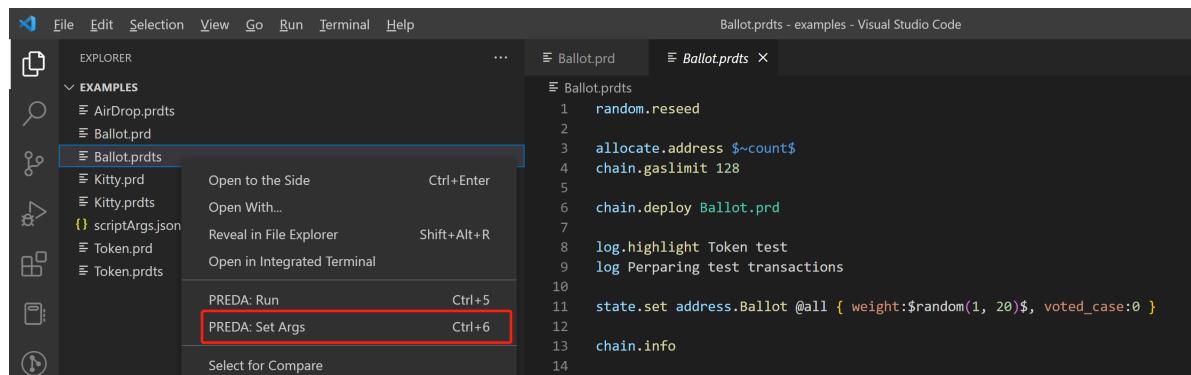

Enter the parameters in the pop-up box and confirm, PREDA-toolchain will execute the script with the set input parameters.

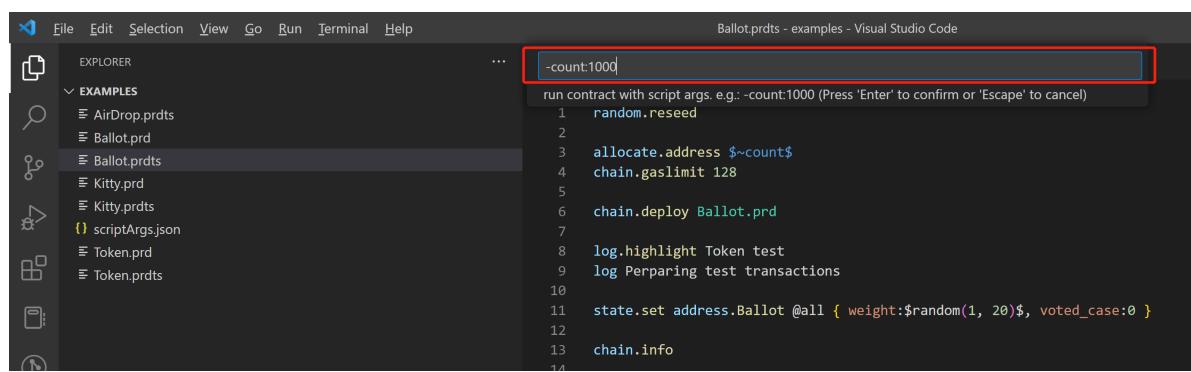

Run the test script

Right click on the script file, and select `PREDA:Run`, PREDA-toolchain will execute the test script.

```

random.reseed
allocate.address $~count$
chain.gaslimit 128
chain.deploy Ballot.prd
log.highlight Token test
log Perparing test transactions
state.set address.Ballot @all { weight:$random(1, 20)$, voted_case:0 }
chain.info
log.highlight Ballot test: Step 1
txnid = Ballot.init @0 { names: ["Spring", "Yarn", "Combat"] }

```

Chain info visualization

The PREDA-toolchain will provide a visual interface for chain information after execute the test script.

viz.shard #g

Contract: Ballot
State: ...

viz.trace txid3

```

graph LR
    Init[Initiator: id0  
BallotFinalized  
Shard #2/4, Height 19] --> Relay1[Ballot_relayLambda 4  
Shard #1/4, Height 20]
    Relay1 --> Relay2_1[Ballot_relayLambda 5  
Shard #1/4, Height 20]
    Relay1 --> Relay2_2[Ballot_relayLambda 5  
Shard #2/4, Height 20]
    Relay1 --> Relay2_3[Ballot_relayLambda 5  
Shard #3/4, Height 20]
    Relay1 --> Relay2_4[Ballot_relayLambda 5  
Shard #0/4, Height 20]
    Relay2_1 --> Final1[Ballot_relayLambda 6  
Shard #4/4, Height 21]
    Relay2_2 --> Final2[Ballot_relayLambda 6  
Shard #3/4, Height 21]
    Relay2_3 --> Final3[Ballot_relayLambda 6  
Shard #2/4, Height 21]
    Relay2_4 --> Final4[Ballot_relayLambda 6  
Shard #1/4, Height 21]

```

PREDA-Toolchain features

Code highlighting

PREDA-Toolchain provide syntax highlighting for *.prd* and *.prdts*.

The screenshot shows the Visual Studio Code interface with the Ballot.prd file open. The code defines a Ballot contract with various functions and variables. The cursor is positioned at the start of a function definition, and the code completion dropdown is visible, listing suggestions like 'BallotResult', 'Ballot', 'Proposal', and 'shardGatherRatio'. The Explorer sidebar on the left shows other files in the project, and the bottom status bar indicates the current line (Ln 25) and column (Col 1).

```
contract Ballot {
    struct Proposal {
        string name;
        uint64 totalVotedWeight;
    }

    struct BallotResult {
        string topVoted;
        uint32 case;
    }

    @global address controller;
    @global uint32 current_case;
    @global array<Proposal> proposals;
    @global BallotResult last_result;

    @global uint32 shardGatherRatio;
    @global function shardGather_reset(){ shardGatherRatio = 0u; }
    @global function bool shardGather_isCompleted(){ return shardGatherRatio == 0x80000000u; }
    @global function bool shardGather_gather()
    {
        shardGatherRatio += 0x80000000u;
        return shardGatherRatio == 0x80000000u;
    }

    @shard array<uint64> votedWeights;
    // address scope
    @address uint64 weight;
    @address uint32 voted_case;
}

@address function bool is_voting()
{
    return last_result.case < current_case;
}

@address function init(array<string> names) export {
    // debug.assert(controller == __transaction.get_self_address());
    debug.assert(is_voting());
    value@leb16(<names>);
}
```

The screenshot shows the Visual Studio Code interface with the Ballot.prds file open. The code contains comments and calls to the Ballot contract. The cursor is at the start of a call to 'Ballot.init', and the code completion dropdown is visible, listing suggestions like 'Ballot', 'BallotResult', 'Proposal', and 'shardGatherRatio'. The Explorer sidebar on the left shows other files in the project, and the bottom status bar indicates the current line (Ln 12) and column (Col 1).

```
// set random seed, default value is timestamp
random.reseted

// allocate some address for the test
allocate.address $~count$

// set gas limit
chain.gaslimit 256

// deploy contract
chain.deploy Ballot.prd

// log
log.highlight Token test
log.Preparing test transactions

// set state, prepare for the test
state.set.address.Ballot @all { weight:$random(1, 20)$, voted_case:0 }

log.highlight Ballot test: Step 1

// call Ballot.init at address 0
txnl = Ballot.init @0 { names: ["Spring", "Yarn", "Combat"] }

// run the chain
chain.run
// print chain info
chain.info

log.highlight Ballot test: Step 2
// call Ballot.vote at all address
txn1[] = Ballot.vote @all { proposal_index: $random(0,2)$, case_num: 1 }
// print chain info
chain.info

log.highlight Ballot test: Step 3
// call Ballot.finalize at address_0 to collect votes
txnl = Ballot.finalize @0 { }
```

Code auto-completion

PREDA-Toolchain provide code auto-completion for `.prd` and `.prdts`.

```
File Edit Selection View Go Run Terminal Help • Ballot.prd - examples - Visual Studio Code  
EXPLORER ... Ballot.prd ... Ballot.prdts ... Preda Viz: Ballot_latest_run  
EXAMPLES  
AirDrop.prdts  
Ballot_latest_run.html  
Ballot_latest_run.log  
Ballot.prd  
Ballot.prdts  
Kitty.prd  
Kitty.prdts  
scriptArgs.json  
Token_latest_run.html  
Token_latest_run.log  
Token.prd  
Token.prdts  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
struct BallotResult {  
    string topVoted;  
    uint32 case;  
}  
@global address controller;  
@global uint32 current_case;  
@global array<Proposal> proposals;  
@global BallotResult last_result;  
@global uint32 shardGatherRatio;  
@global function bool shardGather_isCompleted(){ return shardGatherRatio == 0x80000000u; }  
@global function bool shardGather_gather()  
{  
    shardGatherRatio += 0x00000001u;  
    _block.get_shard_order();  
    return shardGatherRatio == 0x80000000u;  
}  
@shard array<uint64> votedWeights;  
// address scope  
@address uint64 weight;  
@address uint32 voted_case;  
@address function bool is_voting()  
{  
    relay  
    return relay  
    [relay@address Relay statement  
     relay@global Relay global statement  
     @address relay@shard Relay shard statement  
     // debug.assert(controller == transaction.get_self_address());  
     _debug.assert(is_voting());  
     relay@global (*names)  
     __debug.print("global: ", names);  
     for (uint32 i = 0u; i < names.length(); i++) {  
         Proposal proposal;  
         proposal.name = names[i];  
    }  
}  
Ln 34, Col 14 Spaces: 4 UTF-8 CRLF preda ⚡ Prettier
```

```
File Edit Selection View Go Run Terminal Help • Ballot.prd - examples - Visual Studio Code  
EXPLORER ... Ballot.prd ... Ballot.prdts ... Preda Viz: Ballot_latest_run  
EXAMPLES  
AirDrop.prdts  
Ballot_latest_run.html  
Ballot_latest_run.log  
Ballot.prd  
Ballot.prdts  
Kitty.prd  
Kitty.prdts  
scriptArgs.json  
Token_latest_run.html  
Token_latest_run.log  
Token.prd  
Token.prdts  
43 // start stopwatch  
44 stopwatch.restart  
45 // run the chain to execute transactions  
46 chain.run  
47 // stop stopwatch to report performance  
48 stopwatch.report  
49  
50 chain.info  
51 // address visualization  
52 viz.addr @random  
53 viz.addr @3 Ballot  
54 viz.addr @all  
55 viz.addr @all  
56  
57 // txn visualization  
58 viz.txn txn1  
59 viz.txn txn2[0]  
60  
61 viz.section Finalize  
62 // trace visualization  
63 viz.trace txn3  
64  
65 // profiling visualization  
66 viz.profiling  
67  
68 viz.  
    addr  
    block  
    profiling  
    section  
    shard  
    trace  
    txn  
Ln 68, Col 5 Spaces: 4 UTF-8 CRLF prda ⚡ Prettier
```

Compile the contract

Right-click on the contract file, and select `PREDA:Compile`, PREDA-Toolchain will check the contract syntax.

```

contract Ballot {
    struct Proposal {
        string name;
        uint64 totalVotedWeight;
    }

    struct BallotResult {
        string topVoted;
        uint32 case;
    }

    @global address controller;
    @global uint32 current_case;
    @global array<Proposal> proposals;
    @global BallotResult last_result;

    @global uint32 shardGatherRatio;
    @global function shardGather_reset(){ shardGatherRatio = 0x8000000000000000; }
    @global function bool shardGather_isComplete();
    @global function bool shardGather_gather()
    {
        shardGatherRatio += 0x8000000000000000;
        return shardGatherRatio == 0x8000000000000000;
    }

    @shard array<uint64> votedWeights;
}

// address scope
@address uint64 weight;
@address uint32 voted_case;

@address function bool is_voting()
{
    return last_result.case < current_case;
}

@address function init(array<string> names) export {
    // _debug.assert(controller == __transaction.get_self_address());
    // _debug.assert(is_voting());
    eval(controller, names);
}

```

Run the script

Right click on the test script file, and select `PREDA:Run`, PREDA-Toolchain will execute the commands in the test script and output a visual report.

```

43 // start stopwatch
44 stopwatch.restart
45 // run the chain to execute transactions
46 chain.run
47 // stop stopwatch to report performance
48 stopwatch.report

49 chain.info
50
51 // address visualization
52 viz.addr @random
53 viz.addr @Ballot
54 viz.addr @all
55
56 // txm visualization
57 viz.txn txm1
58 viz.txn txm2[0]
59
60
61 viz.section Finalize
62 // trace visualization
63 viz.trace txn3
64
65 // profiling visualization
66 viz.profiling
67

```

Set input parameters of the script

Right-click on the script file, and select `PREDA: Set Args`, PREDA-Toolchain will pop up an input box at the top for entering parameters. The parameter format is as follows:

```
-count:100 -order:1 -sync
```

The script input parameters will be saved in the `scriptArgs.json` file.

```

File Edit Selection View Go Run Terminal Help
EXPLORER ... Ballot.prd Ballot.prdts : -count100-order1-sync
EXAMPLES
AirDrop.prdts
Ballot_latest_run.html
Ballot_latest_run.log
Ballot.prd
Ballot.prdts
Ballot.prdts
Kitty.prd
Kitty.prdts
scriptArgs.json
Token_latest_run.html
Token_latest_run.log
Token.prd
Token.prdts
Token.prdts
& 1
> OUTLINE > TIMELINE
Ln 51 Col 1 Spaces: 4 UTF-8 CRLF prdts Prettier ⌂ ⌂

```

```

1 // set random seed
2 random.reset
3
4 // allocate some address for the test
5 allocate.address $~count$
6
7 // set gas limit
8 chain.gaslimit 256
9
10 // deploy contract
11 chain.deploy Ballot.prd
12
13 // log
14 log.highlight Token test
15 log.Perrping test transactions
16
17 // set state, prepare for the test
18 state.set.address.Ballot @all { weight:$random(1, 20)$, voted_case:0 }
19
20 log.highlight Ballot test: Step 1
21
22 // call Ballot.init at address 0
23 txnl = Ballot.init @0 { names: ["Spring", "Yarn", "Combat"] }
24
25 // run the chain
26 chain.run
27 // print chain info
28 chain.info
29
30 log.highlight Ballot test: Step 2
31 // call Ballot.vote at all address
32 txnl = Ballot.vote @all { proposal_index: $random(0,2)$, case_num: 1 }
33 // print chain info
34 chain.info
35
36 log.highlight Ballot test: Step 3
37 // call Ballot.finalize at address_0 to collect votes
38 txnl = Ballot.finalize @0 {}
39 chain.info
40

```

Built-in parameters

-order:n

The default value of order is 2, it means the blockchain will have 2^{order} shards, the max value of order is 16.

-sync/-async

The sharding mode describes the working mode between shards, when the sharding mode is sync, each shard will output blocks synchronously and the block height will be the same; while when the sharding mode is async, each shard will output blocks asynchronously and the block height may be different.

-perftest

By default, PREDA-toolchain will print logs when executing contract calls, which can consume intensive capability during performance testing. Under this circumstance, you can turn on the performance mode by this parameter.

Custom parameters

Users can use custom parameters in test scripts, such as:

```
allocate.address $~count$
```

The `$~count$` defines a parameter used to apply for the specified number of addresses, then the user can set the value of this parameter in the pop-up box.

```
-count:100
```

Chain info visualization

PREDA-Toolchain provides a visual interface for displaying information on the chain, after executing the test script, users can specify the information to be displayed through the `viz` command.

PREDA test script syntax

Allocate address

Description:

Generate specific number of addresses, The actual number of addresses applied for conforms to the following formula:

$$\begin{cases} \text{actual_number} = \text{shard} * n \\ \text{shard} * (n - 1) \leq \text{specific_number} \leq \text{shard} * n \end{cases}$$

- **shard**: the number of shards
- **n**: positive integer

Command:

```
allocate.address [address_number]
```

Parameter:

- **address_number**: the number of addresses to be generated

Example:

```
allocate.address 10
```

Output:

```
12 addresses added and evenly distributed in shards
```

Specify address

Description:

Use the Allocated address in the test script

Command:

```
@address_order  
@all  
@random
```

Parameter:

- **address_order**: address order n, random, all, represents the number n+1th address, random address, and all addresses respectively.

Example:

```
// address_0 initiate a vote
Ballot.init @0 { names: ["Spring", "Yarn", "Combat"] }
// all address vote
Ballot.vote @all { proposal_index: $random(0,2)$, case_num: 1 }
// a random address vote
Ballot.vote @random { proposal_index: $random(0,2)$, case_num: 1 }
```

Random

Description:

The PREDA-Toolchain provides some functions related to random numbers, for example, specify random address or specify a random input parameter.

First at all, we should specify a seed for random.

Command:

```
random.reseed [seed]
```

Parameters:

- **seed:** the default seed is timestamp, but you can set as any value manually

Example:

```
// set the random seed
random.reseed 88
// specify a random address when call a contract function
Ballot.init @random { names: ["Spring", "Yarn", "Combat"] }
// specify a random input parameter between 0 and 2
Ballot.vote @0 { proposal_index: $random(0,2)$, case_num: 1 }
```

Set gas limit

Description:

Set the gas limit which is the maximum amount of gas that transactions in a block can consume.

Command:

```
chain.gaslimit [limit]
```

Parameters:

- **limit:** the limit for all transaction's gaslimit in a block

Example:

```
chain.gaslimit 128
```

Deploy smart contracts

Description:

Deploy smart contracts, multiple contracts can be deployed.

Command:

```
chain.deploy [contract_file] [*contract_file]
```

Parameters:

- **contract_file:** the name of the contract file, which supports multiple names to be set at the same time, with space-separated.

Example:

```
chain.deploy simplestorage.prd
```

Output:

```
Compiling 1 contract code(s) ...
contract `simplestorage`: 2 function(s) with states in address scope(s)
  0) SimpleStorage.increment: txn
  1) SimpleStorage.decrement: txn
Linking and deploying ...
[PRD]: Successfully deployed 1 contract(s)
```

Set contract states

Description:

Set the state for the blockchain, which is used to initialize the contract state. Users need set all variable when set shard or global states.

Command:

- Set the global state

```
state.set global.contract_name { state_name:state_value }
```

- Set the shard state

```
state.set shard.contract_name @shard_order { state_name:state_value }
```

- Set the address state

```
state.set address.contract_name @address_order { state_name:state_value }
```

Parameters:

- **contract_name:** the name of the contract
- **shard_order:** the serial number for shard
- **address_order:** the serial number for address

- **state_name:** the name of the state to be set
- **state_value:** the value of the state to be set

Example:

Set the global state

```
state.set global.Ballot { controller:"$@0$", current_case:0, proposals:[], last_result:{topVoted:"",case:0}, shardGatherRatio:0}
```

Set the shard state

```
state.set shard.Ballot #all { votedWeights:[] }
```

Set the address state

```
state.set address.Ballot @all { weight:$random(1, 20)$, voted_case:0 }
```

Call a contract function

Description:

Call a contract function and generate the transaction into mempool .

Command:

```
// call a global function
contract_name.contract_function[*call_number] contract_params
// call a shard function
contract_name.contract_function[*call_number] #shard_order contract_params
// call a address function
contract_name.contract_function[*call_number] @address_order contract_params
```

Parameters:

- **contract_name:** the name of the contract
- **contract_function:** the name of the contract function
- **call_number:** the number of call times, which is an optional parameter
- **shard_order:** the serial number for shard, users can also use `#all` to specify shard
- **address_order:** the serial number for address, users can also use `@random` and `@all` to specify address
- **contract_params:** contract input parameters

Example:

```
// call a global function
KittyBreeding.mint*3 { genes: "$bigint.random(32)$", gender: true, owner: "$@all$"
}
// call a shard function
KittyBreeding.registerNewBorn #all {}
// call a address function
KittyBreeding.breed*$~count$ @random { m: $random(1, ~count-1)$, s: $random(~count+1, ~count*2-1)$, gender : false }
```

Run the blockchain

Description:

Run the blockchain to execute transactions in the mempool, then add them to block **until each shard is archived.**

Command:

```
chain.run
```

Example:

```
chain.run
```

Get chain info

Description:

Output the number of transactions and addresses of current shard in the blockchain.

Command:

```
chain.info
```

Example:

```
chain.info
```

Output:

```
Global: h:0 txn:0/0/0 addr:0
Shd#0: h:0 txn:17/0/0 addr:25
Shd#1: h:0 txn:31/0/0 addr:25
Shd#2: h:0 txn:23/0/0 addr:25
Shd#3: h:0 txn:29/0/0 addr:25
Total Txn:100/0
```

log

Description:

Print log or print highlight log

Command:

```
log text
log.highlight text
```

Parameters:

- **text:** content of the log

Example:

```
log this is log  
log.highlight this is highlight log
```

Output:

```
PROBLEMS    OUTPUT    TERMINAL    JUPYTER    DEBUG CONSOLE  
[PRD]: [5fe:hw8] #3-h3 => #g: Ballot.__relaylambda_4: In global  
[PRD]: #0: Ballot.__relaylambda_5: Shard Vote: [150, 135, 90]  
[PRD]: #3: Ballot.__relaylambda_5: Shard Vote: [135, 165, 75]  
[PRD]: #1: Ballot.__relaylambda_5: Shard Vote: [195, 105, 75]  
[PRD]: #2: Ballot.__relaylambda_5: Shard Vote: [150, 75, 150]  
[PRD]: [5fe:hw8] #3-h4 => #g: Ballot.__relaylambda_6: votes: [{"name" : "Spring", "totalVotedWeight" : "Combat", "totalVotedWeight" : 390}]  
[PRD]: [5fe:hw8] #3-h4 => #g: Ballot.__relaylambda_6: result: {"topVoted" : "Spring", "case" : 1}  
Global: h:6 txn:0/0/6 addr:0  
Shd#0: h:6 txn:0/0/26 addr:25  
Shd#1: h:6 txn:0/0/26 addr:25  
Shd#2: h:6 txn:0/0/26 addr:25  
Shd#3: h:6 txn:0/0/28 addr:25  
Total Txn:0/112  
this is log  
[HIGHLIGHT]this is highlight log
```

stopwatch

Description:

Test contract performance with stopwatch.

Command:

```
stopwatch.restart  
stopwatch.report
```

Example:

```
stopwatch.restart  
chain.run  
stopwatch.report
```

Output:

```
Stopwatch: 5 msec  
Order: 2, TPS:20000, uTPS:20000
```

Visualization

viz.block

Description:

Display block information in the visual interface

Command:

```
// Display the block information of the specified shard  
viz.block #shard_order  
// Display the block information of the specified shard and block height  
viz.block #shard_order:height  
// Display the block information of all shard  
viz.block #all  
// Display the block information of global shard  
viz.block #g
```

Parameters:

- **shard_order:** the order of shards
- **height:** the block height

Example:

```
viz.block #1:2
```

Output:

viz.block #1:2

Block Height: #2

| | |
|--------------|--|
| Shard: | # 1/4 |
| Timestamp: | 2022/12/12 11:42 (UTC) |
| Miner: | whtwp4htds8sk0be68r9dv2yfgwh295bscw9bn1b8vjjp2dzp7hp75jph0 ed25519 |
| TxnCount: | 25 |
| Confirm Txn: | View More ▾ |

Example:

```
log.block #g
```

Output:

viz.block #g

Block Height: #0

| | |
|--------------|--|
| Shard: | # g |
| Timestamp: | 2022/12/12 11:42 (UTC) |
| Miner: | whtwp4htds8sk0be68r9dv2yfgwh295bscw9bn1b8vjjp2dzp7hp75jph0 ed25519 |
| TxnCount: | 0 |
| Confirm Txn: | 0 |

[View More](#) ▾

viz.shard

Description:

Display shard states in the visual interface

Command:

```
// Display the shard states of the specified shard
viz.shard #shard_order
// Display the global states
viz.shard #g
// Display all shard states
viz.shard #all
// Display the shard states of the specified shard and contract
viz.shard #shard contract_name
```

Parameters:

- **shard_order:** the order of shards
- **contract_name:** the name of contract

Example:

```
viz.shard #all
```

Output:

viz.shard #all

Shard: # 0/4

| Contract: | Ballot |
|-----------|--|
| State: | <pre>{ "votedWeights": [128, 128, 144] }</pre> |

[View More ▾](#)



Example:

```
viz.shard #g
```

Output:

viz.shard #g

Shard: # g

| Contract: | Ballot |
|-----------|---|
| State: | <pre>{ "controller": "whtwp4htds8sk0be68r9dv2yfgwh295bscw9bn1b8vjjp2dgp7hp75jph0:ed25519" "current_case": 1 "proposals": [{ "name": "Spring" "totalVotedWeight": 464 }, { "name": "Yarn" "totalVotedWeight": 640 }, { "name": "Combat" "totalVotedWeight": 496 }], "last_result": { "topVoted": "Yarn" "case": 1 } "shardGatherRatio": 2147483648 }</pre> |

Example:

```
viz.shard #1 Ballot
```

Output:

viz.shard #1 Ballot

Shard: # 1/4

| Contract: | Ballot |
|-----------|--|
| State: | <pre>{ "votedWeights": [84 120 96] }</pre> |

viz.addr

Description:

Display address states in the visual interface

Command:

```
// Display the address states of the specified address
viz.addr @address_order
// Display all address states
viz.shard @all
// Display a random address states
viz.shard @random
// Display the address states of the specified address and contract
viz.shard @address_order contract_name
```

Parameters:

- **address_order:** the order of addresses

- **contract_name**: the name of contract

Example:

```
viz.addr @random
```

Output:

viz.addr @random

Address: @0 (mhjeqvnyevxx811bh61xva99rzg8xxadmwaephve8n5cw36c9n726ew2jm ed25519)

| | |
|-----------|--|
| Shard: | # 0/4 |
| Contract: | Ballot |
| State: | <code>{ "weight": 12, "voted_case": 1 }</code> |

Example:

```
viz.addr @3 Ballot
```

Output:

viz.addr @3 Ballot

Address: @3 (5g77354vp1k2tn4pbj4w28m7wadcqbw5nf2jvjtvqxhg5eq4w16n7bcv0w ed25519)

| | |
|-----------|---|
| Shard: | # 0/4 |
| Contract: | Ballot |
| State: | <code>{ "weight": 9, "voted_case": 1 }</code> |

Example:

```
viz.addr @all
```

Output:

viz.addr @all

Address: @78 (2bn8eh4s5mcwt6jp9naac45kry3ays5jea1adzpn3wxc4s2m13ar7zbp48 ed25519)

| | |
|-----------|---|
| Shard: | # 0/4 |
| Contract: | Ballot |
| State: | <code>{ "weight": 9, "voted_case": 1 }</code> |

[View More ▾](#)

viz.txn

Description:

Display transaction information in the visual interface

Command:

```
viz.txn txn_name
```

Parameters:

- **txn_name:** identifies a contract method call, which cannot be repeated

Example:

```
txnl = Ballot.init @0 { names: ["Spring", "Yarn", "Combat"] }
chain.run
viz.txn txnl
```

Output:

```
viz.txn txnl
```

Timestamp: 2022/12/12 12:43 (UTC)

| | |
|--------------------|--|
| InvokeContextType: | Normal |
| Target: | @0 (qjmdcvjjc0df1y5kt37f89vpb2q6bzzjb5pjff5x3q111sgmfpbr6652mr ed25519) |
| BuildNum: | 1 |
| Function: | init.Ballot |
| Block Height: | 0 |
| Shard: | # 0/4 |
| Return Value: | Success |

Example:

```
txn2[] = Ballot.vote @all { proposal_index: $random(0,2)$, case_num: 1 }
chain.run
viz.txn txn2[0]
```

Output:

```
viz.txn txn2[0]
```

Timestamp: 2022/12/12 12:44 (UTC)

| | |
|--------------------|--|
| InvokeContextType: | Normal |
| Target: | @0 (kpfy499nznz3rspa6ck6ptf4wm3ppgv94hwhyf55t2drdnbjx4x86srg2c ed25519) |
| BuildNum: | 1 |
| Function: | vote.Ballot |
| Block Height: | 2 |
| Shard: | # 3/4 |
| Return Value: | Success |

viz.trace

Description:

Display the transaction call chain in the visual interface

Command:

```
viz.trace txn_name
```

Parameters:

- **txn_name:** identifies a contract method call, which cannot be repeated

Example:

```
txn3 = Ballot.finalize @0 {}
chain.run
viz.trace txn3
```

Output:



viz.section

Description:

Display section information in the visual interface

Command:

```
viz.section section_name
```

Parameters:

- **section_name:** the name of section


Example:

```
viz.section Finalize
```

Output:

Finalize

```
viz.trace txn3
```

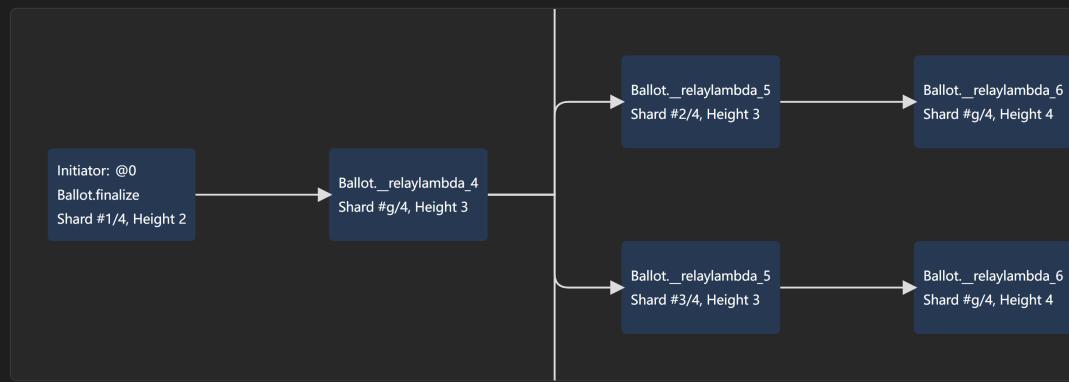

viz.profiling

Description:

Display performance information in the visual interface, this information relies on the statistics of the stopwatch.

Command:

```
viz.profiling
```

Example:

```
viz.profiling
```

Output:

```
viz.profiling
```

5
Block Height

75
Overall Transactions

330 TPS
Overall Throughput

shard #g, Height 5

0

0 TPS

shard #0, Height 5

25

110 TPS

shard #1, Height 5

25

110 TPS

shard #2, Height 5

25

110 TPS