



Enterprise Databases

NetApp Solutions

NetApp

July 31, 2023

This PDF was generated from https://docs.netapp.com/us-en/netapp-solutions/databases/aws_ora_fsx_ec2_inc_merge.html on July 31, 2023. Always check docs.netapp.com for the latest.

Table of Contents

NetApp Enterprise Database Solutions	1
Oracle Database	1
Microsoft SQL Server	314
Open Source Databases	410
SnapCenter for databases	427

NetApp Enterprise Database Solutions

Oracle Database

TR-4973: Quick Recovery and Clone of Oracle VLDB with Incremental Merge on AWS FSx ONTAP

Allen Cao, Niyaz Mohamed, NetApp

Purpose

Recovering a Very Large Database (VLDB) in Oracle using the Oracle Recovery Manager (RMAN) backup tool can be a highly challenging task. The database restoration process from backup media in the event of a failure can be time-consuming, delaying the database recovery and potentially impacting your Service Level Agreement (SLA) significantly. However, starting from version 10g, Oracle introduced a RMAN feature that allows users to create staged image copies of the Oracle database data files on additional disk storage located on the DB server host. These image copies can be incrementally updated using RMAN on a daily basis. In the case of a failure, the Database Administrator (DBA) can swiftly switch the Oracle database from the failed media to the image copy, eliminating the need for a complete database media restore. The result is a greatly improved SLA, albeit at the cost of doubling the required database storage.

If you are keen on SLA for your VLDB and contemplating moving the Oracle database to a public cloud such as AWS, you could set up a similar database protection structure using resources such as AWS FSx ONTAP for staging your standby database image copy. In this documentation, we demonstrate how to provision and export an NFS file system from AWS FSx ONTAP to be mounted on an Oracle database server for staging a standby database copy for quick recovery in the event of a primary storage failure.

Better yet, we also show how you could leverage NetApp FlexClone to create a copy of the same staging NFS file system for other use cases such as standing up a dev/test Oracle environment with this same standby database image copy without additional storage investment.

This solution addresses the following use cases:

- An Oracle VLDB image copy incremental merge via RMAN on NFS mount point off AWS FSx ONTAP storage.
- Quick recovery of an Oracle VLDB by switching to database image copy on FSx ONTAP storage in the event of failure.
- Clone FSx ONTAP NFS file system volume storing an Oracle VLDB image copy to be used for standing up another database instance for other use cases.

Audience


This solution is intended for the following people:

- A DBA who set up Oracle VLDB image copy incremental merge via RMAN in AWS for faster database recovery.
- A database solution architect who tests Oracle workloads in the AWS public cloud.
- A storage administrator who manages Oracle databases deployed to AWS FSx ONTAP storage.
- An application owner who would like to stand up Oracle databases in AWS FSx/EC2 environment.

Solution test and validation environment

The testing and validation of this solution was performed in an AWS FSx ONTAP and EC2 environment that might not match the final deployment environment. For more information, see the section [Key Factors for Deployment Consideration].

Architecture

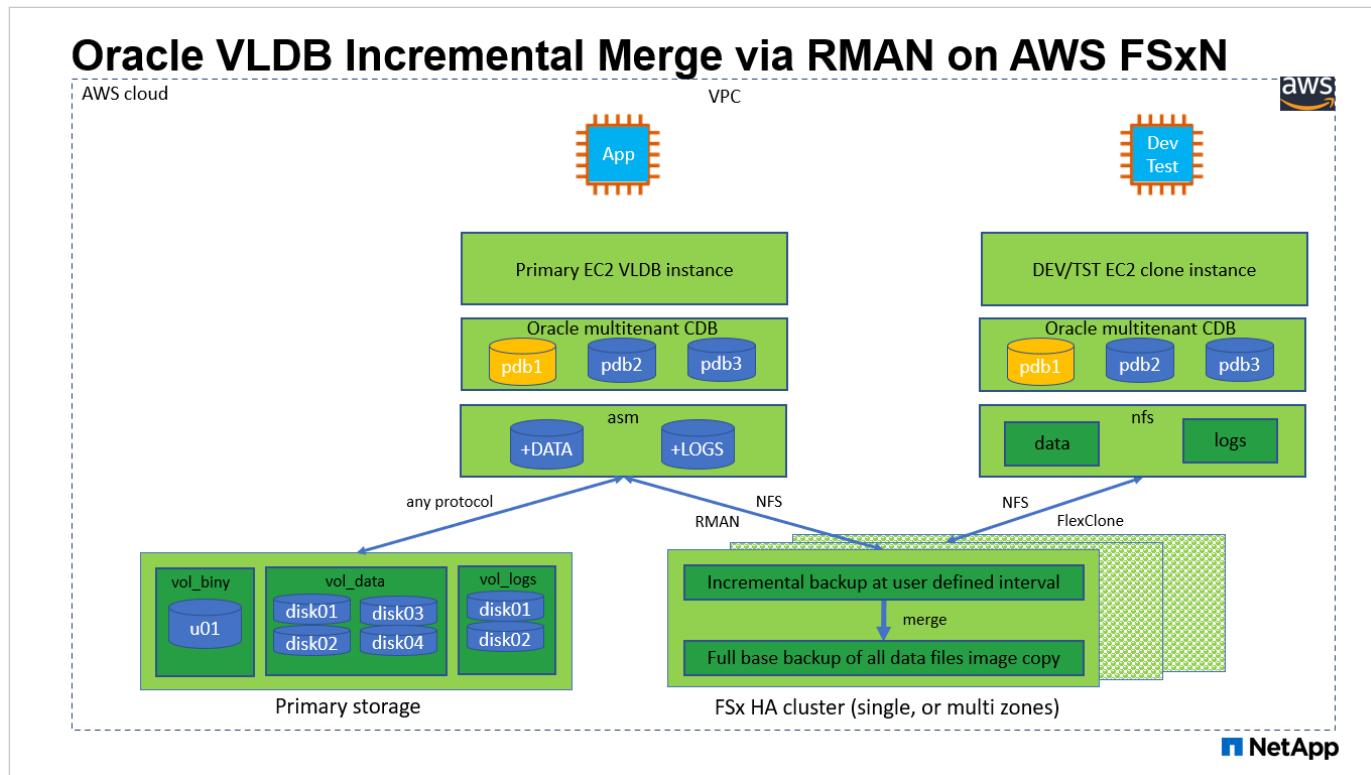

Hardware and software components

Hardware		
FSx ONTAP storage	Current version offered by AWS	One FSx HA cluster in the same VPC and availability zone
EC2 instance for compute	t2.xlarge/4vCPU/16G	Two EC2 T2 xlarge EC2 instances, one as primary DB server and the other as a clone DB server
Software		
RedHat Linux	RHEL-8.6.0_HVM-20220503-x86_64-2-Hourly2-GP2	Deployed RedHat subscription for testing
Oracle Grid Infrastructure	Version 19.18	Applied RU patch p34762026_190000_Linux-x86-64.zip
Oracle Database	Version 19.18	Applied RU patch p34765931_190000_Linux-x86-64.zip
Oracle OPatch	Version 12.2.0.1.36	Latest patch p6880880_190000_Linux-x86-64.zip

Key factors for deployment consideration

- **Oracle VLDB storage layout for RMAN incremental merge.** In our tests and validations, the NFS volume for Oracle incremental backup and merge is allocated from a single FSx file system, which has 4GBps throughput, 160,000 raw SSD IOPS, and 192TiB capacity limit. For deployment over the thresholds, multiple FSx file systems can be concatenated in parallel with multiple NFS mount points to provide higher capacity.
- **Oracle recoverability using RMAN incremental merge.** The RMAN incremental backup and merge is generally executed at user defined frequency based on your RTO and RPO objectives. If there are total loss of primary data storage and/or archived logs, the data loss can occur. The Oracle database can be recovered up to last incremental backup that is available from FSx database backup image copy. To minimize the data loss, Oracle flash recovery area can be setup on FSx NFS mount point and archived logs are backed up to FSx NFS mount along with database image copy.
- **Running Oracle VLDB off FSx NFS file system.** Unlike other bulk storage for database backup, AWS FSx ONTAP is a cloud enabled production grade storage that delivers high level of performance and storage efficiency. Once Oracle VLDB switches over from primary storage to image copy on FSx ONTAP NFS file system, database performance can be maintained at high level while the primary storage failure is addressed. You can take comfort to know that user application experience does not suffer as the result of primary storage failure.
- **FlexClone Oracle VLDB image copy of NFS volume for other use cases.** AWS FSx ONTAP FlexClone provides shared copies of the same NFS data volume that are writable. Thus, they can be used for many other use cases while still maintaining the integrity of staging Oracle VLDB image copy even when Oracle database is switched over. This provides tremendous storage cost saving by substantially reducing VLDB storage footprint. NetApp recommends to minimize FlexClone activities in the event of database switching over from primary storage to database image copy in order to maintain Oracle performance at high level.
- **EC2 compute instances.** In these tests and validations, we used an AWS EC2 t2.xlarge instance as the Oracle database compute instance. NetApp recommends using an M5 type EC2 instance as the compute instance for Oracle in production deployment because it is optimized for database workload. You need to size the EC2 instance appropriately for the number of vCPUs and the amount of RAM based on actual workload requirements.
- **FSx storage HA clusters single- or multi-zone deployment.** In these tests and validations, we deployed an FSx HA cluster in a single AWS availability zone. For production deployment, NetApp recommends deploying an FSx HA pair in two different availability zones. An FSx HA cluster is always provisioned in a HA pair that is sync mirrored in a pair of active-passive file systems to provide storage-level redundancy. Multi-zone deployment further enhances high availability in the event of failure in a single AWS zone.
- **FSx storage cluster sizing.** An Amazon FSx for ONTAP storage file system provides up to 160,000 raw SSD IOPS, up to 4GBps throughput, and a maximum of 192TiB capacity. However, you can size the cluster in terms of provisioned IOPS, throughput, and the storage limit (minimum 1,024 GiB) based on your actual requirements at the time of deployment. The capacity can be adjusted dynamically on the fly without affecting application availability.
- **dNFS configuration.** dNFS is built into Oracle kernel and is known to dramatically increase Oracle database performance when Oracle is deployed to NFS storage. dNFS is packaged into Oracle binary but is not turned on by default. It should be turned on for any Oracle database deployment on NFS. For multiple FSx file systems deployment for a VLDB, dNFS multi-path to different FSx NFS file systems should be properly configured.

Solution deployment

It is assumed that you already have your Oracle VLDB deployed in AWS EC2 environment within a VPC. If you need help on Oracle deployment in AWS, please refer to following technical reports for help.

- Oracle Database Deployment on EC2 and FSx Best Practices
- Oracle Database Deployment and Protection in AWS FSx/EC2 with iSCSI/ASM
- Oracle 19c in Standalone Restart on AWS FSx/EC2 with NFS/ASM

Your Oracle VLDB can be running either on a FSx ONTAP or any other storage of choices within the AWS EC2 ecosystem. The following section provides step-by-step deployment procedures for setting up RMAN incremental merge to an image copy of an Oracle VLDB that is staging in an NFS mount off AWS FSx ONTAP storage.

Prerequisites for deployment

Deployment requires the following prerequisites.

1. An AWS account has been set up, and the necessary VPC and network segments have been created within your AWS account.
2. From the AWS EC2 console, you must deploy two EC2 Linux instances, one as the primary Oracle DB server and an optional alternative clone target DB server. See the architecture diagram in the previous section for more details about the environment setup. Also review the [User Guide for Linux instances](#) for more information.
3. From the AWS EC2 console, deploy Amazon FSx for ONTAP storage HA clusters to host the NFS volumes that stores the Oracle database standby image copy. If you are not familiar with the deployment of FSx storage, see the documentation [Creating FSx for ONTAP file systems](#) for step-by-step instructions.
4. Steps 2 and 3 can be performed using the following Terraform automation toolkit, which creates an EC2 instance named `ora_01` and an FSx file system named `fsx_01`. Review the instruction carefully and change the variables to suit your environment before execution. The template can be easily revised for your own deployment requirements.

```
git clone https://github.com/NetApp-Automation/na_aws_fsx_ec2_deploy.git
```



Ensure that you have allocated at least 50G in EC2 instance root volume in order to have sufficient space to stage Oracle installation files.

Provision and export NFS volume to be mounted to EC2 DB instance host

In this demonstration, we will show how to provision an NFS volume from the command line by login to an FSx cluster via ssh as fsxadmin user through FSx cluster management IP. Alternatively, the volume can be allocated using the AWS FSx console as well. Repeat the procedures on other FSx file systems if more than one FSx file system are set up to accommodate the size of the database.

1. First, provision NFS volume via CLI by logging to the FSx cluster through SSH as the fsxadmin user. Change to your FSx cluster management IP address, which can be retrieved from AWS FSx ONTAP UI console.

```
ssh fsxadmin@172.30.15.53
```

2. Create NFS volume the same size as your primary storage for storing primary Oracle VLDB database data files image copy.

```
vol create -volume ora_01_copy -aggregate aggr1 -size 100G -state online -type RW -junction-path /ora_01_copy -snapshot-policy none -tiering-policy snapshot-only
```

3. Alternatively, the volume can be provisioned from AWS FSx console UI with options: storage efficiency Enabled, security style Unix , Snapshot policy None, and Storage tiering Snapshot Only as show below.

4. Create a customized snapshot policy for oracle database with a daily schedule and 30 days retention. You should adjust the policy to fit your specific needs in terms of snapshot frequency and retention window.

```
snapshot policy create -policy oracle -enabled true -schedule1 daily
-count1 30
```

Apply policy to provisioned NFS volume for RMAN incremental backup and merge.

```
vol modify -volume ora_01_copy -snapshot-policy oracle
```

5. Login to EC2 instance as ec2-user and create a directory /nfsfsxn. Create additional mount point directories for additional FSx file systems.

```
sudo mkdir /nfsfsxn
```

6. Mount the FSx ONTAP NFS volume to EC2 DB instance host. Change to your FSx virtual server NFS lif address. The NFS lif address can be retrieved from FSx ONTAP UI console.

```
sudo mount 172.30.15.19:/ora_01_copy /nfsfsxn -o  
rw,bg,hard,vers=3,proto=tcp,timeo=600,rsize=262144,wszie=262144,noin  
tr
```

7. Change mount point ownership to oracle:oisntall, change to your oracle user name and primary group as necessary.

```
sudo chown oracle:oinstall /nfsfsxn
```

Setup Oracle RMAN incremental merge to image copy on FSx

RMAN incremental merge update the staging database data files image copy continuously at every incremental backup/merge interval. The image copy of database backup will be as up to date as the frequency you execute the incremental backup/merge. So, take into consideration of database performance, your RTO and RPO objectives when deciding the frequency of RMAN incremental backup and merge.

1. Login to primary DB server EC2 instance as oracle user
2. Create an oracopy directory under mount point /nfsfsxn to store oracle data files image copies and archlog directory for Oracle flash recovery area.

```
mkdir /nfsfsxn/oracopy
```

```
mkdir /nfsfsxn/archlog
```

3. Login to Oracle database via sqlplus, enable block change tracking for faster incremental backup and change Oracle flash recovery area to FSxN mount if it is currently on primary storage. This allows the RMAN default control file/spfile autobackup and archived logs to be backed up to FSxN NFS mount for recovery.

```
sqlplus / as sysdba
```

From sqlplus prompt, execute following command.

```
alter database enable block change tracking using file  
'/nfsfsxn/oracopy/bct_db1.ctf'
```

```
alter system set db_recovery_file_dest='/nfsfsxn/archlog/'  
scope=both;
```

4. Create a RMAN backup and incremental merge script. The script allocates multiple channels for parallel RMAN backup and merge. First execution would generate the initial full baseline image copy. In a complete run, it first purges obsolete backups that are outside of retention window to keep staging area clean. It then switches current log file before merge and backup. The incremental backup follows the merge so that the database image copy is trailing current database state by one backup/merge cycle. The merge and backup order can be reversed for quicker recovery at user's preference. The RMAN script can be integrated into a simple shell script to be executed from crontab on the primary DB server. Ensure control file autobackup is on in RMAN setting.

```
vi /home/oracle/rman_bkup_merge.cmd
```

Add following lines:

```
RUN
{
    allocate channel c1 device type disk format '/nfsfsxn/oracopy/%U';
    allocate channel c2 device type disk format '/nfsfsxn/oracopy/%U';
    allocate channel c3 device type disk format '/nfsfsxn/oracopy/%U';
    allocate channel c4 device type disk format '/nfsfsxn/oracopy/%U';
    delete obsolete;
    sql 'alter system archive log current';
    recover copy of database with tag 'OraCopyBKUPonFSxN_level_0';
    backup incremental level 1 copies=1 for recover of copy with tag
    'OraCopyBKUPonFSxN_level_0' database;
}
```

5. At EC2 DB server, login to RMAN locally as oracle user with or without RMAN catalog. In this demonstration, we are not connecting to a RMAN catalog.

```
rman target / nocatalog;
```

output:

```
[oracle@ip-172-30-15-99 ~]$ rman target / nocatalog;
```

```
Recovery Manager: Release 19.0.0.0.0 - Production on Wed May 24
17:44:49 2023
Version 19.18.0.0.0
```

```
Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights
reserved.
```

```
connected to target database: DB1 (DBID=1730530050)
using target database control file instead of recovery catalog
```

```
RMAN>
```

6. From RMAN prompt, execute the script. First execution creates a baseline database image copy and subsequent executions merge and update the baseline image copy incrementally. The following is how to execute the script and the typical output. Set the number of channels to match the CPU cores on the host.

```
RMAN> @/home/oracle/rman_bkup_merge.cmd
```

```
RMAN> RUN
2> {
3>   allocate channel c1 device type disk format
4>     '/nfsfsxn/oracopy/%U';
5>   allocate channel c2 device type disk format
6>     '/nfsfsxn/oracopy/%U';
7>   allocate channel c3 device type disk format
8>     '/nfsfsxn/oracopy/%U';
9>   allocate channel c4 device type disk format
10>    '/nfsfsxn/oracopy/%U';
11>  delete obsolete;
12>  sql 'alter system archive log current';
13>  recover copy of database with tag 'OraCopyBKUPonFSxN_level_0';
14>  backup incremental level 1 copies=1 for recover of copy with
15>    tag 'OraCopyBKUPonFSxN_level_0' database;
16> }

allocated channel: c1
channel c1: SID=411 device type=DISK

allocated channel: c2
channel c2: SID=146 device type=DISK

allocated channel: c3
channel c3: SID=402 device type=DISK

allocated channel: c4
channel c4: SID=37 device type=DISK

Starting recover at 17-MAY-23
no copy of datafile 1 found to recover
no copy of datafile 3 found to recover
no copy of datafile 4 found to recover
no copy of datafile 5 found to recover
no copy of datafile 6 found to recover
no copy of datafile 7 found to recover
.
.
Finished recover at 17-MAY-23

Starting backup at 17-MAY-23
channel c1: starting incremental level 1 datafile backup set
channel c1: specifying datafile(s) in backup set
input datafile file number=00022
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.287.113
7018311
```

```
input datafile file number=00026
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.291.113
7018481
input datafile file number=00030
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.295.113
7018787
input datafile file number=00011
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/undotbs1.27
1.1136668041
input datafile file number=00035
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.300.113
7019181
channel c1: starting piece 1 at 17-MAY-23
channel c2: starting incremental level 1 datafile backup set
channel c2: specifying datafile(s) in backup set
input datafile file number=00023
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.288.113
7018359
input datafile file number=00027
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.292.113
7018523
input datafile file number=00031
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.296.113
7018837
input datafile file number=00009
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/system.272.
1136668041
input datafile file number=00034
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.299.113
7019117
.
.
.
Finished backup at 17-MAY-23
```

```
Starting Control File and SPFILE Autobackup at 17-MAY-23
piece
handle=+LOGS/DB1/AUTOBACKUP/2023_05_17/s_1137095435.367.1137095435
comment=NONE
Finished Control File and SPFILE Autobackup at 17-MAY-23
released channel: c1
released channel: c2
released channel: c3
released channel: c4
```

```
RMAN> **end-of-file**
```

7. List database image copy after backup to observe that a database image copy has been created in FSx ONTAP NFS mount point.

```
RMAN> list copy of database tag 'OraCopyBKUPonFSxN_level_0';

List of Datafile Copies
=====

Key      File  S Completion Time Ckp SCN      Ckp Time           Sparse
-----  -----  -  -----
19       1     A 17-MAY-23        3009819  17-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSTEM_FNO-1_0h1sd7ae
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

20       3     A 17-MAY-23        3009826  17-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSAUX_FNO-3_0i1sd7at
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

21       4     A 17-MAY-23        3009830  17-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          UNDOTBS1_FNO-4_0j1sd7b4
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

27       5     A 17-MAY-23        2383520  12-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSTEM_FNO-5_0p1sd7cf
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 2, PDB Name: PDB$SEED

26       6     A 17-MAY-23        2383520  12-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSAUX_FNO-6_0o1sd7c8
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 2, PDB Name: PDB$SEED

34       7     A 17-MAY-23        3009907  17-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
          7_101sd7dl
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

33       8     A 17-MAY-23        2383520  12-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          UNDOTBS1_FNO-8_0v1sd7di
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
```

Container ID: 2, PDB Name: PDB\$SEED

28	9	A	17-MAY-23	3009871	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSTEM_FNO-9_0q1sd7cm						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
22	10	A	17-MAY-23	3009849	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSAUX_FNO-10_0k1sd7bb						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
25	11	A	17-MAY-23	3009862	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
UNDOTBS1_FNO-11_0n1sd7c1						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
35	12	A	17-MAY-23	3009909	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-						
12_111sd7dm						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
29	13	A	17-MAY-23	3009876	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSTEM_FNO-13_0r1sd7ct						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 4, PDB Name: DB1_PDB2						
23	14	A	17-MAY-23	3009854	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSAUX_FNO-14_011sd7bi						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 4, PDB Name: DB1_PDB2						
31	15	A	17-MAY-23	3009900	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
UNDOTBS1_FNO-15_0t1sd7db						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 4, PDB Name: DB1_PDB2						
36	16	A	17-MAY-23	3009911	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-						

```

16_121sd7dn
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 4, PDB Name: DB1_PDB2

30      17 A 17-MAY-23          3009895   17-MAY-23       NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-17_0s1sd7d4
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 5, PDB Name: DB1_PDB3

24      18 A 17-MAY-23          3009858   17-MAY-23       NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSAUX_FNO-18_0m1sd7bq
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 5, PDB Name: DB1_PDB3

32      19 A 17-MAY-23          3009903   17-MAY-23       NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-19_0u1sd7de
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 5, PDB Name: DB1_PDB3

37      20 A 17-MAY-23          3009914   17-MAY-23       NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
20_131sd7do
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 5, PDB Name: DB1_PDB3

4       21 A 17-MAY-23          3009019   17-MAY-23       NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
21_021sd6pv
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 3, PDB Name: DB1_PDB1

5       22 A 17-MAY-23          3009419   17-MAY-23       NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
22_031sd6r2
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 3, PDB Name: DB1_PDB1

6       23 A 17-MAY-23          3009460   17-MAY-23       NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
23_041sd6s5
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 3, PDB Name: DB1_PDB1

```

7	24	A	17-MAY-23	3009473	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			24_051sd6t9			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID:	3, PDB Name:	DB1_PDB1	
8	25	A	17-MAY-23	3009502	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			25_061sd6uc			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID:	3, PDB Name:	DB1_PDB1	
9	26	A	17-MAY-23	3009548	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			26_071sd6vf			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID:	3, PDB Name:	DB1_PDB1	
10	27	A	17-MAY-23	3009576	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			27_081sd70i			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID:	3, PDB Name:	DB1_PDB1	
11	28	A	17-MAY-23	3009590	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			28_091sd711			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID:	3, PDB Name:	DB1_PDB1	
12	29	A	17-MAY-23	3009619	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			29_0a1sd72o			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID:	3, PDB Name:	DB1_PDB1	
13	30	A	17-MAY-23	3009648	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			30_0b1sd73r			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID:	3, PDB Name:	DB1_PDB1	
14	31	A	17-MAY-23	3009671	17-MAY-23	NO
			Name:	/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-		
			31_0c1sd74u			
			Tag:	ORACOPYBKUPONFSXN_LEVEL_0		

```

Container ID: 3, PDB Name: DB1_PDB1

15      32    A 17-MAY-23        3009729    17-MAY-23      NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
32_0d1sd762
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 3, PDB Name: DB1_PDB1

16      33    A 17-MAY-23        3009743    17-MAY-23      NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
33_0e1sd775
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 3, PDB Name: DB1_PDB1

17      34    A 17-MAY-23        3009771    17-MAY-23      NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
34_0f1sd788
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 3, PDB Name: DB1_PDB1

18      35    A 17-MAY-23        3009805    17-MAY-23      NO
        Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
35_0g1sd79b
        Tag: ORACOPYBKUPONFSXN_LEVEL_0
        Container ID: 3, PDB Name: DB1_PDB1

```

RMAN>

- Report schema from Oracle RMAN command prompt to observe that current active database data files are in primary storage ASM +DATA disk group.

```

RMAN> report schema;

Report of database schema for database with db_unique_name DB1

List of Permanent Datafiles
=====
File  Size(MB)  Tablespace          RB  segs Datafile Name
-----  -----  -----
1     1060    SYSTEM             YES
+DATA/DB1/DATAFILE/system.257.1136666315
3     810     SYSAUX            NO
+DATA/DB1/DATAFILE/sysaux.258.1136666361
4     675     UNDOTBS1          YES
+DATA/DB1/DATAFILE/undotbs1.259.1136666385

```

```
5    400      PDB$SEED:SYSTEM        NO
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/system.266.11366
67165
6    460      PDB$SEED:SYSAUX       NO
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/sysaux.267.11366
67165
7    5       USERS                 NO
+DATA/DB1/DATAFILE/users.260.1136666387
8    230      PDB$SEED:UNDOTBS1     NO
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/undotbs1.268.113
6667165
9    400      DB1_PDB1:SYSTEM       YES
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/system.272.11366
68041
10   490      DB1_PDB1:SYSAUX      NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/sysaux.273.11366
68041
11   465      DB1_PDB1:UNDOTBS1    YES
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/undotbs1.271.113
6668041
12   5       DB1_PDB1:USERS       NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/users.275.113666
8057
13   400      DB1_PDB2:SYSTEM       YES
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/system.277.11366
68057
14   470      DB1_PDB2:SYSAUX      NO
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/sysaux.278.11366
68057
15   235      DB1_PDB2:UNDOTBS1    YES
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/undotbs1.276.113
6668057
16   5       DB1_PDB2:USERS       NO
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/users.280.113666
8071
17   400      DB1_PDB3:SYSTEM       YES
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/system.282.11366
68073
18   470      DB1_PDB3:SYSAUX      NO
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/sysaux.283.11366
68073
19   235      DB1_PDB3:UNDOTBS1    YES
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/undotbs1.281.113
6668073
20   5       DB1_PDB3:USERS       NO
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/users.285.113666
```

8087
21 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.286.11370182
39
22 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.287.11370183
11
23 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.288.11370183
59
24 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.289.11370184
05
25 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.290.11370184
43
26 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.291.11370184
81
27 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.292.11370185
23
28 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.293.11370187
07
29 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.294.11370187
45
30 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.295.11370187
87
31 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.296.11370188
37
32 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.297.11370189
35
33 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.298.11370190
77
34 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.299.11370191
17
35 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.300.11370191
81

```

List of Temporary Files
=====
File Size(MB) Tablespace          Maxsize(MB) Tempfile Name
-----
1    123      TEMP                32767
+DATA/DB1/TEMPFILE/temp.265.1136666447
2    123      PDB$SEED:TEMP      32767
+DATA/DB1/FB864A929AEB79B9E053630F1EAC7046/TEMPFILE/temp.269.1136667
185
3    10240     DB1_PDB1:TEMP    32767
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/TEMPFILE/temp.274.1136668
051
4    123      DB1_PDB2:TEMP    32767
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/TEMPFILE/temp.279.1136668
067
5    123      DB1_PDB3:TEMP    32767
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/TEMPFILE/temp.284.1136668
081

```

RMAN>

9. Validate database image copy from OS NFS mount point.

```

[oracle@ip-172-30-15-99 ~]$ ls -l /nfsfsxn/oracopy/
total 70585148
-rw-r---- 1 oracle asm 4294975488 May 17 18:09 data_D-DB1_I-
1730530050_TS-SOE_FNO-21_021sd6pv
-rw-r---- 1 oracle asm 4294975488 May 17 18:10 data_D-DB1_I-
1730530050_TS-SOE_FNO-22_031sd6r2
-rw-r---- 1 oracle asm 4294975488 May 17 18:10 data_D-DB1_I-
1730530050_TS-SOE_FNO-23_041sd6s5
-rw-r---- 1 oracle asm 4294975488 May 17 18:11 data_D-DB1_I-
1730530050_TS-SOE_FNO-24_051sd6t9
-rw-r---- 1 oracle asm 4294975488 May 17 18:11 data_D-DB1_I-
1730530050_TS-SOE_FNO-25_061sd6uc
-rw-r---- 1 oracle asm 4294975488 May 17 18:12 data_D-DB1_I-
1730530050_TS-SOE_FNO-26_071sd6vf
-rw-r---- 1 oracle asm 4294975488 May 17 18:13 data_D-DB1_I-
1730530050_TS-SOE_FNO-27_081sd70i
-rw-r---- 1 oracle asm 4294975488 May 17 18:13 data_D-DB1_I-
1730530050_TS-SOE_FNO-28_091sd711
-rw-r---- 1 oracle asm 4294975488 May 17 18:14 data_D-DB1_I-
1730530050_TS-SOE_FNO-29_0a1sd72o
-rw-r---- 1 oracle asm 4294975488 May 17 18:14 data_D-DB1_I-

```

```
1730530050_TS-SOE_FNO-30_0b1sd73r
-rw-r---- 1 oracle asm 4294975488 May 17 18:15 data_D-DB1_I-
1730530050_TS-SOE_FNO-31_0c1sd74u
-rw-r---- 1 oracle asm 4294975488 May 17 18:16 data_D-DB1_I-
1730530050_TS-SOE_FNO-32_0d1sd762
-rw-r---- 1 oracle asm 4294975488 May 17 18:16 data_D-DB1_I-
1730530050_TS-SOE_FNO-33_0e1sd775
-rw-r---- 1 oracle asm 4294975488 May 17 18:17 data_D-DB1_I-
1730530050_TS-SOE_FNO-34_0f1sd788
-rw-r---- 1 oracle asm 4294975488 May 17 18:17 data_D-DB1_I-
1730530050_TS-SOE_FNO-35_0g1sd79b
-rw-r---- 1 oracle asm 513810432 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-10_0k1sd7bb
-rw-r---- 1 oracle asm 492838912 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-14_0l1sd7bi
-rw-r---- 1 oracle asm 492838912 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-18_0m1sd7bq
-rw-r---- 1 oracle asm 849354752 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_0i1sd7at
-rw-r---- 1 oracle asm 482353152 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-6_0o1sd7c8
-rw-r---- 1 oracle asm 1111498752 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_0h1sd7ae
-rw-r---- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-13_0r1sd7ct
-rw-r---- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-17_0s1sd7d4
-rw-r---- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-5_0p1sd7cf
-rw-r---- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_0q1sd7cm
-rw-r---- 1 oracle asm 487596032 May 17 18:18 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-11_0n1sd7c1
-rw-r---- 1 oracle asm 246423552 May 17 18:19 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-15_0t1sd7db
-rw-r---- 1 oracle asm 246423552 May 17 18:19 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-19_0u1sd7de
-rw-r---- 1 oracle asm 707796992 May 17 18:18 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_0j1sd7b4
-rw-r---- 1 oracle asm 241180672 May 17 18:19 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-8_0v1sd7di
-rw-r---- 1 oracle asm 5251072 May 17 18:19 data_D-DB1_I-
1730530050_TS-USERS_FNO-12_111sd7dm
-rw-r---- 1 oracle asm 5251072 May 17 18:19 data_D-DB1_I-
1730530050_TS-USERS_FNO-16_121sd7dn
-rw-r---- 1 oracle asm 5251072 May 17 18:19 data_D-DB1_I-
```

```
1730530050_TS-USERS_FNO-20_131sd7do
-rw-r----- 1 oracle asm      5251072 May 17 18:19 data_D-DB1_I-
1730530050_TS-USERS_FNO-7_101sd7dl
```

This completes the setup of Oracle database standby image copy backup and merge.

Switch Oracle DB to image copy for quick recovery

In the event of a failure due to primary storage issue such as data loss or corruption, database can be quickly switched over to image copy on FSx ONTAP NFS mount and recovered to current state without database restore. Eliminating media restoration speeds up the database recovery tremendously for a VLDB. This use case assumes that the database host instance is intact and database control file, archived and current logs are all available for recovery.

1. Login to EC2 DB server host as oracle user and create a test table before switch over.

```
[ec2-user@ip-172-30-15-99 ~]$ sudo su
[root@ip-172-30-15-99 ec2-user]# su - oracle
Last login: Thu May 18 14:22:34 UTC 2023
[oracle@ip-172-30-15-99 ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Thu May 18 14:30:36
2023
Version 19.18.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 -
Production
Version 19.18.0.0.0

SQL> show pdbs

  CON_ID CON_NAME          OPEN MODE RESTRICTED
----- -----
      2 PDB$SEED        READ ONLY NO
      3 DB1_PDB1        READ WRITE NO
      4 DB1_PDB2        READ WRITE NO
      5 DB1_PDB3        READ WRITE NO

SQL> alter session set container=db1_pdb1;

Session altered.

SQL> create table test (id integer, dt timestamp, event
varchar(100));

Table created.

SQL> insert into test values(1, sysdate, 'test oracle incremental
merge switch to copy');

1 row created.
```

```
SQL> commit;

Commit complete.

SQL> select * from test;

        ID
-----
DT
-----
-----
EVENT
-----
-----
1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy

SQL>
```

2. Simulate a failure by shutdown abort database, then start up oracle in mount stage.

```
SQL> shutdown abort;
ORACLE instance shut down.
SQL> startup mount;
ORACLE instance started.

Total System Global Area 1.2885E+10 bytes
Fixed Size                  9177880 bytes
Variable Size                1778384896 bytes
Database Buffers             1.1073E+10 bytes
Redo Buffers                 24375296 bytes
Database mounted.
SQL>
```

3. As oracle user, connect to Oracle database via RMAN to switch database to copy.

```
RMAN> switch database to copy;

datafile 1 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_0h1sd7ae"
datafile 3 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_0i1sd7at"
```

```
datafile 4 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-UNDOTBS1_FNO-4_0j1sd7b4"
datafile 5 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSTEM_FNO-5_0p1sd7cf"
datafile 6 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSAUX_FNO-6_0o1sd7c8"
datafile 7 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-USERS_FNO-7_101sd7d1"
datafile 8 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-UNDOTBS1_FNO-8_0v1sd7di"
datafile 9 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSTEM_FNO-9_0q1sd7cm"
datafile 10 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSAUX_FNO-10_0k1sd7bb"
datafile 11 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-UNDOTBS1_FNO-11_0n1sd7c1"
datafile 12 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-USERS_FNO-12_111sd7dm"
datafile 13 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSTEM_FNO-13_0r1sd7ct"
datafile 14 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSAUX_FNO-14_0l1sd7bi"
datafile 15 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-UNDOTBS1_FNO-15_0t1sd7db"
datafile 16 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-USERS_FNO-16_121sd7dn"
datafile 17 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSTEM_FNO-17_0s1sd7d4"
datafile 18 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SYSAUX_FNO-18_0m1sd7bq"
datafile 19 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-UNDOTBS1_FNO-19_0u1sd7de"
datafile 20 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-USERS_FNO-20_131sd7do"
datafile 21 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SOE_FNO-21_021sd6pv"
datafile 22 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SOE_FNO-22_031sd6r2"
datafile 23 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SOE_FNO-23_041sd6s5"
datafile 24 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SOE_FNO-24_051sd6t9"
datafile 25 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SOE_FNO-25_061sd6uc"
datafile 26 switched to datafile copy "/nfsfsxn/oracopy/data_DB1_I-1730530050_TS-SOE_FNO-26_071sd6vf"
```

```
datafile 27 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-27_081sd70i"
datafile 28 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-28_091sd711"
datafile 29 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-29_0a1sd72o"
datafile 30 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-30_0b1sd73r"
datafile 31 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-31_0c1sd74u"
datafile 32 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-32_0d1sd762"
datafile 33 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-33_0e1sd775"
datafile 34 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-34_0f1sd788"
datafile 35 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-35_0g1sd79b"
```

4. Recover and open database to bring it up to current from last incremental backup.

```
RMAN> recover database;

Starting recover at 18-MAY-23
allocated channel: ORA_DISK_1
channel ORA_DISK_1: SID=392 device type=DISK
channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00009: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSTEM_FNO-9_0q1sd7cm
destination for restore of datafile 00023: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-23_041sd6s5
destination for restore of datafile 00027: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-27_081sd70i
destination for restore of datafile 00031: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-31_0c1sd74u
destination for restore of datafile 00034: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-34_0f1sd788
channel ORA_DISK_1: reading from backup piece
/nfsfsxn/oracopy/321sfous_98_1_1
channel ORA_DISK_1: piece handle=/nfsfsxn/oracopy/321sfous_98_1_1
tag=ORACOPYBKUPONFSXN_LEVEL_0
channel ORA_DISK_1: restored backup piece 1
channel ORA_DISK_1: restore complete, elapsed time: 00:00:01
```

```
channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00010: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-10_0k1sd7bb
destination for restore of datafile 00021: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-21_021sd6pv
destination for restore of datafile 00025: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-25_061sd6uc
.
.
.

channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00016: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-16_121sd7dn
channel ORA_DISK_1: reading from backup piece
/nfsfsxn/oracopy/3i1sfov0_114_1_1
channel ORA_DISK_1: piece handle=/nfsfsxn/oracopy/3i1sfov0_114_1_1
tag=ORACOPYBKUPONFSXN_LEVEL_0
channel ORA_DISK_1: restored backup piece 1
channel ORA_DISK_1: restore complete, elapsed time: 00:00:01
channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00020: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-20_131sd7do
channel ORA_DISK_1: reading from backup piece
/nfsfsxn/oracopy/3j1sfov0_115_1_1
channel ORA_DISK_1: piece handle=/nfsfsxn/oracopy/3j1sfov0_115_1_1
tag=ORACOPYBKUPONFSXN_LEVEL_0
channel ORA_DISK_1: restored backup piece 1
channel ORA_DISK_1: restore complete, elapsed time: 00:00:01

starting media recovery
media recovery complete, elapsed time: 00:00:01

Finished recover at 18-MAY-23

RMAN> alter database open;

Statement processed

RMAN>
```

5. Check database structure from sqlplus after recovery to observe that all database data files with exception of control, temp, and current log files are now switched over to copy on FSx ONTAP NFS file system.

```

SQL> select name from v$datafile
  2  union
  3  select name from v$tempfile
  4  union
  5  select name from v$controlfile
  6  union
  7  select member from v$logfile;

NAME
-----
-----
-----+
+DATA/DB1/CONTROLFILE/current.261.1136666435
+DATA/DB1/FB864A929AEB79B9E053630F1EAC7046/TEMPFILE/temp.269.1136667
185
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/TEMPFILE/temp.274.1136668
051
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/TEMPFILE/temp.279.1136668
067
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/TEMPFILE/temp.284.1136668
081
+DATA/DB1/ONLINELOG/group_1.262.1136666437
+DATA/DB1/ONLINELOG/group_2.263.1136666437
+DATA/DB1/ONLINELOG/group_3.264.1136666437
+DATA/DB1/TEMPFILE/temp.265.1136666447
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_021sd6pv
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_031sd6r2

NAME
-----
-----
-----+
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_041sd6s5
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_051sd6t9
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_061sd6uc
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_071sd6vf
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-27_081sd70i
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-28_091sd71l
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-29_0a1sd72o
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-30_0b1sd73r
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-31_0c1sd74u
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-32_0d1sd762
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-33_0e1sd775

```

```
NAME
-----
-----
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-34_0f1sd788
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-35_0g1sd79b
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_0k1sd7bb
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_0l1sd7bi
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_0m1sd7bq
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_0i1sd7at
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_0o1sd7c8
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_0r1sd7ct
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_0s1sd7d4
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_0h1sd7ae
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_0p1sd7cf
```

```
NAME
-----
-----
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_0q1sd7cm
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_0n1sd7c1
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_0t1sd7db
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_0u1sd7de
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_0j1sd7b4
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_0v1sd7di
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_111sd7dm
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_121sd7dn
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_131sd7do
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_101sd7dl
```

43 rows selected.

SQL>

6. From SQL plus, check the content of test table we have inserted before the switch over to copy

```

SQL> show pdbs

  CON_ID CON_NAME          OPEN MODE RESTRICTED
----- -----
    2 PDB$SEED           READ ONLY NO
    3 DB1_PDB1           READ WRITE NO
    4 DB1_PDB2           READ WRITE NO
    5 DB1_PDB3           READ WRITE NO

SQL> alter session set container=db1_pdb1;

Session altered.

SQL> select * from test;

  ID
-----
DT
-----
EVENT
-----
1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy

SQL>

```

7. You could run the Oracle database in FSx NFS mount for an extended period without a performance penalty because FSx ONTAP is redundant production-grade storage that delivers high performance. When the primary storage issue is fixed, you can swing back to it by reversing the incremental backup merge processes with minimal downtime.

Oracle DB recovery from image copy to different EC2 DB instance host

In a failure when both primary storage and EC2 DB instance host are lost, the recovery can not be conducted from the original server. Fortunately, you still have an Oracle database backup image copy on the redundant FSxN NFS file system. You could quickly provision another identical EC2 DB instance and easily mount the image copy of your VLDB to the new EC2 DB host via NFS to run recovery. In this section, we will demonstrate the step-by-step procedures for doing so.

1. Insert a row to test table we have created previously for Oracle database restoring to alternative host validation.

```
[oracle@ip-172-30-15-99 ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Tue May 30 17:21:05
2023
Version 19.18.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 -
Production
Version 19.18.0.0.0

SQL> show pdbs

  CON_ID CON_NAME          OPEN MODE RESTRICTED
----- -----
    2 PDB$SEED           READ ONLY NO
    3 DB1_PDB1            READ WRITE NO
    4 DB1_PDB2            READ WRITE NO
    5 DB1_PDB3            READ WRITE NO

SQL> alter session set container=db1_pdb1;

Session altered.

SQL> insert into test values(2, sysdate, 'test recovery on a new EC2
instance host with image copy on FSxN');

1 row created.

SQL> commit;

Commit complete.

SQL> select * from test;
```

```

ID
-----
DT
-----
EVENT
-----
1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy

2
30-MAY-23 05.23.11.000000 PM
test recovery on a new EC2 instance host with image copy on FSxN

SQL>

```

- As oracle user, run RMAN incremental backup and merge to flush the transaction to backup set on FSxN NFS mount.

```

[oracle@ip-172-30-15-99 ~]$ rman target / nocatalog

Recovery Manager: Release 19.0.0.0.0 - Production on Tue May 30
17:26:03 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights
reserved.

connected to target database: DB1 (DBID=1730530050)
using target database control file instead of recovery catalog

RMAN> @rman_bkup_merge.cmd

```

- Shutdown primary EC2 DB instance host to simulate a total failure of storage and DB server host.
- Privison a new EC2 DB instance host ora_02 with same OS and version via AWS EC2 console. Configure OS kernal with same patches as primary EC2 DB server host, Oracle preinstall RPM, and add swap space to the host as well. Install same version and patches of Oracle as in primary EC2 DB server host with software only option. These tasks can be automated with NetApp automation toolkit as available from below links.

Toolkit: [na_oracle19c_deploy](#)

Documentation: [Automated Deployment of Oracle19c for ONTAP on NFS](#)

- Configure oracle environment similarly to primary EC2 DB instance host ora_01, such as oratab, oraInst.loc, and oracle user .bash_profile. It is a good practice to backup those files to FSxN NFS mount point.
- The Oracle database backup image copy on FSxN NFS mount is stored on a FSx cluster that spans AWS availability zones for redundancy, high availability, and high performance. The NFS file system can be easily mounted to a new server as far as the networking is reachable. The following procedures mount the image copy of an Oracle VLDB backup to newly provisioned EC2 DB instance host for recovery.

As ec2-user, create the mount point.

```
sudo mkdir /nfsfsxn
```

As ec2-user, mount the NFS volume that stored Oracle VLDB backup image copy.

```
sudo mount 172.30.15.19:/ora_01_copy /nfsfsxn -o
rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=262144, wsize=262144, noin
tr
```

- Validate the Oracle database backup image copy on FSxN NFS mount point.

```
[ec2-user@ip-172-30-15-124 ~]$ ls -ltr /nfsfsxn/oracopy
total 78940700
-rw-r----. 1 oracle 54331 482353152 May 26 18:45 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-6_4m1t508t
-rw-r----. 1 oracle 54331 419438592 May 26 18:45 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-5_4q1t509n
-rw-r----. 1 oracle 54331 241180672 May 26 18:45 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-8_4t1t50a6
-rw-r----. 1 oracle 54331 450560 May 30 15:29 6b1tf6b8_203_1_1
-rw-r----. 1 oracle 54331 663552 May 30 15:29 6c1tf6b8_204_1_1
-rw-r----. 1 oracle 54331 122880 May 30 15:29 6d1tf6b8_205_1_1
-rw-r----. 1 oracle 54331 507904 May 30 15:29 6e1tf6b8_206_1_1
-rw-r----. 1 oracle 54331 4259840 May 30 15:29 6f1tf6b9_207_1_1
-rw-r----. 1 oracle 54331 9060352 May 30 15:29 6h1tf6b9_209_1_1
-rw-r----. 1 oracle 54331 442368 May 30 15:29 6i1tf6b9_210_1_1
-rw-r----. 1 oracle 54331 475136 May 30 15:29 6j1tf6bb_211_1_1
-rw-r----. 1 oracle 54331 48660480 May 30 15:29 6g1tf6b9_208_1_1
-rw-r----. 1 oracle 54331 589824 May 30 15:29 6l1tf6bb_213_1_1
-rw-r----. 1 oracle 54331 606208 May 30 15:29 6m1tf6bb_214_1_1
-rw-r----. 1 oracle 54331 368640 May 30 15:29 6o1tf6bb_216_1_1
-rw-r----. 1 oracle 54331 368640 May 30 15:29 6p1tf6bc_217_1_1
-rw-r----. 1 oracle 54331 57344 May 30 15:29 6r1tf6bc_219_1_1
-rw-r----. 1 oracle 54331 57344 May 30 15:29 6s1tf6bc_220_1_1
-rw-r----. 1 oracle 54331 57344 May 30 15:29 6t1tf6bc_221_1_1
```

```
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-23_3q1t4ut3
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-21_3o1t4ut2
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-27_461t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-25_3s1t4v1a
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-22_3p1t4ut3
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-31_4a1t5015
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-29_481t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-34_4d1t5058
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-26_451t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-24_3r1t4ut3
-rw-r-----. 1 oracle 54331 555753472 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-10_4i1t5083
-rw-r-----. 1 oracle 54331 429924352 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_4n1t509m
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-30_491t5014
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-28_471t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-35_4e1t5059
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-32_4b1t501u
-rw-r-----. 1 oracle 54331 487596032 May 30 17:26 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-11_411t508t
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-33_4c1t501v
-rw-r-----. 1 oracle 54331 5251072 May 30 17:26 data_D-DB1_I-
1730530050_TS-USERS_FNO-12_4v1t50aa
-rw-r-----. 1 oracle 54331 1121984512 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_4f1t506m
-rw-r-----. 1 oracle 54331 707796992 May 30 17:26 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_4h1t5083
-rw-r-----. 1 oracle 54331 534781952 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-14_4j1t508s
-rw-r-----. 1 oracle 54331 429924352 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-13_4o1t509m
```

```

-rw-r----. 1 oracle 54331 429924352 May 30 17:26 data_DB1_I-
1730530050_TS-SYSTEM_FNO-17_4p1t509m
-rw-r----. 1 oracle 54331 534781952 May 30 17:26 data_DB1_I-
1730530050_TS-SYSAUX_FNO-18_4k1t508t
-rw-r----. 1 oracle 54331 1027612672 May 30 17:26 data_DB1_I-
1730530050_TS-SYSAUX_FNO-3_4g1t506m
-rw-r----. 1 oracle 54331 5251072 May 30 17:26 data_DB1_I-
1730530050_TS-USERS_FNO-7_4u1t50a6
-rw-r----. 1 oracle 54331 246423552 May 30 17:26 data_DB1_I-
1730530050_TS-UNDOTBS1_FNO-15_4r1t50a6
-rw-r----. 1 oracle 54331 5251072 May 30 17:26 data_DB1_I-
1730530050_TS-USERS_FNO-16_501t50ad
-rw-r----. 1 oracle 54331 246423552 May 30 17:26 data_DB1_I-
1730530050_TS-UNDOTBS1_FNO-19_4s1t50a6
-rw-r----. 1 oracle 54331 5251072 May 30 17:26 data_DB1_I-
1730530050_TS-USERS_FNO-20_511t50ad
-rw-r----. 1 oracle 54331 2318712832 May 30 17:32 721tf6b_226_1_1
-rw-r----. 1 oracle 54331 1813143552 May 30 17:33 701tf6a_224_1_1
-rw-r----. 1 oracle 54331 966656 May 30 17:33 731tf6c_227_1_1
-rw-r----. 1 oracle 54331 5980160 May 30 17:33 751tf6ij_229_1_1
-rw-r----. 1 oracle 54331 458752 May 30 17:33 761tf6in_230_1_1
-rw-r----. 1 oracle 54331 458752 May 30 17:33 771tf6iq_231_1_1
-rw-r----. 1 oracle 54331 11091968 May 30 17:33 741tf6ij_228_1_1
-rw-r----. 1 oracle 54331 401408 May 30 17:33 791tf6it_233_1_1
-rw-r----. 1 oracle 54331 2070708224 May 30 17:33 6v1tf6a_223_1_1
-rw-r----. 1 oracle 54331 376832 May 30 17:33 7a1tf6it_234_1_1
-rw-r----. 1 oracle 54331 1874903040 May 30 17:33 711tf6b_225_1_1
-rw-r----. 1 oracle 54331 303104 May 30 17:33 7c1tf6iu_236_1_1
-rw-r----. 1 oracle 54331 319488 May 30 17:33 7d1tf6iv_237_1_1
-rw-r----. 1 oracle 54331 57344 May 30 17:33 7f1tf6iv_239_1_1
-rw-r----. 1 oracle 54331 57344 May 30 17:33 7g1tf6iv_240_1_1
-rw-r--r--. 1 oracle 54331 57344 May 30 17:33 7h1tf6iv_241_1_1
-rw-r----. 1 oracle 54331 12720 May 30 17:33 db1_ctl.sql
-rw-r----. 1 oracle 54331 11600384 May 30 17:54 bct_db1.ctf

```

8. Verify the available Oracle archived logs on the FSxN NFS mount for recovery and note the last log file log sequence number. In this case, it is 175. Our recovery point is up to log sequence number 176.

```

[ec2-user@ip-172-30-15-124 ~]$ ls -ltr
/nfsfsxn/archlog/DB1/archivelog/2023_05_30
total 5714400
-r--r----. 1 oracle 54331 321024 May 30 14:59
o1_mf_1_140_003t9mvn_.arc
-r--r----. 1 oracle 54331 48996352 May 30 15:29
o1_mf_1_141_01t9qf6r_.arc
-r--r----. 1 oracle 54331 167477248 May 30 15:44

```

```
o1_mf_1_142_02n3x2qb_.arc
-r--r----. 1 oracle 54331 165684736 May 30 15:46
o1_mf_1_143_02rotwyb_.arc
-r--r----. 1 oracle 54331 165636608 May 30 15:49
o1_mf_1_144_02x563wh_.arc
-r--r----. 1 oracle 54331 168408064 May 30 15:51
o1_mf_1_145_031kg2co_.arc
-r--r----. 1 oracle 54331 169446400 May 30 15:54
o1_mf_1_146_035xpcdt_.arc
-r--r----. 1 oracle 54331 167595520 May 30 15:56
o1_mf_1_147_03bds8qf_.arc
-r--r----. 1 oracle 54331 169270272 May 30 15:59
o1_mf_1_148_03gyt7rx_.arc
-r--r----. 1 oracle 54331 170712576 May 30 16:01
o1_mf_1_149_03mfxl7v_.arc
-r--r----. 1 oracle 54331 170744832 May 30 16:04
o1_mf_1_150_03qzz0ty_.arc
-r--r----. 1 oracle 54331 169380864 May 30 16:06
o1_mf_1_151_03wgxdry_.arc
-r--r----. 1 oracle 54331 169833984 May 30 16:09
o1_mf_1_152_040y85v3_.arc
-r--r----. 1 oracle 54331 165134336 May 30 16:20
o1_mf_1_153_04ox946w_.arc
-r--r----. 1 oracle 54331 169929216 May 30 16:22
o1_mf_1_154_04rbv7n8_.arc
-r--r----. 1 oracle 54331 171903488 May 30 16:23
o1_mf_1_155_04tv1yvn_.arc
-r--r----. 1 oracle 54331 179061248 May 30 16:25
o1_mf_1_156_04xgfjtl_.arc
-r--r----. 1 oracle 54331 173593088 May 30 16:26
o1_mf_1_157_04zyg8hw_.arc
-r--r----. 1 oracle 54331 175999488 May 30 16:27
o1_mf_1_158_052gp9mt_.arc
-r--r----. 1 oracle 54331 179092992 May 30 16:29
o1_mf_1_159_0551wk7s_.arc
-r--r----. 1 oracle 54331 175524352 May 30 16:30
o1_mf_1_160_057146my_.arc
-r--r----. 1 oracle 54331 173949440 May 30 16:32
o1_mf_1_161_05b2dmwp_.arc
-r--r----. 1 oracle 54331 184166912 May 30 16:33
o1_mf_1_162_05drbj8n_.arc
-r--r----. 1 oracle 54331 173026816 May 30 16:35
o1_mf_1_163_05h8lm1h_.arc
-r--r----. 1 oracle 54331 174286336 May 30 16:36
o1_mf_1_164_05krsqmh_.arc
-r--r----. 1 oracle 54331 166092288 May 30 16:37
```

```

o1_mf_1_165_05n378pw_.arc
-r--r----. 1 oracle 54331 177640960 May 30 16:39
o1_mf_1_166_05pmg74l_.arc
-r--r----. 1 oracle 54331 173972992 May 30 16:40
o1_mf_1_167_05s3o01r_.arc
-r--r----. 1 oracle 54331 178474496 May 30 16:41
o1_mf_1_168_05vmwt34_.arc
-r--r----. 1 oracle 54331 177694208 May 30 16:43
o1_mf_1_169_05y45qdd_.arc
-r--r----. 1 oracle 54331 170814976 May 30 16:44
o1_mf_1_170_060kgh33_.arc
-r--r----. 1 oracle 54331 177325056 May 30 16:46
o1_mf_1_171_0631tvgv_.arc
-r--r----. 1 oracle 54331 164455424 May 30 16:47
o1_mf_1_172_065d94fq_.arc
-r--r----. 1 oracle 54331 178252288 May 30 16:48
o1_mf_1_173_067wnwy8_.arc
-r--r----. 1 oracle 54331 170579456 May 30 16:50
o1_mf_1_174_06b9zdh8_.arc
-r--r----. 1 oracle 54331 93928960 May 30 17:26
o1_mf_1_175_08c7jc2b_.arc
[ec2-user@ip-172-30-15-124 ~]$

```

9. As oracle user, set ORACLE_HOME variable to current Oracle installation on new EC2 instance DB host ora_02, ORACLE_SID to primary Oracle instance SID. In this case, it is db1.
10. As oracle user, create a generic Oracle init file in \$ORACLE_HOME/dbs directory with proper admin directories configured. Most importantly, have Oracle flash recovery area point to FSxN NFS mount path as defined in primary Oracle VLDB instance. flash recovery area configuration is demonstrated in section [Setup Oracle RMAN incremental merge to image copy on FSx](#). Set the Oracle control file to FSx ONTAP NFS file system.

```
vi $ORACLE_HOME/dbs/initdb1.ora
```

With following example entries:

```
*.audit_file_dest='/u01/app/oracle/admin/db1/adump'
*.audit_trail='db'
*.compatible='19.0.0'
*.control_files=('/nfsfsxn/oracopy/db1.ctl')
*.db_block_size=8192
*.db_create_file_dest='/nfsfsxn/oracopy/'
*.db_domain='demo.netapp.com'
*.db_name='db1'
*.db_recovery_file_dest_size=85899345920
*.db_recovery_file_dest='/nfsfsxn/archlog/'
*.diagnostic_dest='/u01/app/oracle'
*.dispatchers='(PROTOCOL=TCP) (SERVICE=db1XDB)'
*.enable_pluggable_database=true
*.local_listener='LISTENER'
*.nls_language='AMERICAN'
*.nls_territory='AMERICA'
*.open_cursors=300
*.pga_aggregate_target=1024m
*.processes=320
*.remote_login_passwordfile='EXCLUSIVE'
*.sga_target=10240m
*.undo_tablespace='UNDOTBS1'
```

The above init file should be replaced by restored backup init file from primary Oracle DB server in the case of discrepancy.

11. As oracle user, launch RMAN to run Oracle recovery on a new EC2 DB instance host.

```
[oracle@ip-172-30-15-124 dbs]$ rman target / nocatalog;

Recovery Manager: Release 19.0.0.0.0 - Production on Wed May 31
00:56:07 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights
reserved.

connected to target database (not started)

RMAN> startup nomount;

Oracle instance started

Total System Global Area    12884900632 bytes

Fixed Size                  9177880 bytes
Variable Size                1778384896 bytes
Database Buffers            11072962560 bytes
Redo Buffers                 24375296 bytes
```

12. Set database ID. The database ID can be retrieved from Oracle file name of image copy on FSx NFS mount point.

```
RMAN> set dbid = 1730530050;

executing command: SET DBID
```

13. Restore controlfile from autobackup. If Oracle controlfile and spfile autobackup is enabled, they are backed up in every incremental backup and merge cycle. The latest backup will be restored if multiple copies are available.

```
RMAN> restore controlfile from autobackup;

Starting restore at 31-MAY-23
allocated channel: ORA_DISK_1
channel ORA_DISK_1: SID=2 device type=DISK

recovery area destination: /nfsfsxn/archlog
database name (or database unique name) used for search: DB1
channel ORA_DISK_1: AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp found in the recovery area
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230531
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230530
channel ORA_DISK_1: restoring control file from AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp
channel ORA_DISK_1: control file restore from AUTOBACKUP complete
output file name=/nfsfsxn/oracopy/db1.ctl
Finished restore at 31-MAY-23
```

14. Restore init file from spfile to a /tmp folder for updating parameter file later to match with primary DB instance.

```
RMAN> restore spfile to pfile '/tmp/archive/initdb1.ora' from
autobackup;

Starting restore at 31-MAY-23
using channel ORA_DISK_1

recovery area destination: /nfsfsxn/archlog
database name (or database unique name) used for search: DB1
channel ORA_DISK_1: AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp found in the recovery area
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230531
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230530
channel ORA_DISK_1: restoring spfile from AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp
channel ORA_DISK_1: SPFILE restore from AUTOBACKUP complete
Finished restore at 31-MAY-23
```

15. Mount control file and validate the database backup image copy.

```

RMAN> alter database mount;

released channel: ORA_DISK_1
Statement processed

RMAN> list copy of database tag 'OraCopyBKUPonFSxN_level_0';

List of Datafile Copies
=====

Key      File  S Completion Time Ckp SCN      Ckp Time      Sparse
-----  ----- -  -----  -----  -----  -----  -----
316      1     A 30-MAY-23        4120170 30-MAY-23       NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSTEM_FNO-1_4f1t506m
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

322      3     A 30-MAY-23        4120175 30-MAY-23       NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSAUX_FNO-3_4g1t506m
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

317      4     A 30-MAY-23        4120179 30-MAY-23       NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          UNDOTBS1_FNO-4_4h1t5083
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

221      5     A 26-MAY-23        2383520 12-MAY-23       NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSTEM_FNO-5_4q1t509n
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 2, PDB Name: PDB$SEED

216      6     A 26-MAY-23        2383520 12-MAY-23       NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          SYSAUX_FNO-6_4m1t508t
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 2, PDB Name: PDB$SEED

323      7     A 30-MAY-23        4120207 30-MAY-23       NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
          7_4u1t50a6
          Tag: ORACOPYBKUPONFSXN_LEVEL_0

227      8     A 26-MAY-23        2383520 12-MAY-23       NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
          UNDOTBS1_FNO-8_4t1t50a6

```

Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 2, PDB Name: PDB\$SEED

308 9 A 30-MAY-23 4120158 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
 SYSTEM_FNO-9_4n1t509m
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

307 10 A 30-MAY-23 4120166 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
 SYSAUX_FNO-10_4i1t5083
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

313 11 A 30-MAY-23 4120154 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
 UNDOTBS1_FNO-11_4l1t508t
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

315 12 A 30-MAY-23 4120162 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
 12_4v1t50aa
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

319 13 A 30-MAY-23 4120191 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
 SYSTEM_FNO-13_4o1t509m
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

318 14 A 30-MAY-23 4120183 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
 SYSAUX_FNO-14_4j1t508s
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

324 15 A 30-MAY-23 4120199 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
 UNDOTBS1_FNO-15_4r1t50a6
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

325 16 A 30-MAY-23 4120211 30-MAY-23 NO

Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_501t50ad
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

320 17 A 30-MAY-23 4120195 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_4p1t509m
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 5, PDB Name: DB1_PDB3

321 18 A 30-MAY-23 4120187 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_4k1t508t
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 5, PDB Name: DB1_PDB3

326 19 A 30-MAY-23 4120203 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_4s1t50a6
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 5, PDB Name: DB1_PDB3

327 20 A 30-MAY-23 4120216 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_511t50ad
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 5, PDB Name: DB1_PDB3

298 21 A 30-MAY-23 4120166 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_3o1t4ut2
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

302 22 A 30-MAY-23 4120154 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_3p1t4ut3
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

297 23 A 30-MAY-23 4120158 30-MAY-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_3q1t4ut3
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

306	24	A	30-MAY-23	4120162	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_3r1t4ut3						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
300	25	A	30-MAY-23	4120166	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_3s1t4v1a						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
305	26	A	30-MAY-23	4120154	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_451t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
299	27	A	30-MAY-23	4120158	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-27_461t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
310	28	A	30-MAY-23	4120162	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-28_471t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
303	29	A	30-MAY-23	4120166	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-29_481t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
309	30	A	30-MAY-23	4120154	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-30_491t5014						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
301	31	A	30-MAY-23	4120158	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-31_4a1t5015						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						

```

Container ID: 3, PDB Name: DB1_PDB1

312      32    A 30-MAY-23          4120162    30-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
32_4b1t501u
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 3, PDB Name: DB1_PDB1

314      33    A 30-MAY-23          4120162    30-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
33_4c1t501v
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 3, PDB Name: DB1_PDB1

304      34    A 30-MAY-23          4120158    30-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
34_4d1t5058
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 3, PDB Name: DB1_PDB1

311      35    A 30-MAY-23          4120154    30-MAY-23        NO
          Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
35_4e1t5059
          Tag: ORACOPYBKUPONFSXN_LEVEL_0
          Container ID: 3, PDB Name: DB1_PDB1

```

16. Switch database to copy to run recovery without database restore.

```

RMAN> switch database to copy;

Starting implicit crosscheck backup at 31-MAY-23
allocated channel: ORA_DISK_1
channel ORA_DISK_1: SID=11 device type=DISK
Crosschecked 33 objects
Finished implicit crosscheck backup at 31-MAY-23

Starting implicit crosscheck copy at 31-MAY-23
using channel ORA_DISK_1
Crosschecked 68 objects
Finished implicit crosscheck copy at 31-MAY-23

searching for all files in the recovery area
cataloging files...
cataloging done

List of Cataloged Files

```

=====

File Name:

/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp

datafile 1 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_4f1t506m"
datafile 3 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_4g1t506m"
datafile 4 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_4h1t5083"
datafile 5 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-5_4q1t509n"
datafile 6 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-6_4m1t508t"
datafile 7 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-USERS_FNO-7_4u1t50a6"
datafile 8 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-8_4t1t50a6"
datafile 9 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_4n1t509m"
datafile 10 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-10_4i1t5083"
datafile 11 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-UNDOTBS1_FNO-11_4l1t508t"
datafile 12 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-12_4v1t50aa"
datafile 13 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSTEM_FNO-13_4o1t509m"
datafile 14 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-14_4j1t508s"
datafile 15 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-UNDOTBS1_FNO-15_4r1t50a6"
datafile 16 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-16_501t50ad"
datafile 17 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSTEM_FNO-17_4p1t509m"
datafile 18 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-18_4k1t508t"
datafile 19 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-UNDOTBS1_FNO-19_4s1t50a6"
datafile 20 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-20_511t50ad"
datafile 21 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-21_3o1t4ut2"
datafile 22 switched to datafile copy "/nfsfsxn/oracopy/data_D-

```
DB1_I-1730530050_TS-SOE_FNO-22_3p1t4ut3"
datafile 23 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-23_3q1t4ut3"
datafile 24 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-24_3r1t4ut3"
datafile 25 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-25_3s1t4v1a"
datafile 26 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-26_451t4vt7"
datafile 27 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-27_461t4vt7"
datafile 28 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-28_471t4vt7"
datafile 29 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-29_481t4vt7"
datafile 30 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-30_491t5014"
datafile 31 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-31_4a1t5015"
datafile 32 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-32_4b1t501u"
datafile 33 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-33_4c1t501v"
datafile 34 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-34_4d1t5058"
datafile 35 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-35_4e1t5059"
```

17. Run Oracle recovery up to last available archive log in flash recovery area.

```
RMAN> run {
2> set until sequence=176;
3> recover database;
4> }

executing command: SET until clause

Starting recover at 31-MAY-23
using channel ORA_DISK_1

starting media recovery

archived log for thread 1 with sequence 142 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_142_02n3x2qb_.ar
```

```
c
archived log for thread 1 with sequence 143 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_143__02rotwyb_.ar
c
archived log for thread 1 with sequence 144 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_144__02x563wh_.ar
c
archived log for thread 1 with sequence 145 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_145__031kg2co_.ar
c
archived log for thread 1 with sequence 146 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_146__035xpcdt_.ar
c
archived log for thread 1 with sequence 147 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_147__03bds8qf_.ar
c
archived log for thread 1 with sequence 148 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_148__03gyt7rx_.ar
c
archived log for thread 1 with sequence 149 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_149__03mfxl7v_.ar
c
archived log for thread 1 with sequence 150 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_150__03qzz0ty_.ar
c
archived log for thread 1 with sequence 151 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_151__03wgxdry_.ar
c
archived log for thread 1 with sequence 152 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_152__040y85v3_.ar
c
archived log for thread 1 with sequence 153 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_153__04ox946w_.ar
c
archived log for thread 1 with sequence 154 is already on disk as
```

```
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_154__04rbv7n8_.ar
c
archived log for thread 1 with sequence 155 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_155__04tv1yvn_.ar
c
archived log for thread 1 with sequence 156 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_156__04xgfjtl_.ar
c
archived log for thread 1 with sequence 157 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_157__04zyg8hw_.ar
c
archived log for thread 1 with sequence 158 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_158__052gp9mt_.ar
c
archived log for thread 1 with sequence 159 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_159__0551wk7s_.ar
c
archived log for thread 1 with sequence 160 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_160__057146my_.ar
c
archived log for thread 1 with sequence 161 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_161__05b2dmwp_.ar
c
archived log for thread 1 with sequence 162 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_162__05drbj8n_.ar
c
archived log for thread 1 with sequence 163 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_163__05h81m1h_.ar
c
archived log for thread 1 with sequence 164 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_164__05krsgmh_.ar
c
archived log for thread 1 with sequence 165 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_165__05n378pw_.ar
```

```
c
archived log for thread 1 with sequence 166 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_166__05pmg741_.ar
c
archived log for thread 1 with sequence 167 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_167__05s3o01r_.ar
c
archived log for thread 1 with sequence 168 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_168__05vmwt34_.ar
c
archived log for thread 1 with sequence 169 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_169__05y45qdd_.ar
c
archived log for thread 1 with sequence 170 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_170__060kggh33_.ar
c
archived log for thread 1 with sequence 171 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_171__0631tvgv_.ar
c
archived log for thread 1 with sequence 172 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_172__065d94fq_.ar
c
archived log for thread 1 with sequence 173 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_173__067wnwy8_.ar
c
archived log for thread 1 with sequence 174 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_174__06b9zdh8_.ar
c
archived log for thread 1 with sequence 175 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_175__08c7jc2b_.ar
c
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_142__02n3x2qb_.arc thread=1 sequence=142
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_143__02rotwy
```

```
b_.arc thread=1 sequence=143
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_144__02x563w
h_.arc thread=1 sequence=144
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_145__031kg2c
o_.arc thread=1 sequence=145
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_146__035xpcd
t_.arc thread=1 sequence=146
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_147__03bds8q
f_.arc thread=1 sequence=147
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_148__03gyt7r
x_.arc thread=1 sequence=148
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_149__03mfx17
v_.arc thread=1 sequence=149
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_150__03qzz0t
y_.arc thread=1 sequence=150
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_151__03wgxdr
y_.arc thread=1 sequence=151
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_152__040y85v
3_.arc thread=1 sequence=152
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_153__04ox946
w_.arc thread=1 sequence=153
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_154__04rbv7n
8_.arc thread=1 sequence=154
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_155__04tv1yv
n_.arc thread=1 sequence=155
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_156__04xgfjt
l_.arc thread=1 sequence=156
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_157__04zyg8h
w_.arc thread=1 sequence=157
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_158__052gp9m
t_.arc thread=1 sequence=158
```

```
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_159__0551wk7
s_.arc thread=1 sequence=159
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_160__057146m
y_.arc thread=1 sequence=160
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_161__05b2dmw
p_.arc thread=1 sequence=161
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_162__05drbj8
n_.arc thread=1 sequence=162
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_163__05h81ml1
h_.arc thread=1 sequence=163
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_164__05krsqm
h_.arc thread=1 sequence=164
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_165__05n378p
w_.arc thread=1 sequence=165
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_166__05pmg74
l_.arc thread=1 sequence=166
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_167__05s3o01
r_.arc thread=1 sequence=167
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_168__05vmwt3
4_.arc thread=1 sequence=168
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_169__05y45qd
d_.arc thread=1 sequence=169
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_170__060kgih3
3_.arc thread=1 sequence=170
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_171__0631tvg
v_.arc thread=1 sequence=171
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_172__065d94f
q_.arc thread=1 sequence=172
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_173__067wnwy
8_.arc thread=1 sequence=173
archived log file
```

```
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_174__06b9zdh
8_.arc thread=1 sequence=174
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_175__08c7jc2
b_.arc thread=1 sequence=175
media recovery complete, elapsed time: 00:48:34
Finished recover at 31-MAY-23
```



For faster recovery, enable parallel sessions with `recovery_parallelism` parameter or specify degree of parallel in recovery command for database recovery: `RECOVER DATABASE PARALLEL (DEGREE d INSTANCES DEFAULT) ;`. In general, degrees of parallelism should be equal to number of CPU cores on the host.

18. Exit RMAN, login to Oracle as oracle user via sqlplus to open database and reset log after an incomplete recovery.

```

SQL> select name, open_mode from v$database;

NAME      OPEN_MODE
-----
DB1       MOUNTED

SQL> select member from v$logfile;

MEMBER
-----
+
+
+DATA/DB1/ONLINELOG/group_3.264.1136666437
+DATA/DB1/ONLINELOG/group_2.263.1136666437
+DATA/DB1/ONLINELOG/group_1.262.1136666437

SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_1.262.1136666437' to
'/nfsfsxn/oracopy/redo01.log';

Database altered.

SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_2.263.1136666437' to
'/nfsfsxn/oracopy/redo02.log';

Database altered.

SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_3.264.1136666437' to
'/nfsfsxn/oracopy/redo03.log';

Database altered.

SQL> alter database open resetlogs;

Database altered.

```

19. Validate the database restored to new host that has the row we have inserted before primary database failure.

```

SQL> show pdbs

  CON_ID CON_NAME          OPEN MODE RESTRICTED
----- -----
    2 PDB$SEED           READ ONLY NO
    3 DB1_PDB1           READ WRITE NO
    4 DB1_PDB2           READ WRITE NO
    5 DB1_PDB3           READ WRITE NO

SQL> alter session set container=db1_pdb1;

Session altered.

SQL> select * from test;

  ID DT
EVENT
-----
-----
```

```

  1 18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy
  2 30-MAY-23 05.23.11.000000 PM
test recovery on a new EC2 instance host with image copy on FSxN
```

20. Other post recovery tasks

Add FSxN NFS mount to fstab so that the NFS file system will be mounted when EC2 instance host rebooted.

As EC2 user, vi /etc/fstab and add following entry:

```

172.30.15.19:/ora_01_copy      /nfsfsxn      nfs
rw,bg,hard,vers=3,proto=tcp,timeo=600,rsize=262144,wszie=262144,noin
tr 0      0
```

Update the Oracle init file from primary database init file backup that is restored to /tmp/archive and create spfile as needed.

This completes the Oracle VLDB database recovery from backup image copy on FSxN NFS file system to a new EC2 DB instance host.

Clone Oracle standby image copy for other use cases

Another benefit of using AWS FSx ONTAP for staging Oracle VLDB image copy is that it can be FlexCloned to serve many other purposes with minimal additional storage investment. In the following use case, we demonstrate how to snapshot and clone the staging NFS volume on FSx ONTAP for other Oracle use cases such as DEV, UAT, etc.

1. We begin with inserting a row into the same test table we have created before.

```
SQL> insert into test values (3, sysdate, 'test clone on a new EC2
instance host with image copy on FSxN');

1 row created.

SQL> select * from test;

          ID
-----
DT
-----
EVENT
-----
1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy

2
30-MAY-23 05.23.11.000000 PM
test recovery on a new EC2 instance host with image copy on FSxN

          ID
-----
DT
-----
EVENT
-----
3
05-JUN-23 03.19.46.000000 PM
test clone on a new EC2 instance host with image copy on FSxN

SQL>
```

2. Take a RMAN backup and merge to FSx ONTAP database image copy so that the transaction will be captured in the backup set on FSx NFS mount but not merged into copy until cloned database is recovered.

```
RMAN> @/home/oracle/rman_bkup_merge.cmd
```

3. Login to FSx cluster via ssh as fsxadmin user to observe the snapshots created by scheduled backup policy - oracle and take an one-off snapshot so that it will include the transaction we committed in step 1.

```

FsxId06c3c8b2a7bd56458::> vol snapshot create -vserver svm_ora
-volume ora_01_copy -snapshot one-off.2023-06-05-1137 -foreground
true

FsxId06c3c8b2a7bd56458::> snapshot show

---Blocks---
Vserver   Volume     Snapshot                               Size
Total%  Used%
-----
-----  

svm_ora   ora_01_copy
          daily.2023-06-02_0010           3.59GB
2%      5%
          daily.2023-06-03_0010           1.10GB
1%      1%
          daily.2023-06-04_0010           608KB
0%      0%
          daily.2023-06-05_0010           3.81GB
2%      5%
          one-off.2023-06-05-1137        168KB
0%      0%
          svm_ora_root
          weekly.2023-05-28_0015         1.86MB
0%    78%
          daily.2023-06-04_0010           152KB
0%    22%
          weekly.2023-06-04_0015         1.24MB
0%    70%
          daily.2023-06-05_0010           196KB
0%    27%
          hourly.2023-06-05_1005         156KB
0%    22%
          hourly.2023-06-05_1105         156KB
0%    22%
          hourly.2023-06-05_1205         156KB
0%    22%
          hourly.2023-06-05_1305         156KB
0%    22%
          hourly.2023-06-05_1405         1.87MB
0%    78%
          hourly.2023-06-05_1505         148KB
0%    22%
15 entries were displayed.

```

4. Clone from the one-off snapshot to be used for standing up a new DB1 clone instance on an alternative EC2 Oracle host. You have the option to clone from any available daily snapshots for volume ora_01_copy.

```
FsxId06c3c8b2a7bd56458::> vol clone create -flexclone db1_20230605of  
-type RW -parent-vserver svm_ora -parent-volume ora_01_copy  
-junction-path /db1_20230605of -junction-active true -parent  
-snapshot one-off.2023-06-05-1137  
[Job 464] Job succeeded: Successful

FsxId06c3c8b2a7bd56458::>

FsxId06c3c8b2a7bd56458::> vol show db1*  
Vserver      Volume          Aggregate     State       Type       Size  
Available    Used%  
-----  
-----  
svm_ora      db1_20230605of  
                           aggr1        online      RW        200GB  
116.6GB     38%  
  
FsxId06c3c8b2a7bd56458::>
```

5. Turn off snapshot policy for the cloned volume as it inherits parent volume snapshot policy unless you want to protect the cloned volume, then leave it alone.

```
FsxId06c3c8b2a7bd56458::> vol modify -volume db1_20230605of  
-snapshot-policy none

Warning: You are changing the Snapshot policy on volume  
"db1_20230605of" to "none". Snapshot copies on this volume that do  
not match any of the prefixes of the new Snapshot policy will not be  
deleted. However, when the new Snapshot policy  
takes effect, depending on the new retention count, any  
existing Snapshot copies that continue to use the same prefixes  
might be deleted. See the 'volume modify' man page for more  
information.

Do you want to continue? {y|n}: y
Volume modify successful on volume db1_20230605of of Vserver
svm_ora.

FsxId06c3c8b2a7bd56458::>
```

6. Login to a new EC2 Linux instance with Oracle software pre-installed with same version and patch level as your primary Oracle EC2 instance and mount the cloned volume.

```
[ec2-user@ip-172-30-15-124 ~]$ sudo mkdir /nfsfsxn
[ec2-user@ip-172-30-15-124 ~]$ sudo mount -t nfs
172.30.15.19:/db1_20230605of /nfsfsxn -o
rw,bg,hard,vers=3,proto=tcp,timeo=600,rsize=262144,wszie=262144,noin
tr
```

7. Validate the database incremental backup sets, image copy, and available archived logs on FSx NFS mount.

```
[ec2-user@ip-172-30-15-124 ~]$ ls -ltr /nfsfsxn/oracopy
total 79450332
-rw-r---- 1 oracle 54331 482353152 Jun  1 19:02 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-6_891tkrhr
-rw-r---- 1 oracle 54331 419438592 Jun  1 19:03 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-5_8d1tkril
-rw-r---- 1 oracle 54331 241180672 Jun  1 19:03 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj7
-rw-r---- 1 oracle 54331 912506880 Jun  1 20:21 8n1tkvv2_279_1_1
-rw-r---- 1 oracle 54331 925696 Jun  1 20:21 8q1t105i_282_1_1
-rw-r---- 1 oracle 54331 1169014784 Jun  1 20:21 8p1tkvv2_281_1_1
-rw-r---- 1 oracle 54331 6455296 Jun  1 20:21 8r1t105m_283_1_1
-rw-r---- 1 oracle 54331 139264 Jun  1 20:21 8t1t105t_285_1_1
-rw-r---- 1 oracle 54331 3514368 Jun  1 20:21 8s1t105t_284_1_1
-rw-r---- 1 oracle 54331 139264 Jun  1 20:21 8u1t1060_286_1_1
-rw-r---- 1 oracle 54331 425984 Jun  1 20:21 901t1062_288_1_1
-rw-r---- 1 oracle 54331 344064 Jun  1 20:21 911t1062_289_1_1
-rw-r---- 1 oracle 54331 245760 Jun  1 20:21 931t1063_291_1_1
-rw-r---- 1 oracle 54331 237568 Jun  1 20:21 941t1064_292_1_1
-rw-r---- 1 oracle 54331 57344 Jun  1 20:21 961t1065_294_1_1
-rw-r---- 1 oracle 54331 57344 Jun  1 20:21 971t1066_295_1_1
-rw-r---- 1 oracle 54331 57344 Jun  1 20:21 981t1067_296_1_1
-rw-r---- 1 oracle 54331 1040760832 Jun  1 20:23 8m1tkvv2_278_1_1
-rw-r---- 1 oracle 54331 932847616 Jun  1 20:24 8o1tkvv2_280_1_1
-rw-r---- 1 oracle 54331 1121984512 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_821tkrb8
-rw-r---- 1 oracle 54331 1027612672 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_831tkrd9
-rw-r---- 1 oracle 54331 429924352 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_8a1tkrhr
-rw-r---- 1 oracle 54331 707796992 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_851tkrgf
-rw-r---- 1 oracle 54331 534781952 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-14_871tkrhr
-rw-r---- 1 oracle 54331 534781952 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-18_881tkrhr
```

```
-rw-r----- 1 oracle 54331 429924352 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-13_8b1tkril
-rw-r----- 1 oracle 54331 429924352 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-17_8c1tkril
-rw-r----- 1 oracle 54331 246423552 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-15_8e1tkril
-rw-r----- 1 oracle 54331 246423552 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-7_8h1tkrj9
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-16_8j1tkrja
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-20_8k1tkrjb
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-12_8i1tkrj9
-rw-r----- 1 oracle 54331 555753472 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-10_861tkrgo
-rw-r----- 1 oracle 54331 796925952 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-11_841tkrf2
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-21_7j1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-34_801tkram
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-29_7r1tkr32
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-25_7n1tkqrh
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-31_7t1tkr3i
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-33_7v1tkra6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-23_7l1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-27_7p1tkqrq
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-35_811tkrap
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-32_7ultkr42
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-22_7k1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-24_7m1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-28_7q1tkqs1
```

```
-rw-r----- 1 oracle 54331 4294975488 Jun  5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-30_7s1tkr3a
-rw-r----- 1 oracle 54331 4294975488 Jun  5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-26_7o1tkqrj
-rw-r----- 1 oracle 54331 1241432064 Jun  5 15:30 9d1tv06n_301_1_1
-rw-r----- 1 oracle 54331 1019805696 Jun  5 15:31 9a1tv06m_298_1_1
-rw-r----- 1 oracle 54331      4612096 Jun  5 15:31 9e1tv0ld_302_1_1
-rw-r----- 1 oracle 54331    967163904 Jun  5 15:31 9b1tv06n_299_1_1
-rw-r----- 1 oracle 54331    31563776 Jun  5 15:31 9g1tv0lt_304_1_1
-rw-r----- 1 oracle 54331      319488 Jun  5 15:31 9h1tv0lt_305_1_1
-rw-r----- 1 oracle 54331      335872 Jun  5 15:31 9i1tv0m0_306_1_1
-rw-r----- 1 oracle 54331      565248 Jun  5 15:31 9k1tv0m1_308_1_1
-rw-r----- 1 oracle 54331      581632 Jun  5 15:31 9l1tv0m5_309_1_1
-rw-r----- 1 oracle 54331    54345728 Jun  5 15:31 9f1tv0lt_303_1_1
-rw-r----- 1 oracle 54331    368640 Jun  5 15:31 9n1tv0m5_311_1_1
-rw-r----- 1 oracle 54331    385024 Jun  5 15:31 9o1tv0m6_312_1_1
-rw-r----- 1 oracle 54331    985858048 Jun  5 15:31 9c1tv06n_300_1_1
-rw-r----- 1 oracle 54331      57344 Jun  5 15:31 9q1tv0m7_314_1_1
-rw-r----- 1 oracle 54331      57344 Jun  5 15:31 9r1tv0m8_315_1_1
-rw-r----- 1 oracle 54331      57344 Jun  5 15:31 9s1tv0m9_316_1_1
-rw-r--r-- 1 oracle 54331      12720 Jun  5 15:31 db1_ctl.sql
-rw-r----- 1 oracle 54331    11600384 Jun  5 15:48 bct_db1.ctf
[ec2-user@ip-172-30-15-124 ~]$
```

```
[oracle@ip-172-30-15-124 ~]$ ls -l
/nfsfsxn/archlog/DB1/archivelog/2023_06_05
total 2008864
-rw-r----- 1 oracle 54331      729088 Jun  5 14:38
o1_mf_1_190_17vwvvt9_.arc
-rw-r----- 1 oracle 54331 166651904 Jun  5 14:44
o1_mf_1_191_17vx6vmg_.arc
-rw-r----- 1 oracle 54331 167406080 Jun  5 14:47
o1_mf_1_192_17vxctms_.arc
-rw-r----- 1 oracle 54331 166868992 Jun  5 14:49
o1_mf_1_193_17vxjjps_.arc
-rw-r----- 1 oracle 54331 166087168 Jun  5 14:52
o1_mf_1_194_17vxnxrh_.arc
-rw-r----- 1 oracle 54331 175210496 Jun  5 14:54
o1_mf_1_195_17vxswv5_.arc
-rw-r----- 1 oracle 54331 167078400 Jun  5 14:57
o1_mf_1_196_17vxylwp_.arc
-rw-r----- 1 oracle 54331 169701888 Jun  5 14:59
o1_mf_1_197_17vy3cyw_.arc
-rw-r----- 1 oracle 54331 167845376 Jun  5 15:02
o1_mf_1_198_17vy8245_.arc
-rw-r----- 1 oracle 54331 170763776 Jun  5 15:05
```

```
o1_mf_1_199_17vydv4c_.arc
-rw-r----- 1 oracle 54331 193853440 Jun  5 15:07
o1_mf_1_200_17vykf23_.arc
-rw-r----- 1 oracle 54331 165523968 Jun  5 15:09
o1_mf_1_201_17vyp1dh_.arc
-rw-r----- 1 oracle 54331 161117184 Jun  5 15:12
o1_mf_1_202_17vyvrm5_.arc
-rw-r----- 1 oracle 54331 10098176 Jun  5 15:21
o1_mf_1_203_17vzdfwm_.arc
```

8. The recovery processes now are similar to previous use case of recovery to a new EC2 DB instance after a failure - set oracle environment (oratab, \$ORACLE_HOME, \$ORACLE_SID) to match with primary production instance, create an init file including db_recovery_file_dest_size and db_recovery_file_dest that point to flash recovery directory on FSx NFS mount. Then, launch RMAN to run recovery. Following are command steps and output.

```
[oracle@ip-172-30-15-124 dbs]$ rman target / nocatalog

Recovery Manager: Release 19.0.0.0.0 - Production on Wed Jun 7
14:44:33 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights
reserved.

connected to target database (not started)

RMAN> startup nomount;

Oracle instance started

Total System Global Area 10737418000 bytes

Fixed Size 9174800 bytes
Variable Size 1577058304 bytes
Database Buffers 9126805504 bytes
Redo Buffers 24379392 bytes

RMAN> set dbid = 1730530050;

executing command: SET DBID

RMAN> restore controlfile from autobackup;

Starting restore at 07-JUN-23
allocated channel: ORA_DISK_1
```

```

channel ORA_DISK_1: SID=2 device type=DISK

recovery area destination: /nfsfsxn/archlog/
database name (or database unique name) used for search: DB1
channel ORA_DISK_1: AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_06_05/o1_mf_s_1138721482_17vzyb
vq_.bkp found in the recovery area
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230607
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230606
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230605
channel ORA_DISK_1: restoring control file from AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_06_05/o1_mf_s_1138721482_17vzyb
vq_.bkp
channel ORA_DISK_1: control file restore from AUTOBACKUP complete
output file name=/nfsfsxn/oracopy/db1.ctl
Finished restore at 07-JUN-23

```

```
RMAN> alter database mount;
```

```
released channel: ORA_DISK_1
Statement processed
```

```
RMAN> list incarnation;
```

List of Database Incarnations

DB Key	Inc Key	DB Name	DB ID	STATUS	Reset SCN	Reset Time
1	1	DB1	1730530050	PARENT	1	17-APR-19
2	2	DB1	1730530050	CURRENT	1920977	12-MAY-23

```
RMAN> list copy of database tag 'OraCopyBKUPonFSxN_level_0';
```

List of Datafile Copies

Key	File S	Completion Time	Ckp SCN	Ckp Time	Sparse
362	1 A	05-JUN-23	8319160	01-JUN-23	NO
		Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-			
		SYSTEM_FNO-1_821tkrb8			
		Tag: ORACOPYBKUPONFSXN_LEVEL_0			
363	3 A	05-JUN-23	8319165	01-JUN-23	NO

			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		
			SYSAUX_FNO-3_831tkrd9		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
365	4	A	05-JUN-23	8319171	01-JUN-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		
			UNDOTBS1_FNO-4_851tkrgf		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
355	5	A	01-JUN-23	2383520	12-MAY-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		
			SYSTEM_FNO-5_8d1tkril		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID: 2, PDB Name: PDB\$SEED		
349	6	A	01-JUN-23	2383520	12-MAY-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		
			SYSAUX_FNO-6_891tkrhr		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID: 2, PDB Name: PDB\$SEED		
372	7	A	05-JUN-23	8319201	01-JUN-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-		
			7_8h1tkrj9		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
361	8	A	01-JUN-23	2383520	12-MAY-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		
			UNDOTBS1_FNO-8_8g1tkrj7		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID: 2, PDB Name: PDB\$SEED		
364	9	A	05-JUN-23	8318717	01-JUN-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		
			SYSTEM_FNO-9_8a1tkrhr		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID: 3, PDB Name: DB1_PDB1		
376	10	A	05-JUN-23	8318714	01-JUN-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		
			SYSAUX_FNO-10_861tkrgo		
			Tag: ORACOPYBKUPONFSXN_LEVEL_0		
			Container ID: 3, PDB Name: DB1_PDB1		
377	11	A	05-JUN-23	8318720	01-JUN-23 NO
			Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-		

UNDOTBS1_FNO-11_841tkrf2
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

375 12 A 05-JUN-23 8318719 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_8i1tkrj9
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

368 13 A 05-JUN-23 8319184 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_8b1tkril
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

366 14 A 05-JUN-23 8319175 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_871tkrhr
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

370 15 A 05-JUN-23 8319193 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_8e1tkril
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

373 16 A 05-JUN-23 8319206 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_8j1tkrja
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 4, PDB Name: DB1_PDB2

369 17 A 05-JUN-23 8319188 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_8c1tkril
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 5, PDB Name: DB1_PDB3

367 18 A 05-JUN-23 8319180 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_881tkrhr
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 5, PDB Name: DB1_PDB3

371	19	A	05-JUN-23	8319197	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 5, PDB Name: DB1_PDB3						
374	20	A	05-JUN-23	8319210	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_8k1tkrjb						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 5, PDB Name: DB1_PDB3						
378	21	A	05-JUN-23	8318720	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_7j1tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
388	22	A	05-JUN-23	8318714	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_7k1tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
384	23	A	05-JUN-23	8318717	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_711tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
389	24	A	05-JUN-23	8318719	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_7m1tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
381	25	A	05-JUN-23	8318720	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_7n1tkqrh						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
392	26	A	05-JUN-23	8318714	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_7o1tkqrj						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						

Container ID: 3, PDB Name: DB1_PDB1

385 27 A 05-JUN-23 8318717 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
 27_7p1tkqrq
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

390 28 A 05-JUN-23 8318719 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
 28_7q1tkqs1
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

380 29 A 05-JUN-23 8318720 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
 29_7r1tkr32
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

391 30 A 05-JUN-23 8318714 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
 30_7s1tkr3a
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

382 31 A 05-JUN-23 8318717 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
 31_7t1tkr3i
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

387 32 A 05-JUN-23 8318719 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
 32_7u1tkr42
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

383 33 A 05-JUN-23 8318719 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
 33_7v1tkra6
 Tag: ORACOPYBKUPONFSXN_LEVEL_0
 Container ID: 3, PDB Name: DB1_PDB1

379 34 A 05-JUN-23 8318717 01-JUN-23 NO
 Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-

```
34_801tkram
```

```
    Tag: ORACOPYBKUPONFSXN_LEVEL_0  
    Container ID: 3, PDB Name: DB1_PDB1
```

```
386      35   A 05-JUN-23          8318714      01-JUN-23       NO  
           Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-  
35_811tkrap  
           Tag: ORACOPYBKUPONFSXN_LEVEL_0  
           Container ID: 3, PDB Name: DB1_PDB1
```

```
RMAN> switch database to copy;
```

```
datafile 1 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-SYSTEM_FNO-1_821tkrb8"  
datafile 3 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-SYSAUX_FNO-3_831tkrd9"  
datafile 4 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-UNDOTBS1_FNO-4_851tkrgf"  
datafile 5 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-SYSTEM_FNO-5_8d1tkril"  
datafile 6 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-SYSAUX_FNO-6_891tkrhr"  
datafile 7 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-USERS_FNO-7_8h1tkrj9"  
datafile 8 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj7"  
datafile 9 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-  
1730530050_TS-SYSTEM_FNO-9_8a1tkrhr"  
datafile 10 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-SYSAUX_FNO-10_861tkrgo"  
datafile 11 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-UNDOTBS1_FNO-11_841tkrf2"  
datafile 12 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-USERS_FNO-12_8i1tkrj9"  
datafile 13 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-SYSTEM_FNO-13_8b1tkril"  
datafile 14 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-SYSAUX_FNO-14_871tkrhr"  
datafile 15 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-UNDOTBS1_FNO-15_8e1tkril"  
datafile 16 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-USERS_FNO-16_8j1tkrja"  
datafile 17 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-SYSTEM_FNO-17_8c1tkril"  
datafile 18 switched to datafile copy "/nfsfsxn/oracopy/data_D-  
DB1_I-1730530050_TS-SYSAUX_FNO-18_881tkrhr"
```

```
datafile 19 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4"
datafile 20 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-20_8k1tkrjb"
datafile 21 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-21_7j1tkqk6"
datafile 22 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-22_7k1tkqk6"
datafile 23 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-23_7l1tkqk6"
datafile 24 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-24_7m1tkqk6"
datafile 25 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-25_7n1tkqrh"
datafile 26 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-26_7o1tkqrj"
datafile 27 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-27_7p1tkqrq"
datafile 28 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-28_7q1tkqs1"
datafile 29 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-29_7r1tkr32"
datafile 30 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-30_7s1tkr3a"
datafile 31 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-31_7t1tkr3i"
datafile 32 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-32_7u1tkr42"
datafile 33 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-33_7v1tkra6"
datafile 34 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-34_801tkram"
datafile 35 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-35_811tkrap"
```

```
RMAN> run {
2> set until sequence 204;
3> recover database;
4> }
```

```
executing command: SET until clause
```

```
Starting recover at 07-JUN-23
using channel ORA_DISK_1
```

```
starting media recovery
```

```
archived log for thread 1 with sequence 190 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_190_17vwvvt9_.arc
archived log for thread 1 with sequence 191 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_191_17vx6vmg_.arc
archived log for thread 1 with sequence 192 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_192_17vxctms_.arc
archived log for thread 1 with sequence 193 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_193_17vxjjps_.arc
archived log for thread 1 with sequence 194 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_194_17vxnxrh_.arc
archived log for thread 1 with sequence 195 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_195_17vxswv5_.arc
archived log for thread 1 with sequence 196 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_196_17vxylwp_.arc
archived log for thread 1 with sequence 197 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_197_17vy3cyw_.arc
archived log for thread 1 with sequence 198 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_198_17vy8245_.arc
archived log for thread 1 with sequence 199 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_199_17vydv4c_.arc
archived log for thread 1 with sequence 200 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_200_17vykf23_.arc
archived log for thread 1 with sequence 201 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_201_17vyp1dh_.arc
archived log for thread 1 with sequence 202 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_202_17vyvrm5_.arc
archived log for thread 1 with sequence 203 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_203_17vzdfwm_.arc
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05/o1_mf_1_190_17vwvvt9
_.arc thread=1 sequence=190
archived log file
```

```
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_191_17vx6vmsg
_.arc thread=1 sequence=191
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_192_17vxctms
_.arc thread=1 sequence=192
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_193_17vxjjps
_.arc thread=1 sequence=193
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_194_17vxnxrh
_.arc thread=1 sequence=194
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_195_17vxswv5
_.arc thread=1 sequence=195
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_196_17vxylwp
_.arc thread=1 sequence=196
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_197_17vy3cyw
_.arc thread=1 sequence=197
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_198_17vy8245
_.arc thread=1 sequence=198
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_199_17vydv4c
_.arc thread=1 sequence=199
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_200_17vykf23
_.arc thread=1 sequence=200
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_201_17vyp1dh
_.arc thread=1 sequence=201
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_202_17vyvrm5
_.arc thread=1 sequence=202
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_203_17vzdfwm
_.arc thread=1 sequence=203
media recovery complete, elapsed time: 00:19:30
Finished recover at 07-JUN-23
```

```
RMAN> exit
```

```
Recovery Manager complete.
```

```
[oracle@ip-172-30-15-124 dbs]$ sqlplus / as sysdba
```

```
SQL*Plus: Release 19.0.0.0.0 - Production on Wed Jun 7 15:58:12 2023
Version 19.18.0.0.0
```

```
Copyright (c) 1982, 2022, Oracle. All rights reserved.
```

```
Connected to:
```

```
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 -
Production
Version 19.18.0.0.0
```

```
SQL> select member from v$logfile;
```

```
MEMBER
```

```
-----+
-----+
+DATA/DB1/ONLINELOG/group_3.264.1136666437
+DATA/DB1/ONLINELOG/group_2.263.1136666437
+DATA/DB1/ONLINELOG/group_1.262.1136666437
```

```
SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_1.262.1136666437' to
'/nfsfsxn/oracopy/redo01.log';
```

```
Database altered.
```

```
SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_2.263.1136666437' to
'/nfsfsxn/oracopy/redo02.log';
```

```
Database altered.
```

```
SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_3.264.1136666437' to
'/nfsfsxn/oracopy/redo03.log';
```

```
Database altered.
```

```
SQL> alter database noarchivelog;
```

```
Database altered.
```

```
SQL> alter database open resetlogs;
```

```
Database altered.
```

```
SQL> set lin 200;
```

```

SQL> select name from v$datafile
  2  union
  3  select name from v$controlfile
  4  union
  5  select name from v$tempfile
  6  union
  7  select member from v$logfile;

NAME
-----
-----  

-----  

/nfsfsxn/oracopy/DB1/FB864A929AEB79B9E053630F1EAC7046/datafile/o1_mf
_temp_181bhz6g_.tmp  

/nfsfsxn/oracopy/DB1/FB867DA8C68C816EE053630F1EAC2BCF/datafile/o1_mf
_temp_181bj16t_.tmp  

/nfsfsxn/oracopy/DB1/FB867EA89ECF81C0E053630F1EACB901/datafile/o1_mf
_temp_181bj135_.tmp  

/nfsfsxn/oracopy/DB1/FB867F8A4D4F821CE053630F1EAC69CC/datafile/o1_mf
_temp_181bj13g_.tmp  

/nfsfsxn/oracopy/DB1/datafile/o1_mf_temp_181bhwjg_.tmp  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_7j1tkqk6  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_7k1tkqk6  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_711tkqk6  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_7m1tkqk6  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_7n1tkqrh  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_7o1tkqrj

NAME
-----
-----  

-----  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-27_7p1tkqrq  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-28_7q1tkqs1  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-29_7r1tkr32  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-30_7s1tkr3a  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-31_7t1tkr3i  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-32_7u1tkr42  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-33_7v1tkra6  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-34_801tkram  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-35_811tkrap  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_861tkrgo  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_871tkrhr

NAME
-----
-----  

-----  

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_881tkrhr

```

```
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_831tkrd9
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_891tkrhr
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_8b1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_8c1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_821tkrb8
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_8d1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_8a1tkrhr
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_841tkrf2
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_8e1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4
```

NAME

```
-----
-----
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_851tkrgf
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj7
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_8i1tkrj9
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_8j1tkrja
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_8k1tkrjb
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_8h1tkrj9
/nfsfsxn/oracopy/db1.ctl
/nfsfsxn/oracopy/redo01.log
/nfsfsxn/oracopy/redo02.log
/nfsfsxn/oracopy/redo03.log
```

43 rows selected.

SQL> show pdbs;

CON_ID	CON_NAME	OPEN	MODE	RESTRICTED
2	PDB\$SEED	READ ONLY	NO	
3	DB1_PDB1	READ WRITE	NO	
4	DB1_PDB2	READ WRITE	NO	
5	DB1_PDB3	READ WRITE	NO	

SQL> alter session set container=db1_pdb1;

Session altered.

SQL> select * from test;

EVENT	ID	DT


```
-----  
1 18-MAY-23 02.35.37.000000 PM  
test oracle incremental merge switch to copy  
2 30-MAY-23 05.23.11.000000 PM  
test recovery on a new EC2 instance host with image copy on FSxN  
3 05-JUN-23 03.19.46.000000 PM  
test clone on a new EC2 instance host with image copy on FSxN
```

SQL>

9. Rename the cloned database instance and change database ID with Oracle nid utility. The database instance state needs to be in mount to execute the command.

```
SQL> select name, open_mode, log_mode from v$database;  
  
NAME          OPEN_MODE           LOG_MODE  
----  
DB1          READ WRITE        NOARCHIVELOG  
  
SQL> shutdown immediate;  
Database closed.  
Database dismounted.  
ORACLE instance shut down.  
  
SQL> startup mount;  
ORACLE instance started.  
  
Total System Global Area 1.0737E+10 bytes  
Fixed Size                  9174800 bytes  
Variable Size                1577058304 bytes  
Database Buffers             9126805504 bytes  
Redo Buffers                 24379392 bytes  
Database mounted.  
SQL> exit  
Disconnected from Oracle Database 19c Enterprise Edition Release  
19.0.0.0.0 - Production  
Version 19.18.0.0.0  
[oracle@ip-172-30-15-124 dbs]$ nid target=/ dbname=db1tst  
  
DBNEWID: Release 19.0.0.0.0 - Production on Wed Jun 7 16:15:14 2023  
  
Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights  
reserved.  
  
Connected to database DB1 (DBID=1730530050)
```

Connected to server version 19.18.0

Control Files in database:

/nfsfsxn/oracopy/db1.ctl

Change database ID and database name DB1 to DB1TST? (Y/[N]) => Y

Proceeding with operation

Changing database ID from 1730530050 to 3054879890

Changing database name from DB1 to DB1TST

Control File /nfsfsxn/oracopy/db1.ctl - modified
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_821tkrb - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_831tkrd - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_851tkrg - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_8d1tkri - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_891tkrh - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_8h1tkrj - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_8a1tkrh - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_861tkrg - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_841tkrf - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_8i1tkrj - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_8b1tkri - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_871tkrh - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_8e1tkri - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_8j1tkrj - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_8c1tkri - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_881tkrh - dbid changed, wrote new name
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-

```
UNDOTBS1_FNO-19_8f1tkrj - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
20_8k1tkrj - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
21_7j1tkqk - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
22_7k1tkqk - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
23_7l1tkqk - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
24_7m1tkqk - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
25_7n1tkqr - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
26_7o1tkqr - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
27_7p1tkqr - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
28_7q1tkqs - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
29_7r1tkr3 - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
30_7s1tkr3 - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
31_7t1tkr3 - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
32_7u1tkr4 - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
33_7v1tkra - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
34_801tkra - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
35_811tkra - dbid changed, wrote new name
    Datafile /nfsfsxn/oracopy/DB1/datafile/o1_mf_temp_181bhjg_.tm -
dbid changed, wrote new name
    Datafile
/nfsfsxn/oracopy/DB1/FB864A929AEB79B9E053630F1EAC7046/datafile/o1_mf
_temp_181bhz6g_.tm - dbid changed, wrote new name
    Datafile
/nfsfsxn/oracopy/DB1/FB867DA8C68C816EE053630F1EAC2BCF/datafile/o1_mf
_temp_181bj16t_.tm - dbid changed, wrote new name
    Datafile
/nfsfsxn/oracopy/DB1/FB867EA89ECF81C0E053630F1EACB901/datafile/o1_mf
_temp_181bj135_.tm - dbid changed, wrote new name
    Datafile
/nfsfsxn/oracopy/DB1/FB867F8A4D4F821CE053630F1EAC69CC/datafile/o1_mf
```

```
_temp_181bj13g_.tm - dbid changed, wrote new name
Control File /nfsfsxn/oracopy/db1.ctl - dbid changed, wrote new
name
Instance shut down

Database name changed to DB1TST.
Modify parameter file and generate a new password file before
restarting.
Database ID for database DB1TST changed to 3054879890.
All previous backups and archived redo logs for this database are
unusable.
Database is not aware of previous backups and archived logs in
Recovery Area.
Database has been shutdown, open database with RESETLOGS option.
Successfully changed database name and ID.
DBNEWID - Completed successfully.
```

10. Change Oracle database environment configuration to new database name or instance ID in oratab, init file, and create necessary admin directories that match with new instance ID. Then, start the instance with resetlogs option.

```

SQL> startup mount;
ORACLE instance started.

Total System Global Area 1.0737E+10 bytes
Fixed Size                  9174800  bytes
Variable Size              1577058304  bytes
Database Buffers           9126805504  bytes
Redo Buffers                24379392  bytes
Database mounted.

SQL> alter database open resetlogs;

Database altered.

SQL> select name, open_mode, log_mode from v$database;

NAME          OPEN_MODE          LOG_MODE
-----  -----
DB1TST        READ WRITE       NOARCHIVELOG

SQL> show pdbs

CON_ID CON_NAME          OPEN MODE RESTRICTED
-----  -----
2 PDB$SEED      READ ONLY  NO
3 DB1_PDB1      MOUNTED
4 DB1_PDB2      MOUNTED
5 DB1_PDB3      MOUNTED

SQL> alter pluggable database all open;

Pluggable database altered.

SQL> show pdbs

CON_ID CON_NAME          OPEN MODE RESTRICTED
-----  -----
2 PDB$SEED      READ ONLY  NO
3 DB1_PDB1      READ WRITE NO
4 DB1_PDB2      READ WRITE NO
5 DB1_PDB3      READ WRITE NO

SQL>
```

This completes the clone of a new Oracle instance from staging database copy on FSx NFS mount for DEV, UAT, or any other use cases. Multiple Oracle instances can be cloned off the same staging image copy.



If you run into error RMAN-06571: datafile 1 does not have recoverable copy when switching the database to copy, check database incarnation that matches with primary production DB. If needed, reset the incarnation to match with primary with RMAN command `reset database to incarnation n;`.

Where to find additional information

To learn more about the information described in this document, review the following documents and/or websites:

- RMAN: Merged Incremental Backup Strategies (Doc ID 745798.1)

https://support.oracle.com/knowledge/Oracle%20Database%20Products/745798_1.html

- RMAN Backup and Recovery User's Guide

<https://docs.oracle.com/en/database/oracle/oracle-database/19;bradv/getting-started-rman.html>

- Amazon FSx for NetApp ONTAP

<https://aws.amazon.com/fsx/netapp-ontap/>

- Amazon EC2

https://aws.amazon.com/pm/ec2/?trk=36c6da98-7b20-48fa-8225-4784bc9d9843&sc_channel=ps&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2&ef_id=Cj0KCQiA54KfBhCKARIIsAJzSrdqwQrghn6l71jiWzSeaT9Uh1-vY-VfhJixFxnv5rWwn2S7RqZOTQ0aAh7eEALw_wcB:G:s&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2

TR-4974: Oracle 19c in Standalone Restart on AWS FSx/EC2 with NFS/ASM

Allen Cao, Niyaz Mohamed, NetApp

Purpose

ASM (Automatic Storage Management) is a popular Oracle storage volume manager that is employed in many Oracle installations. It is also Oracle's recommended storage management solution. It provides an alternative to conventional volume managers and file systems. Since Oracle version 11g, ASM has been packaged with grid infrastructure rather than a database. As a result, in order to utilize Oracle ASM for storage management without RAC, you must install Oracle grid infrastructure in a standalone server, also known as Oracle Restart. Doing so certainly adds more complexity in an otherwise simpler Oracle database deployment. However, as the name implies, when Oracle is deployed in Restart mode, any failed Oracle services are restarted after a host reboot without user intervention, which provides a certain degree of high availability or HA functionality.

Oracle ASM is generally deployed in FC, iSCSI storage protocols and luns as raw storage devices. However, ASM on NFS protocol and NFS file system is also supported configuration by Oracle. In this documentation, we demonstrate how to deploy an Oracle 19c database with the NFS protocol and Oracle ASM in an Amazon FSx for ONTAP storage environment with EC2 compute instances. We also demonstrate how to use the NetApp SnapCenter service through the NetApp BlueXP console to backup, restore, and clone your Oracle database for dev/test or other use cases for storage-efficient database operation in the AWS public cloud.

This solution addresses the following use cases:

- Oracle database deployment in Amazon FSx for ONTAP storage and EC2 compute instances with NFS/ASM
- Testing and validating an Oracle workload in the public AWS cloud with NFS/ASM
- Testing and validating Oracle database Restart functionalities deployed in AWS

Audience


This solution is intended for the following people:

- A DBA who would like to deploy Oracle in an AWS public cloud with NFS/ASM.
- A database solution architect who would like to test Oracle workloads in the AWS public cloud.
- The storage administrator who would like to deploy and manage an Oracle database deployed to AWS FSx storage.
- The application owner who would like to stand up an Oracle database in AWS FSx/EC2.

Solution test and validation environment

The testing and validation of this solution was performed in an AWS FSx and EC2 environment that might not match the final deployment environment. For more information, see the section [\[Key Factors for Deployment Consideration\]](#).

Architecture

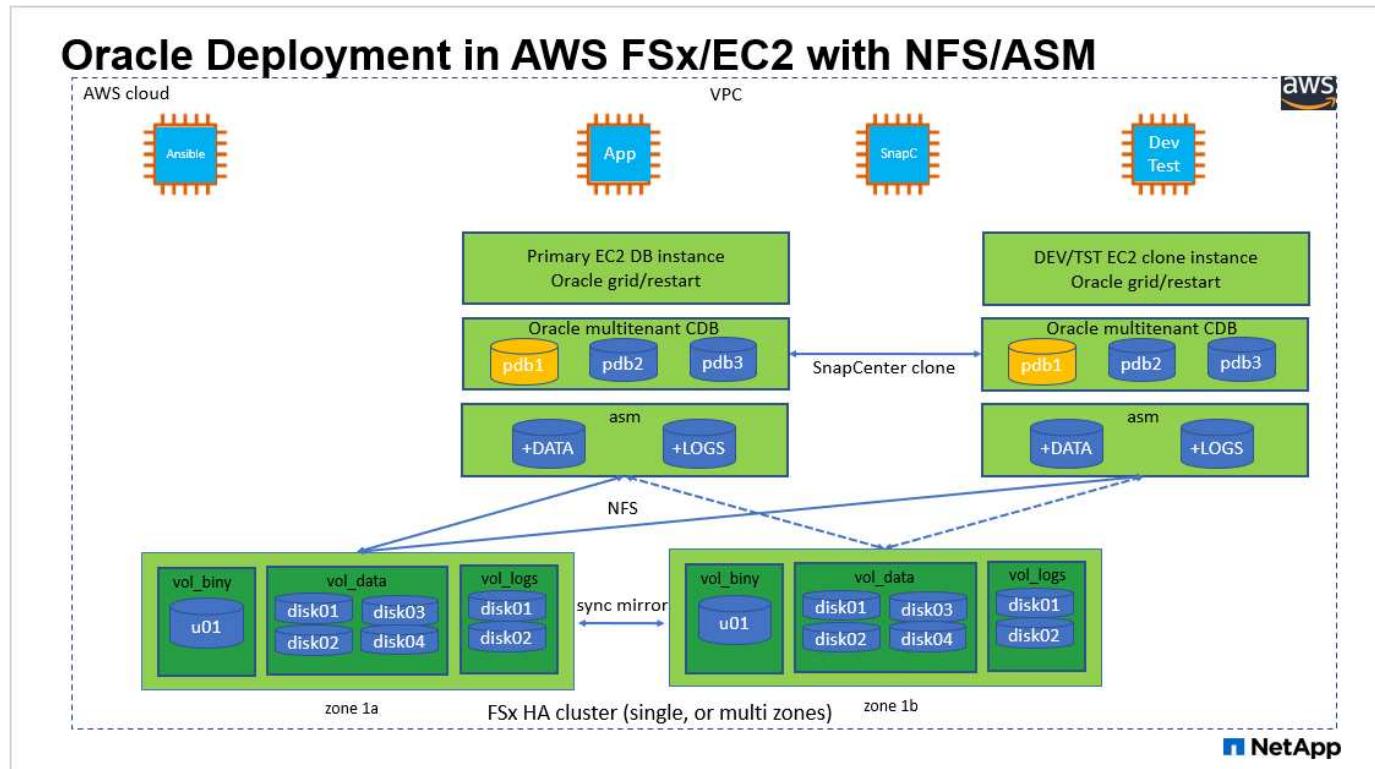

Hardware and software components

Hardware		
FSx ONTAP storage	Current version offered by AWS	One FSx HA cluster in the same VPC and availability zone

EC2 instance for compute	t2.xlarge/4vCPU/16G	Two EC2 T2 large EC2 instances, one as primary DB server and the other as a clone DB server
Software		
RedHat Linux	RHEL-8.6.0_HVM-20220503-x86_64-2-Hourly2-GP2	Deployed RedHat subscription for testing
Oracle Grid Infrastructure	Version 19.18	Applied RU patch p34762026_190000_Linux-x86-64.zip
Oracle Database	Version 19.18	Applied RU patch p34765931_190000_Linux-x86-64.zip
Oracle OPatch	Version 12.2.0.1.36	Latest patch p6880880_190000_Linux-x86-64.zip
SnapCenter Service	Version	v2.3.1.2324

Key factors for deployment consideration

- **EC2 compute instances.** In these tests and validations, we used an AWS EC2 t2.xlarge instance type for the Oracle database compute instance. NetApp recommends using an M5 type EC2 instance as the compute instance for Oracle in production deployment because it is optimized for database workloads. You need to size the EC2 instance appropriately for the number of vCPUs and the amount of RAM based on actual workload requirements.
- **FSx storage HA clusters single- or multi-zone deployment.** In these tests and validations, we deployed an FSx HA cluster in a single AWS availability zone. For production deployment, NetApp recommends deploying an FSx HA pair in two different availability zones. An FSx HA cluster is always provisioned in a HA pair that is sync mirrored in a pair of active-passive file systems to provide storage-level redundancy. Multi-zone deployment further enhances high availability in the event of failure in a single AWS zone.
- **FSx storage cluster sizing.** An Amazon FSx for ONTAP storage file system provides up to 160,000 raw SSD IOPS, up to 4GBps throughput, and a maximum of 192TiB capacity. However, you can size the cluster in terms of provisioned IOPS, throughput, and the storage limit (minimum 1,024 GiB) based on your actual requirements at the time of deployment. The capacity can be adjusted dynamically on the fly without affecting application availability.
- **Oracle data and logs layout.** In our tests and validations, we deployed two ASM disk groups for data and logs respectively. Within the +DATA asm disk group, we provisioned four disks in a data NFS file system mount point. Within the +LOGS asm disk group, we provisioned two disks in a logs NFS file system mount point. For large database deployment, ASM disk groups can be built to span multiple FSx file systems with ASM NFS disks distributed through multiple NFS mount points anchored on FSx file systems. This particular setup is designed to meet database throughput over 4GBps throughput and 160,000 raw SSD IOPS requirement.
- **dNFS configuration.** dNFS is built into Oracle kernel and is known to dramatically increase Oracle database performance when Oracle is deployed to NFS storage. dNFS is packaged into Oracle binary but is not turned on by default. It should be turned on for any Oracle database deployment on NFS. For multiple FSx file systems deployment for large database, dNFS multi-path should be properly configured.
- **Oracle ASM redundancy level to use for each Oracle ASM disk group that you create.** Because FSx already mirrors the storage on the FSx cluster level, you should ONLY use External Redundancy, which means that the option does not allow Oracle ASM to mirror the contents of the disk group. This is particularly important as NFS for Oracle database data storage requires HARD NFS mount option which is NOT desirable for mirroring ASM contents on the Oracle level.
- **Database backup.** NetApp provides a SaaS version of SnapCenter software service for database backup, restore, and clone in the cloud that is available through the NetApp BlueXP console UI. NetApp

recommends implementing such a service to achieve fast (under a minute) SnapShot backup, quick (few minutes) database restore, and database cloning.

Solution deployment

The following section provides step-by-step deployment procedures.

Prerequisites for deployment

Deployment requires the following prerequisites.

1. An AWS account has been set up, and the necessary VPC and network segments have been created within your AWS account.
2. From the AWS EC2 console, you must deploy two EC2 Linux instances, one as the primary Oracle DB server and an optional alternative clone target DB server. See the architecture diagram in the previous section for more details about the environment setup. Also review the [User Guide for Linux instances](#) for more information.
3. From the AWS EC2 console, deploy Amazon FSx for ONTAP storage HA clusters to host the Oracle database volumes. If you are not familiar with the deployment of FSx storage, see the documentation [Creating FSx for ONTAP file systems](#) for step-by-step instructions.
4. Steps 2 and 3 can be performed using the following Terraform automation toolkit, which creates an EC2 instance named `ora_01` and an FSx file system named `fsx_01`. Review the instruction carefully and change the variables to suit your environment before execution.

```
git clone https://github.com/NetApp-Automation/na_aws_fsx_ec2_deploy.git
```



Ensure that you have allocated at least 50G in EC2 instance root volume in order to have sufficient space to stage Oracle installation files.

EC2 instance kernel configuration

With the prerequisites provisioned, log into the EC2 instance as ec2-user and sudo to root user to configure the Linux kernel for Oracle installation.

1. Create a staging directory /tmp/archive folder and set the 777 permission.

```
mkdir /tmp/archive  
chmod 777 /tmp/archive
```

2. Download and stage the Oracle binary installation files and other required rpm files to the /tmp/archive directory.

See the following list of installation files to be stated in /tmp/archive on the EC2 instance.

```
[ec2-user@ip-172-30-15-58 ~]$ ls -l /tmp/archive  
total 10537316  
-rw-rw-r--. 1 ec2-user ec2-user      19112 Mar 21 15:57 compat-  
libcap1-1.10-7.el7.x86_64.rpm  
-rw-rw-r--  1 ec2-user ec2-user 3059705302 Mar 21 22:01  
LINUX.X64_193000_db_home.zip  
-rw-rw-r--  1 ec2-user ec2-user 2889184573 Mar 21 21:09  
LINUX.X64_193000_grid_home.zip  
-rw-rw-r--. 1 ec2-user ec2-user      589145 Mar 21 15:56  
netapp_linux_unified_host_utilities-7-1.x86_64.rpm  
-rw-rw-r--. 1 ec2-user ec2-user      31828 Mar 21 15:55 oracle-  
database-preinstall-19c-1.0-2.el8.x86_64.rpm  
-rw-rw-r--  1 ec2-user ec2-user 2872741741 Mar 21 22:31  
p34762026_190000_Linux-x86-64.zip  
-rw-rw-r--  1 ec2-user ec2-user 1843577895 Mar 21 22:32  
p34765931_190000_Linux-x86-64.zip  
-rw-rw-r--  1 ec2-user ec2-user 124347218 Mar 21 22:33  
p6880880_190000_Linux-x86-64.zip  
-rw-r--r--  1 ec2-user ec2-user     257136 Mar 22 16:25  
policycoreutils-python-utils-2.9-9.el8.noarch.rpm
```

3. Install Oracle 19c preinstall RPM, which satisfies most kernel configuration requirements.

```
yum install /tmp/archive/oracle-database-preinstall-19c-1.0-  
2.el8.x86_64.rpm
```

4. Download and install the missing compat-libcap1 in Linux 8.

```
yum install /tmp/archive/compat-libcap1-1.10-7.el7.x86_64.rpm
```

5. From NetApp, download and install NetApp host utilities.

```
yum install /tmp/archive/netapp_linux_unified_host_utilities-7-1.x86_64.rpm
```

6. Install policycoreutils-python-utils, which is not available in the EC2 instance.

```
yum install /tmp/archive/policycoreutils-python-utils-2.9-9.el8.noarch.rpm
```

7. Install open JDK version 1.8.

```
yum install java-1.8.0-openjdk.x86_64
```

8. Install nfs-utils.

```
yum install nfs-utils
```

9. Disable transparent hugepages in the current system.

```
echo never > /sys/kernel/mm/transparent_hugepage/enabled  
echo never > /sys/kernel/mm/transparent_hugepage/defrag
```

Add the following lines in /etc/rc.local to disable transparent_hugepage after reboot:

```
# Disable transparent hugepages  
if test -f /sys/kernel/mm/transparent_hugepage/enabled;  
then  
    echo never > /sys/kernel/mm/transparent_hugepage/enabled  
fi  
if test -f /sys/kernel/mm/transparent_hugepage/defrag;  
then  
    echo never > /sys/kernel/mm/transparent_hugepage/defrag  
fi
```

10. Disable selinux by changing SELINUX=enforcing to SELINUX=disabled. You must reboot the host to make the change effective.

```
vi /etc/sysconfig/selinux
```

11. Add the following lines to `limit.conf` to set the file descriptor limit and stack size without quotes " ".

```
vi /etc/security/limits.conf
"*
    hard    nofile      65536"
"*
    soft     stack      10240"
```

12. Add swap space to EC2 instance by following this instruction: [How do I allocate memory to work as swap space in an Amazon EC2 instance by using a swap file?](#) The exact amount of space to add depends on the size of RAM up to 16G.
13. Add the ASM group to be used for the asm sysasm group

```
groupadd asm
```

14. Modify the oracle user to add ASM as a secondary group (the oracle user should have been created after Oracle preinstall RPM installation).

```
usermod -a -G asm oracle
```

15. Reboot the EC2 instance.

Provision and export NFS volumes to be mounted to EC2 instance host

Provision three volumes from the command line by login to FSx cluster via ssh as fsxadmin user with FSx cluster management IP to host the Oracle database binary, data, and logs files.

1. Log into the FSx cluster through SSH as the fsxadmin user.

```
ssh fsxadmin@172.30.15.53
```

2. Execute the following command to create a volume for the Oracle binary.

```
vol create -volume ora_01_bin -aggregate aggr1 -size 50G -state online -type RW -junction-path /ora_01_bin -snapshot-policy none -tiering-policy snapshot-only
```

3. Execute the following command to create a volume for Oracle data.

```
vol create -volume ora_01_data -aggregate aggr1 -size 100G -state online -type RW -junction-path /ora_01_data -snapshot-policy none -tiering-policy snapshot-only
```

4. Execute the following command to create a volume for Oracle logs.

```
vol create -volume ora_01_logs -aggregate aggr1 -size 100G -state online -type RW -junction-path /ora_01_logs -snapshot-policy none -tiering-policy snapshot-only
```

5. Validate the DB volumes created.

```
vol show
```

This is expected to return:

```
FsxId02ad7bf3476b741df::> vol show
(vol show)
FsxId06c3c8b2a7bd56458::> vol show
Vserver      Volume          Aggregate     State       Type        Size
Available   Used%
-----  -----  -----  -----
-----  -----  -----
svm_ora    ora_01_bin  aggr1        online      RW         50GB
47.50GB    0%
svm_ora    ora_01_data  aggr1        online      RW         100GB
95.00GB    0%
svm_ora    ora_01_logs  aggr1        online      RW         100GB
95.00GB    0%
svm_ora    svm_ora_root aggr1        online      RW         1GB
972.1MB    0%
4 entries were displayed.
```

Database storage configuration

Now, import and set up the FSx storage for the Oracle grid infrastructure and database installation on the EC2 instance host.

1. Log into the EC2 instance via SSH as the ec2-user with your SSH key and EC2 instance IP address.

```
ssh -i ora_01.pem ec2-user@172.30.15.58
```

2. Create /u01 directory to mount Oracle binary file system

```
sudo mkdir /u01
```

3. Mount the binary volume to /u01, changed to your FSx NFS lif IP address. If you deployed FSx cluster via NetApp automation toolkit, FSx virtual storage server NFS lif IP address will be listed in the output at the end of resources provision execution. Otherwise, it can be retrieved from AWS FSx console UI.

```
sudo mount -t nfs 172.30.15.19:/ora_01_bin /u01 -o  
rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536
```

4. Change /u01 mount point ownership to the Oracle user and it's associated primary group.

```
sudo chown oracle:oinstall /u01
```

5. Create /oradata directory to mount Oracle data file system

```
sudo mkdir /oradata
```

6. Mount the data volume to /oradata, changed to your FSx NFS lif IP address

```
sudo mount -t nfs 172.30.15.19:/ora_01_data /oradata -o  
rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536
```

7. Change /oradata mount point ownership to the Oracle user and it's associated primary group.

```
sudo chown oracle:oinstall /oradata
```

8. Create /oralogs directory to mount Oracle logs file system

```
sudo mkdir /oralogs
```

9. Mount the log volume to /oralog, changed to your FSx NFS lif IP address

```
sudo mount -t nfs 172.30.15.19:/ora_01_logs /oralog -o  
rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536
```

10. Change /oralog mount point ownership to the Oracle user and its associated primary group.

```
sudo chown oracle:oinstall /oralog
```

11. Add a mount point to /etc/fstab.

```
sudo vi /etc/fstab
```

Add the following line.

```
172.30.15.19:/ora_01_bin /u01 nfs  
rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536 0  
0  
172.30.15.19:/ora_01_data /oradata nfs  
rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536 0  
0  
172.30.15.19:/ora_01_logs /oralog nfs  
rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536 0  
0
```

12. sudo to oracle user, create asm folders to store asm disk files

```
sudo su  
su - oracle  
mkdir /oradata/asm  
mkdir /oralog/asm
```

13. As the oracle user, create asm data disk files, change the count to match to the disk size with block size.

```
dd if=/dev/zero of=/oradata/asm/nfs_data_disk01 bs=1M count=20480
oflag=direct
dd if=/dev/zero of=/oradata/asm/nfs_data_disk02 bs=1M count=20480
oflag=direct
dd if=/dev/zero of=/oradata/asm/nfs_data_disk03 bs=1M count=20480
oflag=direct
dd if=/dev/zero of=/oradata/asm/nfs_data_disk04 bs=1M count=20480
oflag=direct
```

14. As the root user, change data disk file permission to 640

```
chmod 640 /oradata/asm/*
```

15. AS the oracle user, create asm logs disk files, change to count to match to the disk size with block size.

```
dd if=/dev/zero of=/oralog/asm/nfs_logs_disk01 bs=1M count=40960
oflag=direct
dd if=/dev/zero of=/oralog/asm/nfs_logs_disk02 bs=1M count=40960
oflag=direct
```

16. As the root user, change logs disk file permission to 640

```
chmod 640 /oralog/asm/*
```

17. Reboot the EC2 instance host.

Oracle grid infrastructure installation

1. Log into the EC2 instance as the ec2-user via SSH and enable password authentication by uncommenting `PasswordAuthentication yes` and then commenting out `PasswordAuthentication no`.

```
sudo vi /etc/ssh/sshd_config
```

2. Restart the sshd service.

```
sudo systemctl restart sshd
```

3. Reset the Oracle user password.

```
sudo passwd oracle
```

4. Log in as the Oracle Restart software owner user (oracle). Create an Oracle directory as follows:

```
mkdir -p /u01/app/oracle  
mkdir -p /u01/app/oraInventory
```

5. Change the directory permission setting.

```
chmod -R 775 /u01/app
```

6. Create a grid home directory and change to it.

```
mkdir -p /u01/app/oracle/product/19.0.0/grid  
cd /u01/app/oracle/product/19.0.0/grid
```

7. Unzip the grid installation files.

```
unzip -q /tmp/archive/LINUX.X64_193000_grid_home.zip
```

8. From grid home, delete the OPatch directory.

```
rm -rf OPatch
```

9. From grid home, copy `p6880880_190000_Linux-x86-64.zip` to the `grid_home`, and then unzip it.

```
cp /tmp/archive/p6880880_190000_Linux-x86-64.zip .
unzip p6880880_190000_Linux-x86-64.zip
```

- From grid home, revise `cv/admin/cvu_config`, uncomment and replace `CV_ASSUME_DISTID=OEL5` with `CV_ASSUME_DISTID=OL7`.

```
vi cv/admin/cvu_config
```

- Prepare a `gridsetup.rsp` file for silent installation and place the `rsp` file in the `/tmp/archive` directory. The `rsp` file should cover sections A, B, and G with the following information:

```
INVENTORY_LOCATION=/u01/app/oraInventory
oracle.install.option=HA_CONFIG
ORACLE_BASE=/u01/app/oracle
oracle.install.asm.OSDBA=dba
oracle.install.asm.OSOPER=oper
oracle.install.asm.OSASM=asm
oracle.install.asm.SYSASMPassword="SetPWD"
oracle.install.asm.diskGroup.name=DATA
oracle.install.asm.diskGroup.redundancy=EXTERNAL
oracle.install.asm.diskGroup.AUSize=4
oracle.install.asm.diskGroup.disks=/oradata/asm/*,/oralog/asm/*
oracle.install.asm.diskGroup.diskDiscoveryString=/oradata/asm/nfs_data_disk01,/oradata/asm/nfs_data_disk02,/oradata/asm/nfs_data_disk03,/oradata/asm/nfs_data_disk04
oracle.install.asm.monitorPassword="SetPWD"
oracle.install.asm.configureAFD=false
```

- Log into the EC2 instance as the root user.

- Install `cvuqdisk-1.0.10-1.rpm`.

```
rpm -ivh /u01/app/oracle/product/19.0.0/grid/cv/rpm/cvuqdisk-1.0.10-1.rpm
```

- Log into the EC2 instance as the Oracle user and extract the patch in the `/tmp/archive` folder.

```
unzip p34762026_190000_Linux-x86-64.zip
```

- From grid home `/u01/app/oracle/product/19.0.0/grid` and as the oracle user, launch `gridSetup.sh` for grid infrastructure installation.

```
./gridSetup.sh -applyRU /tmp/archive/34762026/ -silent  
-responseFile /tmp/archive/gridsetup.rsp
```

Ignore the warnings about wrong groups for grid infrastructure. We are using a single Oracle user to manage Oracle Restart, so this is expected.

16. As root user, execute the following script(s):

```
/u01/app/oraInventory/orainstRoot.sh  
  
/u01/app/oracle/product/19.0.0/grid/root.sh
```

17. As the Oracle user, execute the following command to complete the configuration:

```
/u01/app/oracle/product/19.0.0/grid/gridSetup.sh -executeConfigTools  
-responseFile /tmp/archive/gridsetup.rsp -silent
```

18. As the Oracle user, create the LOGS disk group.

```
bin/asmca -silent -sysAsmPassword 'yourPWD' -asmsnmpPassword  
'yourPWD' -createDiskGroup -diskGroupName LOGS -disk  
'/oratalogs/asm/nfs_logs_disk*' -redundancy EXTERNAL -au_size 4
```

19. As the Oracle user, validate grid services after installation configuration.

```

bin/crsctl stat res -t
+
Name           Target  State        Server
State details
Local Resources
ora.DATA.dg      ONLINE  ONLINE     ip-172-30-15-58
STABLE
ora.LISTENER.lsnr  ONLINE  ONLINE     ip-172-30-15-58
STABLE
ora.LOGS.dg      ONLINE  ONLINE     ip-172-30-15-58
STABLE
ora.asm          ONLINE  ONLINE     ip-172-30-15-58
Started, STABLE
ora.ons           OFFLINE OFFLINE    ip-172-30-15-58
STABLE
Cluster Resources
ora.cssd          ONLINE  ONLINE     ip-172-30-15-58
STABLE
ora.diskmon       OFFLINE OFFLINE
STABLE
ora.driver.afd    ONLINE  ONLINE     ip-172-30-15-58
STABLE
ora.evmd          ONLINE  ONLINE     ip-172-30-15-58
STABLE

```

Oracle database installation

1. Log in as the Oracle user and unset \$ORACLE_HOME and \$ORACLE_SID if it is set.

```
unset ORACLE_HOME  
unset ORACLE_SID
```

2. Create the Oracle DB home directory and change to it.

```
mkdir /u01/app/oracle/product/19.0.0/db1  
cd /u01/app/oracle/product/19.0.0/db1
```

3. Unzip the Oracle DB installation files.

```
unzip -q /tmp/archive/LINUX.X64_193000_db_home.zip
```

4. From the DB home, delete the OPatch directory.

```
rm -rf OPatch
```

5. From DB home, copy p6880880_190000_Linux-x86-64.zip to grid_home, and then unzip it.

```
cp /tmp/archive/p6880880_190000_Linux-x86-64.zip .  
unzip p6880880_190000_Linux-x86-64.zip
```

6. From DB home, revise cv/admin/cvu_config, and uncomment and replace CV_ASSUME_DISTID=OEL5 with CV_ASSUME_DISTID=OL7.

```
vi cv/admin/cvu_config
```

7. From the /tmp/archive directory, unpack the DB 19.18 RU patch.

```
unzip p34765931_190000_Linux-x86-64.zip
```

8. Prepare the DB silent install rsp file in /tmp/archive/dbinstall.rsp directory with the following values:

```
oracle.install.option=INSTALL_DB_SWONLY
UNIX_GROUP_NAME=oinstall
INVENTORY_LOCATION=/u01/app/oraInventory
ORACLE_HOME=/u01/app/oracle/product/19.0.0/db1
ORACLE_BASE=/u01/app/oracle
oracle.install.db.InstallEdition=EE
oracle.install.db.OSDBA_GROUP=dba
oracle.install.db.OSOPER_GROUP=oper
oracle.install.db.OSBACKUPDBA_GROUP=oper
oracle.install.db.OSDGDBA_GROUP=dba
oracle.install.db.OSKMDBA_GROUP=dba
oracle.install.db.OSRACDBA_GROUP=dba
oracle.install.db.rootconfig.executeRootScript=false
```

9. From db1 home /u01/app/oracle/product/19.0.0/db1, execute silent software-only DB installation.

```
./runInstaller -applyRU /tmp/archive/34765931/ -silent
-ignorePrereqFailure -responseFile /tmp/archive/dbinstall.rsp
```

10. As root user, run the `root.sh` script after software-only installation.

```
/u01/app/oracle/product/19.0.0/db1/root.sh
```

11. As Oracle user, create the `dbca.rsp` file with the following entries:

```
gdbName=db1.demo.netapp.com
sid=db1
createAsContainerDatabase=true
numberOfPDBs=3
pdbName=db1_pdb
useLocalUndoForPDBs=true
pdbAdminPassword="yourPWD"
templateName=General_Purpose.dbc
sysPassword="yourPWD"
systemPassword="yourPWD"
dbsnmpPassword="yourPWD"
storageType=ASM
diskGroupName=DATA
characterSet=AL32UTF8
nationalCharacterSet=AL16UTF16
listeners=LISTENER
databaseType=MULTIPURPOSE
automaticMemoryManagement=false
totalMemory=8192
```



Set the total memory based on available memory in EC2 instance host. Oracle allocates 75% of `totalMemory` to DB instance SGA or buffer cache.

12. As Oracle user, launch DB creation with dbca.

```
bin/dbca -silent -createDatabase -responseFile /tmp/archive/dbca.rsp

output:
Prepare for db operation
7% complete
Registering database with Oracle Restart
11% complete
Copying database files
33% complete
Creating and starting Oracle instance
35% complete
38% complete
42% complete
45% complete
48% complete
Completing Database Creation
53% complete
55% complete
56% complete
Creating Pluggable Databases
60% complete
64% complete
69% complete
78% complete
Executing Post Configuration Actions
100% complete
Database creation complete. For details check the logfiles at:
/u01/app/oracle/cfgtoollogs/dbca/db1.

Database Information:
Global Database Name:db1.demo.netapp.com
System Identifier(SID):db1
Look at the log file "/u01/app/oracle/cfgtoollogs/dbca/db1/db1.log"
for further details.
```

13. As Oracle user, validate Oracle Restart HA services after DB creation.

```
[oracle@ip-172-30-15-58 db1]$ ../../grid/bin/crsctl stat res -t
-----
-----
Name          Target  State       Server           State
details

-----
-----
Local Resources
-----
-----
ora.DATA.dg
      ONLINE  ONLINE      ip-172-30-15-58    STABLE
ora.LISTENER.lsnr
      ONLINE  ONLINE      ip-172-30-15-58    STABLE
ora.LOGS.dg
      ONLINE  ONLINE      ip-172-30-15-58    STABLE
ora.asm
      ONLINE  ONLINE      ip-172-30-15-58
Started,STABLE
ora.ons
      OFFLINE OFFLINE     ip-172-30-15-58    STABLE
-----
-----
Cluster Resources
-----
-----
ora.cssd
      1      ONLINE  ONLINE      ip-172-30-15-58    STABLE
ora.db1.db
      1      ONLINE  ONLINE      ip-172-30-15-58
Open,HOME=/u01/app/o
racle/product/19.0.0
/db1,STABLE
ora.diskmon
      1      OFFLINE OFFLINE     STABLE
ora.evmd
      1      ONLINE  ONLINE      ip-172-30-15-58    STABLE
-----
-----
[oracle@ip-172-30-15-58 db1]$
```

14. Set the Oracle user `.bash_profile`.

```
vi ~/.bash_profile
```

15. Add following entries:

```
export ORACLE_HOME=/u01/app/oracle/product/19.0.0/db1
export ORACLE_SID=db1
export PATH=$PATH:$ORACLE_HOME/bin
alias asm='export
ORACLE_HOME=/u01/app/oracle/product/19.0.0/grid;export
ORACLE_SID=+ASM;export PATH=$PATH:$ORACLE_HOME/bin'
```

16. Validate the CDB/PDB created.

```
. ~/.bash_profile

sqlplus / as sysdba

SQL> select name, open_mode from v$database;

NAME      OPEN_MODE
DB1       READ WRITE

SQL> select name from v$datafile;

NAME

+DATA/DB1/DATAFILE/system.256.1132176177
+DATA/DB1/DATAFILE/sysaux.257.1132176221
+DATA/DB1/DATAFILE/undotbs1.258.1132176247
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/system.265.11321
77009
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/sysaux.266.11321
77009
+DATA/DB1/DATAFILE/users.259.1132176247
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/undotbs1.267.113
2177009
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/system.271.11321
77853
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/sysaux.272.11321
77853
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/undotbs1.270.113
2177853
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/users.274.113217
```

```
7871
```

```
NAME
```

```
+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/system.276.11321  
77871  
+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/sysaux.277.11321  
77871  
+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/undotbs1.275.113  
2177871  
+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/users.279.113217  
7889  
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/system.281.11321  
77889  
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/sysaux.282.11321  
77889  
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/undotbs1.280.113  
2177889  
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/users.284.113217  
7907
```

```
19 rows selected.
```

```
SQL> show pdbs
```

CON_ID	CON_NAME	OPEN	MODE	RESTRICTED
2	PDB\$SEED	READ ONLY	NO	
3	DB1_PDB1	READ WRITE	NO	
4	DB1_PDB2	READ WRITE	NO	
5	DB1_PDB3	READ WRITE	NO	

```
SQL>
```

17. As oracle user, change to Oracle database home directory /u01/app/oracle/product/19.0.0/db1 and Enable dNFS

```
cd /u01/app/oracle/product/19.0.0/db1  
  
mkdir rdbms/lib/odm  
  
cp lib/libnfsodm19.so rdbms/lib/odm/
```

18. Configure orafstab file in ORACLE_HOME

```
vi $ORACLE_HOME/dbs/oranfstab

add following entries:

server: fsx_01
local: 172.30.15.58 path: 172.30.15.19
nfs_version: nfsv3
export: /ora_01_bin mount: /u01
export: /ora_01_data mount: /oradata
export: /ora_01_logs mount: /oralogs
```

19. As oracle user, login to database from sqlplus and set the DB recovery size and location to the +LOGS disk group.

```
. ~/.bash_profile

sqlplus / as sysdba

alter system set db_recovery_file_dest_size = 80G scope=both;

alter system set db_recovery_file_dest = '+LOGS' scope=both;
```

20. Enable archive log mode and reboot Oracle DB instance

```
shutdown immediate;

startup mount;

alter database archivelog;

alter database open;

alter system switch logfile;
```

21. Validate DB log mode and dNFS after instance reboot

```

SQL> select name, log_mode from v$database;

NAME      LOG_MODE
----- -----
DB1       ARCHIVELOG

SQL> select svrname, dirname from v$dnfs_servers;

SVRNAME
-----
DIRNAME
-----
fsx_01
/ora_01_data

fsx_01
/ora_01_biny

fsx_01
/ora_01_logs

```

22. Validate Oracle ASM

```

[oracle@ip-172-30-15-58 db1]$ asm
[oracle@ip-172-30-15-58 db1]$ sqlplus / as sysasm

SQL*Plus: Release 19.0.0.0.0 - Production on Tue May 9 20:39:39 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 -
Production
Version 19.18.0.0.0

SQL> set lin 200
SQL> col path form a30
SQL> select name, path, header_status, mount_status, state from
v$asm_disk;

NAME          PATH
----- -----

```

```

HEADER_STATUS MOUNT_S STATE
-----
----- -----
DATA_0002          /oradata/asm/nfs_data_disk01 MEMBER
CACHED  NORMAL
DATA_0000          /oradata/asm/nfs_data_disk02 MEMBER
CACHED  NORMAL
DATA_0001          /oradata/asm/nfs_data_disk03 MEMBER
CACHED  NORMAL
DATA_0003          /oradata/asm/nfs_data_disk04 MEMBER
CACHED  NORMAL
LOGS_0000          /oralogs/asm/nfs_logs_disk01 MEMBER
CACHED  NORMAL
LOGS_0001          /oralogs/asm/nfs_logs_disk02 MEMBER
CACHED  NORMAL

6 rows selected.

```

```

SQL> select name, state, ALLOCATION_UNIT_SIZE, TOTAL_MB, FREE_MB
from v$asm_diskgroup;

```

NAME	STATE	ALLOCATION_UNIT_SIZE
TOTAL_MB	FREE_MB	
DATA	MOUNTED	4194304
81920	73536	
LOGS	MOUNTED	4194304
81920	81640	

This completes Oracle 19c version 19.18 Restart deployment on an Amazon FSx for ONTAP and EC2 compute instance with NFS/ASM. If desired, NetApp recommends relocating the Oracle control file and online log files to the +LOGS disk group.

Automated deployment option

NetApp will release a fully automated solution deployment toolkit with Ansible to facilitate the implementation of this solution. Please check back for the availability of the toolkit. After it is released, a link will be posted here.

Oracle Database backup, restore, and clone with SnapCenter Service

See [SnapCenter Services for Oracle](#) for details on Oracle database backup, restore, and clone with NetApp BlueXP console.

Where to find additional information

To learn more about the information described in this document, review the following documents and/or websites:

- Installing Oracle Grid Infrastructure for a Standalone Server with a New Database Installation

<https://docs.oracle.com/en/database/oracle/oracle-database/19/ladbi/installing-oracle-grid-infrastructure-for-a-standalone-server-with-a-new-database-installation.html#GUID-0B1CEE8C-C893-46AA-8A6A-7B5FAAEC72B3>

- Installing and Configuring Oracle Database Using Response Files

<https://docs.oracle.com/en/database/oracle/oracle-database/19/ladbi/installing-and-configuring-oracle-database-using-response-files.html#GUID-D53355E9-E901-4224-9A2A-B882070EDDF7>

- Amazon FSx for NetApp ONTAP

<https://aws.amazon.com/fsx/netapp-ontap/>

- Amazon EC2

https://aws.amazon.com/pm/ec2/?trk=36c6da98-7b20-48fa-8225-4784bc9843&sc_channel=ps&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2&ef_id=Cj0KCQiA54KfBhCKARIIsAJzSrdqwQrghn6I71jiWzSeaT9Uh1-vY-VfhJixFxnv5rWwn2S7RqZOTQ0aAh7eEALw_wcB:G:s&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2

TR-4965: Oracle Database Deployment and Protection in AWS FSx/EC2 with iSCSI/ASM

Allen Cao, Niyaz Mohamed, NetApp

Purpose

ASM (Automatic Storage Management) is a popular Oracle storage volume manager that is employed in many Oracle installations. It is also Oracle's recommended storage management solution. It provides an alternative to conventional volume managers and file systems. Since Oracle version 11g, ASM has been packaged with grid infrastructure rather than a database. As a result, in order to utilize Oracle ASM for storage management without RAC, you must install Oracle grid infrastructure in a standalone server, also known as Oracle Restart. Doing so certainly adds more complexity in an otherwise simpler Oracle database deployment. However, as the name implies, when Oracle is deployed in Restart mode, any failed Oracle services are restarted after a host reboot without user intervention, which provides a certain degree of high availability or HA functionality.

In this documentation, we demonstrate how to deploy an Oracle database with the iSCSI protocol and Oracle ASM in an Amazon FSx for ONTAP storage environment with EC2 compute instances. We also demonstrate how to use the NetApp SnapCenter service through the NetApp BlueXP console to backup, restore, and clone your Oracle database for dev/test or other use cases for storage-efficient database operation in the AWS public cloud.

This solution addresses the following use cases:

- Oracle database deployment in Amazon FSx for ONTAP storage and EC2 compute instances with iSCSI/ASM
- Testing and validating an Oracle workload in the public AWS cloud with iSCSI/ASM

- Testing and validating Oracle database Restart functionalities deployed in AWS

Audience


This solution is intended for the following people:

- A DBA who would like to deploy Oracle in an AWS public cloud with iSCSI/ASM.
- A database solution architect who would like to test Oracle workloads in the AWS public cloud.
- The storage administrator who would like to deploy and manage an Oracle database deployed to AWS FSx storage.
- The application owner who would like to stand up an Oracle database in AWS FSx/EC2.

Solution test and validation environment

The testing and validation of this solution was performed in an AWS FSx and EC2 environment that might not match the final deployment environment. For more information, see the section [\[Key Factors for Deployment Consideration\]](#).

Architecture

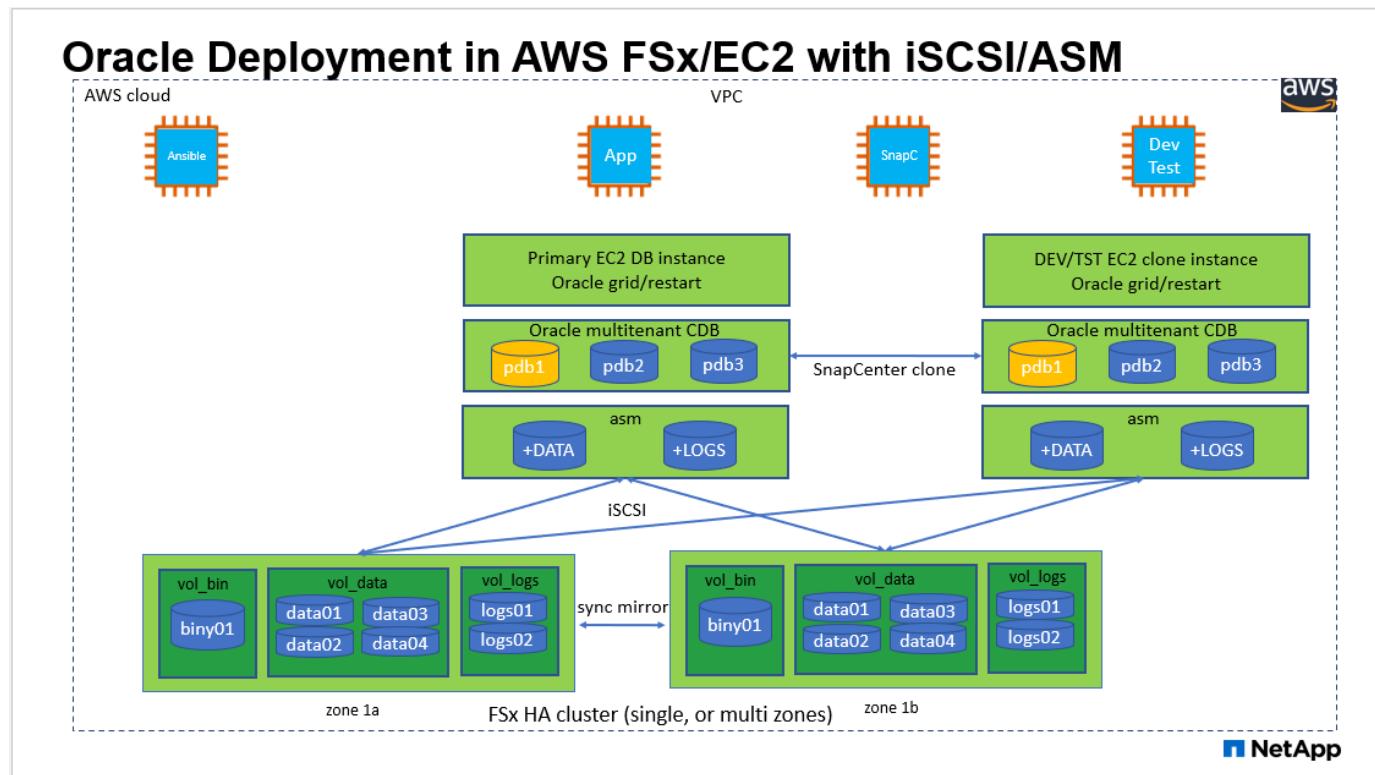

Hardware and software components

Hardware		
FSx ONTAP storage	Current version offered by AWS	One FSx HA cluster in the same VPC and availability zone
EC2 instance for compute	t2.xlarge/4vCPU/16G	Two EC2 T2 xlarge EC2 instances, one as primary DB server and the other as a clone DB server

Software		
RedHat Linux	RHEL-8.6.0_HVM-20220503-x86_64-2-Hourly2-GP2	Deployed RedHat subscription for testing
Oracle Grid Infrastructure	Version 19.18	Applied RU patch p34762026_190000_Linux-x86-64.zip
Oracle Database	Version 19.18	Applied RU patch p34765931_190000_Linux-x86-64.zip
Oracle OPatch	Version 12.2.0.1.36	Latest patch p6880880_190000_Linux-x86-64.zip
SnapCenter Service	Version	v2.3.1.2324

Key factors for deployment consideration

- **EC2 compute instances.** In these tests and validations, we used an AWS EC2 t2.xlarge instance type for the Oracle database compute instance. NetApp recommends using an M5 type EC2 instance as the compute instance for Oracle in production deployment because it is optimized for database workloads. You need to size the EC2 instance appropriately for the number of vCPUs and the amount of RAM based on actual workload requirements.
- **FSx storage HA clusters single- or multi-zone deployment.** In these tests and validations, we deployed an FSx HA cluster in a single AWS availability zone. For production deployment, NetApp recommends deploying an FSx HA pair in two different availability zones. An FSx HA cluster is always provisioned in a HA pair that is sync mirrored in a pair of active-passive file systems to provide storage-level redundancy. Multi-zone deployment further enhances high availability in the event of failure in a single AWS zone.
- **FSx storage cluster sizing.** An Amazon FSx for ONTAP storage file system provides up to 160,000 raw SSD IOPS, up to 4GBps throughput, and a maximum of 192TiB capacity. However, you can size the cluster in terms of provisioned IOPS, throughput, and the storage limit (minimum 1,024 GiB) based on your actual requirements at the time of deployment. The capacity can be adjusted dynamically on the fly without affecting application availability.
- **Oracle data and logs layout.** In our tests and validations, we deployed two ASM disk groups for data and logs respectively. Within the +DATA asm disk group, we provisioned four LUNs in a data volume. Within the +LOGS asm disk group, we provisioned two LUNs in a logs volume. In general, multiple LUNs laid out within an Amazon FSx for ONTAP volume provides better performance.
- **iSCSI configuration.** The EC2 instance database server connects to FSx storage with the iSCSI protocol. EC2 instances generally deploy with a single network interface or ENI. The single NIC interface carries both iSCSI and application traffic. It is important to gauge the Oracle database peak I/O throughput requirement by carefully analyzing the Oracle AWR report in order to choose a right EC2 compute instance that meets both application and iSCSI traffic-throughput requirements. NetApp also recommends allocating four iSCSI connections to both FSx iSCSI endpoints with multipath properly configured.
- **Oracle ASM redundancy level to use for each Oracle ASM disk group that you create.** Because FSx already mirrors the storage on the FSx cluster level, you should use External Redundancy, which means that the option does not allow Oracle ASM to mirror the contents of the disk group.
- **Database backup.** NetApp provides a SaaS version of SnapCenter software service for database backup, restore, and clone in the cloud that is available through the NetApp BlueXP console UI. NetApp recommends implementing such a service to achieve fast (under a minute) SnapShot backup, quick (few minutes) database restore, and database cloning.

Solution deployment

The following section provides step-by-step deployment procedures.

Prerequisites for deployment

Deployment requires the following prerequisites.

1. An AWS account has been set up, and the necessary VPC and network segments have been created within your AWS account.
2. From the AWS EC2 console, you must deploy two EC2 Linux instances, one as the primary Oracle DB server and an optional alternative clone target DB server. See the architecture diagram in the previous section for more details about the environment setup. Also review the [User Guide for Linux instances](#) for more information.
3. From the AWS EC2 console, deploy Amazon FSx for ONTAP storage HA clusters to host the Oracle database volumes. If you are not familiar with the deployment of FSx storage, see the documentation [Creating FSx for ONTAP file systems](#) for step-by-step instructions.
4. Steps 2 and 3 can be performed using the following Terraform automation toolkit, which creates an EC2 instance named `ora_01` and an FSx file system named `fsx_01`. Review the instruction carefully and change the variables to suit your environment before execution.

```
git clone https://github.com/NetApp-Automation/na_aws_fsx_ec2_deploy.git
```



Ensure that you have allocated at least 50G in EC2 instance root volume in order to have sufficient space to stage Oracle installation files.

EC2 instance kernel configuration

With the prerequisites provisioned, log into the EC2 instance as ec2-user and sudo to root user to configure the Linux kernel for Oracle installation.

1. Create a staging directory /tmp/archive folder and set the 777 permission.

```
mkdir /tmp/archive  
chmod 777 /tmp/archive
```

2. Download and stage the Oracle binary installation files and other required rpm files to the /tmp/archive directory.

See the following list of installation files to be stated in /tmp/archive on the EC2 instance.

```
[ec2-user@ip-172-30-15-58 ~]$ ls -l /tmp/archive  
total 10537316  
-rw-rw-r--. 1 ec2-user ec2-user      19112 Mar 21 15:57 compat-  
libcap1-1.10-7.el7.x86_64.rpm  
-rw-rw-r--  1 ec2-user ec2-user 3059705302 Mar 21 22:01  
LINUX.X64_193000_db_home.zip  
-rw-rw-r--  1 ec2-user ec2-user 2889184573 Mar 21 21:09  
LINUX.X64_193000_grid_home.zip  
-rw-rw-r--. 1 ec2-user ec2-user      589145 Mar 21 15:56  
netapp_linux_unified_host_utilities-7-1.x86_64.rpm  
-rw-rw-r--. 1 ec2-user ec2-user      31828 Mar 21 15:55 oracle-  
database-preinstall-19c-1.0-2.el8.x86_64.rpm  
-rw-rw-r--  1 ec2-user ec2-user 2872741741 Mar 21 22:31  
p34762026_190000_Linux-x86-64.zip  
-rw-rw-r--  1 ec2-user ec2-user 1843577895 Mar 21 22:32  
p34765931_190000_Linux-x86-64.zip  
-rw-rw-r--  1 ec2-user ec2-user 124347218 Mar 21 22:33  
p6880880_190000_Linux-x86-64.zip  
-rw-r--r--  1 ec2-user ec2-user     257136 Mar 22 16:25  
policycoreutils-python-utils-2.9-9.el8.noarch.rpm
```

3. Install Oracle 19c preinstall RPM, which satisfies most kernel configuration requirements.

```
yum install /tmp/archive/oracle-database-preinstall-19c-1.0-  
2.el8.x86_64.rpm
```

4. Download and install the missing compat-libcap1 in Linux 8.

```
yum install /tmp/archive/compat-libcap1-1.10-7.el7.x86_64.rpm
```

5. From NetApp, download and install NetApp host utilities.

```
yum install /tmp/archive/netapp_linux_unified_host_utilities-7-1.x86_64.rpm
```

6. Install policycoreutils-python-utils, which is not available in the EC2 instance.

```
yum install /tmp/archive/policycoreutils-python-utils-2.9-9.el8.noarch.rpm
```

7. Install open JDK version 1.8.

```
yum install java-1.8.0-openjdk.x86_64
```

8. Install iSCSI initiator utils.

```
yum install iscsi-initiator-utils
```

9. Install sg3_utils.

```
yum install sg3_utils
```

10. Install device-mapper-multipath.

```
yum install device-mapper-multipath
```

11. Disable transparent hugepages in the current system.

```
echo never > /sys/kernel/mm/transparent_hugepage/enabled  
echo never > /sys/kernel/mm/transparent_hugepage/defrag
```

Add the following lines in /etc/rc.local to disable transparent_hugepage after reboot:

```
# Disable transparent hugepages
    if test -f /sys/kernel/mm/transparent_hugepage/enabled;
then
        echo never > /sys/kernel/mm/transparent_hugepage/enabled
    fi
    if test -f /sys/kernel/mm/transparent_hugepage/defrag;
then
        echo never > /sys/kernel/mm/transparent_hugepage/defrag
    fi
```

12. Disable selinux by changing SELINUX=enforcing to SELINUX=disabled. You must reboot the host to make the change effective.

```
vi /etc/sysconfig/selinux
```

13. Add the following lines to limit.conf to set the file descriptor limit and stack size without quotes " ".

```
vi /etc/security/limits.conf
"*
        hard      nofile      65536"
"*
        soft      stack      10240"
```

14. Add swap space to EC2 instance by following this instruction: [How do I allocate memory to work as swap space in an Amazon EC2 instance by using a swap file?](#) The exact amount of space to add depends on the size of RAM up to 16G.

15. Change node.session.timeout.replacement_timeout in the iscsi.conf configuration file from 120 to 5 seconds.

```
vi /etc/iscsi/iscsid.conf
```

16. Enable and start the iSCSI service on the EC2 instance.

```
systemctl enable iscsid
systemctl start iscsid
```

17. Retrieve the iSCSI initiator address to be used for database LUN mapping.

```
cat /etc/iscsi/initiatorname.iscsi
```

18. Add the ASM group to be used for the asm sysasm group

```
groupadd asm
```

19. Modify the oracle user to add ASM as a secondary group (the oracle user should have been created after Oracle preinstall RPM installation).

```
usermod -a -G asm oracle
```

20. Reboot the EC2 instance.

Provision and map database volumes and LUNs to the EC2 instance host

Provision three volumes from the command line by login to FSx cluster via ssh as fsxadmin user with FSx cluster management IP to host the Oracle database binary, data, and logs files.

1. Log into the FSx cluster through SSH as the fsxadmin user.

```
ssh fsxadmin@172.30.15.53
```

2. Execute the following command to create a volume for the Oracle binary.

```
vol create -volume ora_01_bin -aggregate aggr1 -size 50G -state  
online -type RW -snapshot-policy none -tiering-policy snapshot-only
```

3. Execute the following command to create a volume for Oracle data.

```
vol create -volume ora_01_data -aggregate aggr1 -size 100G -state  
online -type RW -snapshot-policy none -tiering-policy snapshot-only
```

4. Execute the following command to create a volume for Oracle logs.

```
vol create -volume ora_01_logs -aggregate aggr1 -size 100G -state  
online -type RW -snapshot-policy none -tiering-policy snapshot-only
```

5. Create a binary LUN within the database binary volume.

```
lun create -path /vol/ora_01_bin/ora_01_bin_01 -size 40G -ostype  
linux
```

6. Create data LUNs within the database data volume.

```
lun create -path /vol/ora_01_data/ora_01_data_01 -size 20G -ostype  
linux
```

```
lun create -path /vol/ora_01_data/ora_01_data_02 -size 20G -ostype  
linux
```

```
lun create -path /vol/ora_01_data/ora_01_data_03 -size 20G -ostype  
linux
```

```
lun create -path /vol/ora_01_data/ora_01_data_04 -size 20G -ostype  
linux
```

7. Create log LUNs within the database logs volume.

```
lun create -path /vol/ora_01_logs/ora_01_logs_01 -size 40G -ostype  
linux
```

```
lun create -path /vol/ora_01_logs/ora_01_logs_02 -size 40G -ostype  
linux
```

8. Create an igroup for the EC2 instance with the initiator retrieved from step 14 of the EC2 kernel configuration above.

```
igroup create -igroup ora_01 -protocol iscsi -ostype linux  
-initiator iqn.1994-05.com.redhat:f65fed7641c2
```

9. Map the LUNs to the igroup created above. Increment the LUN ID sequentially for each additional LUN within a volume.

```
map -path /vol/ora_01_bin/ora_01_bin_01 -igroup ora_01 -vserver  
svm_ora -lun-id 0  
map -path /vol/ora_01_data/ora_01_data_01 -igroup ora_01 -vserver  
svm_ora -lun-id 1  
map -path /vol/ora_01_data/ora_01_data_02 -igroup ora_01 -vserver  
svm_ora -lun-id 2  
map -path /vol/ora_01_data/ora_01_data_03 -igroup ora_01 -vserver  
svm_ora -lun-id 3  
map -path /vol/ora_01_data/ora_01_data_04 -igroup ora_01 -vserver  
svm_ora -lun-id 4  
map -path /vol/ora_01_logs/ora_01_logs_01 -igroup ora_01 -vserver  
svm_ora -lun-id 5  
map -path /vol/ora_01_logs/ora_01_logs_02 -igroup ora_01 -vserver  
svm_ora -lun-id 6
```

10. Validate the LUN mapping.

```
mapping show
```

This is expected to return:

```

FsxId02ad7bf3476b741df::> mapping show
  (lun mapping show)
Vserver      Path                      Igroup  LUN ID
Protocol
-----
-----
svm_ora      /vol/ora_01_bin/y/ora_01_bin/y_01          ora_01    0
iscsi
svm_ora      /vol/ora_01_data/ora_01_data_01          ora_01    1
iscsi
svm_ora      /vol/ora_01_data/ora_01_data_02          ora_01    2
iscsi
svm_ora      /vol/ora_01_data/ora_01_data_03          ora_01    3
iscsi
svm_ora      /vol/ora_01_data/ora_01_data_04          ora_01    4
iscsi
svm_ora      /vol/ora_01_logs/ora_01_logs_01          ora_01    5
iscsi
svm_ora      /vol/ora_01_logs/ora_01_logs_02          ora_01    6
iscsi

```

Database storage configuration

Now, import and set up the FSx storage for the Oracle grid infrastructure and database installation on the EC2 instance host.

1. Log into the EC2 instance via SSH as the ec2-user with your SSH key and EC2 instance IP address.

```
ssh -i ora_01.pem ec2-user@172.30.15.58
```

2. Discover the FSx iSCSI endpoints using either SVM iSCSI IP address. Then change to your environment-specific portal address.

```
sudo iscsiadadm iscsiadadm --mode discovery --op update --type  
sendtargets --portal 172.30.15.51
```

3. Establish iSCSI sessions by logging into each target.

```
sudo iscsiadadm --mode node -l all
```

The expected output from the command is:

```
[ec2-user@ip-172-30-15-58 ~]$ sudo iscsiadadm --mode node -l all  
Logging in to [iface: default, target: iqn.1992-  
08.com.netapp:sn.1f795e65c74911edb785affbf0a2b26e:vs.3, portal:  
172.30.15.51,3260]  
Logging in to [iface: default, target: iqn.1992-  
08.com.netapp:sn.1f795e65c74911edb785affbf0a2b26e:vs.3, portal:  
172.30.15.13,3260]  
Login to [iface: default, target: iqn.1992-  
08.com.netapp:sn.1f795e65c74911edb785affbf0a2b26e:vs.3, portal:  
172.30.15.51,3260] successful.  
Login to [iface: default, target: iqn.1992-  
08.com.netapp:sn.1f795e65c74911edb785affbf0a2b26e:vs.3, portal:  
172.30.15.13,3260] successful.
```

4. View and validate a list of active iSCSI sessions.

```
sudo iscsiadadm --mode session
```

Return the iSCSI sessions.

```
[ec2-user@ip-172-30-15-58 ~]$ sudo iscsiadm --mode session
tcp: [1] 172.30.15.51:3260,1028 iqn.1992-
08.com.netapp:sn.1f795e65c74911edb785affbf0a2b26e:vs.3 (non-flash)
tcp: [2] 172.30.15.13:3260,1029 iqn.1992-
08.com.netapp:sn.1f795e65c74911edb785affbf0a2b26e:vs.3 (non-flash)
```

5. Verify that the LUNs were imported into the host.

```
sudo sanlun lun show
```

This will return a list of Oracle LUNs from FSx.

```
[ec2-user@ip-172-30-15-58 ~]$ sudo sanlun lun show
controller(7mode/E-Series) /                                                 device
host          lun
vserver(cDOT/FlashRay)           lun-pathname
filename      adapter   protocol  size    product

svm_ora          /vol/ora_01_logs/ora_01_logs_02
/dev/sdn        host3     iSCSI     40g     cDOT
svm_ora          /vol/ora_01_logs/ora_01_logs_01
/dev/sdm        host3     iSCSI     40g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_03
/dev/sdk         host3     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_04
/dev/sdl         host3     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_01
/dev/sdi         host3     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_02
/dev/sdj         host3     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_biny/ora_01_biny_01
/dev/sdh         host3     iSCSI     40g     cDOT
svm_ora          /vol/ora_01_logs/ora_01_logs_02
/dev/sdg         host2     iSCSI     40g     cDOT
svm_ora          /vol/ora_01_logs/ora_01_logs_01
/dev/sdf         host2     iSCSI     40g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_04
/dev/sde         host2     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_02
/dev/sdc         host2     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_03
/dev/sdd         host2     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_data/ora_01_data_01
/dev/sdb         host2     iSCSI     20g     cDOT
svm_ora          /vol/ora_01_biny/ora_01_biny_01
/dev/sda         host2     iSCSI     40g     cDOT
```

6. Configure the `multipath.conf` file with following default and blacklist entries.

```

sudo vi /etc/multipath.conf

defaults {
    find_multipaths yes
    user_friendly_names yes
}

[source, cli]
blacklist {
    devnode "^(ram|raw|loop|fd|md|dm-|sr|scd|st)[0-9]*"
    devnode "^\hd[a-z]"
    devnode "^\cciss.*"
}

```

7. Start the multipath service.

```
sudo systemctl start multipathd
```

Now multipath devices appear in the /dev/mapper directory.

```
[ec2-user@ip-172-30-15-58 ~]$ ls -l /dev/mapper
total 0
lrwxrwxrwx 1 root root      7 Mar 21 20:13
3600a09806c574235472455534e68512d -> ../dm-0
lrwxrwxrwx 1 root root      7 Mar 21 20:13
3600a09806c574235472455534e685141 -> ../dm-1
lrwxrwxrwx 1 root root      7 Mar 21 20:13
3600a09806c574235472455534e685142 -> ../dm-2
lrwxrwxrwx 1 root root      7 Mar 21 20:13
3600a09806c574235472455534e685143 -> ../dm-3
lrwxrwxrwx 1 root root      7 Mar 21 20:13
3600a09806c574235472455534e685144 -> ../dm-4
lrwxrwxrwx 1 root root      7 Mar 21 20:13
3600a09806c574235472455534e685145 -> ../dm-5
lrwxrwxrwx 1 root root      7 Mar 21 20:13
3600a09806c574235472455534e685146 -> ../dm-6
crw----- 1 root root 10, 236 Mar 21 18:19 control
```

8. Log into the FSx cluster as the fsxadmin user via SSH to retrieve the serial-hex number for each LUN start with 6c574xxx..., the HEX number start with 3600a0980, which is AWS vendor ID.

```
lun show -fields serial-hex
```

and return as follow:

```
FsxId02ad7bf3476b741df::> lun show -fields serial-hex
vserver path                                serial-hex
-----
svm_ora /vol/ora_01_bin/ora_01_bin_01 6c574235472455534e68512d
svm_ora /vol/ora_01_data/ora_01_data_01 6c574235472455534e685141
svm_ora /vol/ora_01_data/ora_01_data_02 6c574235472455534e685142
svm_ora /vol/ora_01_data/ora_01_data_03 6c574235472455534e685143
svm_ora /vol/ora_01_data/ora_01_data_04 6c574235472455534e685144
svm_ora /vol/ora_01_logs/ora_01_logs_01 6c574235472455534e685145
svm_ora /vol/ora_01_logs/ora_01_logs_02 6c574235472455534e685146
7 entries were displayed.
```

9. Update the /dev/multipath.conf file to add a user-friendly name for the multipath device.

```
sudo vi /etc/multipath.conf
```

with following entries:

```

multipaths {
    multipath {
        wwid      3600a09806c574235472455534e68512d
        alias    ora_01_bin_01
    }
    multipath {
        wwid      3600a09806c574235472455534e685141
        alias    ora_01_data_01
    }
    multipath {
        wwid      3600a09806c574235472455534e685142
        alias    ora_01_data_02
    }
    multipath {
        wwid      3600a09806c574235472455534e685143
        alias    ora_01_data_03
    }
    multipath {
        wwid      3600a09806c574235472455534e685144
        alias    ora_01_data_04
    }
    multipath {
        wwid      3600a09806c574235472455534e685145
        alias    ora_01_logs_01
    }
    multipath {
        wwid      3600a09806c574235472455534e685146
        alias    ora_01_logs_02
    }
}

```

10. Reboot the multipath service to verify that the devices under `/dev/mapper` have changed to LUN names versus serial-hex IDs.

```
sudo systemctl restart multipathd
```

Check `/dev/mapper` to return as following:

```
[ec2-user@ip-172-30-15-58 ~]$ ls -l /dev/mapper
total 0
crw----- 1 root root 10, 236 Mar 21 18:19 control
lrwxrwxrwx 1 root root      7 Mar 21 20:41 ora_01_bin_01 -> ../dm-
0
lrwxrwxrwx 1 root root      7 Mar 21 20:41 ora_01_data_01 -> ../dm-
1
lrwxrwxrwx 1 root root      7 Mar 21 20:41 ora_01_data_02 -> ../dm-
2
lrwxrwxrwx 1 root root      7 Mar 21 20:41 ora_01_data_03 -> ../dm-
3
lrwxrwxrwx 1 root root      7 Mar 21 20:41 ora_01_data_04 -> ../dm-
4
lrwxrwxrwx 1 root root      7 Mar 21 20:41 ora_01_logs_01 -> ../dm-
5
lrwxrwxrwx 1 root root      7 Mar 21 20:41 ora_01_logs_02 -> ../dm-
6
```

11. Partition the binary LUN with a single primary partition.

```
sudo fdisk /dev/mapper/ora_01_bin_01
```

12. Format the partitioned binary LUN with an XFS file system.

```
sudo mkfs.xfs /dev/mapper/ora_01_bin_01p1
```

13. Mount the binary LUN to /u01.

```
sudo mount -t xfs /dev/mapper/ora_01_bin_01p1 /u01
```

14. Change /u01 mount point ownership to the Oracle user and it's associated primary group.

```
sudo chown oracle:oinstall /u01
```

15. Find the UUID of the binary LUN.

```
sudo blkid /dev/mapper/ora_01_bin_01p1
```

16. Add a mount point to /etc/fstab.

```
sudo vi /etc/fstab
```

Add the following line.

```
UUID=d89fb1c9-4f89-4de4-b4d9-17754036d11d      /u01      xfs  
defaults,nofail 0          2
```



It is important to mount the binary with only the UUID and with the nofail option to avoid possible root-lock issues during EC2-instance reboot.

17. As the root user, add the udev rule for Oracle devices.

```
vi /etc/udev/rules.d/99-oracle-asmdevices.rules
```

Include following entries:

```
ENV{ DM_NAME }=="ora*", GROUP=="oinstall", OWNER=="oracle",  
MODE=="660"
```

18. As the root user, reload the udev rules.

```
udevadm control --reload-rules
```

19. As the root user, trigger the udev rules.

```
udevadm trigger
```

20. As the root user, reload multipathd.

```
systemctl restart multipathd
```

21. Reboot the EC2 instance host.

Oracle grid infrastructure installation

1. Log into the EC2 instance as the ec2-user via SSH and enable password authentication by uncommenting `PasswordAuthentication yes` and then commenting out `PasswordAuthentication no`.

```
sudo vi /etc/ssh/sshd_config
```

2. Restart the sshd service.

```
sudo systemctl restart sshd
```

3. Reset the Oracle user password.

```
sudo passwd oracle
```

4. Log in as the Oracle Restart software owner user (oracle). Create an Oracle directory as follows:

```
mkdir -p /u01/app/oracle  
mkdir -p /u01/app/oraInventory
```

5. Change the directory permission setting.

```
chmod -R 775 /u01/app
```

6. Create a grid home directory and change to it.

```
mkdir -p /u01/app/oracle/product/19.0.0/grid  
cd /u01/app/oracle/product/19.0.0/grid
```

7. Unzip the grid installation files.

```
unzip -q /tmp/archive/LINUX.X64_193000_grid_home.zip
```

8. From grid home, delete the OPatch directory.

```
rm -rf OPatch
```

9. From grid home, copy `p6880880_190000_Linux-x86-64.zip` to the `grid_home`, and then unzip it.

```
cp /tmp/archive/p6880880_190000_Linux-x86-64.zip .
unzip p6880880_190000_Linux-x86-64.zip
```

10. From grid home, revise `cv/admin/cvu_config`, uncomment and replace `CV_ASSUME_DISTID=OEL5` with `CV_ASSUME_DISTID=OL7`.

```
vi cv/admin/cvu_config
```

11. Prepare a `gridsetup.rsp` file for silent installation and place the `rsp` file in the `/tmp/archive` directory. The `rsp` file should cover sections A, B, and G with the following information:

```
INVENTORY_LOCATION=/u01/app/oraInventory
oracle.install.option=HA_CONFIG
ORACLE_BASE=/u01/app/oracle
oracle.install.asm.OSDBA=dba
oracle.install.asm.OSOPER=oper
oracle.install.asm.OSASM=asm
oracle.install.asm.SYSASMPassword="SetPWD"
oracle.install.asm.diskGroup.name=DATA
oracle.install.asm.diskGroup.redundancy=EXTERNAL
oracle.install.asm.diskGroup.AUSize=4
oracle.install.asm.diskGroup.disks=/dev/mapper/ora_01_data*
oracle.install.asm.diskGroup.diskDiscoveryString=/dev/mapper/ora_01_
data_01,/dev/mapper/ora_01_data_02,/dev/mapper/ora_01_data_03,/dev/m
apper/ora_01_data_04
oracle.install.asm.monitorPassword="SetPWD"
oracle.install.asm.configureAFD=true
```

12. Log into the EC2 instance as the root user and set `ORACLE_HOME` and `ORACLE_BASE`.

```
export ORACLE_HOME=/u01/app/oracle/product/19.0.0/grid
export ORACLE_BASE=/tmp
cd /u01/app/oracle/product/19.0.0/grid/bin
```

13. Provision disk devices for use with the Oracle ASM filter driver.

```
./asmcmd afd_label DATA01 /dev/mapper/ora_01_data_01 --init  
./asmcmd afd_label DATA02 /dev/mapper/ora_01_data_02 --init  
./asmcmd afd_label DATA03 /dev/mapper/ora_01_data_03 --init  
./asmcmd afd_label DATA04 /dev/mapper/ora_01_data_04 --init  
./asmcmd afd_label LOGS01 /dev/mapper/ora_01_logs_01 --init  
./asmcmd afd_label LOGS02 /dev/mapper/ora_01_logs_02 --init
```

14. Install cvuqdisk-1.0.10-1.rpm.

```
rpm -ivh /u01/app/oracle/product/19.0.0/grid/cv/rpm/cvuqdisk-1.0.10-1.rpm
```

15. Unset \$ORACLE_BASE.

```
unset ORACLE_BASE
```

16. Log into the EC2 instance as the Oracle user and extract the patch in the /tmp/archive folder.

```
unzip p34762026_190000_Linux-x86-64.zip
```

17. From grid home /u01/app/oracle/product/19.0.0/grid and as the oracle user, launch gridSetup.sh for grid infrastructure installation.

```
./gridSetup.sh -applyRU /tmp/archive/34762026/ -silent  
-responseFile /tmp/archive/gridsetup.rsp
```

Ignore the warnings about wrong groups for grid infrastructure. We are using a single Oracle user to manage Oracle Restart, so this is expected.

18. As root user, execute the following script(s):

```
/u01/app/orainventory/orainstRoot.sh
```

```
/u01/app/oracle/product/19.0.0/grid/root.sh
```

19. As root user, reload the multipathd.

```
systemctl restart multipathd
```

20. As the Oracle user, execute the following command to complete the configuration:

```
/u01/app/oracle/product/19.0.0/grid/gridSetup.sh -executeConfigTools  
-responseFile /tmp/archive/gridsetup.rsp -silent
```

21. As the Oracle user, create the LOGS disk group.

```
bin/asmca -silent -sysAsmPassword 'yourPWD' -asmsnmpPassword  
'yourPWD' -createDiskGroup -diskGroupName LOGS -disk 'AFD:LOGS*'  
-redundancy EXTERNAL -au_size 4
```

22. As the Oracle user, validate grid services after installation configuration.

```
bin/crsctl stat res -t  
+  
Name                  Target  State             Server  
State details  
Local Resources  
ora.DATA.dg          ONLINE  ONLINE         ip-172-30-15-58  
STABLE  
ora.LISTENER.lsnr   ONLINE  ONLINE         ip-172-30-15-58  
STABLE  
ora.LOGS.dg          ONLINE  ONLINE         ip-172-30-15-58  
STABLE  
ora.asm              ONLINE  ONLINE         ip-172-30-15-58  
Started, STABLE  
ora.ons              OFFLINE OFFLINE        ip-172-30-15-58  
STABLE  
Cluster Resources  
ora.cssd            ONLINE  ONLINE         ip-172-30-15-58  
STABLE  
ora.diskmon         OFFLINE OFFLINE          
STABLE  
ora.driver.afd      ONLINE  ONLINE         ip-172-30-15-58  
STABLE  
ora.evmd            ONLINE  ONLINE         ip-172-30-15-58  
STABLE
```

23. Validate ASM filter driver status.

```

[oracle@ip-172-30-15-58 grid]$ export
ORACLE_HOME=/u01/app/oracle/product/19.0.0/grid
[oracle@ip-172-30-15-58 grid]$ export ORACLE_SID=+ASM
[oracle@ip-172-30-15-58 grid]$ export PATH=$PATH:$ORACLE_HOME/bin
[oracle@ip-172-30-15-58 grid]$ asmcmd
ASMCMD> lsdg
State      Type      Rebal   Sector   Logical_Sector   Block       AU
Total_MB   Free_MB   Req_mir_free_MB   Usable_file_MB   Offline_disks
Voting_files   Name
MOUNTED    EXTERN    N           512           512     4096   1048576
81920      81847          0           81847           0
N  DATA/
MOUNTED    EXTERN    N           512           512     4096   1048576
81920      81853          0           81853           0
N  LOGS/
ASMCMD> afd_state
ASMCMD-9526: The AFD state is 'LOADED' and filtering is 'ENABLED' on
host 'ip-172-30-15-58.ec2.internal'

```

Oracle database installation

1. Log in as the Oracle user and unset \$ORACLE_HOME and \$ORACLE_SID if it is set.

```
unset ORACLE_HOME  
unset ORACLE_SID
```

2. Create the Oracle DB home directory and change to it.

```
mkdir /u01/app/oracle/product/19.0.0/db1  
cd /u01/app/oracle/product/19.0.0/db1
```

3. Unzip the Oracle DB installation files.

```
unzip -q /tmp/archive/LINUX.X64_193000_db_home.zip
```

4. From the DB home, delete the OPatch directory.

```
rm -rf OPatch
```

5. From DB home, copy p6880880_190000_Linux-x86-64.zip to grid_home, and then unzip it.

```
cp /tmp/archive/p6880880_190000_Linux-x86-64.zip .  
unzip p6880880_190000_Linux-x86-64.zip
```

6. From DB home, revise cv/admin/cvu_config, and uncomment and replace CV_ASSUME_DISTID=OEL5 with CV_ASSUME_DISTID=OL7.

```
vi cv/admin/cvu_config
```

7. From the /tmp/archive directory, unpack the DB 19.18 RU patch.

```
unzip p34765931_190000_Linux-x86-64.zip
```

8. Prepare the DB silent install rsp file in /tmp/archive/dbinstall.rsp directory with the following values:

```
oracle.install.option=INSTALL_DB_SWONLY
UNIX_GROUP_NAME=oinstall
INVENTORY_LOCATION=/u01/app/oraInventory
ORACLE_HOME=/u01/app/oracle/product/19.0.0/db1
ORACLE_BASE=/u01/app/oracle
oracle.install.db.InstallEdition=EE
oracle.install.db.OSDBA_GROUP=dba
oracle.install.db.OSOPER_GROUP=oper
oracle.install.db.OSBACKUPDBA_GROUP=oper
oracle.install.db.OSDGDBA_GROUP=dba
oracle.install.db.OSKMDBA_GROUP=dba
oracle.install.db.OSRACDBA_GROUP=dba
oracle.install.db.rootconfig.executeRootScript=false
```

9. From db1 home /u01/app/oracle/product/19.0.0/db1, execute silent software-only DB installation.

```
./runInstaller -applyRU /tmp/archive/34765931/ -silent
-ignorePrereqFailure -responseFile /tmp/archive/dbinstall.rsp
```

10. As root user, run the `root.sh` script after software-only installation.

```
/u01/app/oracle/product/19.0.0/db1/root.sh
```

11. As Oracle user, create the `dbca.rsp` file with the following entries:

```
gdbName=db1.demo.netapp.com
sid=db1
createAsContainerDatabase=true
numberOfPDBs=3
pdbName=db1_pdb
useLocalUndoForPDBs=true
pdbAdminPassword="yourPWD"
templateName=General_Purpose.dbc
sysPassword="yourPWD"
systemPassword="yourPWD"
dbsnmpPassword="yourPWD"
storageType=ASM
diskGroupName=DATA
characterSet=AL32UTF8
nationalCharacterSet=AL16UTF16
listeners=LISTENER
databaseType=MULTIPURPOSE
automaticMemoryManagement=false
totalMemory=8192
```

12. As Oracle user, lauch DB creation with dbca.

```
bin/dbca -silent -createDatabase -responseFile /tmp/archive/dbca.rsp

output:
Prepare for db operation
7% complete
Registering database with Oracle Restart
11% complete
Copying database files
33% complete
Creating and starting Oracle instance
35% complete
38% complete
42% complete
45% complete
48% complete
Completing Database Creation
53% complete
55% complete
56% complete
Creating Pluggable Databases
60% complete
64% complete
69% complete
78% complete
Executing Post Configuration Actions
100% complete
Database creation complete. For details check the logfiles at:
/u01/app/oracle/cfgtoollogs/dbca/db1.

Database Information:
Global Database Name:db1.demo.netapp.com
System Identifier(SID):db1
Look at the log file "/u01/app/oracle/cfgtoollogs/dbca/db1/db1.log"
for further details.
```

13. As Oracle user, validate Oracle Restart HA services after DB creation.

```
[oracle@ip-172-30-15-58 db1]$ ../../grid/bin/crsctl stat res -t

Name          Target  State       Server           State
details

Local Resources

ora.DATA.dg    ONLINE  ONLINE     ip-172-30-15-58   STABLE
ora.LISTENER.lsnr  ONLINE  ONLINE     ip-172-30-15-58   STABLE
ora.LOGS.dg    ONLINE  ONLINE     ip-172-30-15-58   STABLE
ora.asm        ONLINE  ONLINE     ip-172-30-15-58   Started,STABLE
ora.ons        OFFLINE OFFLINE    ip-172-30-15-58   STABLE

Cluster Resources

ora.cssd      ONLINE  ONLINE     ip-172-30-15-58   STABLE
ora.db1.db    ONLINE  ONLINE     ip-172-30-15-58   Open,HOME=/u01/app/oracle/product/19.0.0/db1,STABLE
ora.diskmon    OFFLINE OFFLINE    ip-172-30-15-58   STABLE
ora.driver.afd  ONLINE  ONLINE     ip-172-30-15-58   STABLE
ora.evmd       ONLINE  ONLINE     ip-172-30-15-58   STABLE
```

14. Set the Oracle user `.bash_profile`.

```
vi ~/.bash_profile
```

15. Add following entries:

```
export ORACLE_HOME=/u01/app/oracle/product/19.0.0/db1
export ORACLE_SID=db1
export PATH=$PATH:$ORACLE_HOME/bin
alias asm='export
ORACLE_HOME=/u01/app/oracle/product/19.0.0/grid;export
ORACLE_SID=+ASM;export PATH=$PATH:$ORACLE_HOME/bin'
```

16. Validate the CDB/PDB created.

```
/home/oracle/.bash_profile

sqlplus / as sysdba
```

```
SQL> select name, open_mode from v$database;

NAME      OPEN_MODE

DB1       READ WRITE

SQL> select name from v$datafile;

NAME

+DATA/DB1/DATAFILE/system.256.1132176177
+DATA/DB1/DATAFILE/sysaux.257.1132176221
+DATA/DB1/DATAFILE/undotbs1.258.1132176247
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/system.265.11321
77009
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/sysaux.266.11321
77009
+DATA/DB1/DATAFILE/users.259.1132176247
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/undotbs1.267.113
2177009
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/system.271.11321
77853
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/sysaux.272.11321
77853
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/undotbs1.270.113
2177853
+DATA/DB1/F7852758DCD6B800E0533A0F1EAC1DC6/DATAFILE/users.274.113217
7871

NAME

+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/system.276.11321
77871
+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/sysaux.277.11321
77871
+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/undotbs1.275.113
2177871
+DATA/DB1/F785288BBCD1BA78E0533A0F1EACCD6F/DATAFILE/users.279.113217
7889
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/system.281.11321
77889
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/sysaux.282.11321
77889
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/undotbs1.280.113
2177889
```

```
+DATA/DB1/F78529A14DD8BB18E0533A0F1EACB8ED/DATAFILE/users.284.113217  
7907
```

19 rows selected.

```
SQL> show pdbs
```

CON_ID	CON_NAME	OPEN	MODE	RESTRICTED
2	PDB\$SEED	READ ONLY	NO	
3	DB1_PDB1	READ WRITE	NO	
4	DB1_PDB2	READ WRITE	NO	
5	DB1_PDB3	READ WRITE	NO	

```
SQL>
```

17. Set the DB recovery location to the +LOGS disk group.

```
alter system set db_recovery_file_dest_size = 80G scope=both;  
  
alter system set db_recovery_file_dest = '+LOGS' scope=both;
```

18. Log into the database with sqlplus and enable archive log mode.

```
sqlplus /as sysdba.  
  
shutdown immediate;  
  
startup mount;  
  
alter database archivelog;  
  
alter database open;
```

This completes Oracle 19c version 19.18 Restart deployment on an Amazon FSx for ONTAP and EC2 compute instance. If desired, NetApp recommends relocating the Oracle control file and online log files to the +LOGS disk group.

Automated deployment option

NetApp will release a fully automated solution deployment toolkit with Ansible to facilitate the implementation of this solution. Please check back for the availability of the toolkit. After it is released, a link will be posted here.

Oracle Database backup, restore, and clone with SnapCenter Service

See [SnapCenter Services for Oracle](#) for details on Oracle database backup, restore, and clone with NetApp BlueXP console.

Where to find additional information

To learn more about the information described in this document, review the following documents and/or websites:

- Installing Oracle Grid Infrastructure for a Standalone Server with a New Database Installation

<https://docs.oracle.com/en/database/oracle/oracle-database/19/ladbi/installing-oracle-grid-infrastructure-for-a-standalone-server-with-a-new-database-installation.html#GUID-0B1CEE8C-C893-46AA-8A6A-7B5FAAEC72B3>

- Installing and Configuring Oracle Database Using Response Files

<https://docs.oracle.com/en/database/oracle/oracle-database/19/ladbi/installing-and-configuring-oracle-database-using-response-files.html#GUID-D53355E9-E901-4224-9A2A-B882070EDDF7>

- Amazon FSx for NetApp ONTAP

<https://aws.amazon.com/fsx/netapp-ontap/>

- Amazon EC2

https://aws.amazon.com/pm/ec2/?trk=36c6da98-7b20-48fa-8225-4784bc9843&sc_channel=ps&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2&ef_id=Cj0KCQiA54KfBhCKARIzAJzSrdqwQrghn6I71jiWzSeaT9Uh1-vY-VfhJixFxnv5rWwn2S7RqZOTQ0aAh7eEALw_wcB:G:s&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2

Oracle Database Deployment on AWS EC2 and FSx Best Practices

WP-7357: Oracle Database Deployment on EC2 and FSx Best Practices Introduction

Allen Cao, Niyaz Mohamed, Jeffrey Steiner, NetApp

Many mission-critical enterprise Oracle databases are still hosted on-premises, and many enterprises are looking to migrate these Oracle databases to a public cloud. Often, these Oracle databases are application centric and thus require user-specific configurations, a capability that is missing from many database-as-a-service public-cloud offerings. Therefore, the current database landscape calls for a public-cloud-based Oracle database solution built from a high-performance, scalable compute and storage service that can accommodate unique requirements. AWS EC2 compute instances and the AWS FSx storage service might be the missing pieces of this puzzle that you can leverage to build and migrate your mission critical Oracle database workloads to a public cloud.

Amazon Elastic Compute Cloud (Amazon EC2) is a web service that provides secure, resizable compute capacity in the cloud. It is designed to make web-scale cloud computing easier for enterprises. The simple Amazon EC2 web-service interface allows you to obtain and configure capacity with minimal friction. It provides you with complete control of your computing resources and lets you run on Amazon's proven

computing environment.

Amazon FSx for ONTAP is an AWS storage service that uses industry-leading NetApp ONTAP block and file storage, which exposes NFS, SMB, and iSCSI. With such a powerful storage engine, it has never been easier to relocate mission-critical Oracle database apps to AWS with sub-millisecond response times, multiple Gbps of throughput, and 100,000+ IOPS per database instance. Better yet, the FSx storage service comes with native replication capability that allows you to easily migrate your on-premises Oracle database to AWS or to replicate your mission critical Oracle database to a secondary AWS availability zone for HA or DR.

The goal of this documentation is to provide step-by-step processes, procedures, and best-practice guidance on how to deploy and configure an Oracle database with FSx storage and an EC2 instance that delivers performance similar to an on-premises system. NetApp also provides an automation toolkit that automates most of the tasks that are required for the deployment, configuration, and management of your Oracle database workload in the AWS public cloud.

To learn more about the solution and use case, take a look at following overview video:

[Modernize your Oracle database with hybrid cloud in AWS and FSx ONTAP, Part1 - Use case and solution architecture](#)

[Next: Solutions architecture.](#)


Solution architecture

[Previous: Introduction.](#)

The following architecture diagram illustrates a highly available Oracle database deployment on an AWS EC2 instance with the FSx storage service. A similar deployment scheme but with the standby in a different region can be set up for disaster recovery.

Within the environment, the Oracle compute instance is deployed via an AWS EC2 instance console. There are multiple EC2 instance types available from the console. NetApp recommends deploying a database-oriented EC2 instance type such as an m5 Ami image with RedHat enterprise Linux 8 and up to 10Gps of network bandwidth.

Oracle database storage on FSx volumes on the other hand is deployed with the AWS FSx console or CLI. The Oracle binary, data, or log volumes are subsequently presented and mounted on an EC2 instance Linux host. Each data or log volume can have multiple LUNs allocated depending on the underlying storage protocol employed.

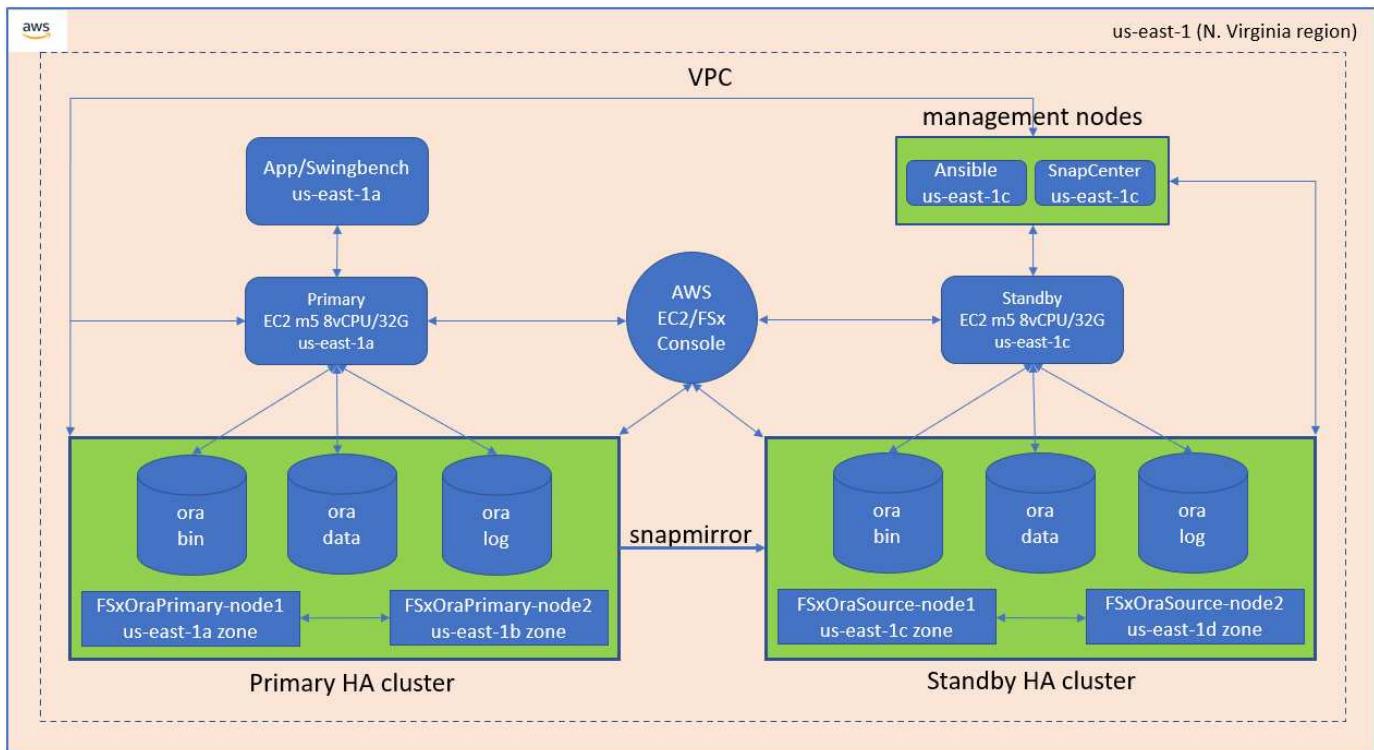

An FSx storage cluster is designed with double redundancy, so that both the primary and standby storage clusters are deployed in two different availability zones. Database volumes are replicated from a primary FSx cluster to a standby FSx cluster at a user-configurable interval for all Oracle binary, data, and log volumes.

This high availability Oracle environment is managed with an Ansible controller node and a SnapCenter backup server and UI tool. Oracle installation, configuration, and replication are automated using Ansible playbook-based tool kits. Any update to the Oracle EC2 instance kernel operating system or Oracle patching can be executed in parallel to keep the primary and standby in sync. In fact, the initial automation setup can be easily expanded to perform some repeating daily Oracle tasks if needed.

SnapCenter provides workflows for Oracle database point-in-time recovery or for database cloning at either the primary or standby zones if needed. Through the SnapCenter UI, you can configure Oracle database backup and replication to standby FSx storage for high availability or disaster recovery based on your RTO or RPO objectives.

The solution provides an alternative process that delivers capabilities similar to those available from Oracle RAC and Data Guard deployment.

[Next: Factors to consider.](#)

Factors to consider for Oracle database deployment

[Previous: Solution architecture.](#)

A public cloud provides many choices for compute and storage, and using the correct type of compute instance and storage engine is a good place to start for database deployment. You should also select compute and storage configurations that are optimized for Oracle databases.

The following sections describe the key considerations when deploying Oracle database in an AWS public cloud on an EC2 instance with FSx storage.

VM performance


Selecting the right VM size is important for optimal performance of a relational database in a public cloud. For better performance, NetApp recommends using an EC2 M5 Series instance for Oracle deployment, which is optimized for database workloads. The same instance type is also used to power a RDS instance for Oracle by AWS.

- Choose the correct vCPU and RAM combination based on workload characteristics.
- Add swap space to a VM. The default EC2 instance deployment does not create a swap space, which is not optimal for a database.


Storage layout and settings

NetApp recommends the following storage layout:

- For NFS storage, the recommended volume layout is three volumes: one for the Oracle binary; one for Oracle data and a duplicate control file; and one for the Oracle active log, archived log, and control file.

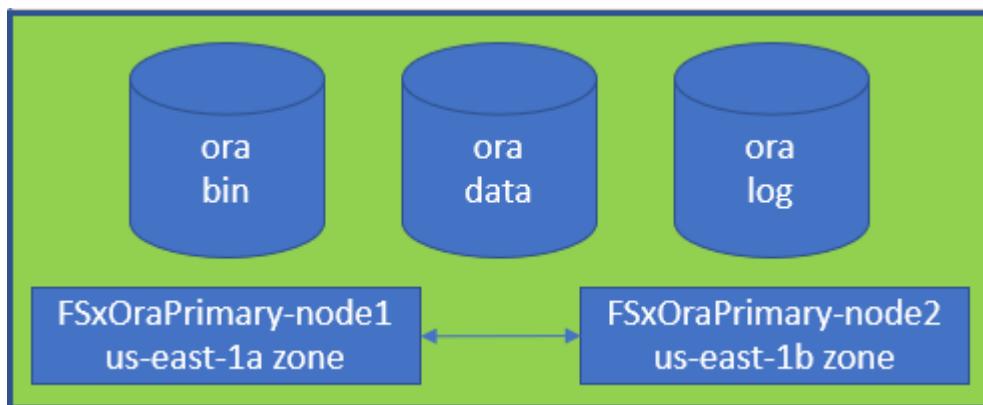

- For iSCSI storage, the recommended volume layout is three volumes: one for the Oracle binary; one for Oracle data and a duplicate control file; and one for the Oracle active log, archived log, and control file. However, each data and log volume ideally should contain four LUNs. The LUNs are ideally balanced on the HA cluster nodes.

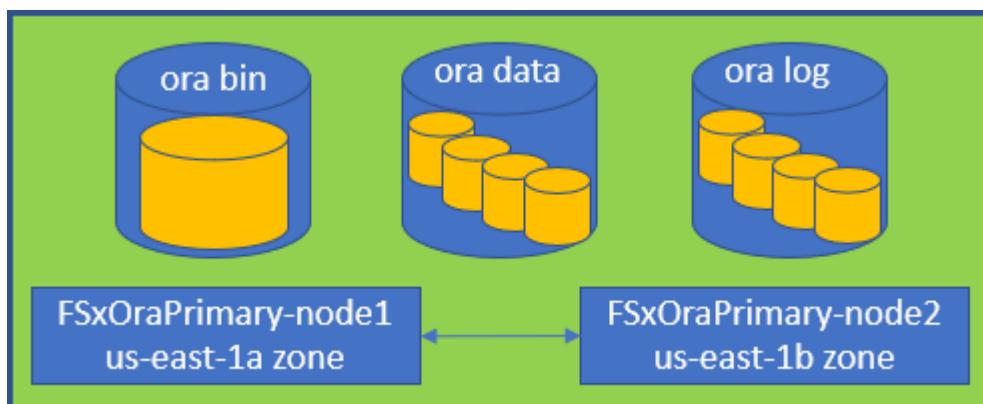

- For storage IOPS and throughput, you can choose the threshold for provisioned IOPS and throughput for the FSx storage cluster, and these parameters can be adjusted on the fly anytime the workload changes.
 - The auto IOPS setting is three IOPS per GiB of allocated storage capacity or user defined storage up to 80,000.
 - The throughput level is incremented as follow: 128, 256, 512, 1024, 2048 MBps.

Review the [Amazon FSx for NetApp ONTAP performance](#) documentation when sizing throughput and IOPS.

NFS configuration

Linux, the most common operating system, includes native NFS capabilities. Oracle offers the direct NFS (dNFS) client natively integrated into Oracle. Oracle has supported NFSv3 for over 20 years. dNFS is supported with NFSv3 with all versions of Oracle. NFSv4 is supported with all OS's that follow the NFSv4 standard. dNFS support for NFSv4 requires Oracle 12.1.0.2 or higher. NFSv4.1 requires specific OS support. Consult the NetApp Interoperability Matrix Tool (IMT) for supported OS's. dNFS support for NFSv4.1 requires Oracle version 19.3.0.0 or higher.

Automated Oracle deployment using the NetApp automation toolkit automatically configures dNFS on NFSv3.

Other factors to consider:

- TCP slot tables are the NFS equivalent of host-bus-adapter (HBA) queue depth. These tables control the number of NFS operations that can be outstanding at any one time. The default value is usually 16, which is far too low for optimum performance. The opposite problem occurs on newer Linux kernels, which can automatically increase the TCP slot table limit to a level that saturates the NFS server with requests.

For optimum performance and to prevent performance problems, adjust the kernel parameters that control the TCP slot tables to 128.

```
sysctl -a | grep tcp.*.slot_table
```

- The following table provides recommended NFS mount options for Linux NFSv3 - single instance.

File Type	Mount Options
• Control files • Data files • Redo logs	<code>rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536</code>
• ORACLE_HOME • ORACLE_BASE	<code>rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536</code>

Before using dNFS, verify that the patches described in Oracle Doc 1495104.1 are installed.

The NetApp Support matrix for NFSv3 and NFSv4 do not include specific operating systems. All OSs that obey the RFC are supported. When searching the online IMT for NFSv3 or NFSv4 support, do not select a specific OS because no matches will be displayed. All OSs are implicitly supported by the general policy.

High availability

As indicated in the solution architecture, HA is built on storage-level replication. Therefore, the startup and availability of Oracle is contingent on how quickly the compute and storage can be brought up and recovered. See the following key factors:

- Have a standby compute instance ready and synced up with the primary through Ansible parallel update to both hosts.
- Replicate the binary volume from the primary for standby purposes so that you do not need to install Oracle

at the last minute and figure out what needs to be installed and patched.

- Replication frequency dictates how fast the Oracle database can be recovered to make service available. There is a trade off between the replication frequency and storage consumption.
- Leverage automation to make recovery and switch over to standby quick and free of human error. NetApp provides an automation toolkit for this purpose.

[Next: Deployment procedures.](#)

Step-by-Step Oracle Deployment Procedures on AWS EC2 and FSx

[Previous: Solution architecture.](#)

Deploy an EC2 Linux instance for Oracle via EC2 console

If you are new to AWS, you first need to set up an AWS environment. The documentation tab at the AWS website landing page provides EC2 instruction links on how to deploy a Linux EC2 instance that can be used to host your Oracle database via the AWS EC2 console. The following section is a summary of these steps. For details, see the linked AWS EC2-specific documentation.

Setting up your AWS EC2 environment

You must create an AWS account to provision the necessary resources to run your Oracle environment on the EC2 and FSx service. The following AWS documentation provides the necessary details:

- [Set up to use Amazon EC2](#)

Key topics:

- Sign up for AWS.
- Create a key pair.
- Create a security group.

Enabling multiple availability zones in AWS account attributes

For an Oracle high availability configuration as demonstrated in the architecture diagram, you must enable at least four availability zones in a region. The multiple availability zones can also be situated in different regions to meet the required distances for disaster recovery.

The screenshot shows the AWS EC2 Dashboard in the US East (N. Virginia) Region. The left sidebar includes links for New EC2 Experience, EC2 Dashboard, EC2 Global View, Events, Tags, Limits, Instances (with sub-links for Instances, Instance Types, Launch Templates, Spot Requests, Savings Plans, Reserved Instances, Dedicated Hosts, Scheduled Instances, Capacity Reservations), Images (AMIs, AMI Catalog), Elastic Block Store (Volumes, Snapshots, Lifecycle Manager), and Network & Security. The main content area displays resource counts: Instances (running) 8, Dedicated Hosts 0, Elastic IPs 5; Instances 12, Key pairs 48, Load balancers 0; Placement groups 25, Security groups 34, Snapshots 0; Volumes 19. A callout box suggests using the AWS Launch Wizard for Microsoft SQL Server Always On availability groups. The Service health section shows four zones: us-east-1a, us-east-1b, us-east-1c, and us-east-1d, each associated with a Zone ID (use1-az6, use1-az1, use1-az2, use1-az4). The Account attributes sidebar lists supported platforms, Default VPC, Settings (which is highlighted in yellow), EBS encryption, Zones, EC2 Serial Console, Default credit specification, and Console experiments.

Creating and connecting to an EC2 instance for hosting Oracle database

See the tutorial [Get started with Amazon EC2 Linux instances](#) for step-by-step deployment procedures and best practices.

Key topics:

- Overview.
- Prerequisites.
- Step 1: Launch an instance.
- Step 2: Connect to your instance.
- Step 3: Clean up your instance.

The following screen shots demonstrate the deployment of an m5-type Linux instance with the EC2 console for running Oracle.

1. From the EC2 dashboard, click the yellow Launch Instance button to start the EC2 instance deployment workflow.

Resources

You are using the following Amazon EC2 resources in the US East (N. Virginia) Region:

Instances (running)	6	Dedicated Hosts	0	Elastic IPs	5
Instances	12	Key pairs	48	Load balancers	0
Placement groups	25	Security groups	33	Snapshots	0
Volumes	19				

Launch instance
To get started, launch an Amazon EC2 instance, which is a virtual server in the cloud.

Service health
[AWS Health Dashboard](#)

Explore AWS
Save up to 90% on EC2 with Spot Instances
Optimize price-performance by combining EC2 purchase options in a single EC2 ASG. [Learn more](#)

- In Step 1, select "Red Hat Enterprise Linux 8 (HVM), SSD Volume Type - ami-0b0af3577fe5e3532 (64-bit x86) / ami-01fc429821bf1f4b4 (64-bit Arm)."

Step 1: Choose an Amazon Machine Image (AMI)

Are you launching a database instance? Try Amazon RDS.

Amazon RDS (Hidden)

Red Hat Free tier eligible

Red Hat Enterprise Linux 8 (HVM), SSD Volume Type - ami-0b0af3577fe5e3532 (64-bit x86) / ami-01fc429821bf1f4b4 (64-bit Arm) Select

SUSE Linux Free tier eligible

SUSE Linux Enterprise Server 15 SP3 (HVM), SSD Volume Type - ami-08895422b5f3aa64a (64-bit x86) / ami-08f182b25f271ef79 (64-bit Arm) Select

- In Step 2, select an m5 instance type with the appropriate CPU and memory allocation based on your Oracle database workload. Click "Next: Configure Instance Details."

Step 2: Choose an Instance Type

	m4	m4.16xlarge	64	256	EBS only	Yes	25 Gigabit	Yes
<input type="checkbox"/>	m5	m5.large	2	8	EBS only	Yes	Up to 10 Gigabit	Yes
<input type="checkbox"/>	m5	m5.xlarge	4	16	EBS only	Yes	Up to 10 Gigabit	Yes
<input checked="" type="checkbox"/>	m5	m5.2xlarge	8	32	EBS only	Yes	Up to 10 Gigabit	Yes
<input type="checkbox"/>	m5	m5.4xlarge	16	64	EBS only	Yes	Up to 10 Gigabit	Yes
<input type="checkbox"/>	m5	m5.8xlarge	32	128	EBS only	Yes	10 Gigabit	Yes
<input type="checkbox"/>	m5	m5.12xlarge	48	192	EBS only	Yes	10 Gigabit	Yes
<input type="checkbox"/>	m5	m5.16xlarge	64	256	EBS only	Yes	20 Gigabit	Yes
<input type="checkbox"/>	m5	m5.24xlarge	96	384	EBS only	Yes	25 Gigabit	Yes
<input type="checkbox"/>	m5	m5.metal	96	384	EBS only	Yes	25 Gigabit	Yes

- In Step 3, choose the VPC and subnet where the instance should be placed and enable public IP assignment. Click "Next: Add Storage."

Screenshot of the AWS EC2 instance creation wizard Step 3: Configure Instance Details.

No default VPC found. Select another VPC, or create a new default VPC.

Configure the instance to suit your requirements. You can launch multiple instances from the same AMI, request Spot Instances to take advantage of the lower pricing, assign an access management role to the instance, and more.

Number of instances: 1

Purchasing option: Request Spot Instances

Network: No default VPC found. Create a new default VPC.

Subnet: 250 IP Addresses available

Auto-assign Public IP: Enable

Hostname type:

DNS Hostname:

- Enable IP name IPv4 (A record) DNS requests
- Enable resource-based IPv4 (A record) DNS requests
- Enable resource-based IPv6 (AAAA record) DNS requests

Placement group: Add instance to placement group

Capacity Reservation:

Domain join directory:

IAM role:

Buttons: Cancel, Previous, **Review and Launch**, Next: Add Storage

5. In Step 4, allocate enough space for the root disk. You may need the space to add a swap. By default, EC2 instance assign zero swap space, which is not optimal for running Oracle.

Screenshot of the AWS EC2 instance creation wizard Step 4: Add Storage.

Your instance will be launched with the following storage device settings. You can attach additional EBS volumes and instance store volumes to your instance, or edit the settings of the root volume. You can also attach additional EBS volumes after launching an instance, but not instance store volumes. Learn more about storage options in Amazon EC2.

Volume Type	Device	Snapshot	Size (GiB)	Volume Type	IOPS	Throughput (MB/s)	Delete on Termination	Encryption
Root	/dev/sda1	snap-03a3ad00558b4d17c	50	General Purpose SSD (gp2)	150 / 3000	N/A	<input checked="" type="checkbox"/>	Not Encrypted

Add New Volume

Free tier eligible customers can get up to 30 GB of EBS General Purpose (SSD) or Magnetic storage. Learn more about free usage tier eligibility and usage restrictions.

Shared file systems

You currently don't have any file systems on this instance. Select "Add file system" button below to add a file system.

Add file system

Buttons: Cancel, Previous, **Review and Launch**, Next: Add Tags

6. In Step 5, add a tag for instance identification if needed.

Step 5: Add Tags

A tag consists of a case-sensitive key-value pair. For example, you could define a tag with key = Name and value = Webserver.

A copy of a tag can be applied to volumes, instances or both.

Tags will be applied to all instances and volumes. [Learn more about tagging your Amazon EC2 resources.](#)

Add Tag (Up to 50 tags maximum)

This resource currently has no tags

Choose the Add tag button or click to add a Name tag.
Make sure your IAM policy includes permissions to create tags.

Cancel Previous Review and Launch Next: Configure Security Group

- In Step 6, select an existing security group or create a new one with the desired inbound and outbound policy for the instance.

Step 6: Configure Security Group

A security group is a set of firewall rules that control the traffic for your instance. On this page, you can add rules to allow specific traffic to reach your instance. For example, if you want to set up a web server and allow Internet traffic to reach your instance, add rules that allow unrestricted access to the HTTP and HTTPS ports. You can create a new security group or select from an existing one below. [Learn more](#) about Amazon EC2 security groups.

Assign a security group: Create a new security group Select an existing security group

Security Group ID	Name	Description	Actions
<input type="checkbox"/> sg-0d746a0908b897c48	AviOccm03112021OCCM1635951256631-OCCMSecurityGroup-B3QFHUHJRUWV	NetApp OCCM Instance External Security Group	Copy to new
<input type="checkbox"/> sg-07b0625cd54aae16	AviOCCM0311OCCM1635943382952-OCCMSecurityGroup-1L8D4QX2SC945	NetApp OCCM Instance External Security Group	Copy to new
<input type="checkbox"/> sg-0618122caef6c50e9	AviOccm1103OCCM163594422113-OCCMSecurityGroup-DX5PHX6CKVKC	NetApp OCCM Instance External Security Group	Copy to new
<input type="checkbox"/> sg-0d63ea8c79897e666	AviOccm1209OCCM1631452667252-OCCMSecurityGroup-T5KVZ1Q4SH48	NetApp OCCM Instance External Security Group	Copy to new
<input type="checkbox"/> sg-0aed9f836b48c52d	AviOccmFSxOCCM1638110371156-OCCMSecurityGroup-N0ENZJW3TVYB	NetApp OCCM Instance External Security Group	Copy to new
<input type="checkbox"/> sg-083a6ea5ca9a12375	connector01OCCM1631455604110-OCCMSecurityGroup-1790QV45PH3ZW	NetApp OCCM Instance External Security Group	Copy to new
<input checked="" type="checkbox"/> sg-08148ca915189ac87	default	default VPC security group	Copy to new
<input type="checkbox"/> sg-07fc527620e3bb22	fsx02OCCM163339531669-OCCMSecurityGroup-1XZYC5WM15NP7	NetApp OCCM Instance External Security Group	Copy to new
<input type="checkbox"/> sg-0f359d2ba38db749f	SG-Version10-0CE6MEs-NetAppExternalSecurityGroup-N8B50KGTK8U	ONTAP Cloud firewall rules for management and data interface	Copy to new

Inbound rules for sg-08148ca915189ac87 (Selected security groups: sg-08148ca915189ac87)

Type (i)	Protocol (i)	Port Range (i)	Source (i)	Description (i)
All traffic	All	All	192.168.1.0/24	
All traffic	All	All	sg-08148ca915189ac87 (default)	

Cancel Previous Review and Launch

- In Step 7, review the instance configuration summary, and click Launch to start instance deployment. You are prompted to create a key pair or select a key pair for access to the instance.

Screenshot of the AWS EC2 Instance Launch Wizard Step 7: Review Instance Launch. The page shows the selected AMI (Red Hat Enterprise Linux 8 (HVM), SSD Volume Type - ami-0b0af3577fe5e3532), Instance Type (m5.2xlarge), and Security Group (default). It also lists inbound rules for the security group. A modal window titled "Select an existing key pair or create a new key pair" is open, prompting the user to choose a key pair. The key pair "accessstkey | RSA" is selected. An acknowledgment checkbox is checked, stating: "I acknowledge that I have access to the corresponding private key file, and that without this file, I won't be able to log into my instance." The "Launch Instances" button is highlighted in blue.

9. Log into EC2 instance using an SSH key pair. Make changes to your key name and instance IP address as appropriate.

```
ssh -i ora-db1v2.pem ec2-user@54.80.114.77
```

You need to create two EC2 instances as primary and standby Oracle servers in their designated availability

zone as demonstrated in the architecture diagram.

Provision FSx for ONTAP file systems for Oracle database storage


EC2 instance deployment allocates an EBS root volume for the OS. FSx for ONTAP file systems provides Oracle database storage volumes, including the Oracle binary, data, and log volumes. The FSx storage NFS volumes can be either provisioned from the AWS FSx console or from Oracle installation, and configuration automation that allocates the volumes as the user configures in a automation parameter file.

Creating FSx for ONTAP file systems

Referred to this documentation [Managing FSx for ONTAP file systems](#) for creating FSx for ONTAP file systems.

Key considerations:

- SSD storage capacity. Minimum 1024 GiB, maximum 192 TiB.
- Provisioned SSD IOPS. Based on workload requirements, a maximum of 80,000 SSD IOPS per file system.
- Throughput capacity.
- Set administrator fsxadmin/vsadmin password. Required for FSx configuration automation.
- Backup and maintenance. Disable automatic daily backups; database storage backup is executed through SnapCenter scheduling.
- Retrieve the SVM management IP address as well as protocol-specific access addresses from SVM details page. Required for FSx configuration automation.

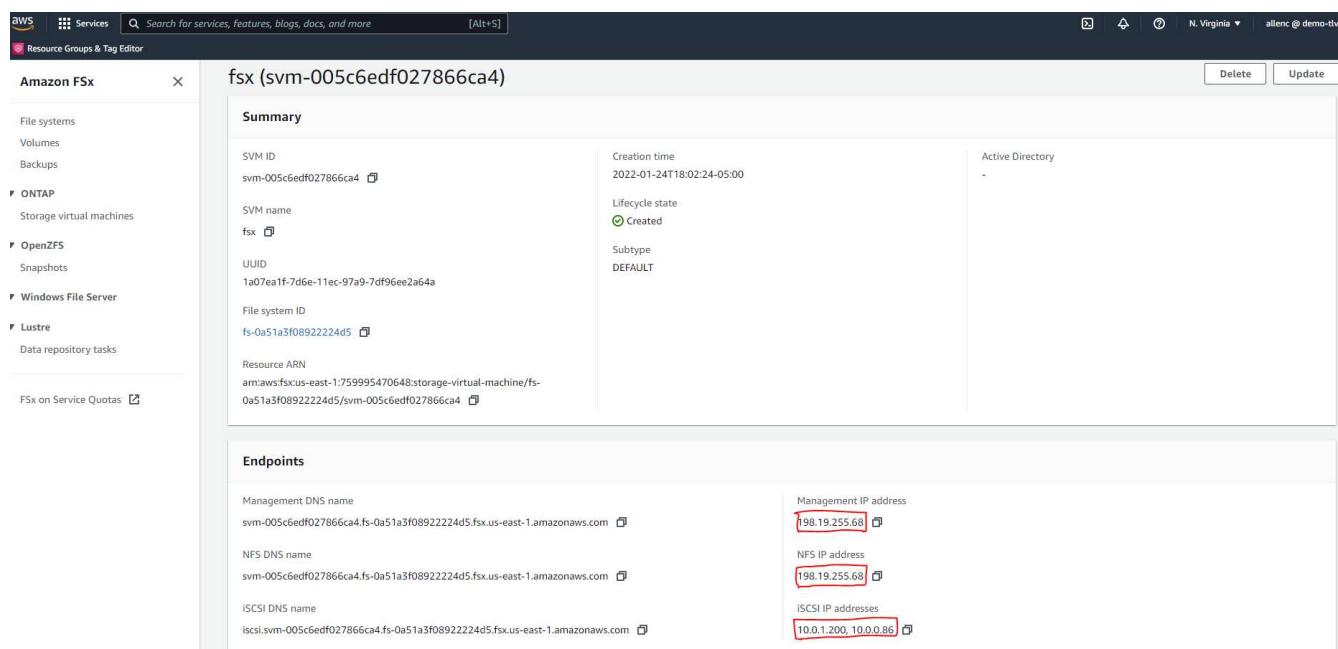

The screenshot shows the AWS FSx console interface. On the left, there's a sidebar with navigation links: Services, Resource Groups & Tag Editor, Amazon FSx, File systems, Volumes, Backups, ONTAP, Storage virtual machines, OpenZFS, Snapshots, Windows File Server, Lustre, Data repository tasks, and FSx on Service Quotas. The main area has a title bar "fsx (svm-005c6edf027866ca4)". Below it, there are two tabs: "Summary" and "Endpoints".

Summary:

- SVM ID: svm-005c6edf027866ca4
- SVM name: fsx
- UUID: 1a07ea1f-7d6e-11ec-97a9-7df96ee2a64a
- File system ID: fs-0a51a3f08922224d5
- Resource ARN: arn:aws:fsxus-east-1:759995470648:storage-virtual-machine/fsx-0a51a3f08922224d5/svm-005c6edf027866ca4
- Creation time: 2022-01-24T18:02:24-05:00
- Lifecycle state: Created
- Subtype: DEFAULT
- Active Directory: -

Endpoints:

- Management DNS name: svm-005c6edf027866ca4.fs-0a51a3f08922224d5.fsx.us-east-1.amazonaws.com
- Management IP address: 198.19.255.68
- NFS DNS name: svm-005c6edf027866ca4.fs-0a51a3f08922224d5.fsx.us-east-1.amazonaws.com
- NFS IP address: 198.19.255.68
- iSCSI DNS name: iscsi.svm-005c6edf027866ca4.fs-0a51a3f08922224d5.fsx.us-east-1.amazonaws.com
- iSCSI IP addresses: 10.0.1.200, 10.0.0.86

See the following step-by-step procedures for setting up either a primary or standby HA FSx cluster.

1. From the FSx console, click Create File System to start the FSx provision workflow.

2. Select Amazon FSx for NetApp ONTAP. Then click Next.

Select file system type

File system options

- Amazon FSx for NetApp ONTAP
- Amazon FSx for OpenZFS
- Amazon FSx for Windows File Server
- Amazon FSx for Lustre

Amazon FSx for NetApp ONTAP

Amazon FSx for NetApp ONTAP provides feature-rich, high-performance, and highly-reliable storage built on NetApp's popular ONTAP file system and fully managed by AWS.

- Broadly accessible from Linux, Windows, and macOS compute instances and containers (running on AWS or on-premises) via industry-standard NFS, SMB, and iSCSI protocols.
- Provides ONTAP's popular data management capabilities like Snapshots, SnapMirror (for data replication), FlexClone (for data cloning), and data compression / deduplication.
- Delivers hundreds of thousands of IOPS with consistent sub-millisecond latencies, and up to 3 GB/s of throughput.
- Offers highly-available and highly-durable multi-AZ SSD storage with support for cross-region replication and built-in, fully managed backups.
- Automatically tiers infrequently-accessed data to capacity pool storage, a fully elastic storage tier that can scale to petabytes in size and is cost-optimized for infrequently-accessed data.
- Integrates with Microsoft Active Directory (AD) to support Windows-based environments and enterprises.

Cancel **Next**

3. Select Standard Create and, in File System Details, name your file system, Multi-AZ HA. Based on your database workload, choose either Automatic or User-Provisioned IOPS up to 80,000 SSD IOPS. FSx storage comes with up to 2TiB NVMe caching at the backend that can deliver even higher measured IOPS.

File system details

File system name - optional [Info](#)

aws_ora_prod

Maximum of 256 Unicode letters, whitespace, and numbers, plus + - = . _ : /

Deployment type [Info](#)

Multi-AZ

Single-AZ

SSD storage capacity [Info](#)

1024

Minimum 1024 GiB; Maximum 192 TiB.

Provisioned SSD IOPS

Amazon FSx provides 3 IOPS per GiB of storage capacity. You can also provision additional SSD IOPS as needed.

Automatic (3 IOPS per GiB of SSD storage)

User-provisioned

40000

Maximum 80,000 IOPS

Throughput capacity [Info](#)

The sustained speed at which the file server hosting your file system can serve data. The file server can also burst to higher speeds for periods of time.

Recommended throughput capacity

128 MB/s

Specify throughput capacity

Throughput capacity

512 MB/s



4. In the Network & Security section, select the VPC, security group, and subnets. These should be created before FSx deployment. Based on the role of the FSx cluster (primary or standby), place the FSx storage nodes in the appropriate zones.

Network & security

Virtual Private Cloud (VPC) [Info](#)

Specify the VPC from which your file system is accessible.

vpc-0474064fc537e5182



VPC Security Groups [Info](#)

Specify VPC Security Groups to associate with your file system's network interfaces.

Choose VPC security group(s)



sg-08148ca915189ac87 (default)

Preferred subnet [Info](#)

Specify the preferred subnet for your file system.

subnet-08c952541f4ab282d (us-east-1a)



Standby subnet

subnet-0a84d6eeeb0f4e5c0 (us-east-1b)



VPC route tables

Specify the VPC route tables associated with your file system.

VPC's default route table

Select one or more VPC route tables

Endpoint IP address range

Specify the IP address range in which the endpoints to access your file system will be created

No preference

Select an IP address range

5. In the Security & Encryption section, accept the default, and enter the fsxadmin password.

Security & encryption

Encryption key [Info](#)

AWS Key Management Service (KMS) encryption key that protects your file system data at rest.

aws/fsx (default)



Description	Account	KMS key ID
Default master key that protects my FSx resources when no other key is defined	759995470648	5b31feff-6759-4306-a852-9c99a743982a

File system administrative password

Password for this file system's "fsxadmin" user, which you can use to access the ONTAP CLI or REST API.

Don't specify a password

Specify a password

Password

Confirm password

6. Enter the SVM name and the vsadmin password.

Default storage virtual machine configuration

Storage virtual machine name

SVM administrative password
Password for this SVM's "vsadmin" user, which you can use to access the ONTAP CLI or REST API.

Don't specify a password
 Specify a password
Password

Confirm password

Active Directory
Joining an Active Directory enables access from Windows and MacOS clients over the SMB protocol.

Do not join an Active Directory
 Join an Active Directory

7. Leave the volume configuration blank; you do not need to create a volume at this point.

Default volume configuration

Volume name

vol1

Maximum of 203 alphanumeric characters, plus _.

Junction path

/vol1

The location within your file system where your volume will be mounted.

Volume size

1024

Minimum 20 MiB; Maximum 104857600 MiB

Storage efficiency

Select whether you would like to enable ONTAP storage efficiencies on your volume: deduplication, compression, and compaction.

- Enabled (recommended)
 Disabled

Capacity pool tiering policy

You can optionally enable automatic tiering of your data to lower-cost capacity pool storage.

Auto



► Backup and maintenance - *optional*

► Tags - *optional*

Cancel

Back

Next

8. Review the Summary page, and click Create File System to complete FSx file system provision.

Screenshot of the AWS FSx Create file system wizard - Step 3: Review and create. The summary table shows the following configuration:

Attribute	Value	Editable after creation
File system type	Amazon FSx for NetApp ONTAP	
File system name	aws_ora_prod	<input checked="" type="checkbox"/>
Deployment type	Multi-AZ	
Storage type	SSD	
SSD storage capacity	1,024 GiB	<input checked="" type="checkbox"/>
Minimum SSD IOPS	40000 IOPS	<input checked="" type="checkbox"/>
Throughput capacity	512 MB/s	<input checked="" type="checkbox"/>
Virtual Private Cloud (VPC)	vpc-0474064fc537e5182	
VPC Security Groups	sg-08148ca915189ac87	<input checked="" type="checkbox"/>
Preferred subnet	subnet-08c952541f4ab282d	
Standby subnet	subnet-0a84d6eeeb0f4e5c0	
VPC route tables	VPC's default route table	
Endpoint IP address range	No preference	
KMS key ID	arn:aws:kms:us-east-1:759995470648:key/5b31feff-6759-4306-a852-9c99a743982a	
Daily automatic backup window	No preference	<input checked="" type="checkbox"/>
Automatic backup	7 day(s)	<input checked="" type="checkbox"/>

Provisioning of database volumes for Oracle database

See [Managing FSx for ONTAP volumes - creating a volume](#) for details.

Key considerations:

- Sizing the database volumes appropriately.
- Disabling capacity pool tiering policy for performance configuration.
- Enabling Oracle dNFS for NFS storage volumes.
- Setting up multipath for iSCSI storage volumes.

Create database volume from FSx console

From the AWS FSx console, you can create three volumes for Oracle database file storage: one for the Oracle binary, one for the Oracle data, and one for the Oracle log. Make sure that volume naming matches the Oracle host name (defined in the hosts file in the automation toolkit) for proper identification. In this example, we use db1 as the EC2 Oracle host name instead of a typical IP-address-based host name for an EC2 instance.

Create volume

X

File system

ONTAP | fs-0a51a3f08922224d5 | rdscustomfs007



Storage virtual machine

svm-005c6edf027866ca4 | fsx



Volume name

db1_bin

Maximum of 203 alphanumeric characters, plus _.

Junction path

/db1_bin

The location within your file system where your volume will be mounted.

Volume size

51200

Minimum 20 MiB; Maximum 104857600 MiB

Storage efficiency

Select whether you would like to enable ONTAP storage efficiencies on your volume: deduplication, compression, and compaction.

- Enabled (recommended)
- Disabled

Capacity pool tiering policy

You can optionally enable automatic tiering of your data to lower-cost capacity pool storage.

None



Cancel

Confirm

Create volume

X

File system

ONTAP | fs-0a51a3f08922224d5 | rdscustomfs007



Storage virtual machine

svm-005c6edf027866ca4 | fsx



Volume name

db1_data

Maximum of 203 alphanumeric characters, plus _.

Junction path

/db1_data

The location within your file system where your volume will be mounted.

Volume size

512000

Minimum 20 MiB; Maximum 104857600 MiB

Storage efficiency

Select whether you would like to enable ONTAP storage efficiencies on your volume: deduplication, compression, and compaction.

- Enabled (recommended)
- Disabled

Capacity pool tiering policy

You can optionally enable automatic tiering of your data to lower-cost capacity pool storage.

None



Cancel

Confirm

Create volume

File system

ONTAP | fs-0a51a3f08922224d5 | rdscustomfs007

Storage virtual machine

svm-005c6edf027866ca4 | fsx

Volume name

db1_log

Maximum of 203 alphanumeric characters, plus _.

Junction path

/db1_log

The location within your file system where your volume will be mounted.

Volume size

256000

Minimum 20 MiB; Maximum 104857600 MiB

Storage efficiency

Select whether you would like to enable ONTAP storage efficiencies on your volume: deduplication, compression, and compaction.

Enabled (recommended)

Disabled

Capacity pool tiering policy

You can optionally enable automatic tiering of your data to lower-cost capacity pool storage.

None

Cancel Confirm



Creating iSCSI LUNs is not currently supported by the FSx console. For iSCSI LUNs deployment for Oracle, the volumes and LUNs can be created by using automation for ONTAP with the NetApp Automation Toolkit.

Install and configure Oracle on an EC2 instance with FSx database volumes

The NetApp automation team provide an automation kit to run Oracle installation and configuration on EC2 instances according to best practices. The current version of the automation kit supports Oracle 19c on NFS with the default RU patch 19.8. The automation kit can be easily adapted for other RU patches if needed.

Prepare a Ansible controller to run automation

Follow the instruction in the section "[Creating and connecting to an EC2 instance for hosting Oracle database](#)" to provision a small EC2 Linux instance to run the Ansible controller. Rather than using RedHat, Amazon Linux t2.large with 2vCPU and 8G RAM should be sufficient.

Retrieve NetApp Oracle deployment automation toolkit

Log into the EC2 Ansible controller instance provisioned from step 1 as ec2-user and from the ec2-user home directory, execute the `git clone` command to clone a copy of the automation code.

```
git clone https://github.com/NetApp-Automation/na_oracle19c_deploy.git
```

```
git clone https://github.com/NetApp-
Automation/na_rds_fsx_oranfs_config.git
```

Execute automated Oracle 19c deployment using automation toolkit

See these detailed instruction [CLI deployment Oracle 19c Database](#) to deploy Oracle 19c with CLI automation. There is a small change in command syntax for playbook execution because you are using an SSH key pair instead of a password for host access authentication. The following list is a high level summary:

1. By default, an EC2 instance uses an SSH key pair for access authentication. From Ansible controller automation root directories `/home/ec2-user/na_oracle19c_deploy`, and `/home/ec2-user/na_rds_fsx_oranfs_config`, make a copy of the SSH key `accesststkey.pem` for the Oracle host deployed in the step "[Creating and connecting to an EC2 instance for hosting Oracle database](#)".
2. Log into the EC2 instance DB host as ec2-user, and install the python3 library.

```
sudo yum install python3
```

3. Create a 16G swap space from the root disk drive. By default, an EC2 instance creates zero swap space. Follow this AWS documentation: [How do I allocate memory to work as swap space in an Amazon EC2 instance by using a swap file?](#).
4. Return to the Ansible controller (`cd /home/ec2-user/na_rds_fsx_oranfs_config`), and execute the preclone playbook with the appropriate requirements and `linux_config` tags.

```
ansible-playbook -i hosts rds_preclone_config.yml -u ec2-user --private
-key accesststkey.pem -e @vars/fsx_vars.yml -t requirements_config
```

```
ansible-playbook -i hosts rds_preclone_config.yml -u ec2-user --private
-key accesststkey.pem -e @vars/fsx_vars.yml -t linux_config
```

5. Switch to the `/home/ec2-user/na_oracle19c_deploy-master` directory, read the `README` file, and populate the `global vars.yml` file with the relevant global parameters.

6. Populate the `host_name.yml` file with the relevant parameters in the `host_vars` directory.
7. Execute the playbook for Linux, and press Enter when prompted for the `vsadmin` password.

```
ansible-playbook -i hosts all_playbook.yml -u ec2-user --private-key  
accesststkey.pem -t linux_config -e @vars/vars.yml
```

8. Execute the playbook for Oracle, and press enter when prompted for the `vsadmin` password.

```
ansible-playbook -i hosts all_playbook.yml -u ec2-user --private-key  
accesststkey.pem -t oracle_config -e @vars/vars.yml
```

Change the permission bit on the SSH key file to 400 if needed. Change the Oracle host (`ansible_host` in the `host_vars` file) IP address to your EC2 instance public address.

Setting up SnapMirror between primary and standby FSx HA cluster

For high availability and disaster recovery, you can set up SnapMirror replication between the primary and standby FSx storage cluster. Unlike other cloud storage services, FSx enables a user to control and manage storage replication at a desired frequency and replication throughput. It also enables users to test HA/DR without any effect on availability.

The following steps show how to set up replication between a primary and standby FSx storage cluster.

1. Setup primary and standby cluster peering. Log into the primary cluster as the `fsxadmin` user and execute the following command. This reciprocal create process executes the `create` command on both the primary cluster and the standby cluster. Replace `standby_cluster_name` with the appropriate name for your environment.

```
cluster peer create -peer-addrs  
standby_cluster_name,inter_cluster_ip_address -username fsxadmin  
-initial-allowed-vserver-peers *
```

2. Set up vServer peering between the primary and standby cluster. Log into the primary cluster as the `vsadmin` user and execute the following command. Replace `primary_vserver_name`, `standby_vserver_name`, `standby_cluster_name` with the appropriate names for your environment.

```
vserver peer create -vserver primary_vserver_name -peer-vserver  
standby_vserver_name -peer-cluster standby_cluster_name -applications  
snapmirror
```

3. Verify that the cluster and vserver peerings are set up correctly.

```

FsxId00164454fac5591e6::> cluster peer show
Peer Cluster Name          Cluster Serial Number Availability  Authentication
-----
FsxId0b6a95149d07aa82e    1-80-000011           Available      ok

FsxId00164454fac5591e6::> vserver peer show
      Peer      Peer          Peering      Remote
Vserver   Vserver   State     Peer Cluster Applications  Vserver
-----
svm_FsxEraSource
      svm_FsxEraTarget
                  peered      FsxId0b6a95149d07aa82e
                                         snapmirror      svm_FsxEraTarget

FsxId00164454fac5591e6::>

```

4. Create target NFS volumes at the standby FSx cluster for each source volume at the primary FSx cluster. Replace the volume name as appropriate for your environment.

```

vol create -volume dr_db1_bin -aggregate aggr1 -size 50G -state online
-policy default -type DP

```

```

vol create -volume dr_db1_data -aggregate aggr1 -size 500G -state online
-policy default -type DP

```

```

vol create -volume dr_db1_log -aggregate aggr1 -size 250G -state online
-policy default -type DP

```

5. You can also create iSCSI volumes and LUNs for the Oracle binary, Oracle data, and the Oracle log if the iSCSI protocol is employed for data access. Leave approximately 10% free space in the volumes for snapshots.

```

vol create -volume dr_db1_bin -aggregate aggr1 -size 50G -state online
-policy default -unix-permissions ---rwxr-xr-x -type RW

```

```

lun create -path /vol/dr_db1_bin/dr_db1_bin_01 -size 45G -ostype linux

```

```

vol create -volume dr_db1_data -aggregate aggr1 -size 500G -state online
-policy default -unix-permissions ---rwxr-xr-x -type RW

```

```

lun create -path /vol/dr_db1_data/dr_db1_data_01 -size 100G -ostype
linux

```

```
lun create -path /vol/dr_db1_data/dr_db1_data_02 -size 100G -ostype  
linux
```

```
lun create -path /vol/dr_db1_data/dr_db1_data_03 -size 100G -ostype  
linux
```

```
lun create -path /vol/dr_db1_data/dr_db1_data_04 -size 100G -ostype  
linux
```

```
vol create -volume dr_db1_log -aggregate aggr1 -size 250G -state online -policy default -unix-permissions  
---rwxr-xr-x -type RW
```

```
lun create -path /vol/dr_db1_log/dr_db1_log_01 -size 45G -ostype linux
```

```
lun create -path /vol/dr_db1_log/dr_db1_log_02 -size 45G -ostype linux
```

```
lun create -path /vol/dr_db1_log/dr_db1_log_03 -size 45G -ostype linux
```

```
lun create -path /vol/dr_db1_log/dr_db1_log_04 -size 45G -ostype linux
```

6. For iSCSI LUNs, create mapping for the Oracle host initiator for each LUN, using the binary LUN as an example. Replace the igroup with an appropriate name for your environment, and increment the lun-id for each additional LUN.

```
lun mapping create -path /vol/dr_db1_bin/dr_db1_bin_01 -igroup ip-10-0-  
1-136 -lun-id 0
```

```
lun mapping create -path /vol/dr_db1_data/dr_db1_data_01 -igroup ip-10-  
0-1-136 -lun-id 1
```

7. Create a SnapMirror relationship between the primary and standby database volumes. Replace the appropriate SVM name for your environment.s

```
snapmirror create -source-path svm_FSxOraSource:db1_bin -destination  
-path svm_FSxOraTarget:dr_db1_bin -vserver svm_FSxOraTarget -throttle  
unlimited -identity-preserve false -policy MirrorAllSnapshots -type DP
```

```
snapmirror create -source-path svm_FSxOraSource:db1_data -destination  
-path svm_FSxOraTarget:dr_db1_data -vserver svm_FSxOraTarget -throttle  
unlimited -identity-preserve false -policy MirrorAllSnapshots -type DP
```

```
snapmirror create -source-path svm_FSxOraSource:db1_log -destination  
-path svm_FSxOraTarget:dr_db1_log -vserver svm_FSxOraTarget -throttle  
unlimited -identity-preserve false -policy MirrorAllSnapshots -type DP
```

This SnapMirror setup can be automated with a NetApp Automation Toolkit for NFS database volumes. The toolkit is available for download from the NetApp public GitHub site.

```
git clone https://github.com/NetApp-  
Automation/na_ora_hadr_failover_resync.git
```

Read the README instructions carefully before attempting setup and failover testing.



Replicating the Oracle binary from the primary to a standby cluster might have Oracle license implications. Contact your Oracle license representative for clarification. The alternative is to have Oracle installed and configured at the time of recovery and failover.


SnapCenter Deployment

SnapCenter installation

Follow [Installing the SnapCenter Server](#) to install SnapCenter server. This documentation covers how to install a standalone SnapCenter server. A SaaS version of SnapCenter is in beta review and could be available shortly. Check with your NetApp representative for availability if needed.

Configure SnapCenter plugin for EC2 Oracle host

1. After automated SnapCenter installation, log into SnapCenter as an administrative user for the Window host on which the SnapCenter server is installed.

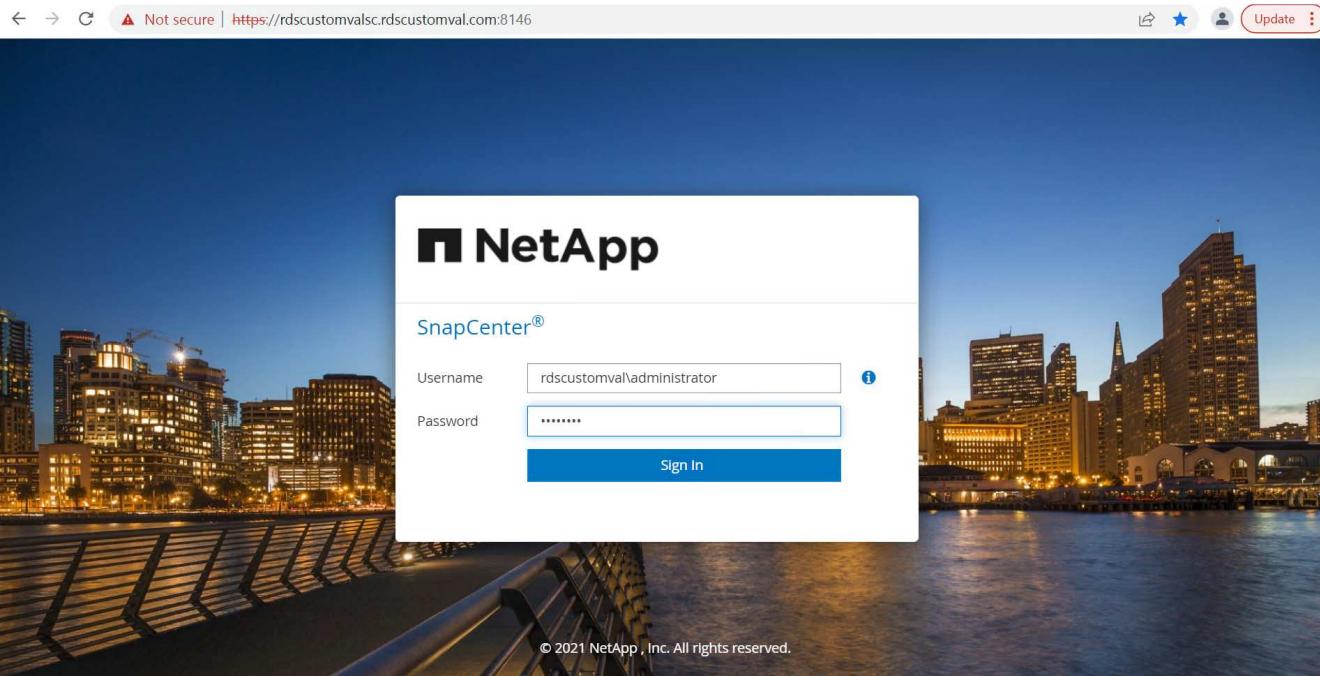

- From the left-side menu, click Settings, and then Credential and New to add ec2-user credentials for SnapCenter plugin installation.

NetApp SnapCenter®


Global Settings Policies Users and Access Roles **Credential** Software

Search by Credential Name

	Credential Name	Authentication Mode	Details
	244rdscustomdb	SQL	UserId:admin
	42rdscustomdb	SQL	UserId:admin
	admin	SQL	UserId:admin
	administrator	Windows	UserId:administrator
	ec2-user	Linux	UserId:ec2-user
	onpremSQL	Windows	UserId:rdscustomval\administrator
	rdsdb2	Windows	UserId:administrator
	rdsdb244	Windows	UserId:administrator
	rdssql	Windows	UserId:administrator
	tst244	SQL	UserId:admin
	tstcredfordemo	Windows	UserId:administrator

New **Modify** **Delete**

- Reset the ec2-user password and enable password SSH authentication by editing the `/etc/ssh/sshd_config` file on the EC2 instance host.
- Verify that the "Use sudo privileges" checkbox is selected. You just reset the ec2-user password in the previous step.

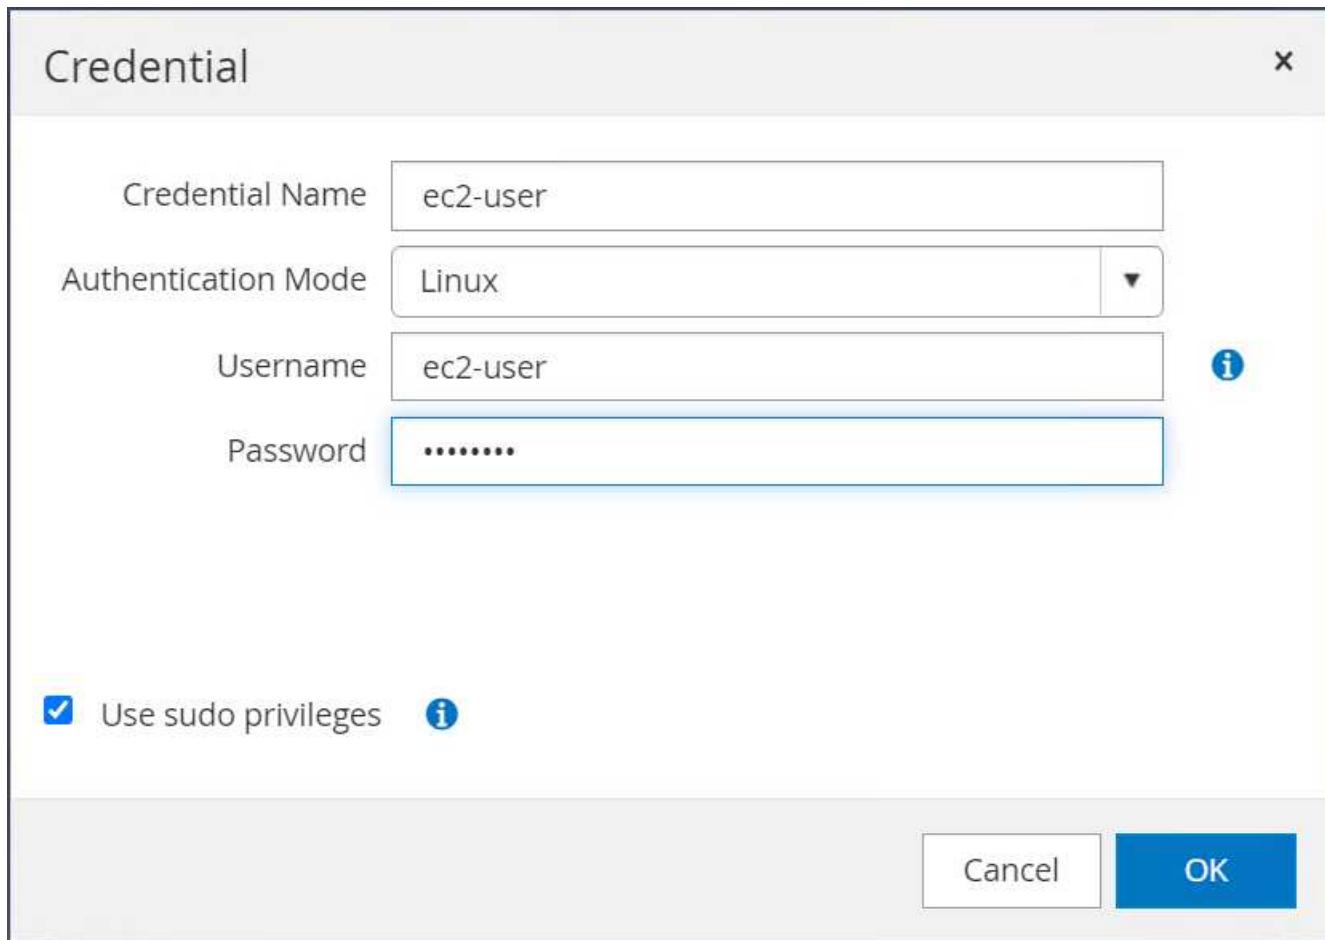

5. Add the SnapCenter server name and the IP address to the EC2 instance host file for name resolution.

```
[ec2-user@ip-10-0-0-151 ~]$ sudo vi /etc/hosts
[ec2-user@ip-10-0-0-151 ~]$ cat /etc/hosts
127.0.0.1    localhost localhost.localdomain localhost4
localhost4.localdomain4
::1          localhost localhost.localdomain localhost6
localhost6.localdomain6
10.0.1.233   rdscustomvalsc.rdscustomval.com rdscustomvalsc
```

6. On the SnapCenter server Windows host, add the EC2 instance host IP address to the Windows host file C:\Windows\System32\drivers\etc\hosts.

```
10.0.0.151      ip-10-0-0-151.ec2.internal
```

7. In the left-side menu, select Hosts > Managed Hosts, and then click Add to add the EC2 instance host to SnapCenter.

The screenshot shows the NetApp SnapCenter interface. On the left, there's a sidebar with icons for Dashboard, Resources, Monitor, Reports, Hosts (which is selected), Storage Systems, Settings, and Alerts. The main area is titled "Managed Hosts" and contains a table with two rows of host information. The columns are Name, Type, System, Plug-in, Version, and Overall Status. The first host is "RDSAMA7-VJ0DQK0" (Windows, Stand-alone, Microsoft Windows Server, Microsoft SQL Server, Version 4.5, Host down). The second host is "rdscustommssql1.rdscustomval.com" (Windows, Stand-alone, Microsoft Windows Server, Microsoft SQL Server, Version 4.5, Running).

	Name	Type	System	Plug-in	Version	Overall Status
<input type="checkbox"/>	RDSAMA7-VJ0DQK0	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Host down
<input type="checkbox"/>	rdscustommssql1.rdscustomval.com	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Running

Check Oracle Database, and, before you submit, click More Options.

This screenshot shows the "Add Host" dialog box. It has fields for Host Type (Linux), Host Name (10.0.0.151), and Credentials (ec2-user). Below these, it says "Select Plug-ins to Install SnapCenter Plug-Ins Package 4.5 P2 for Linux" with checkboxes for Oracle Database (checked) and SAP HANA. At the bottom, there are "More Options" and "Submit" buttons.

Add Host

Host Type: Linux

Host Name: 10.0.0.151

Credentials: ec2-user

Select Plug-ins to Install SnapCenter Plug-Ins Package 4.5 P2 for Linux

Oracle Database

SAP HANA

[More Options](#): Port, Install Path, Custom Plug-Ins...

[Submit](#) [Cancel](#)

Check Skip Preinstall Checks. Confirm Skipping Preinstall Checks, and then click Submit After Save.

More Options

Port	8145	i
Installation Path	/opt/NetApp/snapcenter	i
<input checked="" type="checkbox"/> Skip preinstall checks		
Custom Plug-ins		
Choose a File <input type="button" value="Browse"/> <input type="button" value="Upload"/>		
No plug-ins found.		
<input type="button" value="Save"/>		<input type="button" value="Cancel"/>

You are prompted with Confirm Fingerprint, and then click Confirm and Submit.

Confirm Fingerprint

Authenticity of the host cannot be determined i		
Host name	Fingerprint	Valid
ip-10-0-0-151.ec2.internal	ssh-rsa 2048 97:6F:3C:7D:38:42:F6:54:B7:AF:E3:61:61:BA:2E:6F	
<input type="button" value="Confirm and Submit"/> <input type="button" value="Close"/>		

After successful plugin configuration, the managed host's overall status show as Running.

Managed Hosts							
Search by Name						Add	Remove
	Name	Type	System	Plug-in	Version	Overall Status	
<input type="checkbox"/>	ip-10-0-0-151.ec2.internal	Linux	Stand-alone	UNIX, Oracle Database	4.5	Running	

Configure backup policy for Oracle database

Refer to this section [Setup database backup policy in SnapCenter](#) for details on configuring the Oracle database backup policy.

Generally you need create a policy for the full snapshot Oracle database backup and a policy for the Oracle archive-log-only snapshot backup.



You can enable Oracle archive log pruning in the backup policy to control log-archive space. Check "Update SnapMirror after creating a local Snapshot copy" in "Select secondary replication option" as you need to replicate to a standby location for HA or DR.

Configure Oracle database backup and scheduling

Database backup in SnapCenter is user configurable and can be set up either individually or as a group in a resource group. The backup interval depends on the RTO and RPO objectives. NetApp recommends that you run a full database backup every few hours and archive the log backup at a higher frequency such as 10-15 mins for quick recovery.

Refer to the Oracle section of [Implement backup policy to protect database](#) for a detailed step-by-step processes for implementing the backup policy created in the section [Configure backup policy for Oracle database](#) and for backup job scheduling.

The following image provides an example of the resources groups that are set up to back up an Oracle database.

The screenshot shows the NetApp SnapCenter interface. On the left, there's a sidebar with icons for Dashboard, Resources (selected), Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area has a title 'Oracle Database' and a search bar. Below that is a table with columns: Name, Oracle Database Type, Host/Cluster, Resource Group, Policies, Last Backup, and Overall Status. One row is shown for 'ORCL': Single Instance, ip-10-0-0-151.ec2.internal, 'orc1_full_bkup' and 'orc1_log_bkup' (highlighted in yellow), Oracle full backup and Oracle log backup, 03/24/2022 8:40:08, and 'Backup succeeded'. There are also 'Refresh Resources' and 'New Resource Group' buttons at the bottom right of the table.

Name	Oracle Database Type	Host/Cluster	Resource Group	Policies	Last Backup	Overall Status
ORCL	Single Instance	ip-10-0-0-151.ec2.internal	orc1_full_bkup orc1_log_bkup	Oracle full backup Oracle log backup	03/24/2022 8:40:08	Backup succeeded

[Next: Database management.](#)

EC2 and FSx Oracle database management

[Previous: Deployment procedures.](#)

In addition to the AWS EC2 and FSx management console, the Ansible control node and the SnapCenter UI tool are deployed for database management in this Oracle environment.

An Ansible control node can be used to manage Oracle environment configuration, with parallel updates that keep primary and standby instances in sync for kernel or patch updates. Failover, resync, and failback can be automated with the NetApp Automation Toolkit to archive fast application recovery and availability with Ansible. Some repeatable database management tasks can be executed using a playbook to reduce human errors.

The SnapCenter UI tool can perform database snapshot backup, point-in-time recovery, database cloning, and so on with the SnapCenter plugin for Oracle databases. For more information about Oracle plugin features, see the [SnapCenter Plug-in for Oracle Database overview](#).

The following sections provide details on how key functions of Oracle database management are fulfilled with the SnapCenter UI:

- Database snapshot backups
- Database point-in-time restore

- Database clone creation

Database cloning creates a replica of a primary database on a separate EC2 host for data recovery in the event of logical data error or corruption, and clones can also be used for application testing, debugging, patch validation, and so on.

Taking a snapshot

An EC2/FSx Oracle database is regularly backed up at intervals configured by the user. A user can also take a one-off snapshot backup at any time. This applies to both full-database snapshot backups as well as archive-log-only snapshot backups.

Taking a full database snapshot

A full database snapshot includes all Oracle files, including data files, control files, and archive log files.


1. Log into the SnapCenter UI and click Resources in the left-side menu. From the View dropdown, change to the Resource Group view.

Name	Resources	Tags	Policies
ordl_full_bkup	1	ora_fullbkup	Oracle full backup
ordl_log_bkup	1	ora_logbkup	Oracle log backup

2. Click the full backup resource name, and then click the Backup Now icon to initiate an add-hoc backup.

Name	Resource Name	Type	Host
ordl_full_bkup	ORCL	Oracle Database	ip-10-0-0-151.ec2.internal

3. Click Backup and then confirm the backup to start a full database backup.

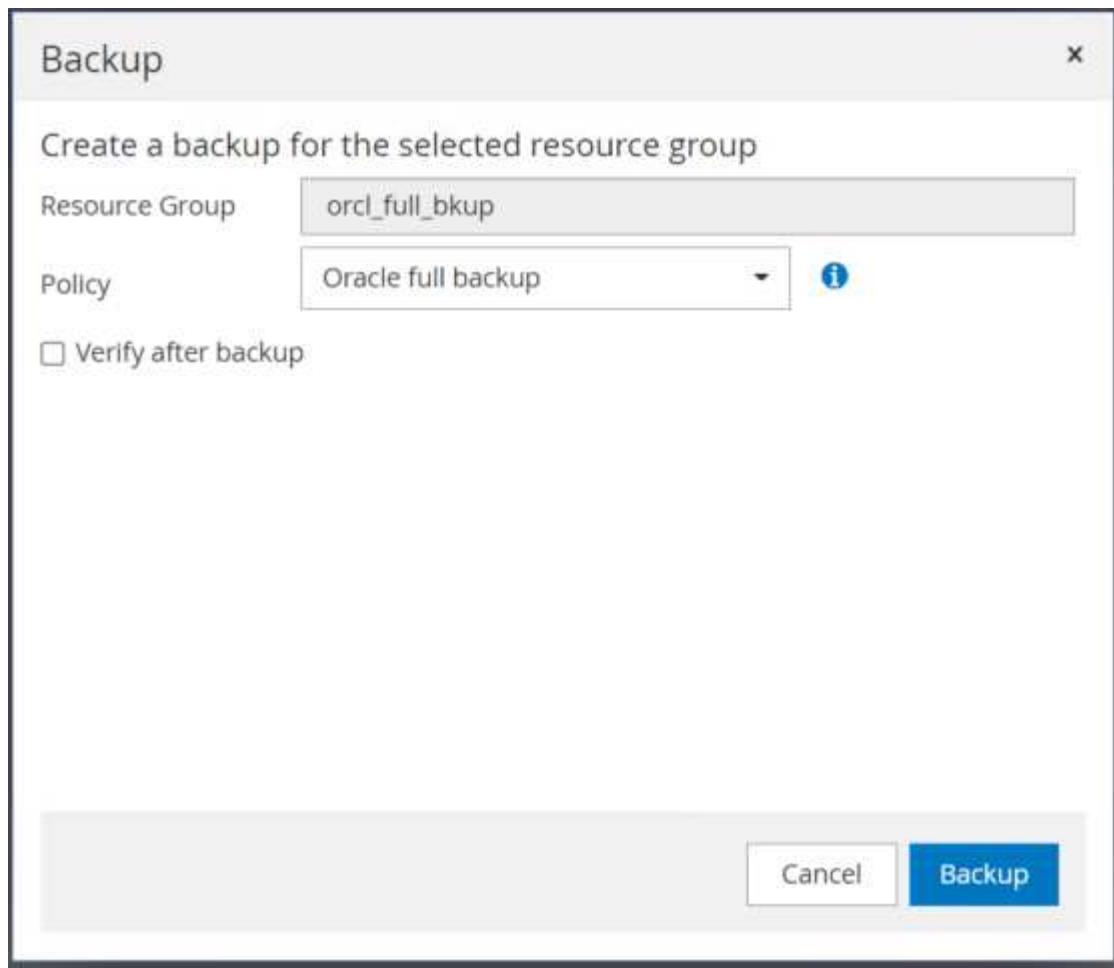

From the Resource view for the database, open the database Managed Backup Copies page to verify that the one-off backup completed successfully. A full database backup creates two snapshots: one for the data volume and one for the log volume.

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
[p-10-0-0-151_03-25-2022_00.34.20.4541.1]	1	Log	03/25/2022 12:34:37 AM	Not Applicable	False	Not Cataloged	1733264
[p-10-0-0-151_03-25-2022_00.34.20.4541.0]	1	Data	03/25/2022 12:34:31 AM	Unverified	False	Not Cataloged	1733220

Taking an archive log snapshot

An archive log snapshot is only taken for the Oracle archive log volume.

1. Log into the SnapCenter UI and click the Resources tab in the left-side menu bar. From the View dropdown, change to the Resource Group view.

The screenshot shows the NetApp SnapCenter interface. On the left is a sidebar with icons for Dashboard, Resources (selected), Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area has a dropdown menu set to 'Oracle Database'. Below it, a 'View' dropdown is set to 'Resource Group' and a search bar says 'Search resource group'. A table lists two resources: 'ordl_full_bkup' and 'ordl_log_bkup'. Both have a count of 1 and are associated with tags 'ora_fullbkup' and 'ora_logbkup' respectively. Policies for both are listed as 'Oracle full backup' and 'Oracle log backup'.

2. Click the log backup resource name, and then click the Backup Now icon to initiate an add-hoc backup for archive logs.

This screenshot shows the 'ordl_log_bkup Details' page. The sidebar and top navigation are identical to the previous screen. The main table shows the resource 'ordl_log_bkup' with details: Resource Name 'ORCL', Type 'Oracle Database', and Host 'ip-10-0-0-151.ec2.internal'. On the right, there are buttons for 'Modify Resource Group', 'Backup Now' (which is highlighted in yellow), 'Maintenance', and 'Delete'.

3. Click Backup and then confirm the backup to start an archive log backup.

A modal dialog box titled 'Backup' is displayed. It asks 'Create a backup for the selected resource group'. The 'Resource Group' field contains 'ordl_log_bkup'. The 'Policy' field is set to 'Oracle log backup'. At the bottom are 'Cancel' and 'Backup' buttons.

From the Resource view for the database, open the database Managed Backup Copies page to verify that the one-off archive log backup completed successfully. An archive log backup creates one snapshot for the log volume.

The screenshot shows the NetApp SnapCenter interface for an Oracle Database named ORCL. In the top right, there are buttons for Database Settings, Protect, Refresh, Sign Out, and other user information. On the left, there's a sidebar with icons for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area is titled 'ORCL Topology' and shows 'Manage Copies' with 27 Backups and 0 Clones. Below this is a 'Primary Backup(s)' section with a table:

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
ip-10-0-0-151_03-25-2022_01:59:38.0733_1	1	Log	03/25/2022 1:59:46 AM	Not Applicable	False	Not Cataloged	1739201

A summary card on the right shows: 27 Backups, 2 Data Backups, 25 Log Backups, and 0 Clones.

Restoring to a point in time

SnapCenter-based restore to a point in time is executed on the same EC2 instance host. Complete the following steps to perform the restore:

1. From the SnapCenter Resources tab > Database view, click the database name to open the database backup.

The screenshot shows the NetApp SnapCenter interface with the 'Resources' tab selected. The left sidebar shows 'Dashboard', 'Resources' (selected), 'Monitor', 'Reports', 'Hosts', 'Storage Systems', 'Settings', and 'Alerts'. The main table shows the following data for the Oracle Database ORCL:

Name	Oracle Database Type	Host/Cluster	Resource Group	Policies	Last Backup	Overall Status
ORCL	Single Instance	ip-10-0-0-151.ec2.internal	ord_full_bkup ord_log_bkup	Oracle full backup Oracle log backup	03/25/2022 1:10:09 PM	Backup succeeded


2. Select the database backup copy and the desired point in time to be restored. Also mark down the corresponding SCN number for the point in time. The point-in-time restore can be performed using either the time or the SCN.

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
ip-10-0-0-151_03-25-2022_12.40.01.1098_1	1	Log	03/25/2022 12:40:09 PM	Not Applicable	False	Not Cataloged	1784293
ip-10-0-0-151_03-25-2022_12.25.01.0080_1	1	Log	03/25/2022 12:25:09 PM	Not Applicable	False	Not Cataloged	1783383
ip-10-0-0-151_03-25-2022_12.10.01.1097_1	1	Log	03/25/2022 12:10:09 PM	Not Applicable	False	Not Cataloged	1782417
ip-10-0-0-151_03-25-2022_11.55.01.0500_1	1	Log	03/25/2022 11:55:09 AM	Not Applicable	False	Not Cataloged	1781160
ip-10-0-0-151_03-25-2022_11.40.01.0323_1	1	Log	03/25/2022 11:40:09 AM	Not Applicable	False	Not Cataloged	1780268
ip-10-0-0-151_03-25-2022_11.25.01.0430_1	1	Log	03/25/2022 11:25:09 AM	Not Applicable	False	Not Cataloged	1779368
ip-10-0-0-151_03-25-2022_11.15.01.1503_1	1	Log	03/25/2022 11:15:17 AM	Not Applicable	False	Not Cataloged	1778546
ip-10-0-0-151_03-25-2022_11.15.01.1503_0	1	Data	03/25/2022 11:15:11 AM	Unverified	False	Not Cataloged	1778504
ip-10-0-0-151_03-25-2022_11.10.01.1834_1	1	Log	03/25/2022 11:10:09 AM	Not Applicable	False	Not Cataloged	1778184

3. Highlight the log volume snapshot and click the Mount button to mount the volume.

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
ip-10-0-0-151_03-25-2022_12.40.01.1098_1	1	Log	03/25/2022 12:40:09 PM	Not Applicable	False	Not Cataloged	1784293
ip-10-0-0-151_03-25-2022_12.25.01.0080_1	1	Log	03/25/2022 12:25:09 PM	Not Applicable	False	Not Cataloged	1783383
ip-10-0-0-151_03-25-2022_12.10.01.1097_1	1	Log	03/25/2022 12:10:09 PM	Not Applicable	False	Not Cataloged	1782417
ip-10-0-0-151_03-25-2022_11.55.01.0500_1	1	Log	03/25/2022 11:55:09 AM	Not Applicable	False	Not Cataloged	1781160
ip-10-0-0-151_03-25-2022_11.40.01.0323_1	1	Log	03/25/2022 11:40:09 AM	Not Applicable	False	Not Cataloged	1780268
ip-10-0-0-151_03-25-2022_11.25.01.0430_1	1	Log	03/25/2022 11:25:09 AM	Not Applicable	False	Not Cataloged	1779368
ip-10-0-0-151_03-25-2022_11.15.01.1503_1	1	Log	03/25/2022 11:15:17 AM	Not Applicable	False	Not Cataloged	1778546
ip-10-0-0-151_03-25-2022_11.15.01.1503_0	1	Data	03/25/2022 11:15:11 AM	Unverified	False	Not Cataloged	1778504
ip-10-0-0-151_03-25-2022_11.10.01.1834_1	1	Log	03/25/2022 11:10:09 AM	Not Applicable	False	Not Cataloged	1778184

4. Choose the primary EC2 instance to mount the log volume.

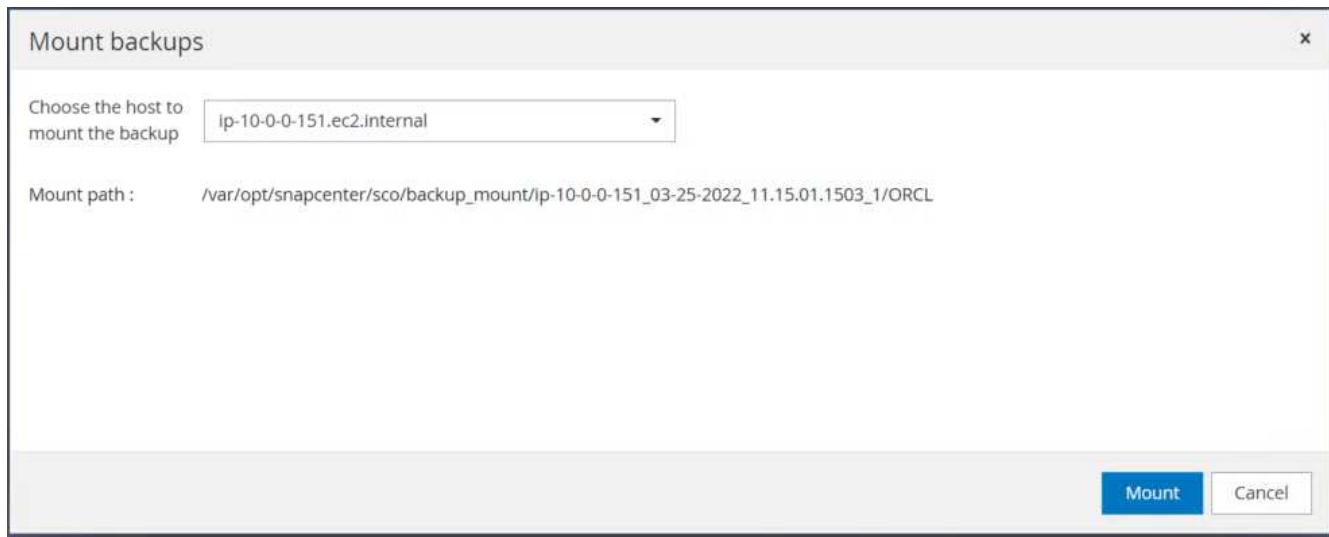

5. Verify that the mount job completes successfully. Also check on the EC2 instance host to see that log volume mounted and also the mount point path.

```
[root@ip-10-0-0-151 ec2-user]# df -h
Filesystem      Size  Used Avail Mounted on
/devtmpfs        7.6G   0    7.6G  0% /dev
tmpfs           1.6G  7.0G  8.3G  46% /dev/shm
tmpfs           7.7G  604K  7.6G  1% /run
tmpfs           7.7G   0    7.7G  0% /sys/fs/cgroup
/dev/nvme0n1p1   9.8G  5.4G  4.3G  56% /
198.19.255.68:/ora_nfs_log  48G  48G  0% /ora_nfs_log
198.19.255.68:/ora_nfs_data  48G  3.4G  45G  8% /ora_nfs_data
/dev/mapper/bdata01-lvdbdata01  40G  471M  38G  2% /rdsdbdata
/dev/nvme5n1     25G   12G  13G  49% /rdsdbbin
tmpfs           1.6G   0    1.6G  0% /run/user/61001
tmpfs           1.6G   0    1.6G  0% /run/user/61005
198.19.255.68:/Scef91c793-5583-480d-9a34-6275dab17f5b  48G  91M  48G  1% /var/opt/snapcenter/sco/backup_mount/ip-10-0-0-151_03-25-2022_11.15.01.1503_1/ORCL/
[root@ip-10-0-0-151 ec2-user]#
```

6. Copy the archive logs from the mounted log volume to the current archive log directory.

```
[ec2-user@ip-10-0-0-151 ~]$ cp /var/opt/snapcenter/sco/backup_mount/ip-10-0-0-151_03-25-2022_11.15.01.1503_1/ORCL/1/db/ORCL_A/arch/*.arc /ora_nfs_log/db/ORCL_A/arch/
```

7. Return to the SnapCenter Resource tab > database backup page, highlight the data snapshot copy, and click the Restore button to start the database restore workflow.

Manage Copies

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
ip-10-0-0-151_03-25-2022_12.10.01.1097_1	1	Log	03/25/2022 12:10:09 PM	Not Applicable	False	Not Cataloged	1782417
ip-10-0-0-151_03-25-2022_11.55.01.0500_1	1	Log	03/25/2022 11:55:09 AM	Not Applicable	False	Not Cataloged	1781160
ip-10-0-0-151_03-25-2022_11.40.01.0323_1	1	Log	03/25/2022 11:40:09 AM	Not Applicable	False	Not Cataloged	1780268
ip-10-0-0-151_03-25-2022_11.25.01.0430_1	1	Log	03/25/2022 11:25:09 AM	Not Applicable	False	Not Cataloged	1779368
ip-10-0-0-151_03-25-2022_11.15.01.1503_1	1	Log	03/25/2022 11:15:17 AM	Not Applicable	True	Not Cataloged	1778546
ip-10-0-0-151_03-25-2022_11.15.01.1503_0	1	Data	03/25/2022 11:15:11 AM	Unverified	False	Not Cataloged	1778504
ip-10-0-0-151_03-25-2022_11.10.01.1834_1	1	Log	03/25/2022 11:10:09 AM	Not Applicable	False	Not Cataloged	1778184

8. Check "All Datafiles" and "Change database state if needed for restore and recovery", and click Next.

Restore ORCL

1 Restore Scope

Restore Scope

All Datafiles

Tablespaces

Control files

Database State

Change database state if needed for restore and recovery

Restore Mode

Force in place restore


If this check box is not selected and if any of the in place restore criteria is not met, restore will be performed using the connect and copy method. The connect and copy restore method might take time based on the files being restored.

Previous

Next

9. Choose a desired recovery scope using either SCN or time. Rather than copying the mounted archive logs

to the current log directory as demonstrated in step 6, the mounted archive log path can be listed in "Specify external archive log files locations" for recovery.

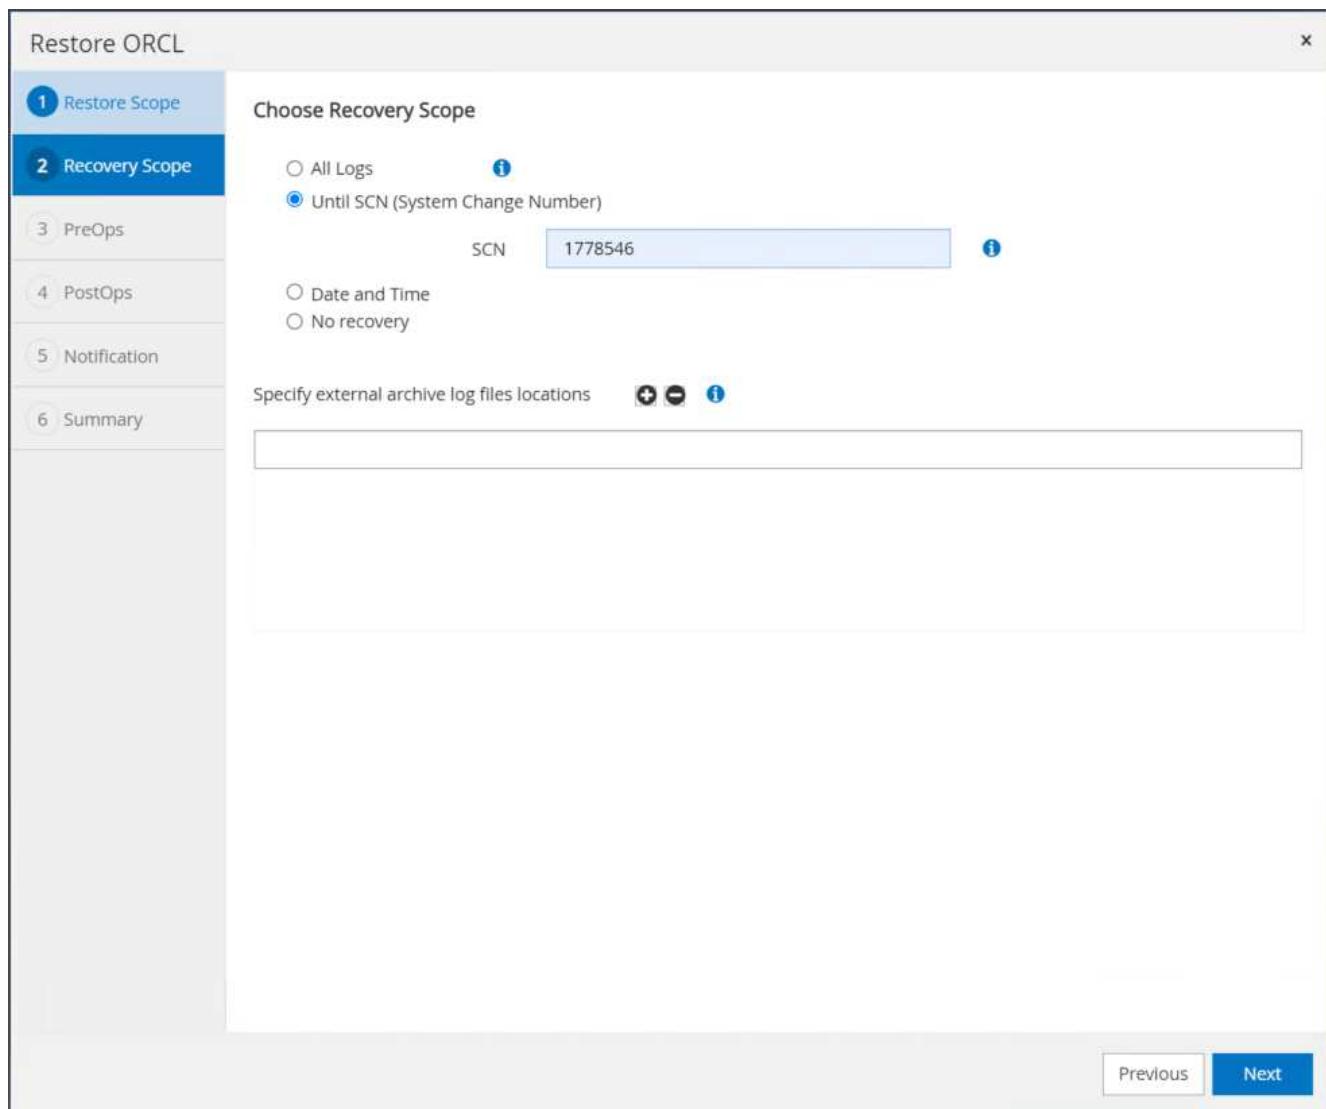

10. Specify an optional prescript to run if necessary.

Restore ORCL

1 Restore Scope

2 Recovery Scope

3 PreOps

4 PostOps

5 Notification

6 Summary

Specify optional scripts to run before performing a restore job i

Prescript full path Enter Prescript path


Arguments

Script timeout secs

Previous Next

The screenshot shows the Oracle SnapCenter Restore wizard interface. The title bar says "Restore ORCL". On the left, a vertical navigation menu lists steps: 1. Restore Scope, 2. Recovery Scope, 3. PreOps (which is selected and highlighted in blue), 4. PostOps, 5. Notification, and 6. Summary. The main panel title is "Specify optional scripts to run before performing a restore job" with an information icon. It contains three input fields: "Prescript full path" with the value "/var/opt/snapcenter/spl/scripts/", "Enter Prescript path" (empty), "Arguments" (empty), and "Script timeout" with the value "60" and unit "secs". At the bottom right are "Previous" and "Next" buttons.

11. Specify an optional afterscript to run if necessary. Check the open database after recovery.

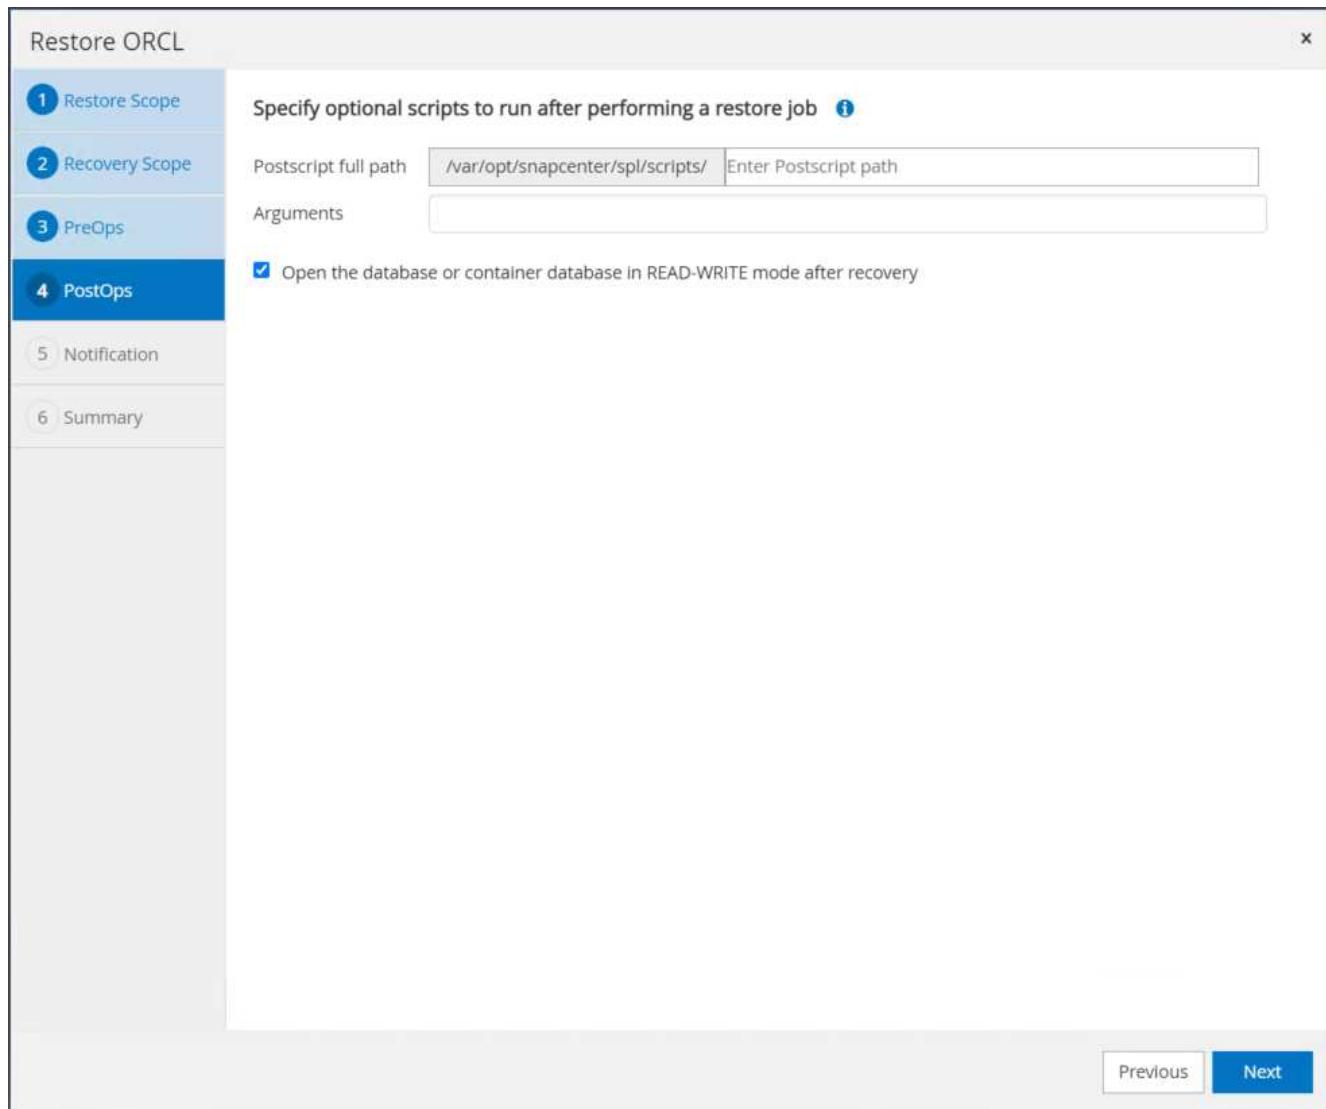

12. Provide an SMTP server and email address if a job notification is needed.

Restore ORCL

Provide email settings i

Email preference	Never
From	From email
To	Email to
Subject	Notification

Attach job report

6 Summary

Previous **Next**

The screenshot shows the 'Restore ORCL' wizard in progress, specifically Step 5: Notification. The left sidebar lists steps 1 through 6. Step 5 is highlighted in blue. The main area displays 'Provide email settings' with the following configuration:

- Email preference: Never
- From: From email
- To: Email to
- Subject: Notification

A checkbox for 'Attach job report' is present but unchecked. At the bottom right, there are 'Previous' and 'Next' buttons.

13. Restore the job summary. Click finish to launch the restore job.

Restore ORCL

X

1 Restore Scope

2 Recovery Scope

3 PreOps

4 PostOps

5 Notification

6 Summary

Summary

Backup name	ip-10-0-0-151_03-25-2022_11.15.01.1503_0
Backup date	03/25/2022 11:15:11 AM
Restore scope	All DataFiles
Recovery scope	Until SCN 1778546
Auxiliary destination	
Options	Change database state if necessary , Open the database or container database in READ-WRITE mode after recovery
Prescript full path	None
Prescript arguments	
Postscript full path	None
Postscript arguments	
Send email	No

Previous **Finish**

14. Validate the restore from SnapCenter.

Job Details

Restore 'ip-10-0-0-151.ec2.internal\ORCL'

- ✓ ▾ Restore 'ip-10-0-0-151.ec2.internal\ORCL'
- ✓ ▾ ip-10-0-0-151.ec2.Internal
 - ✓ ► Prescripts
 - ✓ ► Pre Restore
 - ✓ ► Restore
 - ✓ ► Post Restore
 - ✓ ► Postscripts
 - ✓ ► Post Restore Cleanup
 - ✓ ► Data Collection
 - ✓ ► Send EMS Messages

Task Name: ip-10-0-0-151.ec2.Internal Start Time: 03/25/2022 3:33:53 PM End Time: 03/25/2022 3:35:10 PM

[View Logs](#) [Cancel job](#) [Close](#)

15. Validate the restore from the EC2 instance host.

```

-bash-4.2$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Fri Mar 25 15:44:08 2022
Version 19.8.0.0.0

Copyright (c) 1982, 2020, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.8.0.0.0

SQL> select name, RESETLOGS_CHANGE#, RESETLOGS_TIME, open_mode from v$database;

NAME      RESETLOGS_CHANGE# RESETLOGS OPEN_MODE
-----  -----
ORCL          1778547 25-MAR-22 READ WRITE

SQL>

```

16. To unmount the restore log volume, reverse the steps in step 4.

Creating a database clone

The following section demonstrates how to use the SnapCenter clone workflow to create a database clone from a primary database to a standby EC2 instance.

1. Take a full snapshot backup of the primary database from SnapCenter using the full backup resource group.

The screenshot shows the NetApp SnapCenter interface. On the left, there's a sidebar with various icons. The main area has a blue header bar with the title 'NetApp SnapCenter®'. Below the header, there's a search bar labeled 'Search resource groups' and a dropdown menu set to 'Oracle Database'. A table lists resources under the heading 'Name'. One row is highlighted in yellow, showing 'orc_full_bkup' as the Resource Name, 'ORCL' as the Type, and 'ip-10-0-0-151.ec2.internal' as the Host. To the right of the table are several buttons: 'Modify Resource Group', 'Backup Now', 'Maintenance', and 'Delete'.

2. From the SnapCenter Resource tab > Database view, open the Database Backup Management page for the primary database that the replica is to be created from.

The screenshot shows the NetApp SnapCenter interface. The top navigation bar includes the title 'NetApp SnapCenter®', user information ('rdscustomval/administrator', 'SnapCenterAdmin'), and a 'Sign Out' button. The main area has a blue header bar with the title 'ORCL Topology'. Below the header, there's a search bar labeled 'Search databases' and a dropdown menu set to 'Oracle Database'. A sidebar on the left shows a tree structure with 'Name' expanded, showing 'ORCL'. The main content area is divided into sections: 'Manage Copies' (showing '93 Backups' and '0 Clones'), 'Primary Backup(s)' (listing five backups with columns for 'Backup Name', 'Count', 'Type', 'End Date', 'Verified', 'Mounted', 'RMAN Cataloged', and 'SCN'), and a 'Summary Card' (showing statistics: 93 Backups, 6 Data Backups, 87 Log Backups, and 0 Clones). To the right of the summary card is a 'Database Settings' button.

3. Mount the log volume snapshot taken in step 4 to the standby EC2 instance host.

ORCL Topology

Manage Copies

Local copies

Primary Backup(s)						
Backup Name	Count	Type	IF	End Date	Verified	Mounted
ip-10-0-0-151_03-25-2022_18.55.01.0309_1	1	Log		03/25/2022 6:55:09 PM	Not Applicable	False
ip-10-0-0-151_03-25-2022_18.40.00.9602_1	1	Log		03/25/2022 6:40:23 PM	Not Applicable	False
ip-10-0-0-151_03-25-2022_17.55.01.0197_1	1	Log		03/25/2022 5:55:09 PM	Not Applicable	False
ip-10-0-0-151_03-25-2022_17.50.55.0853_1	1	Log		03/25/2022 5:51:12 PM	Not Applicable	False
ip-10-0-0-151_03-25-2022_17.50.55.0853_0	1	Data		03/25/2022 5:51:05 PM	Unverified	False
ip-10-0-0-151_03-25-2022_17.40.00.9758_1	1	Log		03/25/2022 5:40:08 PM	Not	False

Mount backups

Choose the host to mount the backup : ip-10-0-0-47.ec2.internal

Mount path : /var/opt/snapcenter/sco/backup_mount/ip-10-0-0-151_03-25-2022_17.50.55.0853_1/ORCL

Mount **Cancel**

- Highlight the snapshot copy to be cloned for the replica, and click the Clone button to start the clone procedure.


ORCL Topology

Manage Copies

Local copies

Primary Backup(s)						
Backup Name	Count	Type	IF	End Date	Verified	Mounted
ip-10-0-0-151_03-25-2022_17.55.01.0197_1	1	Log		03/25/2022 5:55:09 PM	Not Applicable	False
ip-10-0-0-151_03-25-2022_17.50.55.0853_1	1	Log		03/25/2022 5:51:12 PM	Not Applicable	False
ip-10-0-0-151_03-25-2022_17.50.55.0853_0	1	Data		03/25/2022 5:51:05 PM	Unverified	False
ip-10-0-0-151_03-25-2022_17.40.00.9758_1	1	Log		03/25/2022 5:40:08 PM	Not Applicable	False
ip-10-0-0-151_03-25-2022_17.25.01.0539_1	1	Log		03/25/2022 5:25:08 PM	Not	False

5. Change the replica copy name so that it is different from the primary database name. Click Next.

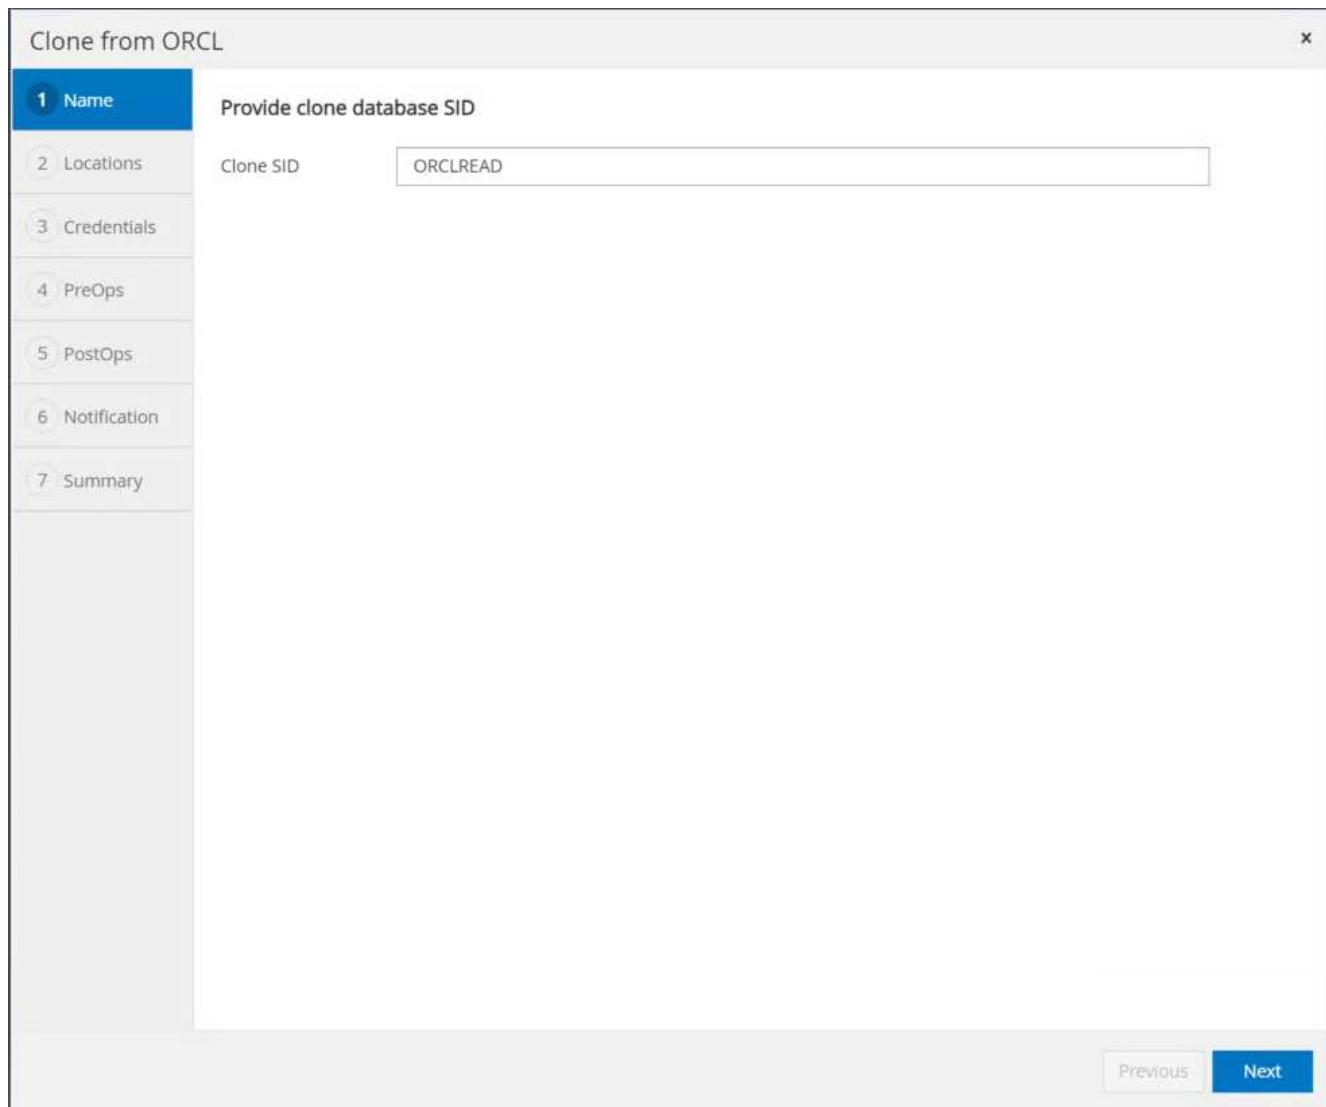

6. Change the clone host to the standby EC2 host, accept the default naming, and click Next.

Clone from ORCL

1 Name

Select the host to create a clone

Clone host: ip-10-0-0-47.ec2.internal

2 Locations

Datafile locations: /ora_nfs_data_ORCLREAD

Control files: /ora_nfs_data_ORCLREAD/ORCLREAD/control/control01.ctl

Redo logs:

Group	Size	Unit	Number of files
RedoGroup 1	128	MB	1
RedoGroup 2	128	MB	1

3 Credentials

4 PreOps

5 PostOps

6 Notification

7 Summary

Previous Next

Group	Size	Unit	Number of files
RedoGroup 1	128	MB	1
RedoGroup 2	128	MB	1

7. Change your Oracle home settings to match those configured for the target Oracle server host, and click Next.

Clone from ORCL

1 Name

2 Locations

3 Credentials

4 PreOps

5 PostOps

6 Notification

7 Summary

Database Credentials for the clone

Credential name for sys user - + ⓘ

Database port

Oracle Home Settings ⓘ

Oracle Home


Oracle OS User

Oracle OS Group

Previous Next

The screenshot shows the 'Clone from ORCL' wizard at the 'Credentials' step (step 3). On the left, a vertical navigation bar lists steps 1 through 7. The 'Credentials' section is active. It contains fields for 'Credential name for sys user' (set to 'None') and 'Database port' (set to '1521'). Below this, the 'Oracle Home Settings' section is expanded, showing 'Oracle Home' as '/rdsdbbin/oracle', 'Oracle OS User' as 'rdsdb', and 'Oracle OS Group' as 'database'. At the bottom right are 'Previous' and 'Next' buttons.

8. Specify a recovery point using either time or the SCN and mounted archive log path.

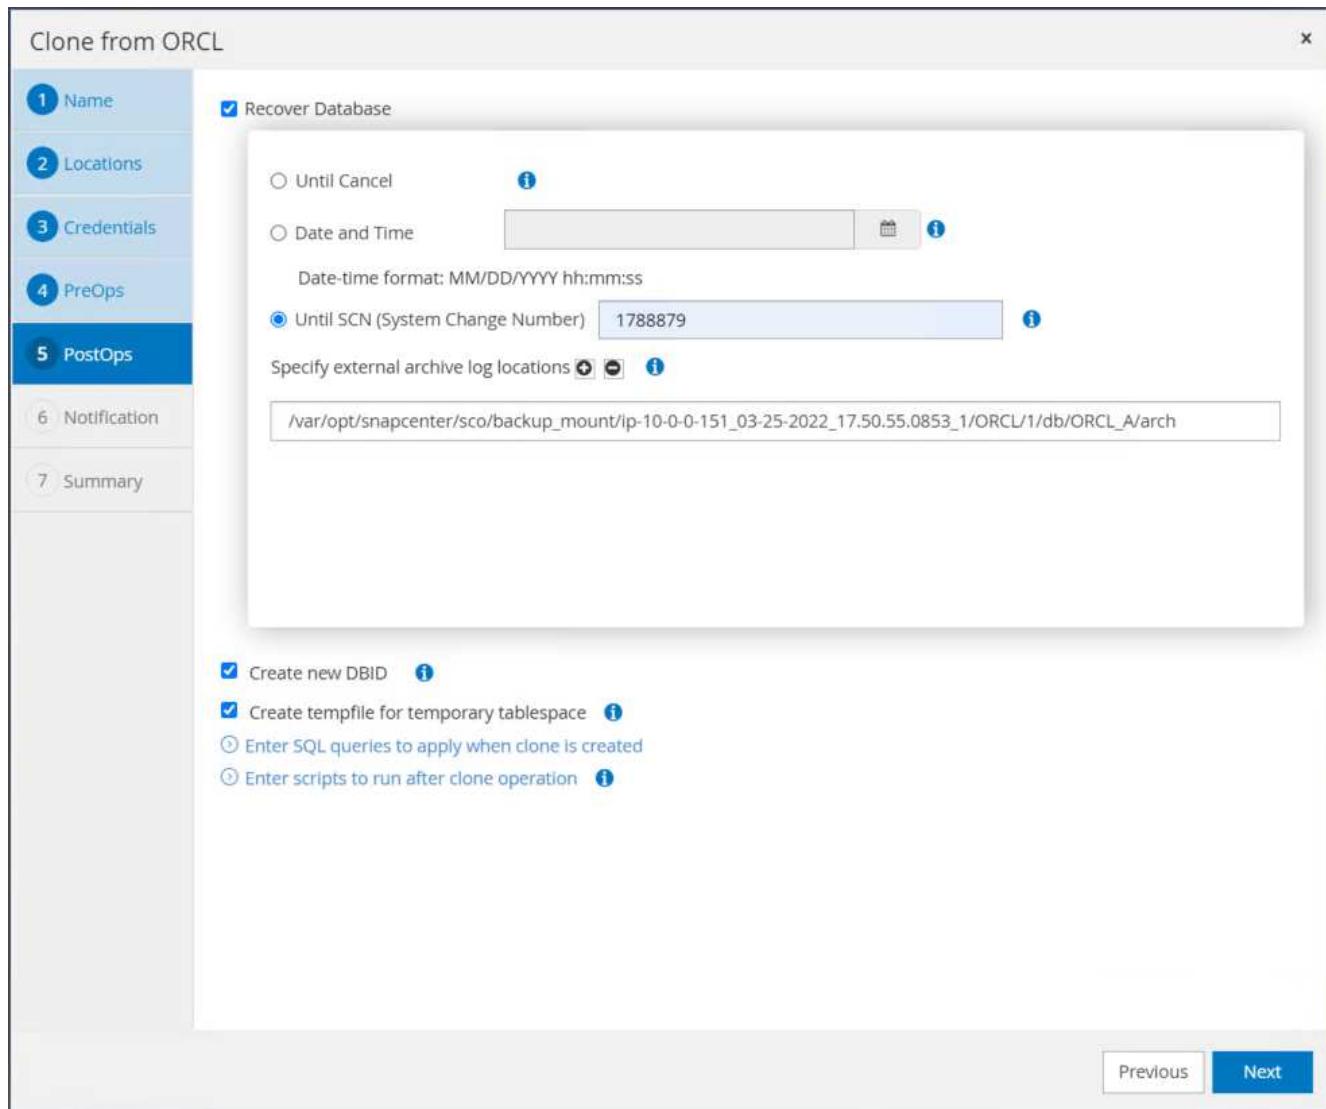

9. Send the SMTP email settings if needed.

Clone from ORCL

x

1 Name

Provide email settings ⓘ

2 Locations

Email preference: Never

3 Credentials

From: From email

To: Email to

Subject: Notification

4 PreOps

5 PostOps

6 Notification

7 Summary

Attach job report

Previous Next

This screenshot shows the 'Clone from ORCL' wizard in progress, specifically Step 6: Notification. The left sidebar lists steps 1 through 7. Step 6 is highlighted in blue. The main area displays email configuration options. The 'Email preference' dropdown is set to 'Never'. The 'From' field contains 'From email', 'To' contains 'Email to', and 'Subject' contains 'Notification'. There is also an unchecked checkbox for 'Attach job report'. At the bottom right are 'Previous' and 'Next' buttons.

10. Clone the job summary, and click Finish to launch the clone job.

Clone from ORCL

	Summary
1 Name	Clone from backup
2 Locations	Clone SID
3 Credentials	Clone server
4 PreOps	Oracle home
5 PostOps	Oracle OS user
6 Notification	Oracle OS group
7 Summary	Datafile mountpaths
	Control files
	Redo groups
	Recovery scope
	Prescript full path
	Prescript arguments
	Postscript full path
	Postscript arguments
	Send email

Previous Finish

11. Validate the replica clone by reviewing the clone job log.

Job Details

Clone from backup 'ip-10-0-0-151_03-25-2022_17.50.55.0853_0'

- ✓ ▾ Clone from backup 'ip-10-0-0-151_03-25-2022_17.50.55.0853_0'
- ✓ ▾ ip-10-0-0-47.ec2.internal
 - ▶ Prescripts
 - ▶ Query Host Information
 - ▶ Prepare for Cloning
 - ▶ Cloning Resources
 - ▶ FileSystem Clone
 - ▶ Application Clone
 - ▶ Postscripts
 - ▶ Register Clone
 - ▶ Unmount Clone
 - ▶ Data Collection
 - ▶ Send EMS Messages

Task Name: ip-10-0-0-47.ec2.internal **Start Time:** 03/25/2022 9:08:32 PM **End Time:** 03/25/2022 9:12:03 PM

View Logs **Cancel Job** **Close**

The cloned database is registered in SnapCenter immediately.

NetApp SnapCenter®

Oracle Database						
View		Database	Search databases			
<input checked="" type="checkbox"/>	Resources	ORCL	Single Instance	ip-10-0-0-151.ec2.internal	orc_full_bkup orc_log_bkup	Last Backup: 03/25/2022 9:10:09 PM Overall Status: Backup succeeded
<input type="checkbox"/>	ORCLREAD	Single Instance	ip-10-0-0-47.ec2.internal			Last Backup: Not protected

12. Turn off Oracle archive log mode. Log into the EC2 instance as oracle user and execute following command:

```
sqlplus / as sysdba
```

```
shutdown immediate;
```

```
startup mount;
```

```
alter database noarchivelog;
```

```
alter database open;
```



Instead primary Oracle backup copies, a clone can also be created from replicated secondary backup copies on target FSx cluster with same procedures.

HA failover to standby and resync

The standby Oracle HA cluster provides high availability in the event of failure in the primary site, either in the compute layer or in the storage layer. One significant benefit of the solution is that a user can test and validate the infrastructure at any time or with any frequency. Failover can be user simulated or triggered by real failure. The failover processes are identical and can be automated for fast application recovery.

See the following list of failover procedures:

1. For a simulated failover, run a log snapshot backup to flush the latest transactions to the standby site, as demonstrated in the section [Taking an archive log snapshot](#). For a failover triggered by an actual failure, the last recoverable data is replicated to the standby site with the last successful scheduled log volume backup.
2. Break the SnapMirror between primary and standby FSx cluster.
3. Mount the replicated standby database volumes at the standby EC2 instance host.
4. Relink the Oracle binary if the replicated Oracle binary is used for Oracle recovery.
5. Recover the standby Oracle database to the last available archive log.
6. Open the standby Oracle database for application and user access.
7. For an actual primary site failure, the standby Oracle database now takes the role of the new primary site and database volumes can be used to rebuild the failed primary site as a new standby site with the reverse SnapMirror method.
8. For a simulated primary site failure for testing or validation, shut down the standby Oracle database after the completion of testing exercises. Then unmount the standby database volumes from the standby EC2 instance host and resync replication from the primary site to the standby site.

These procedures can be performed with the NetApp Automation Toolkit available for download at the public NetApp GitHub site.

```
git clone https://github.com/NetApp-
Automation/na_ora_hadr_failover_resync.git
```

Read the README instruction carefully before attempting setup and failover testing.

[Next: Database migration.](#)

Database migration from on-prem to public cloud

[Previous: Database management.](#)

Database migration is a challenging endeavor by any means. Migrating an Oracle database from on-premises to the cloud is no exception.

The following sections provide key factors to consider when migrating Oracle databases to the AWS public cloud with the AWS EC2 compute and FSx storage platform.

ONTAP storage is available on-premises

If the on-premises Oracle database is sitting on an ONTAP storage array, then it is easier to set up replication for database migration using the NetApp SnapMirror technology that is built into AWS FSx ONTAP storage. The migration process can be orchestrated using NetApp BlueXP console.

1. Build a target compute EC2 instance that matches the on-premises instance.
2. Provision matching, equally sized database volumes from FSx console.
3. Mount the FSx database volumes to the EC2 instance.
4. Set up SnapMirror replication between the on-premises database volumes to the target FSx database volumes. The initial sync might take some time to move the primary source data, but any following incremental updates are much quicker.
5. At the time of switchover, shut down the primary application to stop all transactions. From the Oracle sqlplus CLI interface, execute an Oracle online log switch and allow SnapMirror sync to push the last archived log to the target volume.
6. Break up the mirrored volumes, run Oracle recovery at the target, and bring up the database for service.
7. Point applications to the Oracle database in the cloud.

The following video demonstrates how to migrate an Oracle database from on-premises to AWS FSx/EC2 using the NetApp BlueXP console and SnapMirror replication.

```
<iframe  
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=c0df32f  
8-d6d3-4b79-b0bd-  
b01200f3a2e8&autoplay=false&offerviewer=false&showtitle=false&showbrand=fa  
lse&captions=false&interactivity=all" height="203" width="360"  
style="border: 1px solid #464646;" allowfullscreen  
allow="autoplay"></iframe>
```

ONTAP storage is not available on premises

If the on-premises Oracle database is hosted on third-party storage other than ONTAP, database migration is based on the restore of a Oracle database backup copy. You must play the archive log to make it current before switching over.

AWS S3 can be used as a staging storage area for database move and migration. See the following high level steps for this method:

1. Provision a new, matching EC2 instance that is comparable with the on-premises instance.
2. Provision equal database volumes from FSx storage and mount the volumes to the EC2 instance.
3. Create a disk-level Oracle backup copy.
4. Move the backup copy to AWS S3 storage.
5. Recreate the Oracle control file and restore and recover the database by pulling data and the archive log from S3 storage.
6. Sync the target Oracle database with the on-premises source database.
7. At switchover, shut down the application and source Oracle database. Copy the last few archive logs and apply them to the target Oracle database to bring it up to date.
8. Start up the target database for user access.
9. Redirect application to the target database to complete the switchover.

Migrate on-premises Oracle databases to AWS FSx/EC2 using PDB relocation with maximum availability

This migration approach is best suited to Oracle databases that are already deployed in PDB/CDB multitenant model, and ONTAP storage is not available on-premises. The PDB relocation method utilizes Oracle PDB hot clone technology to move PDBs between a source CDB and a target CDB while minimizing service interruption.

First, create CDB in the AWS FSx/EC2 with sufficient storage to host PDBs to be migrated from on-premises. Multiple on-premises PDBs can be relocated one at a time.

1. If the on-premises database is deployed in a single instance rather than in the multitenant PDB/CDB model, follow the instructions in [Converting a single instance non-CDB to a PDB in a multitenant CDB](#) to convert the single instance to multitenant PDB/CDB. Then follow the next step to migrate the converted PDB to CDB in AWS FSx/EC2.
2. If the on-premises database is already deployed in the multitenant PDB/CDB model, follow the instructions in [Migrate on-premises Oracle databases to cloud with PDB relocation](#) to perform the migration.

The following video demonstrates how an Oracle database (PDB) can be migrated to FSx/EC2 using PDB relocation with maximum availability.

Migrate on-prem Oracle PDB to AWS CDB with max availability



Although the instructions in step 1 and 2 are illustrated in the context of Azure public cloud, the procedures are applicable to AWS cloud without any changes.

The NetApp Solutions Automation team provides a migration toolkit that can facilitate Oracle database migration from on-premises to the AWS cloud. Use following command to download the Oracle database migration toolkit for PDB relocation.

```
git clone https://github.com/NetApp-Automation/na_ora_aws_migration.git
```

Oracle Database Deployment and Protection on Azure NetApp Files

TR-4954: Oracle Database Deployment and Protection on Azure NetApp Files

Author(s): Allen Cao, Niyaz Mohamed, NetApp

Overview

Many mission-critical Oracle enterprise databases are still hosted on-premises, and many enterprises are looking to migrate these Oracle databases to a public cloud. Often, these Oracle databases are application centric and thus require user-specific configurations, a capability that is missing from many database-as-a-service public-cloud offerings. Therefore, the current database landscape calls for a public-cloud-based Oracle database solution built from a high-performance, scalable compute and storage service that can accommodate unique requirements. Azure virtual machine compute instances and the Azure NetApp Files storage service might be the missing pieces of this puzzle that you can leverage to build and migrate your mission-critical Oracle database workloads to a public cloud.

Azure Virtual Machine

Azure virtual machines are one of several types of on-demand, scalable computing resources that Azure offers. Typically, you choose a virtual machine when you need more control over the computing environment than the other choices offer. Azure virtual machines offer a quick and easy way to create a computer with specific configurations required to run your Oracle database, whether it is for compute- or memory-intensive workloads. Virtual machines in an Azure virtual network can easily be connected to your organization's network, for example through a secured VPN tunnel.

Azure NetApp Files (ANF)

Azure NetApp Files is a fully managed Microsoft service that will take your database workload to the cloud faster and more securely than ever before. It was designed to meet the core requirements of running high-performance workloads such as Oracle databases in the cloud, and it provides performance tiers that reflect the real-world range of IOPS demands, low latency, high availability, high durability, manageability at scale, and fast and efficient backup, recovery, and cloning. These capabilities are possible because Azure NetApp Files is based on physical all-flash NetApp ONTAP systems running within the Azure data center environment. Azure NetApp Files is completely integrated into the Azure DCs and portal, and customers can use the same comfortable graphical interface and APIs for creating and managing shared files as with any other Azure object. With Azure NetApp file, you can unlock the full capabilities of Azure without extra risk, cost, or time and trust the only enterprise file service native to Azure.

Conclusion

This documentation describes in detail how to deploy, configure, and protect an Oracle database with an Azure virtual machine and Azure NetApp Files storage service that delivers performance and durability similar to an on-premises system. For best-practices guidance, see TR-4780 [Oracle Databases on Microsoft Azure](#). More importantly, NetApp also provides automation toolkits that automate most of the tasks that are required for the deployment, configuration, data protection, migration, and management of your Oracle database workload in the Azure public cloud. The automation toolkits are available for download at NetApp public GitHub site: [NetApp-Automation](#).

Next: [Solutions architecture](#).


Solution Architecture

Previous: [Introduction](#).

The following architecture diagram illustrates a highly available Oracle database deployment on Azure VM instances and the Azure NetApp Files storage.


Within the environment, the Oracle compute instance is deployed via an Azure services VM console. There are multiple Azure instance types available from the console. NetApp recommends deploying a database-oriented Azure VM instance that meets your expected workload.

Oracle database storage on the other hand is deployed with the Azure NetApp Files service available from Azure console. The Oracle binary, data, or log volumes are subsequently presented and mounted on an Azure VM instance Linux host.

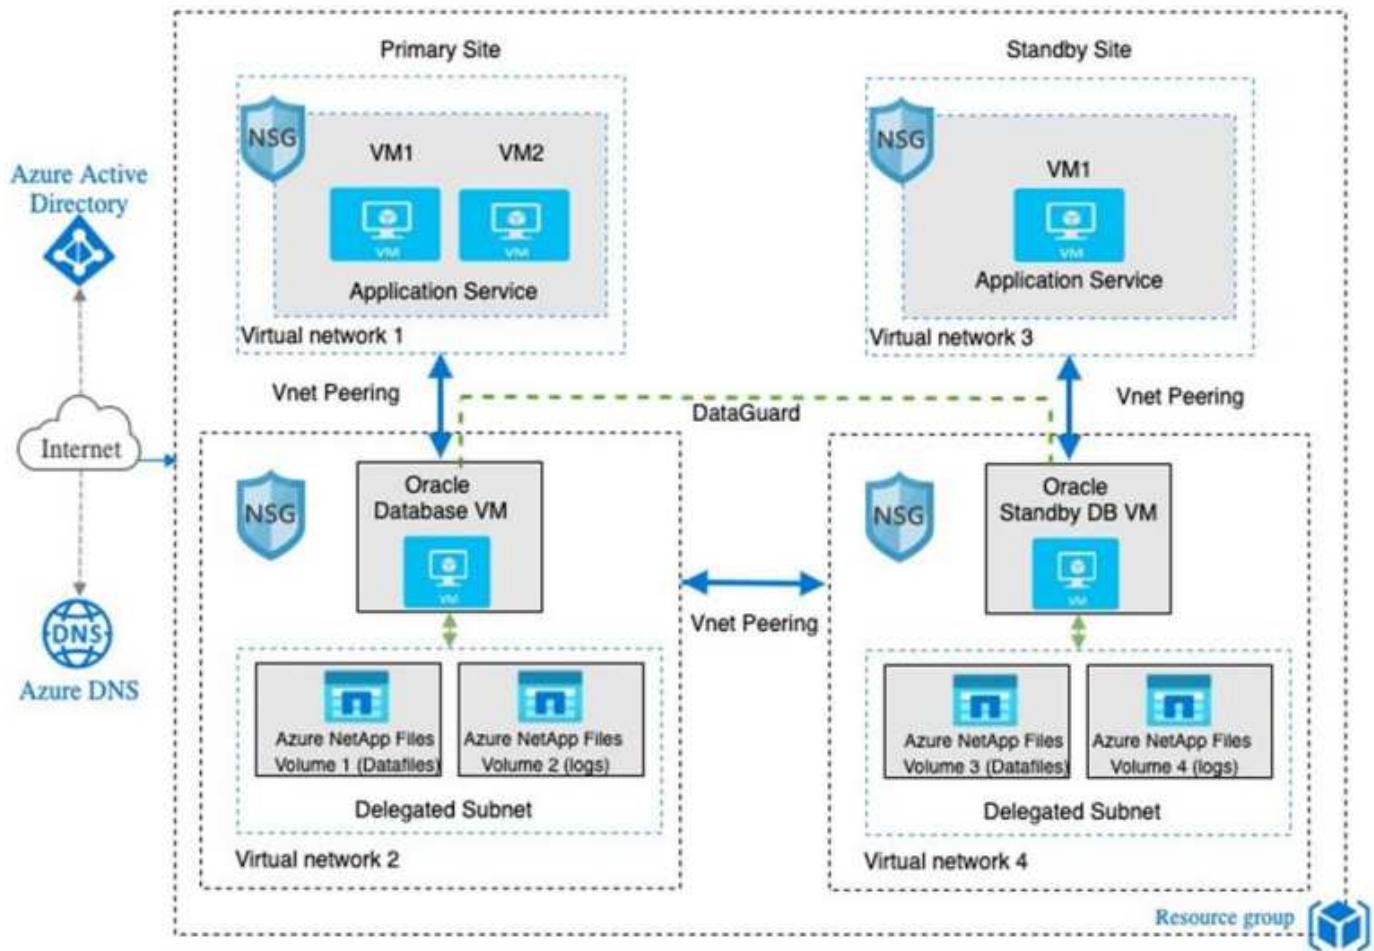

In many respects, the implementation of Azure NetApp Files in Azure cloud is very similar to an on-premises ONTAP data storage architecture with many built-in redundancies, such as RAID and dual controllers. For disaster recovery, a standby site can be setup in different regions and database can be synced up with the primary site using application-level replication (for example, Oracle Data Guard).

In our test validation for Oracle database deployment and data protection, the Oracle database is deployed on a single Azure VM as illustrated in the following diagram:

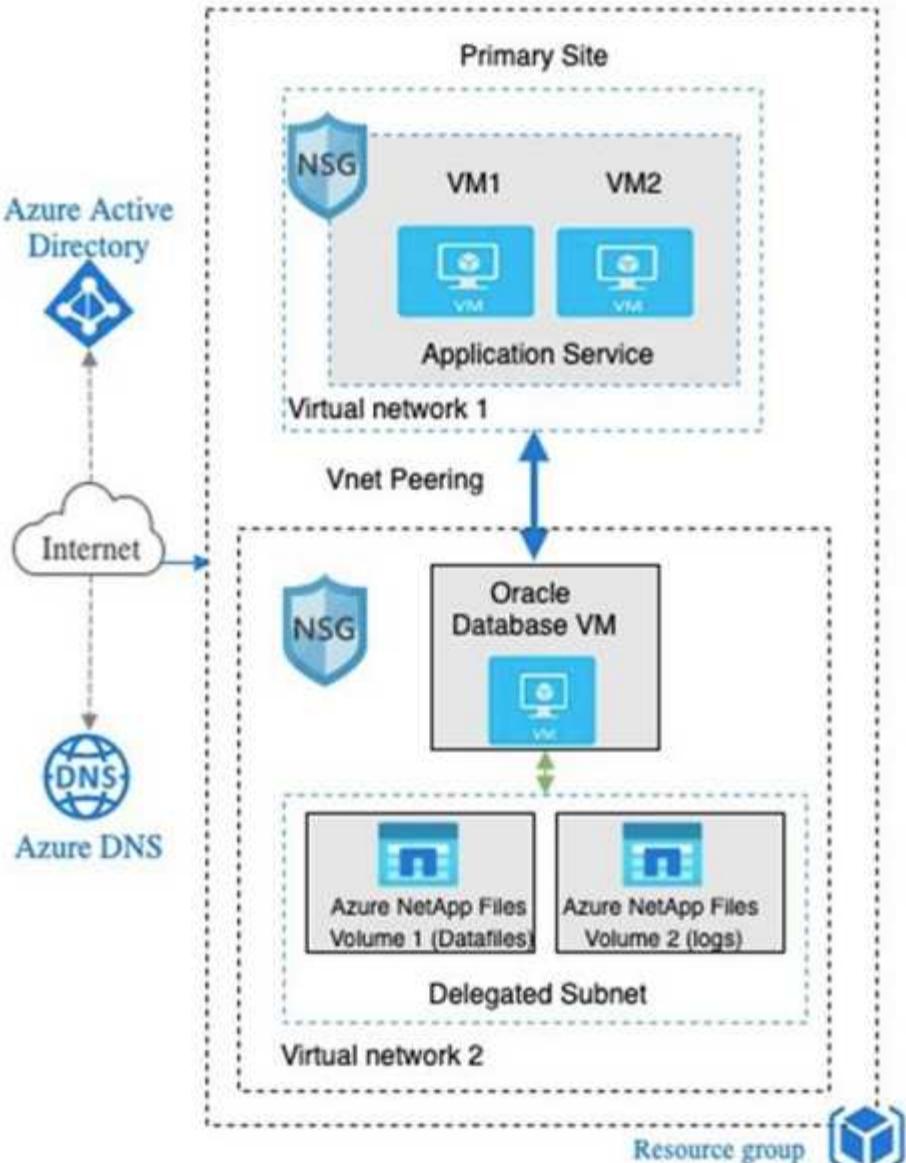

The Azure Oracle environment can be managed with an Ansible controller node for automation using tool kits provided by NetApp for database deployment, backup, recovery, and database migration. Any updates to the Oracle Azure VM instance operating-system kernel or Oracle patching can be performed in parallel to keep the primary and standby in sync. In fact, the initial toolkits can be easily expanded to perform daily Oracle tasks if needed. If you need help to set up a CLI Ansible controller, see [NetApp Solution Automation](#) to get started.

Next: Factors to consider.

Factors to consider for Oracle database deployment

[Previous: Solution architecture.](#)

A public cloud provides many choices for compute and storage, and using the correct type of compute instance and storage engine is a good place to start for database deployment. You should also select compute and storage configurations that are optimized for Oracle databases.

The following sections describe the key considerations when deploying an Oracle database in the Azure public cloud on an Azure virtual machine instance with Azure NetApp Files storage.

VM type and sizing

Selecting the right VM type and size is important for optimal performance of a relational database in a public cloud. An Azure virtual machine provides a variety of compute instances that can be used to host Oracle database workloads. See the Microsoft documentation [Sizes for virtual machines in Azure](#) for different types of Azure virtual machines and their sizing. In general, NetApp recommends using a general-purpose Azure virtual machine for the deployment of small- and medium-sized Oracle databases. For the deployment of larger Oracle databases, a memory-optimized Azure VM is appropriate. With more available RAM, a larger Oracle SGA or smart flash cache can be configured to reduce the physical I/O, which in turn improves database performance.

Azure NetApp Files works as an NFS mount attached to an Azure virtual machine, which offers higher throughput and overcomes the storage-optimized VM throughput limit with local storage. Therefore, running Oracle on Azure NetApp Files could reduce the licensable Oracle CPU core count and licensing costs. See [TR-4780: Oracle Databases on Microsoft Azure](#), Section 7 - How Does Oracle Licensing Work?

Other factors to consider include the following:

- Choose the correct vCPU and RAM combination based on workload characteristics. As the RAM size increases on the VM, so does the number of vCPU cores. There should be a balance at some point as the Oracle license fees are charged on the number of vCPU cores.
- Add swap space to a VM. The default Azure VM deployment does not create a swap space, which is not optimal for a database.

Azure NetApp Files performance

Azure NetApp Files volumes are allocated from a capacity pool the customer must provision in their Azure NetApp Files storage account. Each capacity pool is assigned as follows:

- To a service level that defines the overall performance capability.
- The initially provisioned storage capacity or tiering for that capacity pool. A quality of service (QoS) level that defines the overall maximum throughput per provisioned space.

The service level and initially provisioned storage capacity determines the performance level for a particular Oracle database volume.

1. Service Levels for Azure NetApp Files

Azure NetApp Files supports three service levels: Ultra, Premium, and Standard.

- **Ultra storage.** This tier provides up to 128MiBps of throughput per 1TiB of volume quota assigned.
- **Premium storage.** This tier provides up to 64MiBps of throughput per 1TiB of volume quota assigned.
- **Standard storage.** This tier provides up to 16MiBps of throughput per 1TiB of volume quota assigned.

2. Capacity pool and quality of service

Each of the desired service levels has an associated cost for provisioned capacity and includes a quality-of-service (QoS) level that defines the overall maximum throughput for provisioned space.

For example, a 10TiB-provisioned single-capacity pool with the premium service level provides an overall


available throughput for all volumes in this capacity pool of 10x 64MBps, so 640MBps with 40,000 (16K) IOPs or 80,000 (8K) IOPs.

The minimum capacity pool size is 4TiB. You can change the size of a capacity pool in 1TiB increments in response to changes in your workload requirements to manage storage needs and costs.

3. Calculate the service level at a database volume

The throughput limit for an Oracle database volume is determined by a combination of the following factors:
The service level of the capacity pool to which the volume belongs and The quota assigned to the volume.

The following diagram shows how the throughput limit for an Oracle database volume is calculated.

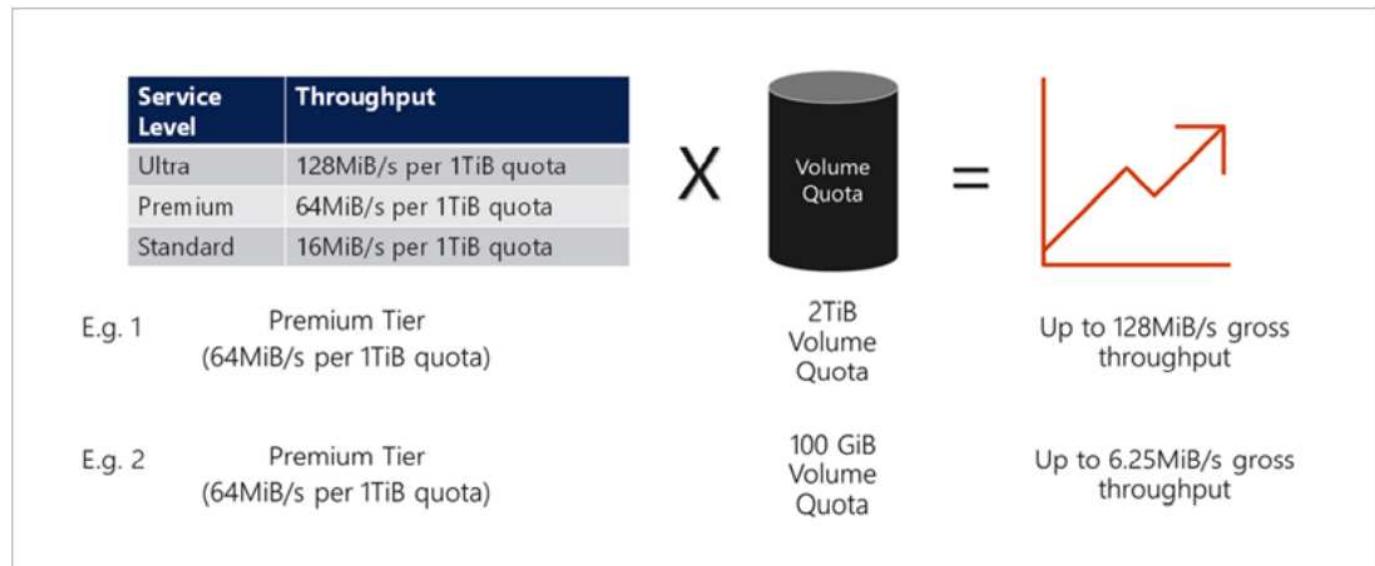

In example 1, a volume from a capacity pool with the Premium storage tier that is assigned 2TiB of quota is assigned a throughput limit of 128MiBps ($2\text{TiB} * 64\text{MiBps}$). This scenario applies regardless of the capacity pool size or the actual volume consumption.


In example 2, a volume from a capacity pool with the Premium storage tier that is assigned 100GiB of quota is assigned a throughput limit of 6.25MiBps ($0.09765625\text{TiB} * 64\text{MiBps}$). This scenario applies regardless of the capacity pool size or the actual volume consumption.

Please note that the minimum volume size is 100GiB.


Storage layout and settings

NetApp recommends the following storage layout:

- For small databases, using single volume layout for all Oracle files.

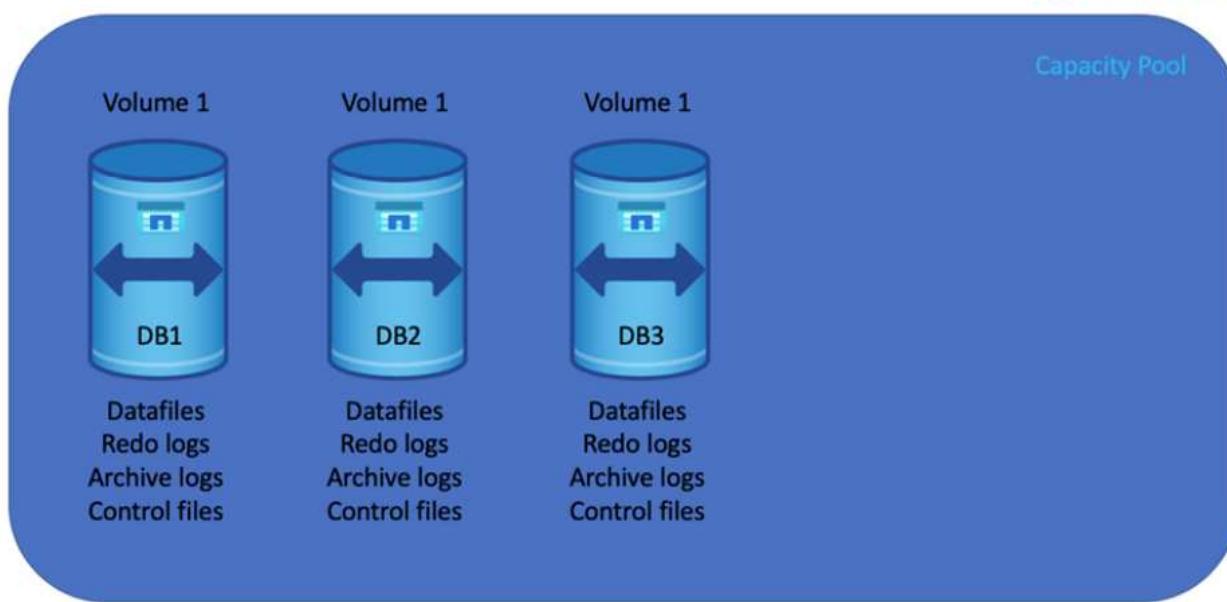

- For large databases, the recommended volume layout is multiple volumes: one for Oracle data and a duplicate control file and one for the Oracle active log, archived log, and control file. NetApp highly recommends allocating a volume for the Oracle binary instead of the local drive so that the database can be relocated to a new host and quickly restored.

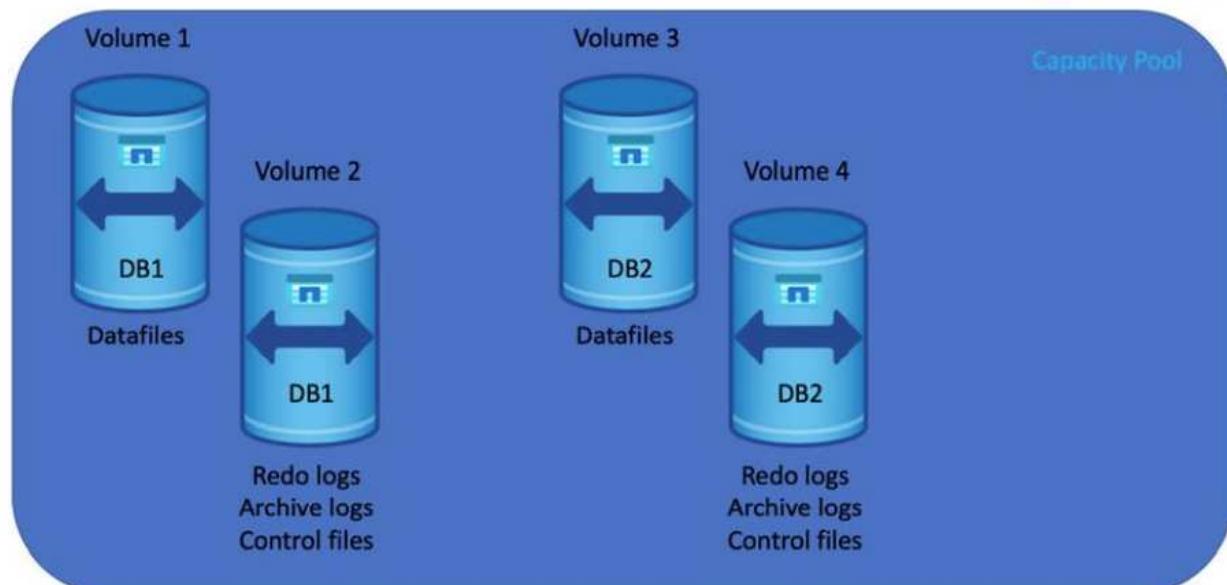


NFS configuration

Linux, the most common operating system, includes native NFS capabilities. Oracle offers a direct NFS (dNFS) client natively integrated into Oracle. Oracle dNFS bypasses the OS cache and enables parallel processing to

improve database performance. Oracle has supported NFSv3 for over 20 years, and NFSv4 is supported with Oracle 12.1.0.2 and later.

By using dNFS (available since Oracle 11g), an Oracle database running on an Azure Virtual Machine can drive significantly more I/O than the native NFS client. Automated Oracle deployment using the NetApp automation toolkit automatically configures dNFS on NFSv3.

The following diagram demonstrates the SLOB benchmark on Azure NetApp Files with Oracle dNFS.

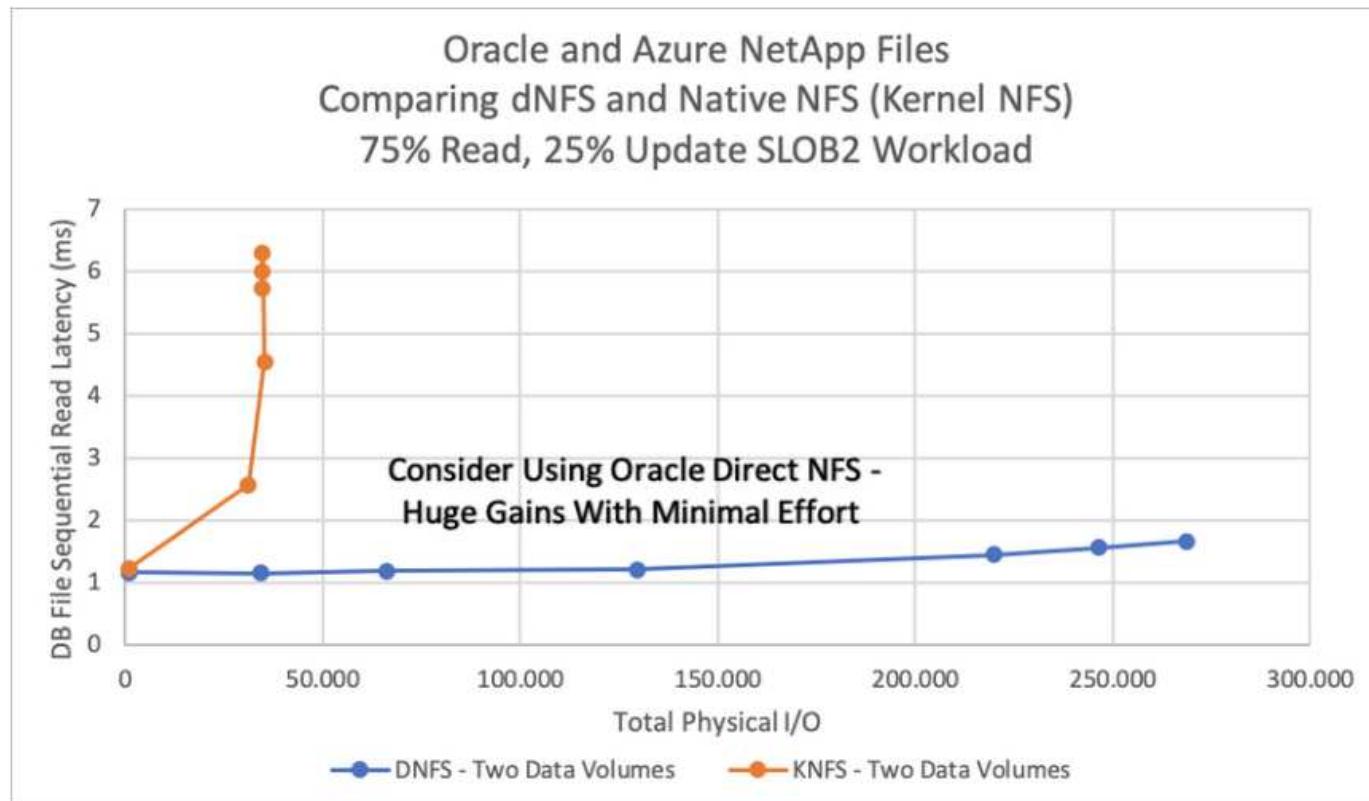

Other factors to consider:

- TCP slot tables are the NFS equivalent of host-bus-adapter (HBA) queue depth. These tables control the number of NFS operations that can be outstanding at any one time. The default value is usually 16, which is far too low for optimum performance. The opposite problem occurs on newer Linux kernels, which can automatically increase the TCP slot table limit to a level that saturates the NFS server with requests.

For optimum performance and to prevent performance problems, adjust the kernel parameters that control TCP slot tables to 128.

```
sysctl -a | grep tcp.*slot_table
```

- The following table provides recommended NFS mount options for a single instance of Linux NFSv3.

File Type	Mount Options
<ul style="list-style-type: none"> • Control files • Data files • Redo logs 	<code>rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536</code>
<ul style="list-style-type: none"> • ORACLE_HOME • ORACLE_BASE 	<code>rw, bg, hard, vers=3, proto=tcp, timeo=600, rsize=65536, wsize=65536</code>

 Before using dNFS, verify that the patches described in Oracle Doc 1495104.1 are installed. The NetApp Support matrix for NFSv3 and NFSv4 do not include specific operating systems. All OSs that obey the RFC are supported. When searching the online IMT for NFSv3 or NFSv4 support, do not select a specific OS because no matches will be displayed. All OSs are implicitly supported by the general policy.

[Next: Deployment procedures.](#)

Step-by-Step Oracle deployment procedures on Azure VM and Azure NetApp Files

[Previous: Factors to consider.](#)

Deploy an Azure VM with ANF for Oracle via Azure portal console

If you are new to Azure, you first need to set up an Azure account environment. This includes signing up your organization to use Azure Active Directory. The following section is a summary of these steps. For details, see the linked Azure-specific documentation.

Create and consume Azure resources

After your Azure environment is set up and an account is created and associated with a subscription, you can log into Azure portal with the account to create the necessary resources to run Oracle.

1. Create a virtual network or VNet

Azure Virtual Network (VNet) is the fundamental building block for your private network in Azure. VNet enables many types of Azure resources, such as Azure Virtual Machines (VMs), to securely communicate with each other, the internet, and on-premises networks. Before provisioning an Azure VM, a VNet (where a VM is deployed) must first be configured.

See [Create a virtual network using the Azure portal](#) to create a VNet.

2. Create a NetApp storage account and capacity pool for ANF

In this deployment scenario, an Azure VM OS is provisioned using regular Azure storage, but ANF volumes are provisioned to run Oracle database via NFS. First, you need to create a NetApp storage account and a capacity pool to host the storage volumes.

See [Set up Azure NetApp Files and create an NFS volume](#) to set up an ANF capacity pool.

3. Provision Azure VM for Oracle

Based on your workload, determine what type of Azure VM you need and the size of the VM vCPU and RAM to deploy for Oracle. Then, from the Azure console, click the VM icon to launch the VM deployment workflow.

- From the Azure VM page, click **Create** and then choose **Azure virtual machine**.

Name	Type	Subscription	Resource group	Location	Status	Operating system	Size	Public IP address	Disks
acao-ora01	Virtual machine	Hybrid Cloud TME Onprem	TMEstorres	South Central US	Stopped (deallocated)	Linux	Standard_B4ms	13.65.63.157	1
ANFAVFWl2JH	Virtual machine	Hybrid Cloud TME Onprem	ANFAVSQL2	West Europe	Running	Windows	Standard_DS2_v2	20.229.80.88	1
ANFAVSfio01	Virtual machine	Hybrid Cloud TME Onprem	anfavsqlrg	South Central US	Stopped (deallocated)	Linux	Standard_D32ds_v4	-	1
ANFAVSfioAZ1	Virtual machine	Hybrid Cloud TME Onprem	anfavsqlrg	South Central US	Running	Linux	Standard_E32as_v4	40.124.74.246	1
ANFAVSfioAZ2	Virtual machine	Hybrid Cloud TME Onprem	anfavsqlrg	South Central US	Stopped (deallocated)	Linux	Standard_E32as_v4	40.124.178.111	1
ANFAVSfioAZ3	Virtual machine	Hybrid Cloud TME Onprem	anfavsqlrg	South Central US	Stopped (deallocated)	Linux	Standard_E32as_v4	40.124.194.32	1
ANFAVSqlDC	Virtual machine	Hybrid Cloud TME Onprem	anfavsqlrg	South Central US	Stopped (deallocated)	Windows	Standard_B4ms	-	1
ANFAVSqlH	Virtual machine	Hybrid Cloud TME Onprem	anfavsqlrg	South Central US	Running	Windows	Standard_B2ms	70.37.66.218	1
ANFAVSqlH2	Virtual machine	Hybrid Cloud TME Onprem	anfavsqlrg	South Central US	Running	Windows	Standard_B2s	20.225.210.195	1
ANFCVOCM	Virtual machine	Hybrid Cloud TME Onprem	anfcvaval2	West Europe	Running	Linux	Standard_DS3_v2	-	1
ANFCVOORDC2	Virtual machine	Hybrid Cloud TME Onprem	anfcvaval2	West Europe	Running	Windows	Standard_B2s	-	1
ANFCVOORDemo	Virtual machine	Hybrid Cloud TME Onprem	anfcvordemorrg	West Europe	Running	Linux	Standard_E4s_v3	-	5
AVSCVOPerfinguest	Virtual machine	Hybrid Cloud TME Onprem	avscvoperfinguest-rg	West Europe	Stopped (deallocated)	Linux	Standard_DS15_v2	-	5

- Choose the subscription ID for the deployment, and then choose the resource group, region, host name, VM image, size, and authentication method. Go to the Disk page.

[Home](#) > [Virtual machines](#) >

Create a virtual machine

...

[Basics](#) [Disks](#) [Networking](#) [Management](#) [Advanced](#) [Tags](#) [Review + create](#)

Create a virtual machine that runs Linux or Windows. Select an image from Azure marketplace or use your own customized image. Complete the Basics tab then Review + create to provision a virtual machine with default parameters or review each tab for full customization. [Learn more](#)

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription * ⓘ

Hybrid Cloud TME Onprem

Resource group * ⓘ

ANFAVSRG

[Create new](#)

Instance details

Virtual machine name * ⓘ

acao-ora01



Region * ⓘ

(US) South Central US



Availability options ⓘ

No infrastructure redundancy required



Security type ⓘ

Standard



Image * ⓘ

Red Hat Enterprise Linux 8.0 (LVM) - Gen2

[See all images](#) | [Configure VM generation](#)

Run with Azure Spot discount ⓘ



Size * ⓘ

Standard_D8s_v3 - 8 vcpus, 32 GiB memory (\$273.02/month)

[See all sizes](#)

Administrator account

Authentication type ⓘ

 SSH public key Password[Review + create](#)[< Previous](#)[Next : Disks >](#)

[Home](#) > [Virtual machines](#) >

Create a virtual machine

Size * ⓘ

Standard_D8s_v3 - 8 vcpus, 32 GiB memory (\$273.02/month)

[See all sizes](#)

Administrator account

Authentication type ⓘ

 SSH public key Password

Username * ⓘ

azureuser



Password * ⓘ



Confirm password * ⓘ



Inbound port rules

Select which virtual machine network ports are accessible from the public internet. You can specify more limited or granular network access on the Networking tab.

Public inbound ports * ⓘ

 None Allow selected ports

Select inbound ports *

SSH (22)



⚠ This will allow all IP addresses to access your virtual machine. This is only recommended for testing. Use the Advanced controls in the Networking tab to create rules to limit inbound traffic to known IP addresses.

Licensing

If you have eligible Red Hat Enterprise Linux subscriptions that are enabled for Red Hat Cloud Access, you can use Azure Hybrid Benefit to attach your Red Hat subscriptions to this VM and save money on compute costs [Learn more ↗](#)

Your Azure subscription is currently not a part of Red Hat Cloud Access. In order to enable AHB for this VM, you must add this Azure subscription to Cloud Access. [Learn more ↗](#)

[Review + create](#)[< Previous](#)[Next : Disks >](#)

3. Choose **premium SSD** for OS local redundancy and leave the data disk blank because the data disks are mounted from ANF storage. Go to the Networking page.

[Home](#) > [Virtual machines](#) >

Create a virtual machine

[Basics](#) [Disks](#) [Networking](#) [Management](#) [Advanced](#) [Tags](#) [Review + create](#)

Azure VMs have one operating system disk and a temporary disk for short-term storage. You can attach additional data disks. The size of the VM determines the type of storage you can use and the number of data disks allowed. [Learn more](#)

Disk options

OS disk type * ⓘ

Premium SSD (locally-redundant storage)

Delete with VM ⓘ



Enable encryption at host ⓘ



Encryption at host is not registered for the selected subscription. [Learn more about enabling this feature](#)

Encryption type *

(Default) Encryption at-rest with a platform-managed key

Enable Ultra Disk compatibility ⓘ



Data disks for acao-ora01

You can add and configure additional data disks for your virtual machine or attach existing disks. This VM also comes with a temporary disk.

LUN	Name	Size (GiB)	Disk type	Host caching	Delete with VM ⓘ
-----	------	------------	-----------	--------------	------------------

[Create and attach a new disk](#) [Attach an existing disk](#)

▼ Advanced

[Review + create](#)[< Previous](#)[Next : Networking >](#)

4. Choose the VNet and subnet. Allocate a public IP for external VM access. Then go to the Management page.

[Home](#) > [Virtual machines](#) >

Create a virtual machine

Network interface

When creating a virtual machine, a network interface will be created for you.

Virtual network * ⓘ

▼

[Create new](#)

Subnet * ⓘ

▼

[Manage subnet configuration](#)

Public IP ⓘ

▼

[Create new](#)

NIC network security group ⓘ

- None
- Basic
- Advanced

Public inbound ports * ⓘ

- None
- Allow selected ports

Select inbound ports *

▼

⚠ This will allow all IP addresses to access your virtual machine. This is only recommended for testing. Use the Advanced controls in the Networking tab to create rules to limit inbound traffic to known IP addresses.

Delete public IP and NIC when VM is deleted ⓘ

Enable accelerated networking ⓘ

Load balancing

You can place this virtual machine in the backend pool of an existing Azure load balancing solution. [Learn more ↗](#)

Place this virtual machine behind an existing load balancing solution?

[Review + create](#)

[< Previous](#)

[Next : Management >](#)

5. Keep all defaults for Management and move to the Advanced page.

Home > Virtual machines >

Create a virtual machine

[Basics](#) [Disks](#) [Networking](#) [Management](#) [Advanced](#) [Tags](#) [Review + create](#)

Configure monitoring and management options for your VM.

Microsoft Defender for Cloud

Microsoft Defender for Cloud provides unified security management and advanced threat protection across hybrid cloud workloads. [Learn more ↗](#)

Your subscription is protected by Microsoft Defender for Cloud basic plan.

Monitoring

Boot diagnostics ⓘ

- Enable with managed storage account (recommended)
 Enable with custom storage account
 Disable

Enable OS guest diagnostics ⓘ

Identity

Enable system assigned managed identity ⓘ

Azure AD

Login with Azure AD ⓘ

RBAC role assignment of Virtual Machine Administrator Login or Virtual Machine User Login is required when using Azure AD login. [Learn more ↗](#)

Azure AD login now uses SSH certificate-based authentication. You will need to use an SSH client that supports OpenSSH certificates. You can use Azure CLI or Cloud Shell from the Azure Portal. [Learn more ↗](#)

Auto-shutdown

Enable auto-shutdown ⓘ

Backup

[Review + create](#)< PreviousNext : Advanced >

6. Keep all defaults for the Advanced page unless you need to customize a VM after deployment with custom scripts. Then go to Tags page.

[Home](#) > [Virtual machines](#) >

Create a virtual machine

[Basics](#) [Disks](#) [Networking](#) [Management](#) [Advanced](#) [Tags](#) [Review + create](#)

Add additional configuration, agents, scripts or applications via virtual machine extensions or cloud-init.

Extensions

Extensions provide post-deployment configuration and automation.

[Extensions](#) ⓘ[Select an extension to install](#)

VM applications

VM applications contain application files that are securely and reliably downloaded on your VM after deployment. In addition to the application files, an install and uninstall script are included in the application. You can easily add or remove applications on your VM after create. [Learn more ↗](#)

[Select a VM application to install](#)

Custom data

Pass a script, configuration file, or other data into the virtual machine **while it is being provisioned**. The data will be saved on the VM in a known location. [Learn more about custom data for VMs ↗](#)

[Custom data](#)

Your image must have a code to support consumption of custom data. If your image supports cloud-init, custom-data will be processed by cloud-init. [Learn more about custom data for VMs ↗](#)

User data

Pass a script, configuration file, or other data that will be accessible to your applications **throughout the lifetime of the virtual machine**. Don't use user data for storing your secrets or passwords. [Learn more about user data for VMs ↗](#)

[Enable user data](#)[Review + create](#)< PreviousNext : Tags >

7. Add a tag for the VM if desired. Then, go to the Review + create page.

[Home](#) > [Virtual machines](#) >

Create a virtual machine

Basics Disks Networking Management Advanced **Tags** Review + create

Tags are name/value pairs that enable you to categorize resources and view consolidated billing by applying the same tag to multiple resources and resource groups. [Learn more about tags](#)

Note that if you create tags and then change resource settings on other tabs, your tags will be automatically updated.

Name ⓘ	Value ⓘ	Resource
database	:	oracle 12 selected <input type="button" value="▼"/> <input type="button" value="Delete"/>
	:	12 selected <input type="button" value="▼"/>

[Review + create](#)

[< Previous](#)

[Next : Review + create >](#)

8. The deployment workflow runs a validation on the configuration, and, if the validation passes, click **Create** to create the VM.

4. Provision ANF database volumes for Oracle

You must create three NFS volumes for an ANF capacity pool for the Oracle binary, data, and log volumes respectively.

- From the Azure console, under the list of Azure services, click Azure NetApp Files to open a volume creation workflow. If you have more than one ANF storage account, click the account that you would like to provision volumes from.

The screenshot shows the Microsoft Azure portal's main dashboard. At the top, there's a blue header bar with the 'Microsoft Azure' logo and a search bar. Below the header, a row of service icons is displayed: 'Create a resource' (plus sign), 'Azure NetApp Files' (highlighted with a yellow box), 'Virtual networks', 'Virtual machines', 'Storage accounts', 'Users', 'Subscriptions', 'Azure Active Directory', 'Quickstart Center', and 'More services'. Underneath this, there's a section titled 'Resources' with tabs for 'Recent' and 'Favorite'. A table lists various resources with columns for 'Name', 'Type', and 'Last Viewed'. Some entries include 'ANFAVSAcct' (NetApp account), 'ANFAVSAval' (Virtual network), 'acao-ora01' (Virtual machine), 'Hybrid Cloud TME Onprem' (Subscription), 'WEANFAVSAcct' (NetApp account), and several 'Volume' entries. At the bottom of the table, there's a link 'See all'.

Name	Type	Last Viewed
ANFAVSAcct	NetApp account	a few seconds ago
ANFAVSAval	Virtual network	3 hours ago
acao-ora01	Virtual machine	5 days ago
Hybrid Cloud TME Onprem	Subscription	2 weeks ago
WEANFAVSAcct	NetApp account	2 weeks ago
ANFAVSAcct/CapPool/acao-ora01-u03	Volume	2 weeks ago
ANFAVSAcct/CapPool/acao-ora01-u02	Volume	2 weeks ago
ANFAVSAcct/CapPool/acao-ora01-u01	Volume	2 weeks ago
acao-ora01_OsDisk_1_673bad70ccce4709af8c1278e2bc97cb	Disk	2 weeks ago
acao-ora0166	Network Interface	3 weeks ago
TMEtstres	Resource group	3 weeks ago

- Under your NetApp storage account, click **Volumes**, and then **Add volume** to create new Oracle volumes.

The screenshot shows the 'ANFAVSAcct' NetApp account details page in the Azure portal. The left sidebar has sections for 'Overview', 'Activity log', 'Access control (IAM)', 'Tags', 'Settings', 'Quota', 'Properties', and 'Locks'. Under 'Azure NetApp Files', there are options for 'Active Directory connections', 'Capacity pools', 'Volumes' (highlighted with a yellow box), 'Snapshot policies', 'Storage service add-ons', 'NetApp add-ons', 'Tasks (preview)', 'Export template', and 'New Support Request'. The main content area shows the 'Essentials' tab with information about the resource group, location, subscription, and tags. It also features a section for 'Enterprise files storage, powered by NetApp' with links for connecting to Active Directory, purchasing capacity pools, and viewing volumes. At the bottom, there are buttons for 'View AD connections', 'View capacity pools', and 'View volumes'.

3. As a good practice, identify Oracle volumes with the VM hostname as a prefix and then followed by the mount point on the host, such as u01 for Oracle binary, u02 for Oracle data, and u03 for Oracle log. Choose the same VNet for the volume as for the VM. Click **Next: Protocol>**.

4. Choose the NFS protocol, add the Oracle host IP address to the allowed client, and remove the default policy that allows all IP addresses 0.0.0.0/0. Then click **Next: Tags>**.

Microsoft Azure

Search resources, services, and docs (G+)

Home > Azure NetApp Files > ANFAVSAcct | Volumes >

ANFAVSAcct | Volumes

NetApp account

Search (Ctrl+ /) Add volume ... Search volumes

Name	Quota
anf2-z1-stdds01	200 GiB
anf2-z1-stdds02	200 GiB
anf2-z1-stdds03	100 GiB
anf2-z1-stdds04	100 GiB
anf2-z1-stdds05	100 GiB
anf2-z1-stdds06	100 GiB
anf2-z1-stdds07	100 GiB
anf2-z1-stdds08	100 GiB
anf-z1-stdds01	6 TiB
anf-z1-stdds02	200 GiB
anf-z1-stdds03	1 TiB
anf-z1-stdds04	200 GiB
anf-z1-stdds06	200 GiB
anf-z1-stdds07	200 GiB
anf-z1-stdds08	200 GiB
anf-zq-stdds05	1 TiB
vol1	1 TiB
vol3basic	100 GiB
volnfsbasic	100 GiB
volnfsstd	100 GiB
volnfsstdnew	100 GiB
zone1basic	6 TiB
zone2basic	100 GiB

Create a volume ...

Basics Protocol Tags Review + create

Configure access to your volume.

Access

Protocol type NFS SMB Dual-protocol

Configuration

File path * acao-ora01_u01

Versions * NFSv3

Kerberos Enabled Disabled

LDAP Enabled Disabled

Azure VMware Solution DataStore

Export policy

Configure the volume's export policy. This can be edited later. [Learn more](#)

↑ Move up ↓ Move down ⌘ Move to top ⌘ Move to bottom ⌂ Delete

Index	Allowed clients	Access	Root Access	...
1	172.30.137.142	Read & Write	On	...
2	172.30.137.142	Read & Write	On	...

Review + create < Previous Next : Tags >

5. Add a volume tag if desired. Then click **Review + Create>**.

Microsoft Azure

Search resources, services, and docs (G+)

Home > Azure NetApp Files > ANFAVSAcct | Volumes >

ANFAVSAcct | Volumes

NetApp account

Search (Ctrl+ /) Add volume ...

Overview

Activity log

Access control (IAM)

Tags

Settings

Quota

Properties

Locks

Azure NetApp Files

Active Directory connections

Storage service

Capacity pools

Volumes

Data protection

Snapshot policies

Storage service add-ons

NetApp add-ons

Automation

Tasks (preview)

Export template

Support + troubleshooting

New Support Request

+ Add volume ...

Search volumes

Name	↑↓	Quota
anf2-z1-stdds01	200 GiB	
anf2-z1-stdds02	200 GiB	
anf2-z1-stdds03	100 GiB	
anf2-z1-stdds04	100 GiB	
anf2-z1-stdds05	100 GiB	
anf2-z1-stdds06	100 GiB	
anf2-z1-stdds07	100 GiB	
anf2-z1-stdds08	100 GiB	
anf-z1-stdds01	6 TiB	
anf-z1-stdds02	200 GiB	
anf-z1-stdds03	1 TiB	
anf-z1-stdds04	200 GiB	
anf-z1-stdds06	200 GiB	
anf-z1-stdds07	200 GiB	
anf-z1-stdds08	200 GiB	
anf-zq-stdds05	1 TiB	
vol1	1 TiB	
vol3basic	100 GiB	
volnfsbasic	100 GiB	
volnfsstd	100 GiB	
volnfsstdnew	100 GiB	
zone1basic	6 TiB	
zone2basic	100 GiB	

Create a volume ...

Basics Protocol Tags Review + create

Tags are name/value pairs that enable you to categorize resources and view consolidated billing by applying the same tag to multiple resources and resource groups. [Learn more about tags](#)

Note that if you create tags and then change resource settings on other tabs, your tags will be automatically updated.

Name Value

database : oracle

Review + create < Previous Next : Review + create >

6. If the validation passes, click **Create** to create the volume.

Install and configure Oracle on Azure VM with ANF

The NetApp solutions team has created many Ansible-based automation toolkits to help you deploy Oracle in Azure smoothly. Follow these steps to deploy Oracle on an Azure VM.

Set up an Ansible controller

If you have not set up an Ansible controller, see [NetApp Solution Automation](#), which has detailed instructions on how to setup an Ansible controller.

Obtain Oracle deployment automation toolkit

Clone a copy of the Oracle deployment toolkit in your home directory under the user ID that you use to log into the Ansible controller.

```
git clone https://github.com/NetApp-Automation/na_oracle19c_deploy.git
```

Execute the toolkit with your configuration

See the [CLI deployment Oracle 19c Database](#) to execute the playbook with the CLI. You can ignore the ONTAP portion of the variables configuration in the global VARS file when you create database volumes from

the Azure console rather than the CLI.



The toolkit default deploys Oracle 19c with RU 19.8. It can be easily adapted for any other patch level with minor default configuration changes. Also default seed-database active log files are deployed into the data volume. If you need active log files on the log volume, it should be relocated after initial deployment. Reach out to the NetApp Solution team for help if needed.

Set up AzAcSnap backup tool for app-consistent snapshots for Oracle

The Azure Application-Consistent Snapshot tool (AzAcSnap) is a command-line tool that enables data protection for third-party databases by handling all the orchestration required to put them into an application-consistent state before taking a storage snapshot. It then returns these databases to an operational state. NetApp recommends installing the tool on the database server host. See the following installation and configuration procedures.

Install AzAcSnap tool

1. Get the most recent version of the [the AzArcSnap Installer](#).
2. Copy the downloaded self-installer to the target system.
3. Execute the self-installer as the root user with the default installation option. If necessary, make the file executable using the `chmod +x *.run` command.

```
./azacsnap_installer_v5.0.run -I
```

Configure Oracle connectivity

The snapshot tools communicate with the Oracle database and need a database user with appropriate permissions to enable or disable backup mode.

1. Set up AzAcSnap database user

The following examples show the setup of the Oracle database user and the use of sqlplus for communication to the Oracle database. The example commands set up a user (AZACSNAP) in the Oracle database and change the IP address, usernames, and passwords as appropriate.

1. From the Oracle database installation, launch sqlplus to log into the database.

```
su - oracle  
sqlplus / AS SYSDBA
```

2. Create the user.

```
CREATE USER azacsnap IDENTIFIED BY password;
```

3. Grant the user permissions. This example sets the permission for the AZACSNAP user to enable putting the database into backup mode.

```
GRANT CREATE SESSION TO azacsnap;  
GRANT SYSBACKUP TO azacsnap;
```

4. Change the default user's password expiration to unlimited.

```
ALTER PROFILE default LIMIT PASSWORD_LIFE_TIME unlimited;
```

5. Validate azacsnap connectivity for the database.

```
connect azacsnap/password  
quit;
```

2. Configure Linux-user azacsnap for DB access with Oracle wallet

The AzAcSnap default installation creates an azacsnap OS user. It's Bash shell environment must be configured for Oracle database access with the password stored in an Oracle wallet.

1. As root user, run the `cat /etc/oratab` command to identify the ORACLE_HOME and ORACLE_SID variables on the host.

```
cat /etc/oratab
```

2. Add ORACLE_HOME, ORACLE_SID, TNS_ADMIN, and PATH variables to the azacsnap user bash profile. Change the variables as needed.

```
echo "export ORACLE_SID=ORATEST" >> /home/azacsnap/.bash_profile  
echo "export ORACLE_HOME=/u01/app/oracle/product/19800/ORATST" >>  
/home/azacsnap/.bash_profile  
echo "export TNS_ADMIN=/home/azacsnap" >> /home/azacsnap/.bash_profile  
echo "export PATH=\$PATH:\$ORACLE_HOME/bin" >>  
/home/azacsnap/.bash_profile
```

3. As the Linux user azacsnap, create the wallet. You are prompted for the wallet password.

```
sudo su - azacsnap  
  
mkstore -wrl $TNS_ADMIN/.oracle_wallet/ -create
```

4. Add the connect string credentials to the Oracle Wallet. In the following example command, AZACSNAP is the ConnectString to be used by AzAcSnap, azacsnap is the Oracle Database User, and AzPasswd1 is the Oracle User's database password. You are again prompted for the wallet password.

```
mkstore -wrl $TNS_ADMIN/.oracle_wallet/ -createCredential AZACSNAP  
azacsnap AzPasswd1
```

5. Create the `tnsnames.ora` file. In the following example command, HOST should be set to the IP address of the Oracle Database and the Server SID should be set to the Oracle Database SID.

```
echo "# Connection string  
AZACSNAP=(DESCRIPTION=(ADDRESS=(PROTOCOL=TCP) (HOST=172.30.137.142) (POR  
T=1521)) (CONNECT_DATA=(SID=ORATST)))\"  
" > $TNS_ADMIN/tnsnames.ora
```

6. Create the `sqlnet.ora` file.

```
echo "SQLNET.WALLET_OVERRIDE = TRUE  
WALLET_LOCATION= (  
    SOURCE=(METHOD=FILE)  
    (METHOD_DATA=(DIRECTORY=\$TNS_ADMIN/.oracle_wallet))  
) " > $TNS_ADMIN/sqlnet.ora
```

7. Test Oracle access using the wallet.

```
sqlplus /@AZACSNAP as SYSBACKUP
```

The expected output from the command:

```
[azacsnap@acao-ora01 ~]$ sqlplus /@AZACSNAP as SYSBACKUP  
  
SQL*Plus: Release 19.0.0.0.0 - Production on Thu Sep 8 18:02:07 2022  
Version 19.8.0.0.0  
  
Copyright (c) 1982, 2019, Oracle. All rights reserved.  
  
Connected to:  
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production  
Version 19.8.0.0.0  
  
SQL>
```

Configure ANF connectivity

This section explains how to enable communication with Azure NetApp Files (with a VM).

1. Within an Azure Cloud Shell session, make sure that you are logged into the subscription that you want to be associated with the service principal by default.

```
az account show
```

2. If the subscription isn't correct, use the following command:

```
az account set -s <subscription name or id>
```

3. Create a service principal using the Azure CLI as in the following example:

```
az ad sp create-for-rbac --name "AzAcSnap" --role Contributor --scopes /subscriptions/{subscription-id} --sdk-auth
```

The expected output:

```
{
  "clientId": "00aa000a-aaaa-0000-00a0-00aa000aaa0a",
  "clientSecret": "00aa000a-aaaa-0000-00a0-00aa000aaa0a",
  "subscriptionId": "00aa000a-aaaa-0000-00a0-00aa000aaa0a",
  "tenantId": "00aa000a-aaaa-0000-00a0-00aa000aaa0a",
  "activeDirectoryEndpointUrl": "https://login.microsoftonline.com",
  "resourceManagerEndpointUrl": "https://management.azure.com/",
  "activeDirectoryGraphResourceId": "https://graph.windows.net/",
  "sqlManagementEndpointUrl": "https://management.core.windows.net:8443",
  "galleryEndpointUrl": "https://gallery.azure.com/",
  "managementEndpointUrl": "https://management.core.windows.net"
}
```

4. Cut and paste the output content into a file called `oracle.json` stored in the Linux user `azacsnap` user bin directory and secure the file with the appropriate system permissions.



Make sure the format of the JSON file is exactly as described above, especially with the URLs enclosed in double quotes (").

Complete the setup of AzAcSnap tool

Follow these steps to configure and test the snapshot tools. After successful testing, you can perform the first database-consistent storage snapshot.

1. Change into the snapshot user account.

```
su - azacsnap
```

2. Change the location of commands.

```
cd /home/azacsnap/bin/
```

3. Configure a storage backup detail file. This creates an `azacsnap.json` configuration file.

```
azacsnap -c configure --configuration new
```

The expected output with three Oracle volumes:

```
[azacsnap@acao-ora01 bin]$ azacsnap -c configure --configuration new
Building new config file
Add comment to config file (blank entry to exit adding comments): Oracle
snapshot bkup
Add comment to config file (blank entry to exit adding comments):
Enter the database type to add, 'hana', 'oracle', or 'exit' (for no
database): oracle

==== Add Oracle Database details ====
Oracle Database SID (e.g. CDB1): ORATST
Database Server's Address (hostname or IP address): 172.30.137.142
Oracle connect string (e.g. /@AZACSNAP): /@AZACSNAP

==== Azure NetApp Files Storage details ====
Are you using Azure NetApp Files for the database? (y/n) [n]: y
--- DATA Volumes have the Application put into a consistent state before
they are snapshot ---
Add Azure NetApp Files resource to DATA Volume section of Database
configuration? (y/n) [n]: y
Full Azure NetApp Files Storage Volume Resource ID (e.g.
/subscriptions/.../resourceGroups/.../providers/Microsoft.NetApp/netAppA
ccounts/.../capacityPools/Premium/volumes/...): /subscriptions/0efa2dfb-
917c-4497-b56a-
b3f4eadb8111/resourceGroups/ANFAVSRG/providers/Microsoft.NetApp/netAppAc
counts/ANFAVSAcct/capacityPools/CapPool/volumes/acao-ora01-u01
Service Principal Authentication filename or Azure Key Vault Resource ID
(e.g. auth-file.json or https://...): oracle.json
Add Azure NetApp Files resource to DATA Volume section of Database
configuration? (y/n) [n]: y
Full Azure NetApp Files Storage Volume Resource ID (e.g.
/subscriptions/.../resourceGroups/.../providers/Microsoft.NetApp/netAppA
```

```

ccounts/.../capacityPools/Premium/volumes/...): /subscriptions/0efa2dfb-
917c-4497-b56a-
b3f4eadb8111/resourceGroups/ANFAVSRG/providers/Microsoft.NetApp/netAppAc-
counts/ANFAVSACct/capacityPools/CapPool/volumes/acao-ora01-u02
Service Principal Authentication filename or Azure Key Vault Resource ID
(e.g. auth-file.json or https://...): oracle.json
Add Azure NetApp Files resource to DATA Volume section of Database
configuration? (y/n) [n]: n
--- OTHER Volumes are snapshot immediately without preparing any
application for snapshot ---
Add Azure NetApp Files resource to OTHER Volume section of Database
configuration? (y/n) [n]: y
Full Azure NetApp Files Storage Volume Resource ID (e.g.
/subscriptions/.../resourceGroups/.../providers/Microsoft.NetApp/netAppA-
ccounts/.../capacityPools/Premium/volumes/...): /subscriptions/0efa2dfb-
917c-4497-b56a-
b3f4eadb8111/resourceGroups/ANFAVSRG/providers/Microsoft.NetApp/netAppAc-
counts/ANFAVSACct/capacityPools/CapPool/volumes/acao-ora01-u03
Service Principal Authentication filename or Azure Key Vault Resource ID
(e.g. auth-file.json or https://...): oracle.json
Add Azure NetApp Files resource to OTHER Volume section of Database
configuration? (y/n) [n]: n

==== Azure Managed Disk details ====
Are you using Azure Managed Disks for the database? (y/n) [n]: n

==== Azure Large Instance (Bare Metal) Storage details ====
Are you using Azure Large Instance (Bare Metal) for the database? (y/n)
[n]: n

Enter the database type to add, 'hana', 'oracle', or 'exit' (for no
database): exit

Editing configuration complete, writing output to 'azacsnap.json'.

```

4. As the azacsnap Linux user, run the azacsnap test command for an Oracle backup.

```

cd ~/bin
azacsnap -c test --test oracle --configfile azacsnap.json

```

The expected output:

```
[azacsnap@acao-ora01 bin]$ azacsnap -c test --test oracle --configfile azacsnap.json
BEGIN : Test process started for 'oracle'
BEGIN : Oracle DB tests
PASSED: Successful connectivity to Oracle DB version 1908000000
END   : Test process complete for 'oracle'
[azacsnap@acao-ora01 bin]$
```

5. Run your first snapshot backup.

```
azacsnap -c backup --volume data --prefix ora_test --retention=1
```

[Next: Database protection.](#)

[Protect your Oracle database in Azure cloud](#)

[Previous: Deployment procedures.](#)

Author(s): Allen Cao, NetApp Solutions Engineering

[Backup Oracle database with snapshot using AzAcSnap tool](#)

The Azure Application-Consistent Snapshot tool (AzAcSnap) is a command-line tool that enables data protection for third-party databases by handling all the orchestration required to put them into an application-consistent state before taking a storage snapshot, after which it returns the databases to an operational state.

In the case of Oracle, you put the database in backup mode to take a snapshot and then take the database out of backup mode.

Backup data and log volumes

The backup can be set up on the database server host with simple shell script that executes the snapshot command. Then, the script can be scheduled to run from crontab.

Generally, the frequency of backup depends on the desired RTO and RPO. Frequent snapshot creation consumes more storage space. There is a trade off between the frequency of backup and space consumption.

Data volumes typically consume more storage space than log volumes. Therefore, you can take snapshots on data volumes every few hours and more frequent snapshots on log volumes every 15 to 30 minutes.

See the following examples of backup scripts and scheduling.

For data volume snapshots:

```
# /bin/sh
cd /home/azacsnap/bin
. ~/.bash_profile
azacsnap -c backup --volume data --prefix acao-ora01-data --retention 36
azacsnap -c backup --volume other --prefix acao-ora01-log --retention 250
```

For log volume snapshots:

```
# /bin/sh
cd /home/azacsnap/bin
. ~/.bash_profile
azacsnap -c backup --volume other --prefix acao-ora01-log --retention 250
```


Crontab schedule:

```
15,30,45 * * * * /home/azacsnap/snap_log.sh
0 */2 * * * /home/azacsnap/snap_data.sh
```

 When setting up the backup `azacsnap.json` configuration file, add all data volumes, including the binary volume, to `dataVolume` and all log volumes to `otherVolume`. The maximum retention of snapshots is 250 copies.

Validate the snapshots

Go to the Azure portal > Azure NetApp Files/volumes to check if the snapshots have been successfully created.

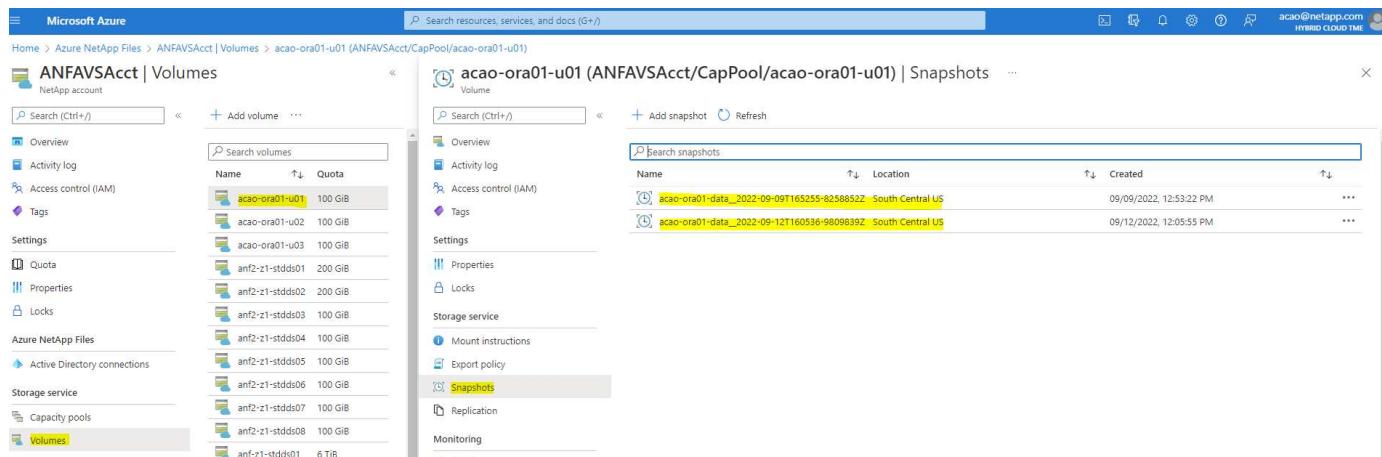

Name	Location	Created
acao-ora01-data_2022-09-09T165255-82588522	South Central US	09/09/2022, 12:53:22 PM
acao-ora01-data_2022-09-12T160536-98098392	South Central US	09/12/2022, 12:05:55 PM

The screenshot shows the Microsoft Azure portal interface for the ANFAVSAcct account. On the left, the 'Volumes' section is selected, displaying a list of volumes including 'acao-ora01-u01' (100 GiB), 'acao-ora01-u02' (100 GiB), and 'acao-ora01-u03' (100 GiB). On the right, the 'Schemas' section is selected, showing a list of snapshots for the 'acao-ora01-u03' volume. The snapshots are listed by name, location, and creation date.

Name	Location	Created
acao-ora01-data_2022-09-12T160628-87547982	South Central US	09/12/2022, 12:06:31 PM
acao-ora01-log_2022-09-12T164501-79659252	South Central US	09/12/2022, 12:45:04 PM
acao-ora01-log_2022-09-12T171501-80326612	South Central US	09/12/2022, 01:15:04 PM
acao-ora01-log_2022-09-12T173001-47879192	South Central US	09/12/2022, 01:30:04 PM
acao-ora01-log_2022-09-12T174501-50106142	South Central US	09/12/2022, 01:45:04 PM
acao-ora01-log_2022-09-12T180053-50298742	South Central US	09/12/2022, 02:00:55 PM
acao-ora01-log_2022-09-12T181502-38570272	South Central US	09/12/2022, 02:15:05 PM
acao-ora01-log_2022-09-12T183002-44078952	South Central US	09/12/2022, 02:30:07 PM

Oracle restore and recovery from local backup

One of key benefits of snapshot backup is that it coexists with source database volumes, and the primary database volumes can be rolled back almost instantly.

Restore and recovery of Oracle on the primary server

The following example demonstrates how to restore and recover an Oracle database from the Azure dashboard and CLI on the same Oracle host.

1. Create a test table in the database to be restored.

```
[oracle@acao-ora01 ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Mon Sep 12 19:02:35 2022
Version 19.8.0.0.0

Copyright (c) 1982, 2019, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.8.0.0.0

SQL> create table testsnapshot(
  id integer,
  event varchar(100),
  dt timestamp);

Table created.

SQL> insert into testsnapshot values(1,'insert a data marker to validate
snapshot restore',sysdate);

1 row created.

SQL> commit;

Commit complete.

SQL> select * from testsnapshot;

ID
-----
EVENT
-----
DT
-----
---
      1
insert a data marker to validate snapshot restore
12-SEP-22 07.07.35.000000 PM
```

2. Drop the table after the snapshot backups.

```
[oracle@acao-ora01 ~]$ sqlplus / as sysdba
```

```
SQL*Plus: Release 19.0.0.0.0 - Production on Tue Sep 13 14:20:22 2022
Version 19.8.0.0.0
```

```
Copyright (c) 1982, 2019, Oracle. All rights reserved.
```

Connected to:

```
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.8.0.0.0
```

```
SQL> drop table testsnapshot;
```

```
Table dropped.
```

```
SQL> select * from testsnapshot;
```

```
select * from testsnapshot
*
```

```
ERROR at line 1:
```

```
ORA-00942: table or view does not exist
```

```
SQL> shutdown immediate;
```

```
Database closed.
```

```
Database dismounted.
```

```
ORACLE instance shut down.
```

```
SQL> exit
```

```
Disconnected from Oracle Database 19c Enterprise Edition Release
19.0.0.0.0 - Production
```

```
Version 19.8.0.0.0
```

- From the Azure NetApp Files dashboard, restore the log volume to the last available snapshot. Choose **Revert volume**.

The screenshot shows the Microsoft Azure Azure NetApp Files dashboard. On the left, there's a sidebar with options like Overview, Activity log, Access control (IAM), Tags, Settings, Quota, Properties, Locks, Active Directory connections, Capacity pools, Application volume groups, and Data protection. The main area shows the 'ANFAVSAcc1 | Volumes' section. It lists several volumes, including 'acao-ora01-u03' which is highlighted with a yellow box. Below the volumes, there's a 'Solutions' section with two tabs: 'Solutions' and 'Solutions'. A 'Revert volume' button is located in the bottom right corner of the 'Solutions' section, also highlighted with a yellow box. The top right corner of the screen shows the user's name 'acao@netapp.com' and 'HYBRID CLOUD TIME'.

4. Confirm revert volume and click **Revert** to complete the volume reversion to the latest available backup.

Revert volume to snapshot

Revert volume acao-ora01-u03 to snapshot acao-ora01-log_2022-09-13T134502-04499192

acao-ora01-u03 (ANFAVSAcc/CapPool/acao-ora01-u03) | Snapshots

This action is irreversible and it will delete all the volumes snapshots that are never than acao-ora01-log_2022-09-13T134502-04499192. Please type acao-ora01-u03 to confirm.

acao-ora01-u03

Revert **Cancel**

5. Repeat the same steps for the data volume, and make sure that the backup contains the table to be recovered.

Revert volume to snapshot

Revert volume acao-ora01-u02 to snapshot acao-ora01-data_2022-09-13T100000-43474562

acao-ora01-u02 (ANFAVSAcc/CapPool/acao-ora01-u02) | Snapshots

This action is irreversible and it will delete all the volumes snapshots that are never than acao-ora01-data_2022-09-13T100000-43474562. Please type acao-ora01-u02 to confirm.

acao-ora01-u02

Revert **Cancel**

6. Again confirm the volume reversion, and click "Revert."

The screenshot shows the Microsoft Azure NetApp Files interface. On the left, there's a sidebar with various options like Overview, Activity log, Access control (IAM), Tags, Settings, Quota, Properties, Locks, and more. Under Storage service, the 'Volumes' option is selected. In the main pane, a list of volumes is shown, including 'acao-ora01-u01', 'acao-ora01-u02' (which is highlighted in yellow), 'acao-ora01-u03', and several 'anf2-z1-std001' through 'anf2-z1-std008' volumes. On the right, a detailed view of the selected volume 'acao-ora01-u02' is displayed, showing its snapshots. A modal window titled 'Revert volume to snapshot' is open, asking if you want to revert the volume to the state of a specific snapshot. The snapshot 'acao-ora01-data_2022-09-13T100002-43474562' is selected.

7. Resync the control files if you have multiple copies of them, and replace the old control file with the latest copy available.

```
[oracle@acao-ora01 ~]$ mv /u02/oradata/ORATST/control01.ctl
/u02/oradata/ORATST/control01.ctl.bk
[oracle@acao-ora01 ~]$ cp /u03/orareco/ORATST/control02.ctl
/u02/oradata/ORATST/control01.ctl
```

8. Log into the Oracle server VM and run database recovery with sqlplus.

```
[oracle@acao-ora01 ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Tue Sep 13 15:10:17 2022
Version 19.8.0.0.0

Copyright (c) 1982, 2019, Oracle. All rights reserved.

Connected to an idle instance.

SQL> startup mount;
ORACLE instance started.

Total System Global Area 6442448984 bytes
Fixed Size                  8910936 bytes
Variable Size                1090519040 bytes
Database Buffers              5335154688 bytes
Redo Buffers                  7864320 bytes
Database mounted.
```

```
SQL> recover database using backup controlfile until cancel;
ORA-00279: change 3188523 generated at 09/13/2022 10:00:09 needed for
thread 1
ORA-00289: suggestion :
/u03/orareco/ORATST/archivelog/2022_09_13/o1_mf_1_43__22rnjq9q_.arc
ORA-00280: change 3188523 for thread 1 is in sequence #43

Specify log: {<RET>=suggested | filename | AUTO | CANCEL}

ORA-00279: change 3188862 generated at 09/13/2022 10:01:20 needed for
thread 1
ORA-00289: suggestion :
/u03/orareco/ORATST/archivelog/2022_09_13/o1_mf_1_44__29f21gb5_.arc
ORA-00280: change 3188862 for thread 1 is in sequence #44
ORA-00278: log file
'./u03/orareco/ORATST/archivelog/2022_09_13/o1_mf_1_43__22rnjq9q_.arc' no
longer
needed for this recovery

Specify log: {<RET>=suggested | filename | AUTO | CANCEL}

ORA-00279: change 3193117 generated at 09/13/2022 12:00:08 needed for
thread 1
ORA-00289: suggestion :
./u03/orareco/ORATST/archivelog/2022_09_13/o1_mf_1_45__29h6qqyw_.arc
ORA-00280: change 3193117 for thread 1 is in sequence #45
ORA-00278: log file
'./u03/orareco/ORATST/archivelog/2022_09_13/o1_mf_1_44__29f21gb5_.arc' no
longer
needed for this recovery

Specify log: {<RET>=suggested | filename | AUTO | CANCEL}

ORA-00279: change 3193440 generated at 09/13/2022 12:01:20 needed for
thread 1
ORA-00289: suggestion :
./u03/orareco/ORATST/archivelog/2022_09_13/o1_mf_1_46_%u_.arc
ORA-00280: change 3193440 for thread 1 is in sequence #46
ORA-00278: log file
'./u03/orareco/ORATST/archivelog/2022_09_13/o1_mf_1_45__29h6qqyw_.arc' no
longer
needed for this recovery

Specify log: {<RET>=suggested | filename | AUTO | CANCEL}
cancel
Media recovery cancelled.
```

```
SQL> alter database open resetlogs;

Database altered.

SQL> select * from testsnapshot;

ID
-----
EVENT
-----
DT
-----
---
1
insert a data marker to validate snapshot restore
12-SEP-22 07.07.35.000000 PM

SQL> select systimestamp from dual;

SYSTIMESTAMP
-----
13-SEP-22 03.28.52.646977 PM +00:00
```

This screen demonstrates that the dropped table has been recovered using local snapshot backups.

[Next: Database migration.](#)

Database migration from on-premises to Azure cloud

[Previous: Database protection.](#)

As a result of the Oracle decision to phase out single-instance databases, many organizations have converted single-instance Oracle databases to multitenant container databases. This enables the easy relocation of a subset of container databases called PDB to cloud with the maximum availability option, which minimize downtime during migration.

However, if you still have a single instance of a Oracle database, it can first be converted into a multitenant container database in place before attempting PDB relocation.

The following sections provide details for the migration of on-premises Oracle databases to Azure cloud in either scenarios.

Converting a single instance non-CDB to a PDB in a multitenant CDB

If you still have a single-instance Oracle database, it must be converted into a multitenant container database

whether you wish to migrate it to the cloud or not, because Oracle will stop supporting single-instance databases some time soon.

The following procedures plug a single instance database into a container database as a pluggable database or PDB.

1. Build a shell container database on the same host as the single-instance database in a separate ORACLE_HOME.
2. Shut down the single instance database and restart it in read-only mode.
3. Run the DBMS_PDB.DESCRIBE procedure to generate the database metadata.

```
BEGIN
    DBMS_PDB.DESCRIBE(
        pdb_descr_file => '/home/oracle/ncdb.xml');
END;
/
```

4. Shut down the single-instance database.
5. Start up the container database.
6. Run the DBMS_PDB.CHECK_PLUG_COMPATIBILITY function to determine whether the non-CDB is compatible with the CDB.

```
SET SERVEROUTPUT ON
DECLARE
    compatible CONSTANT VARCHAR2(3) :=
        CASE DBMS_PDB.CHECK_PLUG_COMPATIBILITY(
            pdb_descr_file => '/disk1/oracle/ncdb.xml',
            pdb_name       => 'NCDB')
            WHEN TRUE THEN 'YES'
            ELSE 'NO'
        END;
BEGIN
    DBMS_OUTPUT.PUT_LINE(compatible);
END;
/
```

If the output is YES, then the non-CDB is compatible, and you can continue with the next step.

If the output is NO, then the non-CDB is not compatible, and you can check the PDB_PLUG_IN_VIOLATIONS view to see why it is not compatible. All violations must be corrected before you continue. For example, any version or patch mismatches should be resolved by running an upgrade or the opatch utility. After correcting the violations, run DBMS_PDB.CHECK_PLUG_COMPATIBILITY again to ensure that the non-CDB is compatible with the CDB.

7. Plug in the single instance non-CDB.

```
CREATE PLUGGABLE DATABASE ncdb USING '/home/oracle/ncdb.xml'
COPY
FILE_NAME_CONVERT = ('/disk1/oracle/dbs/', '/disk2/oracle/ncdb/')
;
```



If there is not sufficient space on the host, the NOCOPY option can be used to create the PDB. In that case, a single-instance non-CDB is not useable after plug in as a PDB because the original data files has been used for the PDB. Make sure to create a backup before the conversion so that there is something to fall back on if anything goes wrong.

8. Start with PDB upgrade after conversion if the version between the source single-instance non-CDB and the target CDB are different. For the same-version conversion, this step can be skipped.

```
sqlplus / as sysdba;
alter session set container=ncdb
alter pluggable database open upgrade;
exit;
dbupgrade -c ncdb -l /home/oracle
```

Review the upgrade log file in the /home/oracle directory.

9. Open the pluggable database, check for pdb plug-in violations, and recompile the invalid objects.

```
alter pluggable database ncdb open;
alter session set container=ncdb;
select message from pdb_plug_inViolations where type like '%ERR%' and
status <> 'RESOLVED';
$ORACLE_HOME/perl/bin/perl $ORACLE_HOME/rdbms/admin/catcon.pl -n 1 -c
'ncdb' -e -b utlrp -d $ORACLE_HOME/rdbms/admin utlrp.sql
```

10. Execute noncdb_to_pdb.sql to update the data dictionary.

```
sqlplus / as sysdba
alter session set container=ncdb;
@$ORACLE_HOME/rdbms/admin/noncdb_to_pdb.sql;
```

Shut down and restart the container DB. The ncdb is taken out of restricted mode.

Migrate on-premises Oracle databases to Azure with PDB relocation

Oracle PDB relocation with the maximum-availability option uses PDB hot-clone technology, which enables source PDB availability while the PDB is being copied over to the target. Upon switchover, sessions and connections are redirected to the target PDB automatically. Thus, down time is minimized independent of the size of the PDB being relocated. NetApp provides an Ansible-based toolkit that automates the migration

procedure.

1. Create a CDB in the Azure public cloud on an Azure VM with the same version and patch level.
2. From the Ansible controller, clone a copy of the automation toolkit.

```
git clone https://github.com/NetApp-Automation/na_ora_aws_migration.git
```

3. Read the instruction in the README file.
4. Configure the Ansible host variable files for both the source and target Oracle servers and the DB server host's configuration file for name resolution.
5. Install the Ansible controller prerequisites on Ansible controller.

```
ansible-playbook -i hosts requirements.yml  
ansible-galaxy collection install -r collections/requirements.yml  
--force
```

6. Execute any pre-migration tasks against the on-premises server.

```
ansible-playbook -i hosts ora_pdb_relocate.yml -u admin -k -K -t  
ora_pdb_relo_onprem
```



The admin user is the management user on the on-premises Oracle server host with sudo privileges. The admin user is authenticated with a password.

7. Execute Oracle PDB relocation from on-premises to the target Azure Oracle host.

```
ansible-playbook -i hosts ora_pdb_relocate.yml -u azureuser --private  
-key db1.pem -t ora_pdb_relo_primary
```



The Ansible controller can be located either on-premises or in the Azure cloud. The controller needs connectivity to the on-premises Oracle server host and the Azure Oracle VM host. The Oracle database port (such as 1521) is open between the on-premises Oracle server host and the Azure Oracle VM host.

Additional Oracle database migration options

Please see the Microsoft documentation for additional migration options: [Oracle database migration decision process](#).

NVA-1155: Oracle 19c RAC databases on FlexPod Datacenter with Cisco UCS and NetApp AFF A800 over FC - Design and deployment guide

Allen Cao, NetApp

This design and deployment guide for Oracle 19c RAC databases on FlexPod Datacenter with Cisco UCS and NetApp AFF A800 over FC provides details of the solution design as well as step-by-step deployment processes for hosting Oracle RAC databases on most recent FlexPod Datacenter infrastructure with the Oracle Linux 8.2 operating system and a Red Hat compatible kernel.

[NVA-1155: Oracle 19c RAC databases on FlexPod Datacenter with Cisco UCS and NetApp AFF A800 over FC](#)

TR-4250: SAP with Oracle on UNIX and NFS with NetApp Clustered Data ONTAP and SnapManager for SAP 3.4

Nils Bauer, NetApp

TR-4250 addresses the challenges of designing storage solutions to support SAP business suite products using an Oracle database. The primary focus of this document is the common storage infrastructure design, deployment, operation, and management challenges faced by business and IT leaders who use the latest generation of SAP solutions. The recommendations in this document are generic; they are not specific to an SAP application or to the size and scope of the SAP implementation. TR-4250 assumes that the reader has a basic understanding of the technology and operation of NetApp and SAP products. TR-4250 was developed based on the interaction of technical staff from NetApp, SAP, Oracle, and our customers.

[TR-4250: SAP with Oracle on UNIX and NFS with NetApp Clustered Data ONTAP and SnapManager for SAP 3.4](#)

Deploying Oracle Database

TR-3633: Oracle databases on ONTAP

Jeffrey Steiner, NetApp

Consult the [Interoperability Matrix Tool \(IMT\)](#) to determine whether the environment, configurations, and versions specified in TR-3633 support your environment.

[TR-3633: Oracle databases on ONTAP](#)

Solution Overview

Automated Deployment of Oracle19c for ONTAP on NFS

Organizations are automating their environments to gain efficiencies, accelerate deployments, and reduce manual effort. Configuration management tools like Ansible are being used to streamline enterprise database operations. In this solution, we demonstrate how you can use Ansible to automate the provisioning and configuration of Oracle 19c with NetApp ONTAP. By enabling storage administrators, systems administrators, and DBAs to consistently and rapidly deploy new storage, configure database servers, and install Oracle 19c software, you achieve the following benefits:

- Eliminate design complexities and human errors, and implement a repeatable consistent deployment and best practices
- Decrease time for provisioning of storage, configuration of DB hosts, and Oracle installation
- Increase database administrators, systems and storage administrators productivity
- Enable scaling of storage and databases with ease

NetApp provides customers with validated Ansible modules and roles to accelerate deployment, configuration, and lifecycle management of your Oracle database environment. This solution provides instruction and Ansible

playbook code, to help you:

- Create and configure ONTAP NFS storage for Oracle Database
- Install Oracle 19c on RedHat Enterprise Linux 7/8 or Oracle Linux 7/8
- Configure Oracle 19c on ONTAP NFS storage

For more details or to begin, please see the overview videos below.

AWX/Tower Deployments

Part 1: Getting Started, Requirements, Automation Details and Initial AWX/Tower Configuration

```
<iframe  
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=d844a9c  
3-4eb3-4512-bf21-  
b01200f09f66&autoplay=false&offerviewer=false&showtitle=false&showbrand=fa  
lse&captions=false&interactivity=all" height="203" width="360"  
style="border: 1px solid #464646;" allowfullscreen  
allow="autoplay"></iframe>
```

Part 2: Variables and Running the Playbook

```
<iframe  
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=6da1b96  
0-e1c9-4950-b750-  
b01200f0bdfa&autoplay=false&offerviewer=false&showtitle=false&showbrand=fa  
lse&captions=false&interactivity=all" height="203" width="360"  
style="border: 1px solid #464646;" allowfullscreen  
allow="autoplay"></iframe>
```

CLI Deployment

Part 1: Getting Started, Requirements, Automation Details and Ansible Control Host Setup

```
<iframe  
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=373e7f2  
a-c101-4292-a3e4-  
b01200f0d078&autoplay=false&offerviewer=false&showtitle=false&showbrand=fa  
lse&captions=false&interactivity=all" height="203" width="360"  
style="border: 1px solid #464646;" allowfullscreen  
allow="autoplay"></iframe>
```

Part 2: Variables and Running the Playbook

```
<iframe  
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=d58ebdb  
0-8bac-4ef9-b4d1-  
b01200f95047&autoplay=false&offerviewer=false&showtitle=false&showbrand=fa  
lse&captions=false&interactivity=all" height="203" width="360"  
style="border: 1px solid #464646;" allowfullscreen  
allow="autoplay"></iframe>
```

Getting started

This solution has been designed to be run in an AWX/Tower environment or by CLI on an Ansible control host.

AWX/Tower

For AWX/Tower environments, you are guided through creating an inventory of your ONTAP cluster management and Oracle server (IPs and hostnames), creating credentials, configuring a project that pulls the Ansible code from NetApp Automation Github, and the Job Template that launches the automation.

1. Fill out the variables specific to your environment, and copy and paste them into the Extra Vars fields in your job template.
2. After the extra vars have been added to your job template, you can launch the automation.
3. The job template is run in three phases by specifying tags for `ontap_config`, `linux_config`, and `oracle_config`.

CLI via the Ansible control host

1. To configure the Linux host so that it can be used as an Ansible control host
[click here for detailed instructions](#)
2. After the Ansible control host is configured, you can git clone the Ansible Automation repository.
3. Edit the hosts file with the IPs and/or hostnames of your ONTAP cluster management and Oracle server's management IPs.
4. Fill out the variables specific to your environment, and copy and paste them into the `vars.yml` file.
5. Each Oracle host has a variable file identified by its hostname that contains host-specific variables.
6. After all variable files have been completed, you can run the playbook in three phases by specifying tags for `ontap_config`, `linux_config`, and `oracle_config`.

Requirements

Environment	Requirements
Ansible environment	AWX/Tower or Linux host to be the Ansible control host Ansible v.2.10 and higher Python 3 Python libraries - netapp-lib - xmltodict - jmespath
ONTAP	ONTAP version 9.3 - 9.7 Two data aggregates NFS vlan and ifgrp created
Oracle server(s)	RHEL 7/8 Oracle Linux 7/8 Network interfaces for NFS, public, and optional mgmt Oracle installation files on Oracle servers

Automation Details

This automated deployment is designed with a single Ansible playbook that consists of three separate roles. The roles are for ONTAP, Linux, and Oracle configurations.

The following table describes which tasks are being automated.

Role	Tasks
ontap_config	Pre-check of the ONTAP environment Creation of NFS based SVM for Oracle Creation of export policy Creation of volumes for Oracle Creation of NFS LIFs
linux_config	Create mount points and mount NFS volumes Verify NFS mounts OS specific configuration Create Oracle directories Configure hugepages Disable SELinux and firewall daemon Enable and start chronyd service increase file descriptor hard limit Create pam.d session file

Role	Tasks
oracle_config	Oracle software installation Create Oracle listener Create Oracle databases Oracle environment configuration Save PDB state Enable instance archive mode Enable DNFS client Enable database auto startup and shutdown between OS reboots

Default parameters

To simplify automation, we have preset many required Oracle deployment parameters with default values. It is generally not necessary to change the default parameters for most deployments. A more advanced user can make changes to the default parameters with caution. The default parameters are located in each role folder under defaults directory.

Deployment instructions

Before starting, download the following Oracle installation and patch files and place them in the /tmp/archive directory with read, write, and execute access for all users on each DB server to be deployed. The automation tasks look for the named installation files in that particular directory for Oracle installation and configuration.

```
LINUX.X64_193000_db_home.zip -- 19.3 base installer
p31281355_190000_Linux-x86-64.zip -- 19.8 RU patch
p6880880_190000_Linux-x86-64.zip -- opatch version 12.2.0.1.23
```

License

You should read license information as stated in the Github repository. By accessing, downloading, installing, or using the content in this repository, you agree the terms of the license laid out [here](#).

Note that there are certain restrictions around producing and/or sharing any derivative works with the content in this repository. Please make sure you read the terms of the [License](#) before using the content. If you do not agree to all of the terms, do not access, download, or use the content in this repository.

After you are ready, click [here for detailed AWX/Tower deployment procedures](#) or [here for CLI deployment](#).

Step-by-step deployment procedure

AWX/Tower deployment Oracle 19c Database

1. Create the inventory, group, hosts, and credentials for your environment

This section describes the setup of inventory, groups, hosts, and access credentials in AWX/Ansible Tower that prepare the environment for consuming NetApp automated solutions.

1. Configure the inventory.
 - a. Navigate to Resources → Inventories → Add, and click Add Inventory.
 - b. Provide the name and organization details, and click Save.
 - c. On the Inventories page, click the inventory created.
 - d. If there are any inventory variables, paste them in the variables field.
 - e. Navigate to the Groups sub-menu and click Add.
 - f. Provide the name of the group for ONTAP, paste the group variables (if any) and click Save.
 - g. Repeat the process for another group for Oracle.
 - h. Select the ONTAP group created, go to the Hosts sub-menu and click Add New Host.
 - i. Provide the IP address of the ONTAP cluster management IP, paste the host variables (if any), and click Save.
 - j. This process must be repeated for the Oracle group and Oracle host(s) management IP/hostname.
2. Create credential types. For solutions involving ONTAP, you must configure the credential type to match username and password entries.
 - a. Navigate to Administration → Credential Types, and click Add.
 - b. Provide the name and description.
 - c. Paste the following content in Input Configuration:

```

fields:
  - id: username
    type: string
    label: Username
  - id: password
    type: string
    label: Password
    secret: true
  - id: vsadmin_password
    type: string
    label: vsadmin_password
    secret: true
  
```

- d. Paste the following content into Injector Configuration:

```

extra_vars:
  password: '{{ password }}'
  username: '{{ username }}'
  vsadmin_password: '{{ vsadmin_password }}'
  
```

3. Configure the credentials.
 - a. Navigate to Resources → Credentials, and click Add.
 - b. Enter the name and organization details for ONTAP.

- c. Select the custom Credential Type you created for ONTAP.
- d. Under Type Details, enter the username, password, and vsadmin_password.
- e. Click Back to Credential and click Add.
- f. Enter the name and organization details for Oracle.
- g. Select the Machine credential type.
- h. Under Type Details, enter the Username and Password for the Oracle hosts.
- i. Select the correct Privilege Escalation Method, and enter the username and password.

2. Create a project

1. Go to Resources → Projects, and click Add.
 - a. Enter the name and organization details.
 - b. Select Git in the Source Control Credential Type field.
 - c. enter https://github.com/NetApp-Automation/na_oracle19c_deploy.git as the source control URL.
 - d. Click Save.
 - e. The project might need to sync occasionally when the source code changes.

3. Configure Oracle host_vars

The variables defined in this section are applied to each individual Oracle server and database.

1. Input your environment-specific parameters in the following embedded Oracle hosts variables or host_vars form.



The items in blue must be changed to match your environment.

Host VARS Config

```
<style>
div {
position: relative;
}
div button {
position: absolute;
top: 0;
right: 0;
}
button {
transition-duration: 0.4s;
background-color: white;
color: #1563a3;
border: 2px solid #1563a3;
}
button:hover {
background-color: #1563a3;
```

```

    color: white;
}
#more_datastores_nfs {
    display: block;
}
#more_datastores_nfs_button {
    display: none;
}

```

</style>

```

<div class="listingblock"><div class="content"><div><button id="copy-
button1" onclick="CopyClassText1()">Copy</button></div><pre><code><div
class="CopyMeClass1" id="CopyMeID1">
#####
##### Host Variables Configuration #####
#####

# Add your Oracle Host
ansible_host: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>10.61.180.15</i></span>

# Oracle db log archive mode: true - ARCHIVELOG or false - NOARCHIVELOG
log_archive_mode: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>true</i></span>

# Number of pluggable databases per container instance identified by sid.
Pdb_name specifies the prefix for container database naming in this case
cdb2_pdb1, cdb2_pdb2, cdb2_pdb3
oracle_sid: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>cdb2</i></span>
pdb_num: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>3</i></span>
pdb_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>"{{ oracle_sid }}_pdb"</i></span>

# CDB listener port, use different listener port for additional CDB on
same host
listener_port: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>1523</i></span>

# CDB is created with SGA at 75% of memory_limit, MB. Consider how many

```

```

databases to be hosted on the node and how much ram to be allocated to
each DB. The grand total SGA should not exceed 75% available RAM on node.
memory_limit: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>5464</i></span>

# Set "em_configuration: DBEXPRESS" to install enterprise manager express
and choose a unique port from 5500 to 5599 for each sid on the host.
# Leave them black if em express is not installed.
em_configuration: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>DBEXPRESS</i></span>
em_express_port: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>5501</i></span>

# "{{groups.oracle[0]}}" represents first Oracle DB server as defined in
Oracle hosts group [oracle]. For concurrent multiple Oracle DB servers
deployment, [0] will be incremented for each additional DB server. For
example, "{{groups.oracle[1]}}" represents DB server 2,
 "{{groups.oracle[2]}}" represents DB server 3 ... As a good practice and
the default, minimum three volumes is allocated to a DB server with
corresponding /u01, /u02, /u03 mount points, which store oracle binary,
oracle data, and oracle recovery files respectively. Additional volumes
can be added by click on "More NFS volumes" but the number of volumes
allocated to a DB server must match with what is defined in global vars
file by volumes_nfs parameter, which dictates how many volumes are to be
created for each DB server.
host_datastores_nfs:
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;'><i>{{groups.oracle[0]}}_u01</i></span>",
    aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>aggr01_node01</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>,
    size: <span <div contenteditable="true"/><i>25</i></span>}
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;'><i>{{groups.oracle[0]}}_u02</i></span>",
    aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>aggr01_node01</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>,
    size: <span <div contenteditable="true"/><i>25</i></span>}
```

```

size: <span <div contenteditable="true"/><i>25</i></span>
    - {vol_name: "<span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>{{groups.oracle[0]}}_u03</i></span>",
aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>aggr01_node01</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>,
size: <span <div contenteditable="true"/><i>25</i></span>}
<a id="more_datastores_nfs" href="javascript:datastoredropdown();">More
NFS volumes</a><div id="select_more_datastores_nfs"></div><a
id="more_datastores_nfs_button"
href="javascript:adddatastorevolumes();">Enter NFS volumes'
details</a><div id="extra_datastores_nfs"></div>
</div></code></pre></div></div>
<script>
function CopyClassText1() {
    var textToCopy = document.getElementById("CopyMeID1");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {
        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_datastores_nfs").style.display = "none";
    var command = document.execCommand("copy");
    if (command)
    {
        document.getElementById("copy-button1").innerHTML = "Copied!";
        setTimeout(revert_copy, 3000);
    }
    window.getSelection().removeRange(CopyRange);
    if(currentRange)
    {
        window.getSelection().addRange(currentRange);
    }
}
function revert_copy() {

```

```

        document.getElementById("copy-button1").innerHTML = "Copy";
        document.getElementById("more_datastores_nfs").style.display =
"block";
    }

function datastoredropdown() {
    document.getElementById("more_datastores_nfs").style.display = "none";
    document.getElementById("more_datastores_nfs_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_datastores_nfs");
    while (x < 100) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_datastores_nfs">How many extra NFS volumes do
you wish to add?</a><select name="number_of_extra_datastores_nfs"
id="number_of_extra_datastores_nfs">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}
function adddatastorevolumes() {
    var y =
document.getElementById("number_of_extra_datastores_nfs").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_datastores_nfs");
    while (j < y) {
        j++;
        myHTML += ' - {vol_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>{{groups.oracle[0]}}_u01</i></span>,
aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>aggr01_node02</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>172.21.94.201</i></span>,
size: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>25</i></span>}<br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_datastores_nfs").style.display =
"none";
    document.getElementById("more_datastores_nfs_button").style.display =

```

```
"none";
```

```
}
```

```
</script>
```

- a. Fill in all variables in the blue fields.
- b. After completing variables input, click the Copy button on the form to copy all variables to be transferred to AWX or Tower.
- c. Navigate back to AWX or Tower and go to Resources → Hosts, and select and open the Oracle server configuration page.
- d. Under the Details tab, click edit and paste the copied variables from step 1 to the Variables field under the YAML tab.
- e. Click Save.
- f. Repeat this process for any additional Oracle servers in the system.

4. Configure global variables

Variables defined in this section apply to all Oracle hosts, databases, and the ONTAP cluster.

1. Input your environment-specific parameters in following embedded global variables or vars form.



The items in blue must be changed to match your environment.

VARS

```
<style>
div {
position: relative;
}
div button {
position: absolute;
top: 0;
right: 0;
}
button {
transition-duration: 0.4s;
background-color: white;
color: #1563a3;
border: 2px solid #1563a3;
}
button:hover {
background-color: #1563a3;
color: white;
}
#more_storage_vlans {
```

```

        display: block;
    }
#more_storage_vlans_button {
    display: none;
}
#more_nfs_volumes {
    display: block;
}
#more_nfs_volumes_button {
    display: none;
}

```

</style>

```

<div class="listingblock"><div class="content"><div><button id="copy-
button" onclick="CopyClassText()">Copy</button></div><pre><code><div
class="CopyMeClass" id="CopyMeID">
#####
##### Oracle 19c deployment global user configuration variables #####
##### Consolidate all variables from ontap, linux and oracle #####
#####
##### Ontap env specific config variables #####
#####

#Inventory group name
#Default inventory group name - 'ontap'
#Change only if you are changing the group name either in inventory/hosts
file or in inventory groups in case of AWX/Tower
hosts_group: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>ontap</i></span>

#CA_signed_certificates (ONLY CHANGE to 'true' IF YOU ARE USING CA SIGNED
CERTIFICATES)
ca_signed_certs: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>false</i></span>

#Names of the Nodes in the ONTAP Cluster
nodes:
    - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;"><i>AFF-
01</i></span>
    - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;"><i>AFF-
02</i></span>

```

```

#Storage VLANs
#Add additional rows for vlans as necessary
storage_vlans:
  - {vlan_id: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>203</i></span>", name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>infra_NFS</i></span>", protocol: ""<span <div contenteditable='true'" /><i>NFS</i></span>"}"}
    <a id="more_storage_vlans" href="javascript:storagevlandropdown();">More Storage VLANs</a><div id="select_more_storage_vlans"></div><a id="more_storage_vlans_button" href="javascript:addstoragevlans();">Enter Storage VLANs details</a><div id="extra_storage_vlans"></div>

#Details of the Data Aggregates that need to be created
#If Aggregate creation takes longer, subsequent tasks of creating volumes may fail.
#There should be enough disks already zeroed in the cluster, otherwise aggregate create will zero the disks and will take long time
data_aggregates:
  - {aggr_name: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>aggr01_node01</i></span>"}
    - {aggr_name: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>aggr01_node02</i></span>"}

#SVM name
svm_name: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>ora_svm</i></span>"

# SVM Management LIF Details
svm_mgmt_details:
  - {address: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.91.100</i></span>", netmask: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>255.255.255.0</i></span>", home_port: "<span <div contenteditable='true'" /><i>e0M</i></span>"}

# NFS storage parameters when data_protocol set to NFS. Volume named after

```

Oracle hosts name identified by mount point as follow for oracle DB server
 1. Each mount point dedicates to a particular Oracle files: u01 - Oracle binary, u02 - Oracle data, u03 - Oracle redo. Add additional volumes by click on "More NFS volumes" and also add the volumes list to corresponding host_vars as host_datastores_nfs variable. For multiple DB server deployment, additional volumes sets needs to be added for additional DB server. Input variable "{{groups.oracle[1]}}_u01", "{{groups.oracle[1]}}_u02", and "{{groups.oracle[1]}}_u03" as vol_name for second DB server. Place volumes for multiple DB servers alternatingly between controllers for balanced IO performance, e.g. DB server 1 on controller node1, DB server 2 on controller node2 etc. Make sure match lif address with controller node.

volumes_nfs:

```

  - {vol_name: ""<span <div contenteditable='true'"  

    style="color:#004EFF; font-weight:bold; font-style:italic; text-  

    decoration:underline;"><i>{{groups.oracle[0]}}_u01</i></span>",  

    aggr_name: <span <div contenteditable='true' style="color:#004EFF; font-  

    weight:bold; font-style:italic; text-  

    decoration:underline;"><i>aggr01_node01</i></span>, lif: <span <div  

    contenteditable='true' style="color:#004EFF; font-weight:bold; font-  

    style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>,  

    size: <span <div contenteditable='true'><i>25</i></span>}  

  - {vol_name: ""<span <div contenteditable='true'"  

    style="color:#004EFF; font-weight:bold; font-style:italic; text-  

    decoration:underline;"><i>{{groups.oracle[0]}}_u02</i></span>",  

    aggr_name: <span <div contenteditable='true' style="color:#004EFF; font-  

    weight:bold; font-style:italic; text-  

    decoration:underline;"><i>aggr01_node01</i></span>, lif: <span <div  

    contenteditable='true' style="color:#004EFF; font-weight:bold; font-  

    style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>,  

    size: <span <div contenteditable='true'><i>25</i></span>}  

  - {vol_name: ""<span <div contenteditable='true'"  

    style="color:#004EFF; font-weight:bold; font-style:italic; text-  

    decoration:underline;"><i>{{groups.oracle[0]}}_u03</i></span>",  

    aggr_name: <span <div contenteditable='true' style="color:#004EFF; font-  

    weight:bold; font-style:italic; text-  

    decoration:underline;"><i>aggr01_node01</i></span>, lif: <span <div  

    contenteditable='true' style="color:#004EFF; font-weight:bold; font-  

    style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>,  

    size: <span <div contenteditable='true'><i>25</i></span>}  

<a id="more_nfs_volumes" href="javascript:nfsvolumesdropdown();">More NFS  

  volumes</a><div id="select_more_nfs_volumes"></div><a  

  id="more_nfs_volumes_button" href="javascript:addnfsvolumes();">Enter NFS  

  volumes' details</a><div id="extra_nfs_volumes"></div>

```

#NFS LIFs IP address and netmask

```

nfs_lifs_details:
  - address: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span> #for node-1
    netmask: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>255.255.255.0</i></span>
  - address: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.201</i></span> #for node-2
    netmask: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>255.255.255.0</i></span>

#NFS client match
client_match: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.0/24</i></span>

#####
### Linux env specific config variables ##
#####

#NFS Mount points for Oracle DB volumes
mount_points:
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>/u01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>/u02</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>/u03</i></span>

# Up to 75% of node memory size divided by 2mb. Consider how many databases to be hosted on the node and how much ram to be allocated to each DB.
# Leave it blank if hugepage is not configured on the host.
hugepages_nr: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>1234</i></span>

# RedHat subscription username and password
redhat_sub_username: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-

```

```

decoration:underline;"/><i>xxx</i></span>
redhat_sub_password: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"/><i>xxx</i></span>

#####
### DB env specific install and config variables ###
#####

db_domain: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"/><i>your.domain.com</i></span>

# Set initial password for all required Oracle passwords. Change them
after installation.
initial_pwd_all: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"/><i>netapp123</i></span>

</div></code></pre></div></div>
<script>
function CopyClassText() {
    var textToCopy = document.getElementById("CopyMeID");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {
        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_storage_vlans").style.display = "none";
    document.getElementById("more_nfs_volumes").style.display = "none";
    var command = document.execCommand("copy");
    if (command)
    {
        document.getElementById("copy-button").innerHTML = "Copied!";
        setTimeout(revert_copy, 3000);
    }
    window.getSelection().removeRange(CopyRange);
    if(currentRange)
}

```

```

    {
        window.getSelection().addRange(currentRange);
    }
}

function revert_copy() {
    document.getElementById("copy-button").innerHTML = "Copy";
    document.getElementById("more_storage_vlans").style.display =
"block";
    document.getElementById("more_nfs_volumes").style.display = "block";
}

function storagevlandropdown() {
    document.getElementById("more_storage_vlans").style.display = "none";
    document.getElementById("more_storage_vlans_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_storage_vlans");
    while (x < 10) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_storage_vlans_info">How many extra VLANs do you
    wish to add?</a><select name="number_of_extra_storage_vlans"
    id="number_of_extra_storage_vlans">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}

function addstoragevlans() {
    var y =
document.getElementById("number_of_extra_storage_vlans").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_storage_vlans");
    while (j < y) {
        j++;
        myHTML += ' - {vlan_id: ""<span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>203</i></span>", name: ""<span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>infra_NFS</i></span>",
protocol: ""<span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"><i>NFS</i></span>"}<br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_storage_vlans").style.display =
}

```

```

"none";
    document.getElementById("more_storage_vlans_button").style.display =
"none";
}
function nfsvolumesdropdown() {
    document.getElementById("more_nfs_volumes").style.display = "none";
    document.getElementById("more_nfs_volumes_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_nfs_volumes");
    while (x < 100) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_nfs_volumes_info">How many extra NFS volumes do
you wish to add?</a><select name="number_of_extra_nfs_volumes"
id="number_of_extra_nfs_volumes">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}
function addnfsvolumes() {
    var y = document.getElementById("number_of_extra_nfs_volumes").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_nfs_volumes");
    while (j < y) {
        j++;
        myHTML += ' - {vol_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>rtpora04_u01</i></span>, aggr_name: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>aggr01_node02</i></span>,
lif: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>172.21.94.201</i></span>, size: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>25</i></span>}<br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_nfs_volumes").style.display =
"none";
    document.getElementById("more_nfs_volumes_button").style.display =
"none";
}

```

```
</script>
```

1. Fill in all variables in blue fields.
2. After completing variables input, click the Copy button on the form to copy all variables to be transferred to AWX or Tower into the following job template.

5. Configure and launch the job template.

1. Create the job template.
 - a. Navigate to Resources → Templates → Add and click Add Job Template.
 - b. Enter the name and description
 - c. Select the Job type; Run configures the system based on a playbook, and Check performs a dry run of a playbook without actually configuring the system.
 - d. Select the corresponding inventory, project, playbook, and credentials for the playbook.
 - e. Select the all_playbook.yml as the default playbook to be executed.
 - f. Paste global variables copied from step 4 into the Template Variables field under the YAML tab.
 - g. Check the box Prompt on Launch in the Job Tags field.
 - h. Click Save.
2. Launch the job template.
 - a. Navigate to Resources → Templates.
 - b. Click the desired template and then click Launch.
 - c. When prompted on launch for Job Tags, type in requirements_config. You might need to click the Create Job Tag line below requirements_config to enter the job tag.

 requirements_config ensures that you have the correct libraries to run the other roles.

 - d. Click Next and then Launch to start the job.
 - e. Click View → Jobs to monitor the job output and progress.
 - f. When prompted on launch for Job Tags, type in ontap_config. You might need to click the Create "Job Tag" line right below ontap_config to enter the job tag.
 - g. Click Next and then Launch to start the job.
 - h. Click View → Jobs to monitor the job output and progress
 - i. After the ontap_config role has completed, run the process again for linux_config.
 - j. Navigate to Resources → Templates.
 - k. Select the desired template and then click Launch.
 - l. When prompted on launch for the Job Tags type in linux_config, you might need to select the Create "job tag" line right below linux_config to enter the job tag.
 - m. Click Next and then Launch to start the job.
 - n. Select View → Jobs to monitor the job output and progress.
 - o. After the linux_config role has completed, run the process again for oracle_config.
 - p. Go to Resources → Templates.

- q. Select the desired template and then click Launch.
- r. When prompted on launch for Job Tags, type oracle_config. You might need to select the Create "Job Tag" line right below oracle_config to enter the job tag.
- s. Click Next and then Launch to start the job.
- t. Select View → Jobs to monitor the job output and progress.

6. Deploy additional database on same Oracle host

The Oracle portion of the playbook creates a single Oracle container database on an Oracle server per execution. To create additional container databases on the same server, complete the following steps.

1. Revise host_vars variables.
 - a. Go back to step 2 - Configure Oracle host_vars.
 - b. Change the Oracle SID to a different naming string.
 - c. Change the listener port to different number.
 - d. Change the EM Express port to a different number if you are installing EM Express.
 - e. Copy and paste the revised host variables to the Oracle Host Variables field in the Host Configuration Detail tab.
2. Launch the deployment job template with only the oracle_config tag.

Validate Oracle installation

1. Log in to Oracle server as oracle user and execute the following commands:

```
ps -ef | grep ora
```



This will list oracle processes if installation completed as expected and oracle DB started

2. Log in to the database to check the db configuration settings and the PDBs created with the following command sets.

```
sqlplus / as sysdba
```

[oracle@localhost ~]\$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Thu May 6 12:52:51 2021
Version 19.8.0.0.0

Copyright (c) 1982, 2019, Oracle. All rights reserved.

Connected to:

Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.8.0.0.0

SQL>

```
select name, log_mode from v$database;
```

SQL> select name, log_mode from v\$database;
NAME LOG_MODE

CDB2 ARCHIVELOG

```
show pdbs;
```

SQL> show pdbs

CON_ID	CON_NAME	OPEN	MODE	RESTRICTED
2	PDB\$SEED	READ	ONLY	NO
3	CDB2_PDB1	READ	WRITE	NO
4	CDB2_PDB2	READ	WRITE	NO
5	CDB2_PDB3	READ	WRITE	NO

```
col svrname form a30
col dirname form a30
select svrname, dirname, nfsversion from v$dnfs_servers;
```

SQL> col svrname form a30
SQL> col dirname form a30
SQL> select svrname, dirname, nfsversion from v\$dnfs_servers;

SVRNAME DIRNAME NFSVERSION

172.21.126.200 /rhelora03_u02 NFSv3.0
172.21.126.200 /rhelora03_u03 NFSv3.0
172.21.126.200 /rhelora03_u01 NFSv3.0

This confirms that dNFS is working properly.

3. Connect to database via listener to check hte Oracle listener configuration with the following command. Change to the appropriate listener port and database service name.

```
sqlplus system@//localhost:1523/cdb2_pdb1.cie.netapp.com
```

```
[oracle@localhost ~]$ sqlplus system@//localhost:1523/cdb2_pdb1.cie.netapp.com
```

```
SQL*Plus: Release 19.0.0.0.0 - Production on Thu May 6 13:19:57 2021  
Version 19.8.0.0.0
```

```
Copyright (c) 1982, 2019, Oracle. All rights reserved.
```

```
Enter password:
```

```
Last Successful login time: Wed May 05 2021 17:11:11 -04:00
```

```
Connected to:
```

```
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production  
Version 19.8.0.0.0
```

```
SQL> show user  
USER is "SYSTEM"  
SQL> show con_name  
CON_NAME  
CDB2_PDB1
```

```
This confirms that Oracle listener is working properly.
```

Where to go for help?

If you need help with the toolkit, please join the [NetApp Solution Automation community support slack channel](#) and look for the solution-automation channel to post your questions or inquires.

Step-by-step deployment procedure

CLI deployment Oracle 19c Database

This section covers the steps required to prepare and deploy Oracle19c Database with the CLI. Make sure that you have reviewed the [Getting Started and Requirements section](#) and prepared your environment accordingly.

Download Oracle19c repo

1. From your ansible controller, run the following command:

```
git clone https://github.com/NetApp-Automation/na_oracle19c_deploy.git
```

2. After downloading the repository, change directories to na_oracle19c_deploy <cd na_oracle19c_deploy>.

Edit the hosts file

Complete the following before deployment:

1. Edit your hosts file na_oracle19c_deploy directory.
2. Under [ontap], change the IP address to your cluster management IP.
3. Under the [oracle] group, add the oracle hosts names. The host name must be resolved to its IP address either through DNS or the hosts file, or it must be specified in the host.
4. After you have completed these steps, save any changes.

The following example depicts a host file:

```
#ONTAP Host<div>
[ontap]
<div>
<span <div contenteditable="false" style="color:#7EAF97
; font-weight:bold; font-style:italic; text-
decoration:;"/>10.61.184.183<i></i></span>
</div>
#Oracle hosts<div>
<div>
[oracle]<div>
<span <div contenteditable="false" style="color:#7EAF97
; font-weight:bold; font-style:italic; text-
decoration:;"/>rtpora01<i></i></span>
<div>
<span <div contenteditable="false" style="color:#7EAF97
; font-weight:bold; font-style:italic; text-
decoration:;"/>rtpora02<i></i></span>
</div>
```

This example executes the playbook and deploys oracle 19c on two oracle DB servers concurrently. You can also test with just one DB server. In that case, you only need to configure one host variable file.



The playbook executes the same way regardless of how many Oracle hosts and databases you deploy.

Edit the host_name.yml file under host_vars

Each Oracle host has its host variable file identified by its host name that contains host-specific variables. You can specify any name for your host. Edit and copy the host_vars from the Host VARS Config section and paste it into your desired host_name.yml file.



The items in blue must be changed to match your environment.

Host VARS Config

```
<style>
div {
position: relative;
}
div button {
position: absolute;
top: 0;
right: 0;
}
button {
transition-duration: 0.4s;
background-color: white;
color: #1563a3;
border: 2px solid #1563a3;
}
button:hover {
background-color: #1563a3;
color: white;
}
#more_datastores_nfs {
display: block;
}
#more_datastores_nfs_button {
display: none;
}
</style>
<div class="listingblock"><div class="content"><div><button id="copy-
button1" onclick="CopyClassText1()">Copy</button></div><pre><code><div
class="CopyMeClass1" id="CopyMeID1">
#####
#####          Host Variables Configuration          #####
#####
# Add your Oracle Host
ansible_host: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>10.61.180.15</i></span>

# Oracle db log archive mode: true - ARCHIVELOG or false - NOARCHIVELOG
log_archive_mode: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>true</i></span>

# Number of pluggable databases per container instance identified by sid.
```

```

Pdb_name specifies the prefix for container database naming in this case
cdb2_pdb1, cdb2_pdb2, cdb2_pdb3
oracle_sid: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>cdb2</i></span>
pdb_num: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>3</i></span>
pdb_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>"{{ oracle_sid }}_pdb"</i></span>

# CDB listener port, use different listener port for additional CDB on
same host
listener_port: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>1523</i></span>

# CDB is created with SGA at 75% of memory_limit, MB. Consider how many
databases to be hosted on the node and how much ram to be allocated to
each DB. The grand total SGA should not exceed 75% available RAM on node.
memory_limit: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>5464</i></span>

# Set "em_configuration: DBEXPRESS" to install enterprise manager express
and choose a unique port from 5500 to 5599 for each sid on the host.
# Leave them black if em express is not installed.
em_configuration: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>DBEXPRESS</i></span>
em_express_port: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>5501</i></span>

# "{{groups.oracle[0]}}" represents first Oracle DB server as defined in
Oracle hosts group [oracle]. For concurrent multiple Oracle DB servers
deployment, [0] will be incremented for each additional DB server. For
example, "{{groups.oracle[1]}}" represents DB server 2,
 "{{groups.oracle[2]}}" represents DB server 3 ... As a good practice and
the default, minimum three volumes is allocated to a DB server with
corresponding /u01, /u02, /u03 mount points, which store oracle binary,
oracle data, and oracle recovery files respectively. Additional volumes
can be added by click on "More NFS volumes" but the number of volumes
allocated to a DB server must match with what is defined in global vars
file by volumes_nfs parameter, which dictates how many volumes are to be

```

```

created for each DB server.

host_datastores_nfs:
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>{{groups.oracle[0]}}_u01</i></span>", aggr_name: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>aggr01_node01</i></span>, lif: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>, size: <span <div contenteditable='true' /><i>25</i></span>}
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>{{groups.oracle[0]}}_u02</i></span>", aggr_name: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>aggr01_node01</i></span>, lif: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>, size: <span <div contenteditable='true' /><i>25</i></span>}
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>{{groups.oracle[0]}}_u03</i></span>", aggr_name: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>aggr01_node01</i></span>, lif: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>, size: <span <div contenteditable='true' /><i>25</i></span>}
<a id="more_datastores_nfs" href="javascript:datastoredropdown();">More NFS volumes</a><div id="select_more_datastores_nfs"></div><a id="more_datastores_nfs_button" href="javascript:adddatastorevolumes();">Enter NFS volumes' details</a><div id="extra_datastores_nfs"></div>
</div></code></pre></div></div>
<script>
function CopyClassText1() {
    var textToCopy = document.getElementById("CopyMeID1");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {

```

```

        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_datastores_nfs").style.display = "none";
    var command = document.execCommand("copy");
    if (command)
    {
        document.getElementById("copy-button1").innerHTML = "Copied!";
        setTimeout(revert_copy, 3000);
    }
    window.getSelection().removeRange(CopyRange);
    if(currentRange)
    {
        window.getSelection().addRange(currentRange);
    }
}

function revert_copy() {
    document.getElementById("copy-button1").innerHTML = "Copy";
    document.getElementById("more_datastores_nfs").style.display =
"block";
}

function datastoredropdown() {
    document.getElementById("more_datastores_nfs").style.display = "none";
    document.getElementById("more_datastores_nfs_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_datastores_nfs");
    while (x < 100) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_datastores_nfs">How many extra NFS volumes do
you wish to add?</a><select name="number_of_extra_datastores_nfs"
id="number_of_extra_datastores_nfs">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}

function adddatastorevolumes() {
    var y =
document.getElementById("number_of_extra_datastores_nfs").value;
    var j=0;
    var myHTML = '';

```

```

var wrapper = document.getElementById("extra_datastores_nfs");
while (j < y) {
    j++;
    myHTML += ' - {vol_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>"{{groups.oracle[0]}}_u01"</i></span>,
aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>aggr01_node02</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>172.21.94.201</i></span>,
size: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>25</i></span>}<br>';
}
wrapper.innerHTML = myHTML;
document.getElementById("select_more_datastores_nfs").style.display =
"none";
document.getElementById("more_datastores_nfs_button").style.display =
"none";
}

</script>

```

Edit the vars.yml file

The `vars.yml` file consolidates all environment-specific variables (ONTAP, Linux, or Oracle) for Oracle deployment.

- Edit and copy the variables from the VARS section and paste these variables into your `vars.yml` file.

VARS

```

<style>
div {
position: relative;
}
div button {
position: absolute;
top: 0;
right: 0;
}
button {
transition-duration: 0.4s;
background-color: white;
color: #1563a3;

```

```

        border: 2px solid #1563a3;
    }
    button:hover {
        background-color: #1563a3;
        color: white;
    }
    #more_storage_vlans {
        display: block;
    }
    #more_storage_vlans_button {
        display: none;
    }
    #more_nfs_volumes {
        display: block;
    }
    #more_nfs_volumes_button {
        display: none;
    }

```

</style>

```

<div class="listingblock"><div class="content"><div><button id="copy-
button" onclick="CopyClassText()">Copy</button></div><pre><code><div
class="CopyMeClass" id="CopyMeID">
#####
##### Oracle 19c deployment global user configuration variables #####
##### Consolidate all variables from ontap, linux and oracle #####
#####
##### Ontap env specific config variables ##
#####
#Inventory group name
#Default inventory group name - 'ontap'
#Change only if you are changing the group name either in inventory/hosts
file or in inventory groups in case of AWX/Tower
hosts_group: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>ontap</i></span>

#CA_signed_certificates (ONLY CHANGE to 'true' IF YOU ARE USING CA SIGNED
CERTIFICATES)
ca_signed_certs: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>false</i></span>

#Names of the Nodes in the ONTAP Cluster

```

```

nodes:
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>AFF-01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>AFF-02</i></span>

#Storage VLANs
#Add additional rows for vlans as necessary
storage_vlans:
  - {vlan_id: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;' /><i>203</i></span>", name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;' /><i>infra_NFS</i></span>", protocol: ""<span <div contenteditable='true' /><i>NFS</i></span>",
    <a id='more_storage_vlans' href='javascript:storagevlandropdown();'>More Storage VLANs</a><div id='select_more_storage_vlans'></div><a id='more_storage_vlans_button' href='javascript:addstoragevlans();'>Enter Storage VLANs details</a><div id='extra_storage_vlans'></div>

#Details of the Data Aggregates that need to be created
#If Aggregate creation takes longer, subsequent tasks of creating volumes may fail.
#There should be enough disks already zeroed in the cluster, otherwise aggregate create will zero the disks and will take long time
data_aggregates:
  - {aggr_name: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;' /><i>aggr01_node01</i></span>"}
  - {aggr_name: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;' /><i>aggr01_node02</i></span>"}

#SVM name
svm_name: "<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;' /><i>ora_svm</i></span>

# SVM Management LIF Details
svm_mgmt_details:
  - {address: "<span <div contenteditable='true' style='color:#004EFF;

```

```

font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>172.21.91.100</i></span>, netmask: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;" /><i>255.255.255.0</i></span>,
home_port: <span <div contenteditable="true"/><i>e0M</i></span>}

# NFS storage parameters when data_protocol set to NFS. Volume named after
Oracle hosts name identified by mount point as follow for oracle DB server
1. Each mount point dedicated to a particular Oracle files: u01 - Oracle
binary, u02 - Oracle data, u03 - Oracle redo. Add additional volumes by
click on "More NFS volumes" and also add the volumes list to corresponding
host_vars as host_datastores_nfs variable. For multiple DB server
deployment, additional volumes sets needs to be added for additional DB
server. Input variable "{{groups.oracle[1]}}_u01",
"{{groups.oracle[1]}}_u02", and "{{groups.oracle[1]}}_u03" as vol_name for
second DB server. Place volumes for multiple DB servers alternatingly
between controllers for balanced IO performance, e.g. DB server 1 on
controller node1, DB server 2 on controller node2 etc. Make sure match lif
address with controller node.

volumes_nfs:
  - {vol_name: ""<span <div contenteditable='true"
style='color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>{{groups.oracle[0]}}_u01</i></span>",
aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;" /><i>aggr01_node01</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>,
size: <span <div contenteditable="true"/><i>25</i></span>}

  - {vol_name: ""<span <div contenteditable='true"
style='color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>{{groups.oracle[0]}}_u02</i></span>",
aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;" /><i>aggr01_node01</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>,
size: <span <div contenteditable="true"/><i>25</i></span>}

  - {vol_name: ""<span <div contenteditable='true"
style='color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>{{groups.oracle[0]}}_u03</i></span>",
aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;" /><i>aggr01_node01</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>,
size: <span <div contenteditable="true"/><i>25</i></span>}

```

```

size: <span <div contenteditable="true"/><i>25</i></span>
<a id="more_nfs_volumes" href="javascript:nfsvolumesdropdown();">More NFS volumes</a><div id="select_more_nfs_volumes"></div><a id="more_nfs_volumes_button" href="javascript:addnfsvolumes();">Enter NFS volumes' details</a><div id="extra_nfs_volumes"></div>

#NFS LIFs IP address and netmask
nfs_lifs_details:
  - address: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>172.21.94.200</i></span> #for node-1
    netmask: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>255.255.255.0</i></span>
  - address: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>172.21.94.201</i></span> #for node-2
    netmask: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>255.255.255.0</i></span>

#NFS client match
client_match: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>172.21.94.0/24</i></span>

#####
### Linux env specific config variables ##
#####

#NFS Mount points for Oracle DB volumes
mount_points:
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u02</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u03</i></span>

# Up to 75% of node memory size divided by 2mb. Consider how many databases to be hosted on the node and how much ram to be allocated to each DB.
# Leave it blank if hugepage is not configured on the host.

```

```

hugepages_nr: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>1234</i></span>

# RedHat subscription username and password
redhat_sub_username: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>xxx</i></span>
redhat_sub_password: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>xxx</i></span>

#####
### DB env specific install and config variables ###
#####

db_domain: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>your.domain.com</i></span>

# Set initial password for all required Oracle passwords. Change them after installation.
initial_pwd_all: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>netapp123</i></span>

</div></code></pre></div></div>
<script>
function CopyClassText() {
    var textToCopy = document.getElementById("CopyMeID");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {
        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_storage_vlans").style.display = "none";
    document.getElementById("more_nfs_volumes").style.display = "none";
    var command = document.execCommand("copy");
}

```

```

        if (command)
        {
            document.getElementById("copy-button").innerHTML = "Copied!";
            setTimeout(revert_copy, 3000);
        }
        window.getSelection().removeRange(CopyRange);
        if(currentRange)
        {
            window.getSelection().addRange(currentRange);
        }
    }

function revert_copy() {
    document.getElementById("copy-button").innerHTML = "Copy";
    document.getElementById("more_storage_vlans").style.display =
"block";
    document.getElementById("more_nfs_volumes").style.display = "block";
}

function storagevlandropdown() {
    document.getElementById("more_storage_vlans").style.display = "none";
    document.getElementById("more_storage_vlans_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_storage_vlans");
    while (x < 10) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_storage_vlans_info">How many extra VLANs do you
wish to add?</a><select name="number_of_extra_storage_vlans"
id="number_of_extra_storage_vlans">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}

function addstoragevlans() {
    var y =
document.getElementById("number_of_extra_storage_vlans").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_storage_vlans");
    while (j < y) {
        j++;
        myHTML += ' - {vlan_id: " <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>203</i></span>" , name: " <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-

```

```

style:italic; text-decoration:underline;" /><i>infra_NFS</i></span>" ,  

protocol: " ;<span <div contenteditable="true" style="color:#004EFF;  

font-weight:bold; font-style:italic; text-  

decoration:underline;" /><i>NFS</i></span>" ; }<br>' ;  

}  

wrapper.innerHTML = myHTML;  

document.getElementById("select_more_storage_vlans").style.display =  

"none";  

document.getElementById("more_storage_vlans_button").style.display =  

"none";  

}  

function nfsvolumesdropdown() {  

    document.getElementById("more_nfs_volumes").style.display = "none";  

    document.getElementById("more_nfs_volumes_button").style.display =  

"block";  

    var x=1;  

    var myHTML = ' ' ;  

    var buildup = ' ' ;  

    var wrapper = document.getElementById("select_more_nfs_volumes");  

    while (x < 100) {  

        buildup += '<option value="' + x + '">' + x + '</option>';  

        x++;  

    }  

    myHTML += '<a id="more_nfs_volumes_info">How many extra NFS volumes do  

you wish to add?</a><select name="number_of_extra_nfs_volumes"  

id="number_of_extra_nfs_volumes">' + buildup + '</select>';  

    wrapper.innerHTML = myHTML;  

}  

function addnfsvolumes() {  

    var y = document.getElementById("number_of_extra_nfs_volumes").value;  

    var j=0;  

    var myHTML = ' ' ;  

    var wrapper = document.getElementById("extra_nfs_volumes");  

    while (j < y) {  

        j++;  

        myHTML += ' - {vol_name: <span <div contenteditable="true"  

style="color:#004EFF; font-weight:bold; font-style:italic; text-  

decoration:underline;" /><i>rtpora04_u01</i></span>, aggr_name: <span <div  

contenteditable="true" style="color:#004EFF; font-weight:bold; font-  

style:italic; text-decoration:underline;" /><i>aggr01_node02</i></span>,  

lif: <span <div contenteditable="true" style="color:#004EFF; font-  

weight:bold; font-style:italic; text-  

decoration:underline;" /><i>172.21.94.201</i></span>, size: <span <div  

contenteditable="true" style="color:#004EFF; font-weight:bold; font-  

style:italic; text-decoration:underline;" /><i>25</i></span>}<br>';  

    }
}

```

```
        wrapper.innerHTML = myHTML;
        document.getElementById("select_more_nfs_volumes").style.display =
"none";
        document.getElementById("more_nfs_volumes_button").style.display =
"none";
    }

</script>
```

Run the playbook

After completing the required environment prerequisites and copying the variables into `vars.yml` and `your_host.yml`, you are now ready to deploy the playbooks.



<username> must be changed to match your environment.

1. Run the ONTAP playbook by passing the correct tags and ONTAP cluster username. Fill the password for ONTAP cluster, and vsadmin when prompted.

```
ansible-playbook -i hosts all_playbook.yml -u username -k -K -t
ontap_config -e @vars/vars.yml
```

2. Run the Linux playbook to execute Linux portion of deployment. Input for admin ssh password as well as sudo password.

```
ansible-playbook -i hosts all_playbook.yml -u username -k -K -t
linux_config -e @vars/vars.yml
```

3. Run the Oracle playbook to execute Oracle portion of deployment. Input for admin ssh password as well as sudo password.

```
ansible-playbook -i hosts all_playbook.yml -u username -k -K -t
oracle_config -e @vars/vars.yml
```

Deploy Additional Database on Same Oracle Host

The Oracle portion of the playbook creates a single Oracle container database on an Oracle server per execution. To create additional container database on the same server, complete the following steps:

1. Revise the host_vars variables.
 - a. Go back to step 3 - Edit the host_name.yml file under host_vars.
 - b. Change the Oracle SID to a different naming string.
 - c. Change the listener port to different number.
 - d. Change the EM Express port to a different number if you have installed EM Express.
 - e. Copy and paste the revised host variables to the Oracle host variable file under host_vars.
2. Execute the playbook with the oracle_config tag as shown above in [Run the playbook](#).

Validate Oracle installation

1. Log in to Oracle server as oracle user and execute the following commands:

```
ps -ef | grep ora
```



This will list oracle processes if installation completed as expected and oracle DB started

2. Log in to the database to check the db configuration settings and the PDBs created with the following command sets.

```
sqlplus / as sysdba
```

```
[oracle@localhost ~]$ sqlplus / as sysdba
```

```
SQL*Plus: Release 19.0.0.0.0 - Production on Thu May 6 12:52:51 2021
Version 19.8.0.0.0
```

```
Copyright (c) 1982, 2019, Oracle. All rights reserved.
```

```
Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.8.0.0.0
```

```
SQL>
```

```
select name, log_mode from v$database;
```

```
SQL> select name, log_mode from v$database;
NAME LOG_MODE
-----
```

```
CDB2 ARCHIVELOG
```

```
show pdbs;
```

SQL> show pdbs

CON_ID	CON_NAME	OPEN	MODE	RESTRICTED
2	PDB\$SEED	READ	ONLY	NO
3	CDB2_PDB1	READ	WRITE	NO
4	CDB2_PDB2	READ	WRITE	NO
5	CDB2_PDB3	READ	WRITE	NO

```
col svrname form a30
col dirname form a30
select svrname, dirname, nfsversion from v$dnfs_servers;
```

SQL> col svrname form a30
SQL> col dirname form a30
SQL> select svrname, dirname, nfsversion from v\$dnfs_servers;

SVRNAME DIRNAME NFSVERSION

```
-----  
172.21.126.200 /rhelora03_u02 NFSv3.0  
172.21.126.200 /rhelora03_u03 NFSv3.0  
172.21.126.200 /rhelora03_u01 NFSv3.0
```

This confirms that dNFS is working properly.

3. Connect to database via listener to check hte Oracle listener configuration with the following command. Change to the appropriate listener port and database service name.

```
sqlplus system@//localhost:1523/cdb2_pdb1.cie.netapp.com
```

[oracle@localhost ~]\$ sqlplus system@//localhost:1523/cdb2_pdb1.cie.netapp.com

SQL*Plus: Release 19.0.0.0.0 - Production on Thu May 6 13:19:57 2021
Version 19.8.0.0.0

Copyright (c) 1982, 2019, Oracle. All rights reserved.

Enter password:
Last Successful login time: Wed May 05 2021 17:11:11 -04:00

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.8.0.0.0

```
SQL> show user
USER is "SYSTEM"
SQL> show con_name
CON_NAME
CDB2_PDB1
```

This confirms that Oracle listener is working properly.

Where to go for help?

If you need help with the toolkit, please join the [NetApp Solution Automation community support slack channel](#) and look for the solution-automation channel to post your questions or inquiries.

Oracle Database Data Protection

Solution Overview

Automated Data Protection for Oracle Databases

Organizations are automating their environments to gain efficiencies, accelerate deployments, and reduce manual effort. Configuration management tools like Ansible are being used to streamline enterprise database operations. In this solution, we demonstrate how you can use Ansible to automate the data protection of Oracle with NetApp ONTAP. By enabling storage administrators, systems administrators, and DBAs to consistently and rapidly setup data replication to an offsite data center or to public cloud, you achieve the following benefits:

- Eliminate design complexities and human errors, and implement a repeatable consistent deployment and best practices
- Decrease time for configuration of Intercluster replication, CVO instantiation, and recovery of Oracle databases
- Increase database administrators, systems and storage administrators productivity
- Provides database recovery workflow for ease of testing a DR scenario.

NetApp provides customers with validated Ansible modules and roles to accelerate deployment, configuration, and lifecycle management of your Oracle database environment. This solution provides instruction and Ansible playbook code, to help you:

On Prem to on prem replication

- Create intercluster lifs on source and destination
- Establish cluster and vserver peering
- Create and initialize SnapMirror of Oracle volumes
- Create a replication schedule through AWX/Tower for Oracle binaries, databases, and logs
- Restore Oracle DB on the destination, and bring database online

On Prem to CVO in AWS

- Create AWS connector
- Create CVO instance in AWS
- Add On-Prem cluster to Cloud Manager
- Create intercluster lifs on source
- Establish cluster and vserver peering
- Create and initialize SnapMirror of Oracle volumes
- Create a replication schedule through AWX/Tower for Oracle binaries, databases, and logs
- Restore Oracle DB on the destination, and bring database online

For more details or to begin, please see the overview videos below.

AWX/Tower Deployments

- Part 1: TBD

[video](#)

- Part 2: TBD

[video](#)

After you are ready, click [here](#) for getting started with the solution.

Getting started

This solution has been designed to be run in an AWX/Tower environment.

AWX/Tower

For AWX/Tower environments, you are guided through creating an inventory of your ONTAP cluster management and Oracle server (IPs and hostnames), creating credentials, configuring a project that pulls the Ansible code from NetApp Automation Github, and the Job Template that launches the automation.

1. The solution has been designed to run in a private cloud scenario (on-premise to on-premise), and hybrid cloud (on-premise to public cloud Cloud Volumes ONTAP [CVO])
2. Fill out the variables specific to your environment, and copy and paste them into the Extra Vars fields in your job template.
3. After the extra vars have been added to your job template, you can launch the automation.
4. The automation is set to be ran three phases (Setup, Replication Schedule for Oracle Binaries, Database, Logs, and Replication Schedule just for Logs), and a forth phase to recovering the database at a DR site.
5. For detailed instructions for obtaining the keys and tokens necessary for the CVO Data Protection visit [Gather Pre-requisites For CVO and Connector Deployments](#)

Requirements

On-Prem |

Environment	Requirements
Ansible environment	AWX/Tower Ansible v.2.10 and higher Python 3 Python libraries - netapp-lib - xmltodict - jmespath
ONTAP	ONTAP version 9.8 + Two data aggregates NFS vlan and ifgrp created
Oracle server(s)	RHEL 7/8 Oracle Linux 7/8 Network interfaces for NFS, public, and optional mgmt Existing Oracle environment on source, and the equivalent Linux operating system at the destination (DR Site or Public Cloud)

CVO

Environment	Requirements
Ansible environment	AWX/Tower Ansible v.2.10 and higher Python 3 Python libraries - netapp-lib - xmltodict - jmespath
ONTAP	ONTAP version 9.8 + Two data aggregates NFS vlan and ifgrp created
Oracle server(s)	RHEL 7/8 Oracle Linux 7/8 Network interfaces for NFS, public, and optional mgmt Existing Oracle environment on source, and the equivalent Linux operating system at the destination (DR Site or Public Cloud) Set appropriate swap space on the Oracle EC2 instance, by default some EC2 instances are deployed with 0 swap

Environment	Requirements
Cloud Manager/AWS	AWS Access/Secret Key
	NetApp Cloud Manager Account
	NetApp Cloud Manager Refresh Token

Automation Details

On-Prem |

This automated deployment is designed with a single Ansible playbook that consists of three separate roles. The roles are for ONTAP, Linux, and Oracle configurations. The following table describes which tasks are being automated.

Playbook	Tasks
ontap_setup	Pre-check of the ONTAP environment
	Creation of Intercluster LIFs on source cluster (OPTIONAL)
	Creation of Intercluster LIFs on destination cluster (OPTIONAL)
	Creation of Cluster and SVM Peering
	Creation of destination SnapMirror and Initialization of designated Oracle volumes
ora_replication_cg	Enable backup mode for each database in /etc/oratab
	Snapshot taken of Oracle Binary and Database volumes
	Snapmirror Updated
	Turn off backup mode for each database in /etc/oratab
ora_replication_log	Switch current log for each database in /etc/oratab
	Snapshot taken of Oracle Log volume
	Snapmirror Updated
ora_recovery	Break SnapMirror
	Enable NFS and create junction path for Oracle volumes on the destination
	Configure DR Oracle Host
	Mount and verify Oracle volumes
	Recover and start Oracle database

CVO

This automated deployment is designed with a single Ansible playbook that consists of three separate roles. The roles are for ONTAP, Linux, and Oracle configurations. The following table describes which tasks are being automated.

Playbook	Tasks
cvo_setup	Pre-check of the environment AWS Configure/AWS Access Key ID/Secret Key/Default Region Creation of AWS Role Creation of NetApp Cloud Manager Connector instance in AWS Creation of Cloud Volumes ONTAP (CVO) instance in AWS Add On-Prem Source ONTAP Cluster to NetApp Cloud Manager Creation of destination SnapMirror and Initialization of designated Oracle volumes
ora_replication_cg	Enable backup mode for each database in /etc/oratab Snapshot taken of Oracle Binary and Database volumes Snapmirror Updated Turn off backup mode for each database in /etc/oratab
ora_replication_log	Switch current log for each database in /etc/oratab Snapshot taken of Oracle Log volume Snapmirror Updated
ora_recovery	Break SnapMirror Enable NFS and create junction path for Oracle volumes on the destination CVO Configure DR Oracle Host Mount and verify Oracle volumes Recover and start Oracle database

Default parameters

To simplify automation, we have preset many required Oracle parameters with default values. It is generally not necessary to change the default parameters for most deployments. A more advanced user can make changes to the default parameters with caution. The default parameters are located in each role folder under defaults directory.

License

You should read license information as stated in the Github repository. By accessing, downloading, installing, or using the content in this repository, you agree the terms of the license laid out [here](#).

Note that there are certain restrictions around producing and/or sharing any derivative works with the content in this repository. Please make sure you read the terms of the [License](#) before using the content. If you do not agree to all of the terms, do not access, download, or use the content in this repository.

After you are ready, click [here for detailed AWX/Tower procedures](#).

Step-by-step deployment procedure

AWX/Tower Oracle Data Protection

Create the inventory, group, hosts, and credentials for your environment

This section describes the setup of inventory, groups, hosts, and access credentials in AWX/Ansible Tower that prepare the environment for consuming NetApp automated solutions.

1. Configure the inventory.
 - a. Navigate to Resources → Inventories → Add, and click Add Inventory.
 - b. Provide the name and organization details, and click Save.
 - c. On the Inventories page, click the inventory created.
 - d. Navigate to the Groups sub-menu and click Add.
 - e. Provide the name oracle for your first group and click Save.
 - f. Repeat the process for a second group called dr_oracle.
 - g. Select the oracle group created, go to the Hosts sub-menu and click Add New Host.
 - h. Provide the IP address of the Source Oracle host's management IP, and click Save.
 - i. This process must be repeated for the dr_oracle group and add the DR/Destination Oracle host's management IP/hostname.



Below are instructions for creating the credential types and credentials for either On-Prem with ONTAP, or CVO on AWS.

On-Prem

1. Configure the credentials.
2. Create Credential Types. For solutions involving ONTAP, you must configure the credential type to match username and password entries.
 - a. Navigate to Administration → Credential Types, and click Add.
 - b. Provide the name and description.
 - c. Paste the following content in Input Configuration:

```
fields:  
  - id: dst_cluster_username  
    type: string  
    label: Destination Cluster Username  
  - id: dst_cluster_password  
    type: string  
    label: Destination Cluster Password  
    secret: true  
  - id: src_cluster_username  
    type: string  
    label: Source Cluster Username  
  - id: src_cluster_password  
    type: string  
    label: Source Cluster Password  
    secret: true
```

- d. Paste the following content into Injector Configuration and then click Save:

```
extra_vars:  
  dst_cluster_username: '{{ dst_cluster_username }}'  
  dst_cluster_password: '{{ dst_cluster_password }}'  
  src_cluster_username: '{{ src_cluster_username }}'  
  src_cluster_password: '{{ src_cluster_password }}'
```

3. Create Credential for ONTAP

- a. Navigate to Resources → Credentials, and click Add.
- b. Enter the name and organization details for the ONTAP Credentials
- c. Select the credential type that was created in the previous step.
- d. Under Type Details, enter the Username and Password for your Source and Destination Clusters.
- e. Click Save

4. Create Credential for Oracle

- a. Navigate to Resources → Credentials, and click Add.
- b. Enter the name and organization details for Oracle

- c. Select the Machine credential type.
- d. Under Type Details, enter the Username and Password for the Oracle hosts.
- e. Select the correct Privilege Escalation Method, and enter the username and password.
- f. Click Save
- g. Repeat process if needed for a different credential for the dr_oracle host.

CVO

1. Configure the credentials.
2. Create credential types. For solutions involving ONTAP, you must configure the credential type to match username and password entries, we will also add entries for Cloud Central and AWS.
 - a. Navigate to Administration → Credential Types, and click Add.
 - b. Provide the name and description.
 - c. Paste the following content in Input Configuration:

```
fields:
  - id: dst_cluster_username
    type: string
    label: CVO Username
  - id: dst_cluster_password
    type: string
    label: CVO Password
    secret: true
  - id: cvo_svm_password
    type: string
    label: CVO SVM Password
    secret: true
  - id: src_cluster_username
    type: string
    label: Source Cluster Username
  - id: src_cluster_password
    type: string
    label: Source Cluster Password
    secret: true
  - id: regular_id
    type: string
    label: Cloud Central ID
    secret: true
  - id: email_id
    type: string
    label: Cloud Manager Email
    secret: true
  - id: cm_password
    type: string
    label: Cloud Manager Password
    secret: true
  - id: access_key
    type: string
    label: AWS Access Key
    secret: true
  - id: secret_key
    type: string
    label: AWS Secret Key
    secret: true
  - id: token
    type: string
    label: Cloud Central Refresh Token
    secret: true
```

d. Paste the following content into Injector Configuration and click Save:

```

extra_vars:
  dst_cluster_username: '{{ dst_cluster_username }}'
  dst_cluster_password: '{{ dst_cluster_password }}'
  cvo_svm_password: '{{ cvo_svm_password }}'
  src_cluster_username: '{{ src_cluster_username }}'
  src_cluster_password: '{{ src_cluster_password }}'
  regular_id: '{{ regular_id }}'
  email_id: '{{ email_id }}'
  cm_password: '{{ cm_password }}'
  access_key: '{{ access_key }}'
  secret_key: '{{ secret_key }}'
  token: '{{ token }}'

```

3. Create Credential for ONTAP/CVO/AWS

- Navigate to Resources → Credentials, and click Add.
- Enter the name and organization details for the ONTAP Credentials
- Select the credential type that was created in the previous step.
- Under Type Details, enter the Username and Password for your Source and CVO Clusters, Cloud Central/Manager, AWS Access/Secret Key and Cloud Central Refresh Token.
- Click Save

4. Create Credential for Oracle (Source)

- Navigate to Resources → Credentials, and click Add.
- Enter the name and organization details for Oracle host
- Select the Machine credential type.
- Under Type Details, enter the Username and Password for the Oracle hosts.
- Select the correct Privilege Escalation Method, and enter the username and password.
- Click Save

5. Create Credential for Oracle Destination

- Navigate to Resources → Credentials, and click Add.
- Enter the name and organization details for the DR Oracle host
- Select the Machine credential type.
- Under Type Details, enter the Username (ec2-user or if you have changed it from default enter that), and the SSH Private Key
- Select the correct Privilege Escalation Method (sudo), and enter the username and password if needed.
- Click Save

Create a project

- Go to Resources → Projects, and click Add.

- a. Enter the name and organization details.
- b. Select Git in the Source Control Credential Type field.
- c. enter https://github.com/NetApp-Automation/na_oracle19c_data_protection.git as the source control URL.
- d. Click Save.
- e. The project might need to sync occasionally when the source code changes.

Configure global variables

Variables defined in this section apply to all Oracle hosts, databases, and the ONTAP cluster.

1. Input your environment-specific parameters in following embedded global variables or vars form.



The items in blue must be changed to match your environment.

On-Prem

```
<style>
div {
position: relative;
}
div button {
position: absolute;
top: 0;
right: 0;
}
button {
  transition-duration: 0.4s;
background-color: white;
color: #1563a3;
border: 2px solid #1563a3;
}
button:hover {
  background-color: #1563a3;
  color: white;
}
#more_binary_vols {
  display: block;
}
#more_binary_vols_button {
  display: none;
}
#more_database_vols {
  display: block;
}
#more_database_vols_button {
  display: none;
}
#more_log_vols {
  display: block;
}
#more_log_vols_button {
  display: none;
}
</style>
<div class="listingblock"><div class="content"><div><button id="copy-button-onprem" onclick="CopyClassText()">Copy</button></div><pre><code><div class="CopyMeClass" id="CopyOnPrem">
#####
<##>
```

```

##### Oracle Data Protection global user configuration variables
#####
##### Consolidate all variables from ontap, aws, and oracle
#####
#####
#####
#####

#####
### Ontap env specific config variables #####
#####

#Inventory group name
#Default inventory group name - 'ontap'
#Change only if you are changing the group name either in
inventory/hosts file or in inventory groups in case of AWX/Tower
hosts_group: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"><i>ontap</i></span>

#CA_signed_certificates (ONLY CHANGE to 'true' IF YOU ARE USING CA
SIGNED CERTIFICATES)
ca_signed_certs: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>false</i></span>

#####
# Inter-cluster LIF details
#####
#Names of the Nodes in the Source ONTAP Cluster
src_nodes:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;"><i>AFF-
01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;"><i>AFF-
02</i></span>

#Names of the Nodes in the Destination ONTAP Cluster
dst_nodes:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;"><i>DR-
AFF-01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;"><i>DR-
AFF-02</i></span>

```

```

#Define whether or not to create intercluster lifs on source cluster
(ONLY CHANGE to 'No' IF YOU HAVE ALREADY CREATED THE INTERCLUSTER
LIFs)

create_source_intercluster_lifs: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>yes</i></span>

source_intercluster_network_port_details:
    using_dedicated_ports: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>yes</i></span>
    using_ifgrp: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>yes</i></span>
    using_vlans: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>yes</i></span>
    failover_for_shared_individual_ports: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline; text-
decoration:underline;" /><i>yes</i></span>
    ifgrp_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>a0a</i></span>
    vlan_id: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>10</i></span>
    ports:
        - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;" /><i>e0b</i></span>
        - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;" /><i>e0g</i></span>
    broadcast_domain: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>NFS</i></span>
    ipspace: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>Default</i></span>
    failover_group_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;" /><i>iclifs</i></span>

source_intercluster_lif_details:

```

```

    - name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>ic1_1</i></span>
        address: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>10.0.0.1</i></span>
        netmask: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>255.255.255.0</i></span>
        home_port: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>a0a-
10</i></span>
        node: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>AFF-01</i></span>
    - name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>ic1_2</i></span>
        address: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>10.0.0.2</i></span>
        netmask: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>255.255.255.0</i></span>
        home_port: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>a0a-
10</i></span>
        node: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>AFF-02</i></span>

#Define whether or not to create intercluster lifs on destination
cluster (ONLY CHANGE to 'No' IF YOU HAVE ALREADY CREATED THE
INTERCLUSTER LIFS)
create_destination_intercluster_lifs: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline; text-
decoration:underline;" /><i>yes</i></span>

destination_intercluster_network_port_details:
    using_dedicated_ports: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>yes</i></span>
    using_ifgrp: <span <div contenteditable="true"

```

```

        style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"/><i>yes</i></span>
    using_vlans: <span <div contenteditable="true"
        style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"/><i>yes</i></span>
    failover_for_shared_individual_ports: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"/><i>yes</i></span>
    ifgrp_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"/><i>a0a</i></span>
    vlan_id: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>10</i></span>
    ports:
        - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"/><i>e0b</i></span>
        - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"/><i>e0g</i></span>
    broadcast_domain: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>NFS</i></span>
    ipspace: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>Default</i></span>
    failover_group_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"/><i>iclifs</i></span>

destination_intercluster_lif_details:
    - name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>icl_1</i></span>
        address: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>10.0.0.3</i></span>
        netmask: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>255.255.255.0</i></span>
        home_port: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>a0a-

```

```

10</i></span>
    node: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>DR-AFF-01</i></span>
      - name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>icl_2</i></span>
        address: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>10.0.0.4</i></span>
        netmask: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>255.255.255.0</i></span>
        home_port: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"><i>a0a-
10</i></span>
        node: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>DR-AFF-02</i></span>

#####
#####
# Variables for SnapMirror Peering
#####
#####
######
#src_lif: #Will be retrieve through Ansible Task
#dst_lif: #Will be retrieve through Ansible Task
passphrase: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>your-passphrase</i></span>

#####
#####
#####
# Source & Destination List
#####
#####
#####
#Please Enter Destination Cluster Name
dst_cluster_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"><i>dst-cluster-
name</i></span>

#Please Enter Destination Cluster
dst_cluster_ip: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-

```

```

decoration:underline; text-decoration:underline;"/><i>dst-cluster-
ip</i></span>

#Please Enter Destination SVM to create mirror relationship
dst_vserver: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>dst-vserver</i></span>

#Please Enter NFS Lif for dst vserver
dst_nfs_lif: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>dst-nfs-lif</i></span>

#Please Enter Source Cluster Name
src_cluster_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"><i>src-cluster-
name</i></span>

#Please Enter Source Cluster
src_cluster_ip: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"><i>src-cluster-
ip</i></span>

#Please Enter Source SVM
src_vserver: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>src-vserver</i></span>

#####
#####
#
# Variable for Oracle Volumes and SnapMirror Details
#####
#####
#
#Please Enter Source Snapshot Prefix Name
cg_snapshot_name_prefix: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>oracle</i></span>

#Please Enter Source Oracle Binary Volume(s)
src_orabinary_vols:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>binary_vol</i></span>

```

```

<a id="more_binary_vols"
    href="javascript:binaryvolsdropdown();">More Binary Vols</a><div
    id="select_more_binary_vols"></div><a id="more_binary_vols_button"
    href="javascript:addbinaryvols();">Enter Volume details</a><div
    id="extra_binary_vols"></div>
#Please Enter Source Database Volume(s)
src_db_vols:
    - <span <div contenteditable="true" style="color:#004EFF; font-
        weight:bold; font-style:italic; text-decoration:underline; text-
        decoration:underline;"><i>db_vol</i></span>
<a id="more_database_vols"
    href="javascript:databasevolsdropdown();">More Database Vols</a><div
    id="select_more_database_vols"></div><a
    id="more_database_vols_button"
    href="javascript:adddatabasevols();">Enter Volume details</a><div
    id="extra_database_vols"></div>
#Please Enter Source Archive Volume(s)
src_archivelog_vols:
    - <span <div contenteditable="true" style="color:#004EFF; font-
        weight:bold; font-style:italic; text-decoration:underline; text-
        decoration:underline;"><i>log_vol</i></span>
<a id="more_log_vols" href="javascript:logvolsdropdown();">More Log
Vols</a><div id="select_more_log_vols"></div><a
    id="more_log_vols_button" href="javascript:addlogvols();">Enter
    Volume details</a><div id="extra_log_vols"></div>
#Please Enter Destination Snapmirror Policy
snapmirror_policy: <span <div contenteditable="true"
    style="color:#004EFF; font-weight:bold; font-style:italic; text-
    decoration:underline; text-
    decoration:underline;"><i>async_policy_oracle</i></span>

#####
#####
# Export Policy Details
#####
#####
#Enter the destination export policy details
export_policy_details:
    name: <span <div contenteditable="true" style="color:#004EFF;
        font-weight:bold; font-style:italic; text-decoration:underline;
        text-decoration:underline;"><i>nfs_export_policy</i></span>
        client_match: <span <div contenteditable="true"
            style="color:#004EFF; font-weight:bold; font-style:italic; text-
            decoration:underline; text-
            decoration:underline;"><i>0.0.0.0/0</i></span>
        ro_rule: sys

```

```

rw_rule: sys

#####
### Linux env specific config variables ###
#####

#NFS Mount points for Oracle DB volumes
mount_points:
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u02</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u03</i></span>

# Up to 75% of node memory size divided by 2mb. Consider how many databases to be hosted on the node and how much ram to be allocated to each DB.
# Leave it blank if hugepage is not configured on the host.
hugepages_nr: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>1234</i></span>

# RedHat subscription username and password
redhat_sub_username: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>xxx</i></span>
redhat_sub_password: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>xxx</i></span>

#####
### DB env specific install and config variables ###
#####

#Recovery Type (leave as scn)
recovery_type: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>scn</i></span>

#Oracle Control Files
control_files:
  - <span <div contenteditable="true" style="color:#004EFF; font-

```

```

    weight:bold; font-style:italic; text-decoration:underline;"/><i>/u02/oradata/CDB2/control01.ctl</i></span>
    - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"/><i>/u03/orareco/CDB2/control02.ctl</i></span>
    >

</div></code></pre></div></div>
<script>
function CopyClassText() {
    var textToCopy = document.getElementById("CopyOnPrem");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {
        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_binary_vols").style.display =
"none";
    document.getElementById("more_database_vols").style.display =
"none";
    document.getElementById("more_log_vols").style.display = "none";
    var command = document.execCommand("copy");
    if (command)
    {
        document.getElementById("copy-button-onprem").innerHTML =
"Copied!";
        setTimeout(revert_copy, 3000);
    }
    window.getSelection().removeRange(CopyRange);
    if(currentRange)
    {
        window.getSelection().addRange(currentRange);
    }
}
function revert_copy() {
    document.getElementById("copy-button-onprem").innerHTML =
"Copy";

```

```

        document.getElementById("more_binary_vols").style.display =
"block";
        document.getElementById("more_database_vols").style.display =
"block";
        document.getElementById("more_log_vols").style.display =
"block";
    }
    function binaryvolsdropdown() {
        document.getElementById("more_binary_vols").style.display =
"none";
        document.getElementById("more_binary_vols_button").style.display =
"block";
        var x=1;
        var myHTML = '';
        var buildup = '';
        var wrapper =
document.getElementById("select_more_binary_vols");
        while (x < 10) {
            buildup += '<option value="' + x + '">' + x + '</option>';
            x++;
        }
        myHTML += '<a id="more_binary_vols_info">How many extra volumes
do you wish to add?</a><select name="number_of_extra_binary_vols"
id="number_of_extra_binary_vols">' + buildup + '</select>';
        wrapper.innerHTML = myHTML;
    }
    function addbinaryvols() {
        var y =
document.getElementById("number_of_extra_binary_vols").value;
        var j=0;
        var myHTML = '';
        var wrapper = document.getElementById("extra_binary_vols");
        while (j < y) {
            j++;
            myHTML += ' - <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>binary_vols</i></span><br>';
        }
        wrapper.innerHTML = myHTML;
        document.getElementById("select_more_binary_vols").style.display =
"none";
        document.getElementById("more_binary_vols_button").style.display =
"none";
    }
    function databasevolsdropdown() {

```

```

        document.getElementById("more_database_vols").style.display =
    "none";

document.getElementById("more_database_vols_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper =
document.getElementById("select_more_database_vols");
    while (x < 10) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_database_vols_info">How many extra
volumes do you wish to add?</a><select
name="number_of_extra_database_vols"
id="number_of_extra_database_vols">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}
function adddatabasevols() {
    var y =
document.getElementById("number_of_extra_database_vols").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_database_vols");
    while (j < y) {
        j++;
        myHTML += ' - <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>db_vol</i></span><br>';
    }
    wrapper.innerHTML = myHTML;

document.getElementById("select_more_database_vols").style.display =
"none";

document.getElementById("more_database_vols_button").style.display =
"none";
}

function logvolsdropdown() {
    document.getElementById("more_log_vols").style.display = "none";
    document.getElementById("more_log_vols_button").style.display =
"block";
    var x=1;

```

```

var myHTML = '';
var buildup = '';
var wrapper = document.getElementById("select_more_log_vols");
while (x < 10) {
    buildup += '<option value="' + x + '">' + x + '</option>';
    x++;
}
myHTML += '<a id="more_database_vols_info">How many extra
volumes do you wish to add?</a><select
name="number_of_extra_log_vols" id="number_of_extra_log_vols">' +
buildup + '</select>';
wrapper.innerHTML = myHTML;
}

function addlogvols() {
    var y =
document.getElementById("number_of_extra_log_vols").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_log_vols");
    while (j < y) {
        j++;
        myHTML += ' - <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>log_vol</i></span><br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_log_vols").style.display =
"none";
    document.getElementById("more_log_vols_button").style.display =
"none";
}

</script>

```

CVO

```

<style>
div {
position: relative;
}
div button {
position: absolute;
top: 0;
right: 0;
}

```

```

button {
    transition-duration: 0.4s;
    background-color: white;
    color: #1563a3;
    border: 2px solid #1563a3;
}
button:hover {
    background-color: #1563a3;
    color: white;
}
#more_binary_vols1 {
    display: block;
}
#more_binary_vols1_button {
    display: none;
}
#more_database_vols1 {
    display: block;
}
#more_database_vols1_button {
    display: none;
}
#more_log_vols1 {
    display: block;
}
#more_log_vols1_button {
    display: none;
}

```

</style>

```

<div class="listingblock"><div class="content"><div><button
id="copy-button-cvo"
onclick="CopyClassTextCVO()">Copy</button></div><pre><code><div
class="CopyMeClassCVO" id="CopyCVO">
#####
## Oracle Data Protection global user configuration variables
#####
##### Consolidate all variables from ontap, aws, CVO and oracle
#####
#####
##### Ontap env specific config variables #####
#####
#####
#####
```

```

#Inventory group name
#Default inventory group name - 'ontap'
#Change only if you are changing the group name either in
inventory/hosts file or in inventory groups in case of AWX/Tower
hosts_group: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>ontap</i></span>

#CA_signed_certificates (ONLY CHANGE to 'true' IF YOU ARE USING CA
SIGNED CERTIFICATES)
ca_signed_certs: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;" /><i>false</i></span>

#Names of the Nodes in the Source ONTAP Cluster
src_nodes:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;" /><i>AFF-
01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;" /><i>AFF-
02</i></span>

#Names of the Nodes in the Destination CVO Cluster
dst_nodes:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;" /><i>DR-
AFF-01</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;" /><i>DR-
AFF-02</i></span>

#Define whether or not to create intercluster lifs on source cluster
(ONLY CHANGE to 'No' IF YOU HAVE ALREADY CREATED THE INTERCLUSTER
LIFS)
create_source_intercluster_lifs: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>yes</i></span>

source_intercluster_network_port_details:
  using_dedicated_ports: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>yes</i></span>
  using_ifgrp: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-

```

```

decoration:underline; text-decoration:underline;"/><i>yes</i></span>
    using_vlans: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>yes</i></span>
    failover_for_shared_individual_ports: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline; text-
decoration:underline;"/><i>yes</i></span>
    ifgrp_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>a0a</i></span>
    vlan_id: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>10</i></span>
    ports:
        - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"/><i>e0b</i></span>
        - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"/><i>e0g</i></span>
    broadcast_domain: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>NFS</i></span>
    ipspace: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>Default</i></span>
    failover_group_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"/><i>iclifs</i></span>

source_intercluster_lif_details:
    - name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>icl_1</i></span>
        address: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>10.0.0.1</i></span>
        netmask: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>255.255.255.0</i></span>
        home_port: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>a0a-
10</i></span>

```

```

        node: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>AFF-01</i></span>
      - name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>icl_2</i></span>
        address: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>10.0.0.2</i></span>
        netmask: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>255.255.255.0</i></span>
        home_port: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;" /><i>a0a-
10</i></span>
        node: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;" /><i>AFF-02</i></span>

#####
### CVO Deployment Variables ###
#####

##### Access Keys Variables #####
# Region where your CVO will be deployed.
region_deploy: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>us-east-1</i></span>

##### CVO and Connector Vars #####
# AWS Managed Policy required to give permission for IAM role
creation.
aws_policy: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>arn:aws:iam::1234567:policy/OCCM</i></spa
n>

# Specify your aws role name, a new role is created if one already
does not exist.
aws_role_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;" /><i>arn:aws:iam::1234567:policy/OCCM</i></spa
n>
```

```

# Name your connector.
connector_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>awx_connector</i></span>

# Name of the key pair generated in AWS.
key_pair: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"><i>key_pair</i></span>

# Name of the Subnet that has the range of IP addresses in your VPC.
subnet: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"><i>subnet-12345</i></span>

# ID of your AWS security group that allows access to on-prem
resources.
security_group: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>sg-123123123</i></span>

# Your Cloud Manager Account ID.
account: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"><i>account-A23123A</i></span>

# Name of your CVO instance
cvo_name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"><i>test_cvo</i></span>

# ID of the VPC in AWS.
vpc: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline;"><i>vpc-
123123123</i></span>

#####
#####
# Variables for - Add on-prem ONTAP to Connector in Cloud Manager
#####
#####

# For Federated users, Client ID from API Authentication Section of
Cloud Central to generate access token.
sso_id: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-

```



```

text-decoration:underline;"/><i>dst-nfs-lif</i></span>

#Please Enter Source Cluster Name
src_cluster_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>src-cluster-
name</i></span>

#Please Enter Source Cluster
src_cluster_ip: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-decoration:underline;"/><i>src-cluster-
ip</i></span>

#Please Enter Source SVM
src_vserver: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"/><i>src-vserver</i></span>

#####
#####
# Variable for Oracle Volumes and SnapMirror Details
#####
#####
# Please Enter Source Snapshot Prefix Name
cg_snapshot_name_prefix: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"/><i>oracle</i></span>

#Please Enter Source Oracle Binary Volume(s)
src_orabinary_vols:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"/><i>binary_vol</i></span>
<a id="more_binary_vols1"
href="javascript:binaryvols1dropdown();">More Binary Vols</a><div
id="select_more_binary_vols1"></div><a id="more_binary_vols1_button"
href="javascript:addbinaryvols1();">Enter Volume details</a><div
id="extra_binary_vols1"></div>
#Please Enter Source Database Volume(s)
src_db_vols:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"/><i>db_vol</i></span>
<a id="more_database_vols1"

```

```

    href="javascript:databasevols1dropdown();">More Database
Vols</a><div id="select_more_database_vols1"></div><a
id="more_database_vols1_button"
href="javascript:adddatabasevols1();">Enter Volume details</a><div
id="extra_database_vols1"></div>
#Please Enter Source Archive Volume(s)
src_archivelog_vols:
    - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>log_vol</i></span>
<a id="more_log_vols1" href="javascript:logvols1dropdown();">More
Log Vols</a><div id="select_more_log_vols1"></div><a
id="more_log_vols1_button" href="javascript:addlogvols1();">Enter
Volume details</a><div id="extra_log_vols1"></div>
#Please Enter Destination Snapmirror Policy
snapmirror_policy: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>async_policy_oracle</i></span>

#####
#####
#
# Export Policy Details
#####
#####
#
#Enter the destination export policy details (Once CVO is Created
Add this Variable to all templates)
export_policy_details:
    name: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline;
text-decoration:underline;"><i>nfs_export_policy</i></span>
    client_match: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>0.0.0.0/0</i></span>
    ro_rule: sys
    rw_rule: sys

#####
#####
#
### Linux env specific config variables ###
#####
#####
#
#NFS Mount points for Oracle DB volumes
mount_points:

```

```

    - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u01</i></span>
    - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u02</i></span>
    - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u03</i></span>

# Up to 75% of node memory size divided by 2mb. Consider how many databases to be hosted on the node and how much ram to be allocated to each DB.
# Leave it blank if hugepage is not configured on the host.
hugepages_nr: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>1234</i></span>

# RedHat subscription username and password
redhat_sub_username: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>xxx</i></span>
redhat_sub_password: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>xxx</i></span>

#####
### DB env specific install and config variables ###
#####
#Recovery Type (leave as scn)
recovery_type: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>scn</i></span>

#Oracle Control Files
control_files:
    - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u02/oradata/CDB2/control01.ctl</i></span>
    - <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>/u03/orareco/CDB2/control02.ctl</i></span>

```

```

</div></code></pre></div></div>
<script>
function CopyClassTextCVO() {
    var textToCopy = document.getElementById("CopyCVO");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {
        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_binary_vols1").style.display =
"none";
    document.getElementById("more_database_vols1").style.display =
"none";
    document.getElementById("more_log_vols1").style.display =
"none";
    var command = document.execCommand("copy");
    if (command)
    {
        document.getElementById("copy-button-cvo").innerHTML =
"Copied!";
        setTimeout(revert_copy, 3000);
    }
    window.getSelection().removeRange(CopyRange);
    if(currentRange)
    {
        window.getSelection().addRange(currentRange);
    }
}
function revert_copy() {
    document.getElementById("copy-button-cvo").innerHTML = "Copy";
    document.getElementById("more_binary_vols1").style.display =
"block";
    document.getElementById("more_database_vols1").style.display =
"block";
    document.getElementById("more_log_vols1").style.display =
"block";
}
function binaryvols1dropdown() {

```

```

        document.getElementById("more_binary_vols1").style.display =
"none";

document.getElementById("more_binary_vols1_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper =
document.getElementById("select_more_binary_vols1");
    while (x < 10) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_binary_vols1_info">How many extra volumes
do you wish to add?</a><select name="number_of_extra_binary_vols1"
id="number_of_extra_binary_vols1">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}
function addbinaryvols1() {
    var y =
document.getElementById("number_of_extra_binary_vols1").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_binary_vols1");
    while (j < y) {
        j++;
        myHTML += ' - <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>binary_vol</i></span><br>';
    }
    wrapper.innerHTML = myHTML;

document.getElementById("select_more_binary_vols1").style.display =
"none";
}

document.getElementById("more_binary_vols1_button").style.display =
"none";
}

function databasevols1dropdown() {
    document.getElementById("more_database_vols1").style.display =
"none";

document.getElementById("more_database_vols1_button").style.display =
"block";

```

```

var x=1;
var myHTML = '';
var buildup = '';
var wrapper =
document.getElementById("select_more_database_vols1");
while (x < 10) {
    buildup += '<option value="' + x + '">' + x + '</option>';
    x++;
}
myHTML += '<a id="more_database_vols1_info">How many extra
volumes do you wish to add?</a><select
name="number_of_extra_database_vols1"
id="number_of_extra_database_vols1">' + buildup + '</select>';
wrapper.innerHTML = myHTML;
}

function adddatabasevols1() {
    var y =
document.getElementById("number_of_extra_database_vols1").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_database_vols1");
    while (j < y) {
        j++;
        myHTML += ' - <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>db_vol</i></span><br>';
    }
    wrapper.innerHTML = myHTML;

document.getElementById("select_more_database_vols1").style.display
= "none";

document.getElementById("more_database_vols1_button").style.display
= "none";
}
function logvols1dropdown() {
    document.getElementById("more_log_vols1").style.display =
"none";
    document.getElementById("more_log_vols1_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_log_vols1");
    while (x < 10) {

```

```

        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_database_vols_info">How many extra
volumes do you wish to add?</a><select
name="number_of_extra_log_vols1" id="number_of_extra_log_vols1">' +
buildup + '</select>';
    wrapper.innerHTML = myHTML;
}
function addlogvols1() {
    var y =
document.getElementById("number_of_extra_log_vols1").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_log_vols1");
    while (j < y) {
        j++;
        myHTML += ' - <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline; text-
decoration:underline;"><i>log_vol</i></span><br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_log_vols1").style.display =
"none";
    document.getElementById("more_log_vols1_button").style.display =
"none";
}
</script>

```

Automation Playbooks

There are four separate playbooks that need to be ran.

1. Playbook for Setting up your environment, On-Prem or CVO.
2. Playbook for replicating Oracle Binaries and Databases on a schedule
3. Playbook for replicating Oracle Logs on a schedule
4. Playbook for Recovering your database on a destination host

ONTAP/CVO Setup

ONTAP and CVO Setup

Configure and launch the job template.

1. Create the job template.
 - a. Navigate to Resources → Templates → Add and click Add Job Template.
 - b. Enter the name ONTAP/CVO Setup
 - c. Select the Job type; Run configures the system based on a playbook.
 - d. Select the corresponding inventory, project, playbook, and credentials for the playbook.
 - e. Select the ontap_setup.yml playbook for an On-Prem environment or select the cvo_setup.yml for replicating to a CVO instance.
 - f. Paste global variables copied from step 4 into the Template Variables field under the YAML tab.
 - g. Click Save.
2. Launch the job template.
 - a. Navigate to Resources → Templates.
 - b. Click the desired template and then click Launch.



We will use this template and copy it out for the other playbooks.

Replication For Binary and Database Volumes

Scheduling the Binary and Database Replication Playbook

Configure and launch the job template.

1. Copy the previously created job template.
 - a. Navigate to Resources → Templates.
 - b. Find the ONTAP/CVO Setup Template, and on the far right click on Copy Template
 - c. Click Edit Template on the copied template, and change the name to Binary and Database Replication Playbook.
 - d. Keep the same inventory, project, credentials for the template.
 - e. Select the ora_replication_cg.yml as the playbook to be executed.
 - f. The variables will remain the same, but the CVO cluster IP will need to be set in the variable dst_cluster_ip.
 - g. Click Save.
2. Schedule the job template.
 - a. Navigate to Resources → Templates.
 - b. Click the Binary and Database Replication Playbook template and then click Schedules at the top set of options.
 - c. Click Add, add Name Schedule for Binary and Database Replication, choose the Start date/time at the beginning of the hour, choose your Local time zone, and Run frequency. Run frequency will be often the SnapMirror replication will be updated.



A separate schedule will be created for the Log volume replication, so that it can be replicated on a more frequent cadence.

Replication for Log Volumes

Scheduling the Log Replication Playbook

Configure and launch the job template.

1. Copy the previously created job template.
 - a. Navigate to Resources → Templates.
 - b. Find the ONTAP/CVO Setup Template, and on the far right click on Copy Template
 - c. Click Edit Template on the copied template, and change the name to Log Replication Playbook.
 - d. Keep the same inventory, project, credentials for the template.
 - e. Select the ora_replication_logs.yml as the playbook to be executed.
 - f. The variables will remain the same, but the CVO cluster IP will need to be set in the variable dst_cluster_ip.
 - g. Click Save.
2. Schedule the job template.
 - a. Navigate to Resources → Templates.
 - b. Click the Log Replication Playbook template and then click Schedules at the top set of options.
 - c. Click Add, add Name Schedule for Log Replication, choose the Start date/time at the beginning of the hour, choose your Local time zone, and Run frequency. Run frequency will be often the SnapMirror replication will be updated.



It is recommended to set the log schedule to update every hour to ensure the recovery to the last hourly update.

Restore and Recover Database

Scheduling the Log Replication Playbook

Configure and launch the job template.

1. Copy the previously created job template.
 - a. Navigate to Resources → Templates.
 - b. Find the ONTAP/CVO Setup Template, and on the far right click on Copy Template
 - c. Click Edit Template on the copied template, and change the name to Restore and Recovery Playbook.
 - d. Keep the same inventory, project, credentials for the template.
 - e. Select the ora_recovery.yml as the playbook to be executed.
 - f. The variables will remain the same, but the CVO cluster IP will need to be set in the variable dst_cluster_ip.
 - g. Click Save.



This playbook will not be ran until you are ready to restore your database at the remote site.

Recovering Oracle Database

1. On-premises production Oracle databases data volumes are protected via NetApp SnapMirror replication to either a redundant ONTAP cluster in secondary data center or Cloud Volume ONTAP in public cloud. In a fully configured disaster recovery environment, recovery compute instances in secondary data center or public cloud are standby and ready to recover the production database in the case of a disaster. The standby compute instances are kept in sync with on-prem instances by running parallel updates on OS kernel patch or upgrade in a lockstep.
2. In this solution demonstrated, Oracle binary volume is replicated to target and mounted at target instance to bring up Oracle software stack. This approach to recover Oracle has advantage over a fresh installation of Oracle at last minute when a disaster occurred. It guarantees Oracle installation is fully in sync with current on-prem production software installation and patch levels etc. However, this may or may not have additional software licensing implication for the replicated Oracle binary volume at recovery site depending on how the software licensing is structured with Oracle. User is recommended to check with its software licensing personnel to assess the potential Oracle licensing requirement before deciding to use the same approach.
3. The standby Oracle host at the destination is configured with the Oracle prerequisite configurations.
4. The SnapMirrors are broken and the volumes are made writable and mounted to the standby Oracle host.
5. The Oracle recovery module performs following tasks to recovery and startup Oracle at recovery site after all DB volumes are mounted at standby compute instance.
 - a. Sync the control file: We deployed duplicate Oracle control files on different database volume to protect critical database control file. One is on the data volume and another is on log volume. Since data and log volumes are replicated at different frequency, they will be out of sync at the time of recovery.
 - b. Relink Oracle binary: Since the Oracle binary is relocated to a new host, it needs a relink.
 - c. Recover Oracle database: The recovery mechanism retrieves last System Change Number in last available archived log in Oracle log volume from control file and recovers Oracle database to recoup all business transactions that was able to be replicated to DR site at the time of failure. The database is then started up in a new incarnation to carry on user connections and business transaction at recovery site.

Before running the Recovering playbook make sure you have the following:

Make sure it copy over the /etc/oratab and /etc/oralInst.loc from the source Oracle host to the destination host

TR-4794: Oracle databases on NetApp EF-Series

Mitch Blackburn, Ebin Kadavy, NetApp

TR-4794 is intended to help storage administrators and database administrators successfully deploy Oracle on NetApp EF-Series storage.

[TR-4794: Oracle databases on NetApp EF-Series](#)

Microsoft SQL Server

TR-4897: SQL Server on Azure NetApp Files - Real Deployment View

Niyaz Mohamed, NetApp

IT organizations face constant change. Gartner reports nearly 75% of all databases will require cloud-based storage by 2022. As a leading relational database management system (RDBMS), Microsoft SQL Server is the go-to choice for Windows platform-designed applications and organizations that rely on SQL Server for everything from enterprise resource planning (ERP) to analytics to content management. SQL Server has helped to revolutionize the way enterprises manage massive data sets and power their applications to meet the schema and query performance demands.

Most IT organizations follow a cloud-first approach. Customers in a transformation phase evaluate their current IT landscape and then migrate their database workloads to the cloud based on an assessment and discovery exercise. Some factors driving customers toward cloud migration include elasticity/burst, data center exit, data center consolidation, end-of-life scenarios, mergers, acquisitions, and so on. The reason for migration can vary based on each organization and their respective business priorities. When moving to the cloud, choosing the right cloud storage is very important in order to unleash the power of SQL Server database cloud deployment.

Use case

Moving the SQL Server estate to Azure and integrating SQL Server with Azure's vast array of platform-as-a-service (PaaS) features such as Azure Data Factory, Azure IoT Hub, and Azure Machine Learning creates tremendous business value to support digital transformation. Adopting the cloud also enables the respective business unit to focus on productivity and delivering new features and enhancements faster (Dev/Test use case) than relying on the CAPEX model or traditional private cloud models. This document covers a real-time deployment of SQL Server Always On availability group (AOAG) on Azure NetApp Files leveraging Azure Virtual Machines.

Azure NetApp Files provides enterprise-grade storage with continuously available file shares. Continuously available shares are required by SQL Server production databases on SMB file share to make sure that the node always has access to the database storage, including during disruptive scenarios such as controller upgrades or failures. Continuously available file shares eliminate the need to replicate data between storage nodes. Azure NetApp Files uses SMB 3.0 scale-out, persistent handles, and transparent failover to support nondisruptive operations (NDOs) for planned and unplanned downtime events, including many administrative tasks.

When planning cloud migrations, you should always evaluate the best approach to use. The most common and easiest approach for application migration is rehosting (also known as lift and shift). The example scenario provided in this document uses the rehosting method. SQL Server on Azure virtual machines with Azure NetApp Files allows you to use full versions of SQL Server in the cloud without having to manage on-premises hardware. SQL Server virtual machines (VMs) also simplify licensing costs when you pay as you go and provides elasticity and bursting capabilities for development, test, and estate refresh scenarios.

Factors to consider

VM performance

Selecting the right VM size is important for optimal performance of a relational database in a public cloud. Microsoft recommends that you continue using the same database performance-tuning options that are applicable to SQL Server in on-premises server environments. Use [memory-optimized](#) VM sizes for the best performance of SQL Server workloads. Collect the performance data of existing deployment to identify the RAM and CPU utilization while choosing the right instances. Most deployments choose between the D, E, or M

series.

Notes:

- For the best performance of SQL Server workloads, use memory-optimized VM sizes.
- NetApp and Microsoft recommend that you identify the storage performance requirements before choosing the instance type with the appropriate memory-to-vCore ratio. This also helps select a lower-instance type with the right network bandwidth to overcome storage throughput limits of the VM.

VM redundancy

To increase redundancy and high availability, SQL Server VMs should either be in the same [availability set](#) or different [availability zones](#). When creating Azure VMs, you must choose between configuring availability sets versus availability zones; an Azure VM cannot participate in both.

High availability

For high availability, configuring SQL Server AOAG or Always On Failover Cluster Instance (FCI) is the best option. For AOAG, this involves multiple instances of SQL Server on Azure Virtual Machines in a virtual network. If high availability is required at the database level, consider configuring SQL Server availability groups.

Storage configuration

Microsoft SQL Server can be deployed with an SMB file share as the storage option. Starting with SQL Server 2012, system databases (master, model, msdb, or tempdb), and user databases can be installed with Server Message Block (SMB) file server as a storage option. This applies to both SQL Server stand-alone and SQL Server FCI.



File share storage for SQL Server databases should support continuously available property. This provides uninterrupted access to the file-share data.

Azure NetApp Files provides high performing file storage to meet any demanding workload, and it reduces SQL Server TCO as compared to block storage solutions. With block storage, VMs have imposed limits on I/O and bandwidth for disk operations; network bandwidth limits alone are applied against Azure NetApp Files. In other words, no VM-level I/O limits are applied to Azure NetApp Files. Without these I/O limits, SQL Server running on smaller VMs connected to Azure NetApp Files can perform as well as SQL Server running on much larger VMs. Azure NetApp Files reduce SQL Server deployment costs by reducing compute and software licensing costs. For detailed cost analysis and performance benefits of using Azure NetApp Files for SQL Server deployment, see the [Benefits of using Azure NetApp Files for SQL Server deployment](#).

Benefits

The benefits of using Azure NetApp Files for SQL Server include the following:

- Using Azure NetApp Files allows you to use smaller instances, thus reducing compute cost.
- Azure NetApp Files also reduces software licensing costs, which reduce the overall TCO.
- Volume reshaping and dynamic service level capability optimizes cost by sizing for steady-state workloads and avoiding overprovisioning.

Notes:

- To increase redundancy and high availability, SQL Server VMs should either be in the same [availability set](#)

or in different [availability zones](#). Consider file path requirements if user-defined data files are required; in which case, select SQL FCI over SQL AOAG.

- The following UNC path is supported: `\ANFSMB-b4ca.anf.test\SQLDB` and `\ANFSMB-b4ca.anf.test\SQLDB\`.
- The loopback UNC path is not supported.
- For sizing, use historic data from your on-premises environment. For OLTP workloads, match the target IOPS with performance requirements using workloads at average and peak times along with the disk reads/sec and disk writes/sec performance counters. For data warehouse and reporting workloads, match the target throughput using workloads at average and peak times and the disk read bytes/sec and disk write bytes/sec. Average values can be used in conjunction with volume reshaping capabilities.

Create continuously available shares

Create continuously available shares with the Azure portal or Azure CLI. In the portal, select the Enable Continuous Availability property option. for the Azure CLI, specify the share as a continuously available share by using the `az netappfiles volume create` with the `smb-continuously-avl` option set to `$True`. To learn more about creating a new, continuous availability-enabled volume, see [Creating a Continuously Available Share](#).

Notes:

- Enable continuous availability for the SMB volume as shown in the following image.
- If a non-administrator domain account is used, make sure the account has the required security privilege assigned.
- Set the appropriate permissions at the share level and proper file-level permissions.
- A continuously available property cannot be enabled on existing SMB volumes. To convert an existing volume to use a continuously available share, use NetApp Snapshot technology. For more information, see [Convert existing SMB volumes to use Continuous Availability](#).

Create a volume

X

Basics **Protocol** Tags Review + create

Configure access to your volume.

Access

Protocol type NFS SMB Dual-protocol (NFSv3 and SMB)

Configuration

Active Directory * <small>(i)</small>	<input type="text" value="10.0.0.100 - anf.test/join"/>	<small>▼</small>
Share name * <small>(i)</small>	<input type="text" value="SQLDB"/>	
Enable Continuous Availability <small>(i)</small>	<input checked="" type="checkbox"/>	

Review + create

< Previous


Next : Tags >

Performance

Azure NetApp Files supports three service levels: Standard (16MBps per terabyte), Premium (64MBps per terabyte), and Ultra (128MBps per terabyte). Provisioning the right volume size is important for optimal performance of the database workload. With Azure NetApp Files, volume performance and the throughput limit are based on a combination of the following factors:

- The service level of the capacity pool to which the volume belongs
- The quota assigned to the volume
- The quality of service (QoS) type (auto or manual) of the capacity pool


For more information, see [Service levels for Azure NetApp Files](#).

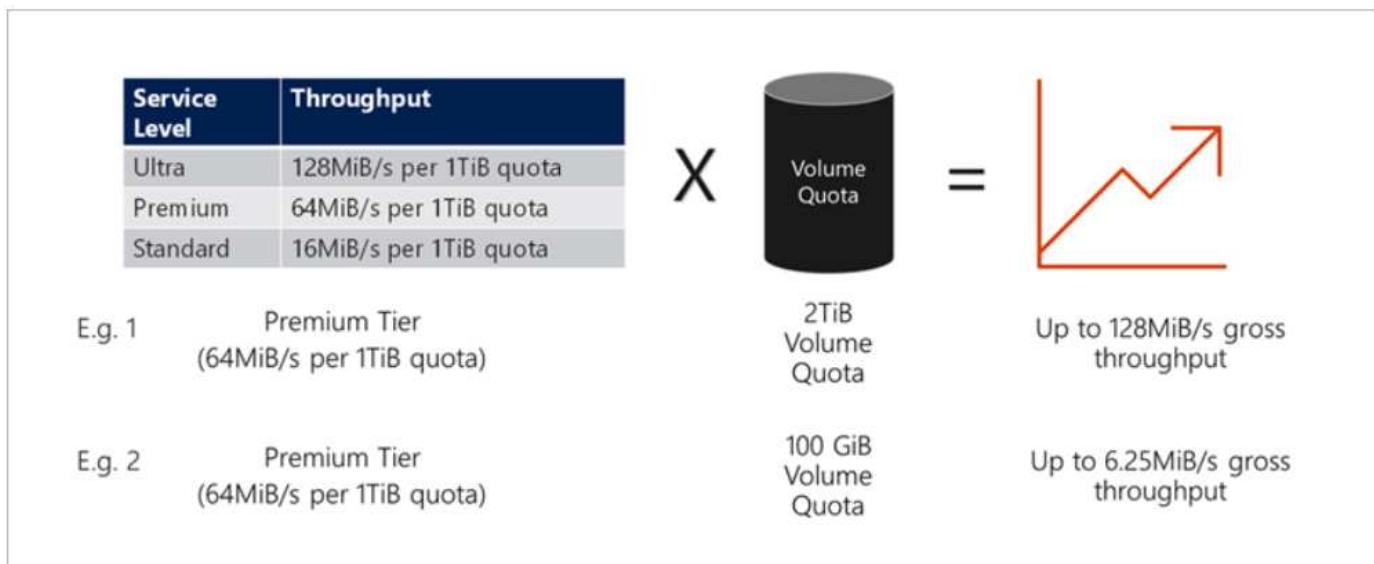

Performance validation

As with any deployment, testing the VM and storage is critical. For storage validation, tools such as HammerDB, Apploader, the [SQL Server storage benchmark \(SB\) tool](#), or any custom script or FIO with the appropriate read/write mix should be used. Keep in mind however that most SQL Server workloads, even busy OLTP workloads, are closer to 80%–90% read and 10%–20% write.

To showcase performance, a quick test was performed against a volume using premium service levels. In this test, the volume size was increased from 100GB to 2TB on the fly without any disruption to application access and zero data migration.

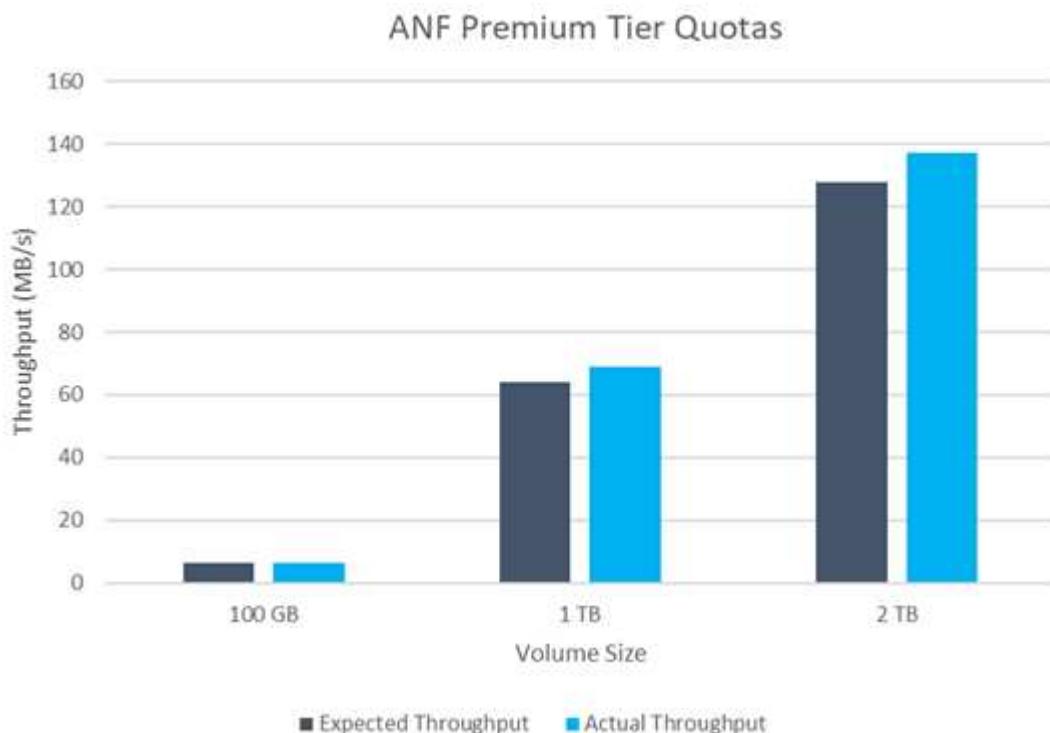

Here is another example of real time performance testing with HammerDB performed for the deployment covered in this paper. For this testing, we used a small instance with eight vCPUs, a 500GB Premium SSD, and a 500GB SMB Azure NetApp Files volume. HammerDB was configured with 80 warehouses and eight

users.

The following chart shows that Azure NetApp Files was able to deliver 2.6x the number of transactions per minute at 4x lower latency when using a comparable sized volume (500GB).

An additional test was performed by resizing to a larger instance with 32x vCPUs and a 16TB Azure NetApp Files volume. There was a significant increase in transactions per minute with consistent 1ms latency. HammerDB was configured with 80 warehouses and 64 users for this test.



Cost optimization

Azure NetApp Files allows nondisruptive, transparent volume resizing and the ability to change the service levels with zero downtime and no effect on applications. This is a unique capability allowing dynamic cost management that avoids the need to perform database sizing with peak metrics. Rather, you can use steady state workloads, which avoids upfront costs. The volume reshaping and dynamic service-level change allows you to adjust the bandwidth and service level of Azure NetApp Files volumes on demand almost instantaneously without pausing I/O, while retaining data access.

Azure PaaS offerings such as LogicApp or Functions can be used to easily resize the volume based on a specific webhook or alert rule trigger to meet the workload demands while dynamically handling the cost.

For example, consider a database that needs 250MBps for steady state operation; however, it also requires a peak throughput of 400MBps. In this case, the deployment should be performed with a 4TB volume within the Premium service level to meet the steady-state performance requirements. To handle the peak workload, increase the volume size using Azure functions to 7TB for that specific period, and then downsize the volume to make the deployment cost effective. This configuration avoids overprovisioning of the storage.

Real-time, high-level reference design


This section covers a real-time deployment of a SQL database estate in an AOAG configuration using an Azure NetApp Files SMB volume.

- Number of nodes: 4
- Number of databases: 21
- Number of availability groups: 4


- Backup retention: 7 days
- Backup archive: 365 days



Deploying FCI with SQL Server on Azure virtual machines with an Azure NetApp Files share provides a cost-efficient model with a single copy of the data. This solution can prevent add-file operation issues if the file path differs from the secondary replica.

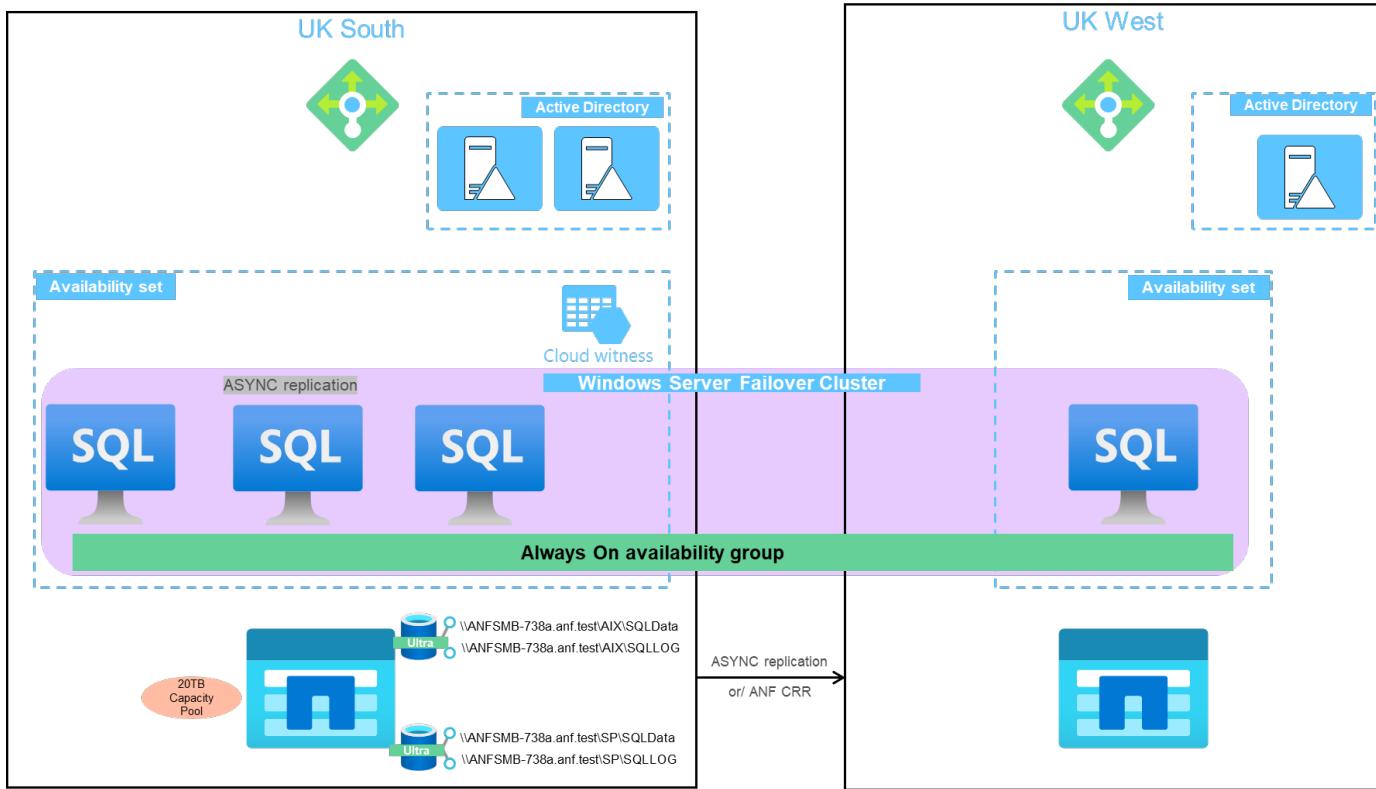

The following image shows the databases within AOAG spread across the nodes.

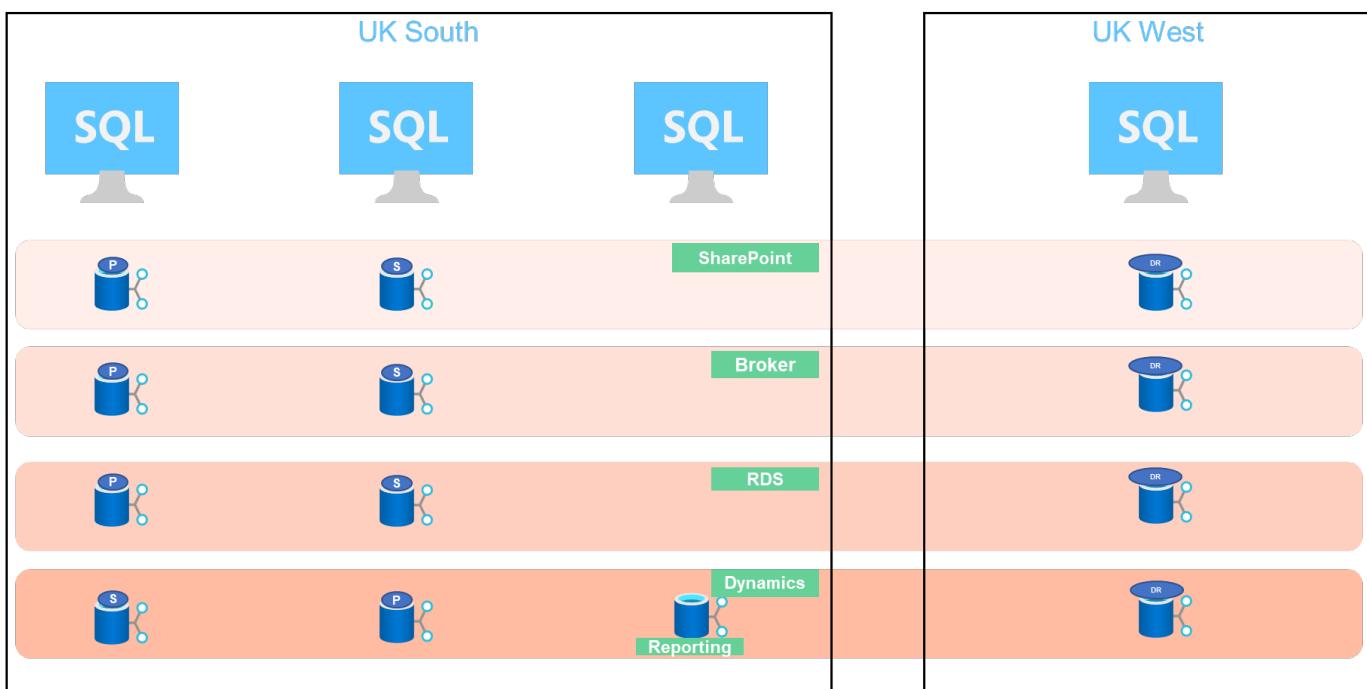

Data layout

The user database files (.mdf) and user database transaction log files (.ldf) along with tempDB are stored on the same volume. The service level is Ultra.

The configuration consists of four nodes and four AGs. All 21 databases (part of Dynamic AX, SharePoint, RDS connection broker, and indexing services) are stored on the Azure NetApp Files volumes. The databases are balanced between the AOAG nodes to use the resources on the nodes effectively. Four D32 v3 instances are added in the WSFC, which participates in the AOAG configuration. These four nodes are provisioned in the Azure virtual network and are not migrated from on-premises.

Notes:

- If the logs require more performance and throughput depending on the nature of the application and the queries executed, the database files can be placed on the Premium service level, and the logs can be stored at the Ultra service level.
- If the tempdb files have been placed on Azure NetApp Files, then the Azure NetApp Files volume should be separated from the user database files. Here is an example distribution of the database files in AOAG.

Notes:

- To retain the benefits of Snapshot copy-based data protection, NetApp recommends not combining data and log data into the same volume.
- An add-file operation performed on the primary replica might fail on the secondary databases if the file path of a secondary database differs from the path of the corresponding primary database. This can happen if the share path is different on primary and secondary nodes (due to different computer accounts). This failure could cause the secondary databases to be suspended. If the growth or performance pattern cannot be predicted and the plan is to add files later, a SQL Server failover cluster with Azure NetApp Files is an acceptable solution. For most deployments, Azure NetApp Files meets the performance requirements.

Migration

There are several ways to migrate an on-premises SQL Server user database to SQL Server in an Azure virtual machine. The migration can be either online or offline. The options chosen depend on the SQL Server version, business requirements, and the SLAs defined within the organization. To minimize downtime during the database migration process, NetApp recommends using either the AlwaysOn option or the transactional replication option. If it is not possible to use these methods, you can migrate the database manually.

The simplest and most thoroughly tested approach for moving databases across machines is backup and restore. Typically, you can start with a database backup followed by a copy of the database backup into Azure. You can then restore the database. For the best data transfer performance, migrate the database files into the Azure VM using a compressed backup file. The high-level design referenced in this document uses the backup approach to Azure file storage with Azure file sync and then restore to Azure NetApp files.



Azure Migrate can be used to discover, assess, and migrate SQL Server workloads.

To perform a migration, complete the following high-level steps:

1. Based on your requirements, set up connectivity.
2. Perform a full database backup to an on-premises file-share location.
3. Copy the backup files to an Azure file share with Azure file sync.
4. Provision the VM with the desired version of SQL Server.
5. Copy the backup files to the VM by using the `copy` command from a command prompt.
6. Restore the full databases to SQL Server on Azure virtual machines.



To restore 21 databases, it took approximately nine hours. This approach is specific to this scenario. However, other migration techniques listed below can be used based on your situation and requirements.

Other migration options to move data from an on-premises SQL Server to Azure NetApp Files include the following:

- Detach the data and log files, copy them to Azure Blob storage, and then attach them to SQL Server in the Azure VM with an ANF file share mounted from the URL.
- If you are using Always On availability group deployment on-premises, use the [Add Azure Replica Wizard](#) to create a replica in Azure and then perform failover.
- Use SQL Server [transactional replication](#) to configure the Azure SQL Server instance as a subscriber, disable replication, and point users to the Azure database instance.
- Ship the hard drive using the Windows Import/Export Service.

Backup and recovery

Backup and recovery are an important aspect of any SQL Server deployment. It is mandatory to have the appropriate safety net to quickly recover from various data failure and loss scenarios in conjunction with high availability solutions such as AOAG. SQL Server Database Quiesce Tool, Azure Backup (streaming), or any third-party backup tool such as Commvault can be used to perform an application-consistent backup of the databases,

Azure NetApp Files Snapshot technology allows you to easily create a point-in-time (PiT) copy of the user databases without affecting performance or network utilization. This technology also allows you to restore a

Snapshot copy to a new volume or quickly revert the affected volume to the state it was in when that Snapshot copy was created by using the revert volume function. The Azure NetApp Files snapshot process is very quick and efficient, which allows for multiple daily backups, unlike the streaming backup offered by Azure backup. With multiple Snapshot copies possible in a given day, the RPO and RTO times can be significantly reduced. To add application consistency so that data is intact and properly flushed to the disk before the Snapshot copy is taken, use the SQL Server database quiesce tool ([SCSQLAPI tool](#); access to this link requires NetApp SSO login credentials). This tool can be executed from within PowerShell, which quiesces the SQL Server database and in turn can take the application-consistent storage Snapshot copy for backups.

*Notes: *


- The SCSSQLAPI tool only supports the 2016 and 2017 versions of SQL Server.
- The SCSSQLAPI tool only works with one database at a time.
- Isolate the files from each database by placing them onto a separate Azure NetApp Files volume.

Because of SCSSQL API's vast limitations, [Azure Backup](#) was used for data protection in order to meet the SLA requirements. It offers a stream-based backup of SQL Server running in Azure Virtual Machines and Azure NetApp Files. Azure Backup allows a 15-minute RPO with frequent log backups and PiT recovery up to one second.

Monitoring

Azure NetApp Files is integrated with Azure Monitor for the time series data and provides metrics on allocated storage, actual storage usage, volume IOPS, throughput, disk read bytes/sec, disk write bytes/sec, disk reads/sec and disk writes/sec, and associated latency. This data can be used to identify bottlenecks with alerting and to perform health checks to verify that your SQL Server deployment is running in an optimal configuration.

In this HLD, ScienceLogic is used to monitor Azure NetApp Files by exposing the metrics using the appropriate service principal. The following image is an example of the Azure NetApp Files Metric option.

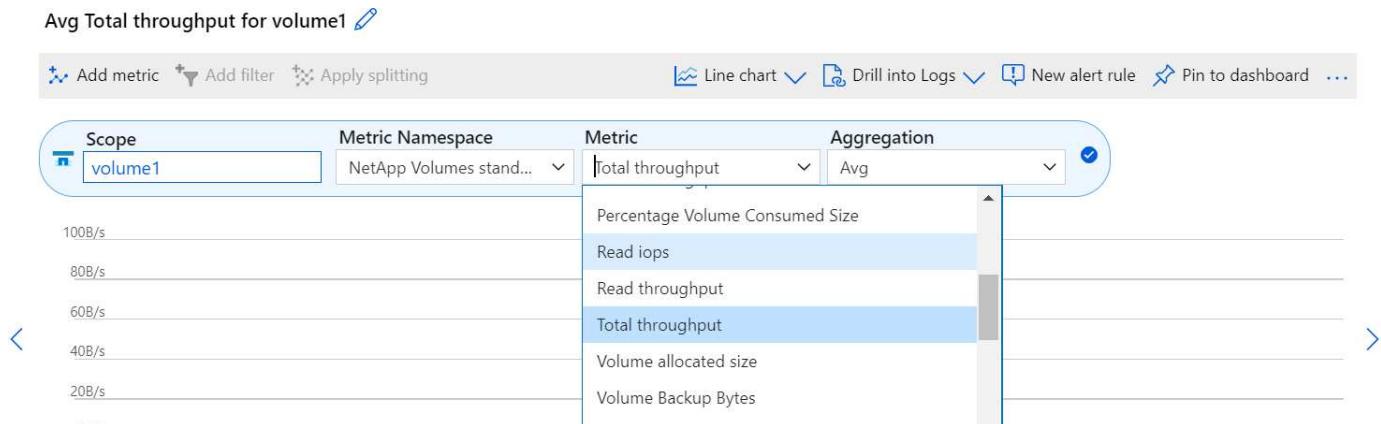

Dev/Test using thick clones

With Azure NetApp Files, you can create instantaneous copies of databases to test functionality that should be implemented by using the current database structure and content during the application development cycles, to use the data extraction and manipulation tools when populating data warehouses, or to even recover data that was mistakenly deleted or changed. This process does not involve copying data from Azure Blob containers, which makes it very efficient. After the volume is restored, it can be used for read/write operations, which significantly reduces validation and time to market. This needs to be used in conjunction with SCSSQLAPI for application consistency. This approach provides yet another continuous cost optimization technique along with

Azure NetApp Files leveraging the Restore to New volume option.

Notes:

- The volume created from the Snapshot copy using the Restore New Volume option consumes capacity from the capacity pool.
- You can delete the cloned volumes by using REST or Azure CLI to avoid additional costs (in case the capacity pool must be increased).

Hybrid storage options

Although NetApp recommends using the same storage for all the nodes in SQL Server availability groups, there are scenarios in which multiple storage options can be used. This scenario is possible for Azure NetApp Files in which a node in AOAG is connected with an Azure NetApp Files SMB file share and the second node is connected with an Azure Premium disk. In these instances, make sure that the Azure NetApp Files SMB share is holding the primary copy of the user databases and the Premium disk is used as the secondary copy.

Notes:

- In such deployments, to avoid any failover issues, make sure that continuous availability is enabled on the SMB volume. With no continuously available attribute, the database can fail if there is any background maintenance at the storage layer.
- Keep the primary copy of the database on the Azure NetApp Files SMB file share.

Business continuity

Disaster recovery is generally an afterthought in any deployment. However, disaster recovery must be addressed during the initial design and deployment phase to avoid any impact to your business. With Azure NetApp Files, the cross-region replication (CRR) functionality can be used to replicate the volume data at the block level to the paired region to handle any unexpected regional outage. The CRR-enabled destination volume can be used for read operations, which makes it an ideal candidate for disaster recovery simulations. In addition, the CRR destination can be assigned with the lowest service level (for instance, Standard) to reduce the overall TCO. In the event of a failover, replication can be broken, which makes the respective volume read/write capable. Also, the service level of the volume can be changed by using the dynamic service level functionality to significantly reduce disaster recovery cost. This is another unique feature of Azure NetApp Files with block replication within Azure.

Long-term Snapshot copy archive

Many organizations must perform long-term retention of snapshot data from database files as a mandatory compliance requirement. Although this process is not used in this HLD, it can be easily accomplished by using a simple batch script using [AzCopy](#) to copy the snapshot directory to the Azure Blob container. The batch script can be triggered based on a specific schedule by using scheduled tasks. The process is straightforward—it includes the following steps:

1. Download the AzCopy V10 executable file. There is nothing to install because it is an exe file.
2. Authorize AzCopy by using a SAS token at the container level with the appropriate permissions.
3. After AzCopy is authorized, the data transfer begins.

Notes:

- In batch files, make sure to escape the % characters that appear in SAS tokens. This can be done by adding an additional % character next to existing % characters in the SAS token string.

- The **Secure Transfer Required** setting of a storage account determines whether the connection to a storage account is secured with Transport Layer Security (TLS). This setting is enabled by default. The following batch script example recursively copies data from the Snapshot copy directory to a designated Blob container:

```
SET source="Z:\~snapshot"
echo %source%
SET
dest="https://testanfacct.blob.core.windows.net/azcopts?sp=racwdl&st=2020
-10-21T18:41:35Z&se=2021-10-22T18:41:00Z&sv=2019-12
-12&sr=c&sig=ZxRUJwF1LXgHS8As7HzXJOaDXXVJ7PxxIX3ACpx56XY%%3D"
echo %dest%
```

The following example cmd is executed in PowerShell:

```
-recursive
```

```
INFO: Scanning...
INFO: Any empty folders will not be processed, because source and/or
destination doesn't have full folder support
Job b3731dd8-da61-9441-7281-17a4db09ce30 has started
Log file is located at: C:\Users\niyaz\.azcopy\b3731dd8-da61-9441-7281-
17a4db09ce30.log
0.0 %, 0 Done, 0 Failed, 2 Pending, 0 Skipped, 2 Total,
INFO: azcopy.exe: A newer version 10.10.0 is available to download
0.0 %, 0 Done, 0 Failed, 2 Pending, 0 Skipped, 2 Total,
Job b3731dd8-da61-9441-7281-17a4db09ce30 summary
Elapsed Time (Minutes): 0.0333
Number of File Transfers: 2
Number of Folder Property Transfers: 0
Total Number of Transfers: 2
Number of Transfers Completed: 2
Number of Transfers Failed: 0
Number of Transfers Skipped: 0
TotalBytesTransferred: 5
Final Job Status: Completed
```

Notes:

- A similar backup feature for long-term retention will soon be available in Azure NetApp Files.
- The batch script can be used in any scenario that requires data to be copied to Blob container of any region.

Cost optimization

With volume reshaping and dynamic service level change, which is completely transparent to the database, Azure NetApp Files allows continuous cost optimizations in Azure. This capability is used in this HLD extensively to avoid overprovisioning of additional storage to handle workload spikes.

Resizing the volume can be easily accomplished by creating an Azure function in conjunction with the Azure alert logs.

Conclusion

Whether you are targeting an all-cloud or hybrid cloud with stretch databases, Azure NetApp Files provides excellent options to deploy and manage the database workloads while reducing your TCO by making data requirements seamless to the application layer.

This document covers recommendations for planning, designing, optimizing, and scaling Microsoft SQL Server deployments with Azure NetApp Files, which can vary greatly between implementations. The right solution depends on both the technical details of the implementation and the business requirements driving the project.

Takeaways

The key points of this document include:

- You can now use Azure NetApp Files to host the database and file share witness for SQL Server cluster.
- You can boost the application response times and deliver 99.9999% availability to provide access to SQL Server data when and where it is needed.
- You can simplify the overall complexity of the SQL Server deployment and ongoing management, such as raid striping, with simple and instant resizing.
- You can rely on intelligent operations features to help you deploy SQL Server databases in minutes and speed development cycles.
- If Azure Cloud is the destination, Azure NetApp Files is the right storage solution for optimized deployment.

Where to find additional information

To learn more about the information described in this document, refer to the following website links:

- Solution architectures using Azure NetApp Files

<https://docs.microsoft.com/en-us/azure/azure-netapp-files/azure-netapp-files-solution-architectures>

- Benefits of using Azure NetApp Files for SQL Server deployment

<https://docs.microsoft.com/en-us/azure/azure-netapp-files/solutions-benefits-azure-netapp-files-sql-server>

- SQL Server on Azure Deployment Guide Using Azure NetApp Files

<https://www.netapp.com/pdf.html?item=/media/27154-tr-4888.pdf>

- Fault tolerance, high availability, and resilience with Azure NetApp Files

<https://cloud.netapp.com/blog/azure-anf-blr-fault-tolerance-high-availability-and-resilience-with-azure-netapp-files>

TR-4923: SQL Server on AWS EC2 using Amazon FSx for NetApp ONTAP

Authors: Pat Sinthusan and Niyaz Mohamed, NetApp

Introduction

Many companies that would like to migrate applications from on-premises to the cloud find that the effort is hindered by the differences in capabilities offered by on-premises storage systems and cloud storage services. That gap has made migrating enterprise applications such as Microsoft SQL Server much more problematic. In particular, gaps in the services needed to run an enterprise application such as robust snapshots, storage efficiency capabilities, high availability, reliability, and consistent performance have forced customers to make design tradeoffs or forgo application migration. With FSx for NetApp ONTAP, customers no longer need to compromise. FSx for NetApp ONTAP is a native (1st party) AWS service sold, supported, billed, and fully managed by AWS. It uses the power of NetApp ONTAP to provide the same enterprise grade storage and data management capabilities NetApp has provided on-premises for three decades in AWS as a managed service.

With SQL Server on EC2 instances, database administrators can access and customize their database environment and the underlying operating system. A SQL Server on EC2 instance in combination with [AWS FSx ONTAP](#) to store the database files, enables high performance, data management, and a simple and easy migration path using block-level replication. Therefore, you can run your complex database on AWS VPC with an easy lift-and-shift approach, fewer clicks, and no schema conversions.

Benefits of using Amazon FSx for NetApp ONTAP with SQL Server

Amazon FSx for NetApp ONTAP is the ideal file storage for SQL Server deployments in AWS. Benefits include the following:

- Consistent high performance and throughput with low latency
- Intelligent caching with NVMe cache to improve performance
- Flexible sizing so that you can increase or shrink capacity, throughput, and IOPs on the fly
- Efficient on-premises-to-AWS block replication
- The use of iSCSI, a well-known protocol for the database environment
- Storage efficiency features like thin provisioning and zero-footprint clones
- Backup time reduction from hours to mins, thereby reducing the RTO
- Granular backup and recovery of SQL databases with the intuitive NetApp SnapCenter UI
- The ability to perform multiple test migrations before actual migration
- Shorter downtime during migration and overcoming migration challenges with file-level or I/O-level copy
- Reducing MTTR by finding the root cause after a major release or patch update

Deploying SQL Server databases on FSx ONTAP with the iSCSI protocol, as is commonly used on-premises, provides an ideal database storage environment with superior performance, storage efficiency, and data-management capabilities. Using multiple iSCSI sessions, assuming a 5% working set size, fitting a Flash Cache delivers over 100K IOPs with the FSx ONTAP service. This configuration provides complete control over performance for the most demanding applications. SQL Server running on smaller EC2 instances connected to FSx for ONTAP can perform the same as SQL Server running on a much larger EC2 instance, because only network bandwidth limits are applied against FSx for ONTAP. Reducing the size of instances also reduces the compute cost, which provides a TCO-optimised deployment. The combination of SQL using iSCSI, SMB3.0 with multichannel, continuous availability shares on FSx for ONTAP provides great advantages for SQL workloads.

Before you begin

The combination of Amazon FSx for NetApp ONTAP and SQL Server on EC2 instance enables the creation of enterprise-level database storage designs that can meet today's most demanding application requirements. To optimize both technologies, it is vital to understand SQL Server I/O patterns and characteristics. A well-designed storage layout for a SQL Server database supports the performance of SQL Server and the management of the SQL Server infrastructure. A good storage layout also allows the initial deployment to be successful and the environment to grow smoothly over time as your business grows.

Prerequisites

Before you complete the steps in this document, you should have the following prerequisites:

- An AWS account
- Appropriate IAM roles to provision EC2 and FSx for ONTAP
- A Windows Active Directory domain on EC2
- All SQL Server nodes must be able to communicate with each other
- Make sure DNS resolution works and host names can be resolved. If not, use host file entry.
- General knowledge of SQL Server installation

Also, please refer to the NetApp Best Practices for SQL Server environments to ensure the best storage configuration.

Best practice configurations for SQL Server environments on EC2

With FSx ONTAP, procuring storage is the easiest task and can be performed by updating the file system. This simple process enables dynamic cost and performance optimization as needed, it helps to balance the SQL workload, and it is also a great enabler for thin provisioning. FSx ONTAP thin provisioning is designed to present more logical storage to EC2 instances running SQL Server than what is provisioned in the file system. Instead of allocating space upfront, storage space is dynamically allocated to each volume or LUN as data is written. In most configurations, free space is also released back when data in the volume or LUN is deleted (and is not being held by any Snapshot copies). The following table provides configuration settings for dynamically allocating storage.

Setting	Configuration
Volume guarantee	None (set by default)
LUN reservation	Enabled
fractional_reserve	0% (set by default)
snap_reserve	0%
Autodelete	volume / oldest_first
Autosize	On
try_first	Autogrow
Volume tiering policy	Snapshot only
Snapshot policy	None

With this configuration, the total size of the volumes can be greater than the actual storage available in the file system. If the LUNs or Snapshot copies require more space than is available in the volume, the volumes automatically grow, taking more space from the containing file system. Autogrow allows FSx ONTAP to automatically increase the size of the volume up to a maximum size that you predetermine. There must be space available in the containing file system to support the automatic growth of the volume. Therefore, with autogrow enabled, you should monitor the free space in the containing filesystem and update the file system when needed.

Along with this, set the [space-allocation](#) option on LUN to enabled so that FSx ONTAP notifies the EC2 host when the volume has run out of space and the LUN in the volume cannot accept writes. Also, this option enables FSx for ONTAP to reclaim space automatically when the SQL Server on EC2 host deletes data. The space-allocation option is set to disabled by default.



If a space-reserved LUN is created in a none-guaranteed volume, then the LUN behaves the same as a non-space-reserved LUN. This is because a none-guaranteed volume has no space to allocate to the LUN; the volume itself can only allocate space as it is written to due to its none guarantee.

With this configuration, FSx ONTAP administrators can generally size the volume so that they must manage and monitor the used space in the LUN on the host side and in the file system.



NetApp recommends using a separate file system for SQL server workloads. If the file system is used for multiple applications, monitor the space usage of both the file system and volumes within the file system to make sure that volumes are not competing for available space.



Snapshot copies used to create FlexClone volumes are not deleted by the autodelete option.



Overcommitment of storage must be carefully considered and managed for a mission-critical application such as SQL server for which even a minimal outage cannot be tolerated. In such a case, it is best to monitor storage consumption trends to determine how much, if any, overcommitment is acceptable.

Best Practices

- For optimal storage performance, provision file-system capacity to 1.35x times the size of total database usage.
- Appropriate monitoring accompanied by an effective action plan is required when using thin provisioning to avoid application downtime.
- Make sure to set Cloudwatch and other monitoring tool alerts so that people are contacted with enough time to react as storage is filled.


Configure Storage for SQL Server and deploy Snapcenter for Backup, Restore and clone operations

In order to perform SQL server operations with SnapCenter, you must first create volumes and LUNs for SQL server.

Create volumes and LUNs for SQL Server

To create volumes and LUNs for SQL Server, complete the following steps:

1. Open the Amazon FSx console at <https://console.aws.amazon.com/fsx/>
2. Create an Amazon FSx for the NetApp ONTAP file system using the Standard Create option under Creation Method. This allows you to define FSxadmin and vsadmin credentials.

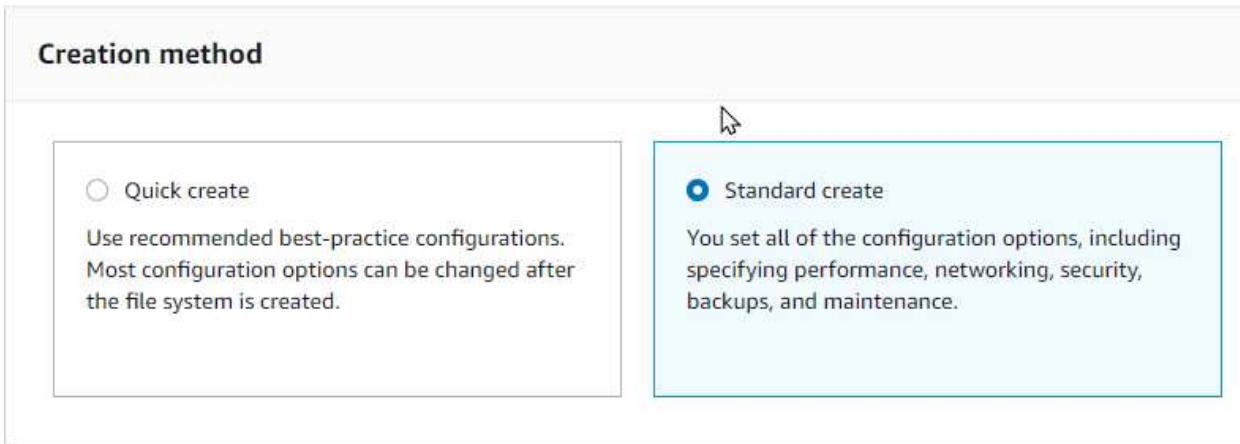

3. Specify the password for fsxadmin.

File system administrative password

Password for this file system's "fsxadmin" user, which you can use to access the ONTAP CLI or REST API.

- Don't specify a password
 Specify a password

Password

Confirm password

4. Specify the password for SVMs.

SVM administrative password

Password for this SVM's "vsadmin" user, which you can use to access the ONTAP CLI or REST API.

- Don't specify a password
 Specify a password

Password

Confirm password

5. Create volumes by following the step listed in [Creating a volume on FSx for NetApp ONTAP](#).

Best practices

- Disable storage Snapshot copy schedules and retention policies. Instead, use NetApp SnapCenter to coordinate Snapshot copies of the SQL Server data and log volumes.
- Configure databases on individual LUNs on separate volumes to leverage fast and granular restore functionality.
- Place user data files (.mdf) on separate volumes because they are random read/write workloads. It is common to create transaction log backups more frequently than database backups. For this reason, place transaction log files (.ldf) on a separate volume from the data files so that independent backup schedules can be created for each. This separation also isolates the sequential write I/O of the log files from the random read/write I/O of data files and significantly improves SQL Server performance.
- Tempdb is a system database used by Microsoft SQL Server as a temporary workspace, especially for I/O intensive DBCC CHECKDB operations. Therefore, place this database on a dedicated volume. In large environments in which volume count is a challenge, you can consolidate tempdb into fewer volumes and store it in the same volume as other system databases after careful planning. Data protection for tempdb is not a high priority because this database is recreated every time Microsoft SQL Server is restarted.

6. Use the following SSH command to create volumes:

```
Vol create -vserver svm001 -volume vol_awssqlprod01_data -aggregate aggr1 -size 800GB -state online -tiering-policy snapshot-only -percent-snapshot-space 0 -autosize-mode grow -snapshot-policy none -security-style ntfs -aggregate aggr1
volume modify -vserver svm001 -volume vol_awssqlprod01_data -fractional-reserve 0
volume modify -vserver svm001 -volume vol_awssqlprod01_data -space -mgmt-try-first vol_grow
volume snapshot autodelete modify -vserver svm001 -volume vol_awssqlprod01_data -delete-order oldest_first
```

7. Start the iSCSI service with PowerShell using elevated privileges in Windows Servers.

```
Start-service -Name msiscsi
Set-Service -Name msiscsi -StartupType Automatic
```

8. Install Multipath-IO with PowerShell using elevated privileges in Windows Servers.

```
Install-WindowsFeature -name Multipath-IO -Restart
```

9. Find the Windows initiator Name with PowerShell using elevated privileges in Windows Servers.

```
Get-InitiatorPort | select NodeAddress
```

```
PS C:\Users\administrator.CONTOSO> Get-InitiatorPort | select NodeAddress  
NodeAddress  
-----  
iqn.1991-05.com.microsoft:ws2019-sql1.contoso.net
```

10. Connect to Storage virtual machines (SVM) using putty and create an iGroup.

```
igroup create -igroup igrp_ws2019sql1 -protocol iscsi -ostype windows -initiator iqn.1991-05.com.microsoft:ws2019-sql1.contoso.net
```

11. Use the following SSH command to create LUNs:

```
lun create -path /vol/vol_awssqlprod01_data/lun_awssqlprod01_data -size 700GB -ostype windows_2008 -space-reserve enabled -space-allocation enabled lun create -path /vol/vol_awssqlprod01_log/lun_awssqlprod01_log -size 100GB -ostype windows_2008 -space-reserve enabled -space-allocation enabled
```

```
svmsql::> lun create -path /vol/vol_awssqlprod01_data/lun_awssqlprod01_data -size 700GB -ostype windows_2008  
created a LUN of size 700g (751619276800)  
svmsql::> lun create -path /vol/vol_awssqlprod01_log/lun_awssqlprod01_log -size 100GB -ostype windows_2008  
Created a LUN of size 100g (107374182400)  
svmsql::> lun show  
Vserver Path State Mapped Type Size  
-----  
svmsql /vol/vol_awssqlprod01_data/lun_awssqlprod01_data online unmapped windows_2008  
700GB  
svmsql /vol/vol_awssqlprod01_log/lun_awssqlprod01_log online unmapped windows_2008  
100GB  
2 entries were displayed.
```

12. To achieve I/O alignment with the OS partitioning scheme, use windows_2008 as the recommended LUN type. Refer [here](#) for additional information.
13. Use the following SSH command to map igroup to the LUNs that you just created.

```
lun show  
lun map -path /vol/vol_awssqlprod01_data/lun_awssqlprod01_data -igroup igrp_awssqlprod01 lun map -path /vol/vol_awssqlprod01_log/lun_awssqlprod01_log -igroup igrp_awssqlprod01
```

```

svmsql::> lun show
Vserver  Path          State  Mapped  Type      Size
-----  -----
svmsql   /vol/vol_awssqlprod01_data/lun_awssqlprod01_data
                    online  unmapped windows_2008
                                         700GB
svmsql   /vol/vol_awssqlprod01_log/lun_awssqlprod01_log
                    online  unmapped windows_2008
                                         100GB
2 entries were displayed.

svmsql::> lun map -path /vol/vol_awssqlprod01_data/lun_awssqlprod01_data -igroup igrp_awssqlprod01
svmsql::> lun map -path /vol/vol_awssqlprod01_log/lun_awssqlprod01_log -igroup igrp_awssqlprod01
svmsql::>
svmsql::> lun show
Vserver  Path          State  Mapped  Type      Size
-----  -----
svmsql   /vol/vol_awssqlprod01_data/lun_awssqlprod01_data
                    online  mapped   windows_2008
                                         700GB
svmsql   /vol/vol_awssqlprod01_log/lun_awssqlprod01_log
                    online  mapped   windows_2008
                                         100GB
2 entries were displayed.

```

14. For a shared disk that uses the Windows Failover Cluster, run an SSH command to map the same LUN to the igroup that belong to all servers that participate in the Windows Failover Cluster.
15. Connect Windows Server to an SVM with an iSCSI target. Find the target IP address from AWS Portal.

svmsql (svm-09e98ab33a31b724a)

Summary	
SVM ID	Creation time 2021-09-21T13:19:34-07:00
svm-09e98ab33a31b724a	Lifecycle state Created
SVM name	Subtype DEFAULT
svmsql	
UUID	
ea00ea2d-1b1d-11ec-9de1-6f9cef731025	
File system ID	
fs-0ab4b447ebd6082aa	
Resource ARN	
arn:aws:fsx:us-west-2:139763910815:storage-virtual-machine/fs-0ab4b447ebd6082aa/svm-09e98ab33a31b724a	

Endpoints	
Management DNS name	Management IP address 198.19.255.153
svm-09e98ab33a31b724a.fs-0ab4b447ebd6082aa.fsx.us-west-2.amazonaws.com	
NFS DNS name	NFS IP address 198.19.255.153
svm-09e98ab33a31b724a.fs-0ab4b447ebd6082aa.fsx.us-west-2.amazonaws.com	
iSCSI DNS name	iSCSI IP addresses 10.2.1.167, 10.2.2.12
iscsi.svm-09e98ab33a31b724a.fs-0ab4b447ebd6082aa.fsx.us-west-2.amazonaws.com	

16. From Server Manager and the Tools menu, select the iSCSI Initiator. Select the Discovery tab and then select Discover Portal. Supply the iSCSI IP address from previous step and select Advanced. From Local Adapter, select Microsoft iSCSI Initiator. From Initiator IP, select the IP of the server. Then select OK to close all windows.

The screenshot shows the 'iSCSI Initiator Properties' window with the 'Targets' tab selected. In the 'Target portals' section, it says 'The system will look for Targets on following portals:' followed by a table with columns: Address, Port, Adapter, and IP address. Below the table is a button 'Discover Portal...'. To the right, a 'Discover Target Portal' dialog box is open, prompting for 'IP address or DNS name' (10.2.1.167) and 'Port' (3260). There are 'Advanced...', 'OK', and 'Cancel' buttons.

To add a target portal, click Discover Portal.
To remove a target portal, select the address above and then click Remove.

iSNS servers
The system is registered on the following iSNS servers:
Name

To add an iSNS server, click Add Server.

Advanced Settings
General IPsec
Connect using
Local adapter: Microsoft iSCSI Initiator
Initiator IP: 10.2.2.232
Target portal IP:
CRC / Checksum
 Data digest Header digest

17. Repeat step 12 for the second iSCSI IP from the SVM.
18. Select the **Targets** tab, select **Connect**, and select **Enable multi-path**.

The screenshot shows the 'iSCSI Initiator Properties' window with the 'Targets' tab selected. In the 'Discovered targets' section, there is a table with columns: Name and Status, showing one entry 'iqn.1992-08.com.netapp:sn.ea00ea2d1b1d11ec9de16f9... Inactive'. Below the table is a 'Quick Connect' section with a 'Target:' input field and a 'Quick Connect...' button.

To connect using advanced options, select a target and then click Connect.

Connect To Target
Target name: 92-08.com.netapp:sn.ea00ea2d1b1d11ec9de16f9cef731025:vs.3
 Add this connection to the list of Favorite Targets.
This will make the system automatically attempt to restore the connection every time this computer restarts.
 Enable multi-path
 Advanced... OK Cancel

Connect

19. For best performance, add more sessions; NetApp recommends creating five iSCSI sessions. Select **Properties** > *Add session* > *Advanced* and repeat step 12.

```
$TargetPortals = ('10.2.1.167', '10.2.2.12')
foreach ($TargetPortal in $TargetPortals) {New-IscsiTargetPortal
-TargetPortalAddress $TargetPortal}
```

```
$TargetPortals = ('10.2.1.167', '10.2.2.12')
foreach ($TargetPortal in $TargetPortals) {New-IscsiTargetPortal -TargetPortalAddress $TargetPortal}

InitiatorInstanceName :
InitiatorPortalAddress :
IsDataDigest : False
IsHeaderDigest : False
TargetPortalAddress : 10.2.1.167
TargetPortalPortNumber : 3260
PSCoputerName :

InitiatorInstanceName :
InitiatorPortalAddress :
IsDataDigest : False
IsHeaderDigest : False
TargetPortalAddress : 10.2.2.12
TargetPortalPortNumber : 3260
PSCoputerName :
```

Best Practices

- Configure five iSCSI sessions per target interface for optimal performance.
- Configure a round-robin policy for the best overall iSCSI performance.
- Make sure that the allocation unit size is set to 64K for partitions when formatting the LUNs

20. Run the following PowerShell command to make sure that the iSCSI session is persisted.

```
$targets = Get-IscsiTarget
foreach ($target in $targets)
{
    Connect-IscsiTarget -IsMultipathEnabled $true -NodeAddress
    $target.NodeAddress -IsPersistent $true
}
```

```
PS C:\Windows\system32> Connect-IscsiTarget -NodeAddress (Get-IscsiTarget | select -ExpandProperty NodeAddress)

AuthenticationType : NONE
InitiatorInstanceName : ROOT\ISCSIPRT\0000_0
InitiatorNodeAddress : iqn.1991-05.com.microsoft:awssqlprod01.cloudheroes.dom
InitiatorPortalAddress : 0.0.0.0
InitiatorSideIdentifier : 400001370000
IsConnected : True
IsDataDigest : False
IsDiscovered : True
IsHeaderDigest : False
IsPersistent : True
NumberOfConnections : 1
SessionIdentifier : ffff9988350ff010-4000013700000012
TargetNodeAddress : iqn.1992-08.com.netapp:sn.ea00ea2d1b1d11ec9de16f9cef731025:vs.3
TargetsSideIdentifier : 0200
PSCoputerName :
```

21. Initialize disks with the following PowerShell command.

```
$disks = Get-Disk | where PartitionStyle -eq raw
foreach ($disk in $disks) {Initialize-Disk $disk.Number}
```

PS C:\Windows\system32> \$disks = Get-Disk where PartitionStyle -eq raw					
PS C:\Windows\system32> foreach (\$disk in \$disks) {Initialize-Disk \$disk.Number}					
Number	Friendly Name	Serial Number	HealthStatus	OperationalStatus	Total Size Partition Style
0	AWS PVDISK	vo10541c31fc4c790ab	Healthy	Online	30 GB MBR
1	NETAPP LUN C-Mode	TwB0p7RmR2s2	Healthy	Online	700 GB GPT
2	NETAPP LUN C-Mode	TwB0p7RmR2s3	Healthy	Online	100 GB GPT

22. Run the Create Partition and Format Disk commands with PowerShell.

```
New-Partition -DiskNumber 1 -DriveLetter F -UseMaximumSize
Format-Volume -DriveLetter F -FileSystem NTFS -AllocationUnitSize
65536
New-Partition -DiskNumber 2 -DriveLetter G -UseMaximumSize
Format-Volume -DriveLetter G -FileSystem NTFS -AllocationUnitSize
65536
```

You can automate volume and LUN creation using the PowerShell script from Appendix B. LUNs can also be created using SnapCenter.

Once the volumes and LUNs are defined, you need to set up SnapCenter to be able to perform the database operations.

SnapCenter overview

NetApp SnapCenter is next-generation data protection software for tier-1 enterprise applications. SnapCenter, with its single-pane-of-glass management interface, automates and simplifies the manual, complex, and time-consuming processes associated with the backup, recovery, and cloning of multiple databases and other application workloads. SnapCenter leverages NetApp technologies, including NetApp Snapshots, NetApp SnapMirror, SnapRestore, and NetApp FlexClone. This integration allows IT organizations to scale their storage infrastructure, meet increasingly stringent SLA commitments, and improve the productivity of administrators across the enterprise.

SnapCenter Server requirements

The following table lists the minimum requirements for installing the SnapCenter Server and plug-in on Microsoft Windows Server.


Components	Requirement
Minimum CPU count	Four cores/vCPUs
Memory	Minimum: 8GB Recommended: 32GB
Storage space	Minimum space for installation: 10GB Minimum space for repository: 10GB
Supported operating system	<ul style="list-style-type: none">Windows Server 2012Windows Server 2012 R2Windows Server 2016Windows Server 2019
Software packages	<ul style="list-style-type: none">.NET 4.5.2 or laterWindows Management Framework (WMF) 4.0 or laterPowerShell 4.0 or later

For detailed information, refer to [space and sizing requirements](#).

For version compatibility, see the [NetApp Interoperability Matrix Tool](#).

Database storage layout

The following figure depicts some considerations for creating the Microsoft SQL Server database storage layout when backing up with SnapCenter.

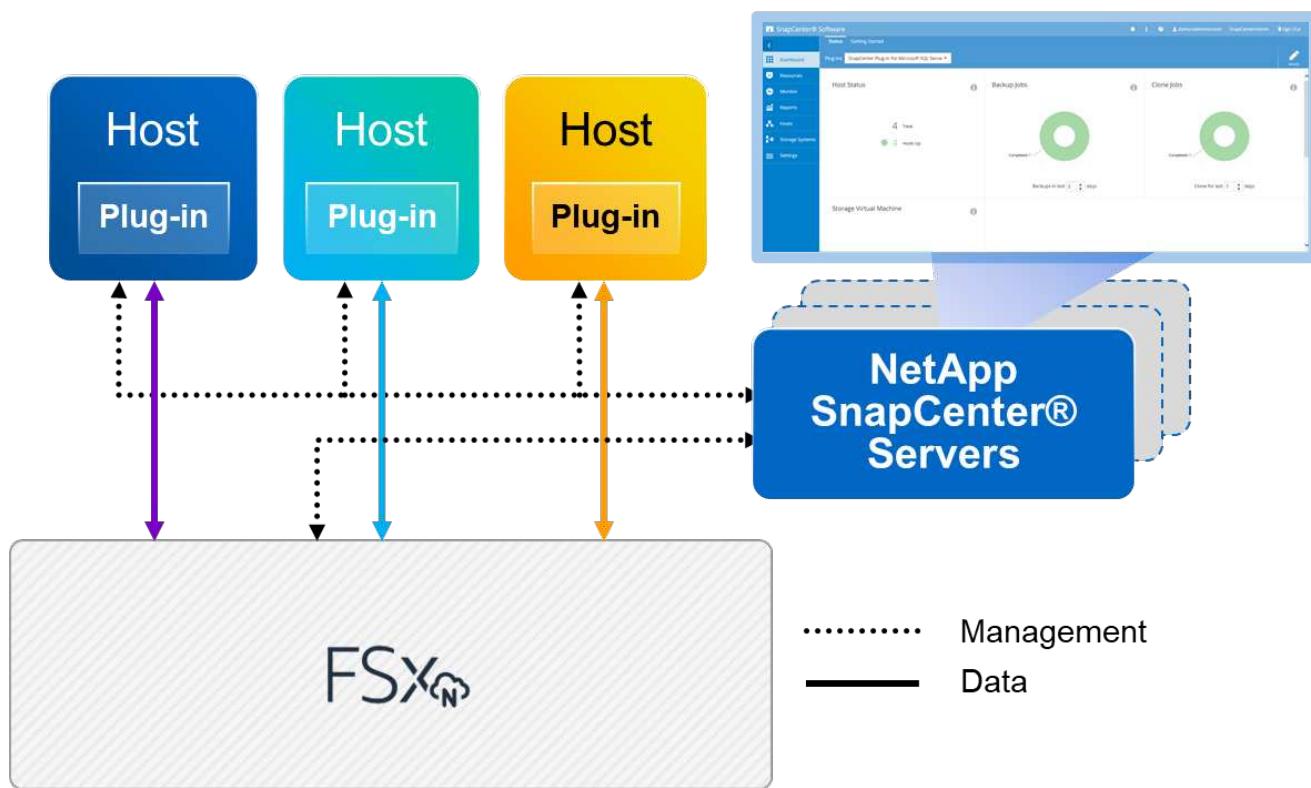

Best practices

- Place databases with I/O-intensive queries or with large database size (say 500GB or more) on a separate volume for faster recovery. This volume should also be backed up by separate jobs.
- Consolidate small-to-medium size databases that are less critical or have fewer I/O requirements to a single volume. Backing up a large number of databases residing in the same volume leads to fewer Snapshot copies that need to be maintained. It is also a best practice to consolidate Microsoft SQL Server instances to use the same volumes to control the number of backup Snapshot copies taken.
- Create separate LUNs to store full text-related files and file-streaming related files.
- Assign separate LUNs per host to store Microsoft SQL Server log backups.
- System databases that store database server metadata configuration and job details are not updated frequently. Place system databases/tempdb in separate drives or LUNs. Do not place system databases in the same volume as the user databases. User databases have a different backup policy, and the frequency of user database backup is not same for system databases.
- For Microsoft SQL Server Availability Group setup, place the data and log files for replicas in an identical folder structure on all nodes.

In addition to the performance benefit of segregating the user database layout into different volumes, the database also significantly affects the time required to back up and restore. Having separate volumes for data and log files significantly improves the restore time as compared to a volume hosting multiple user data files. Similarly, user databases with a high I/O intensive application are prone to an increase in the

backup time. A more detailed explanation about backup and restore practices is provided later in this document.



Starting with SQL Server 2012 (11.x), system databases (Master, Model, MSDB, and TempDB), and Database Engine user databases can be installed with an SMB file server as a storage option. This applies to both stand-alone SQL Server and SQL Server failover cluster installations. This enables you to use FSx for ONTAP with all its performance and data management capabilities, including volume capacity, performance scalability, and data protection features, which SQL Server can take advantage of. Shares used by the application servers must be configured with the continuously available property set and the volume should be created with NTFS security style. NetApp Snapcenter cannot be used with databases placed on SMB shares from FSx for ONTAP.



For SQL Server databases that do not use SnapCenter to perform backups, Microsoft recommends placing the data and log files on separate drives. For applications that simultaneously update and request data, the log file is write intensive, and the data file (depending on your application) is read/write intensive. For data retrieval, the log file is not needed. Therefore, requests for data can be satisfied from the data file placed on its own drive.




When you create a new database, Microsoft recommends specifying separate drives for the data and logs. To move files after the database is created, the database must be taken offline. For more Microsoft recommendations, see [Place Data and Log Files on Separate Drives](#).

Installation and setup for SnapCenter


Follow the [Install the SnapCenter Server](#) and [Installing SnapCenter Plug-in for Microsoft SQL Server](#) to install and setup SnapCenter.

After Installing SnapCenter, complete the following steps to set it up.


1. To set up credentials, select **Settings > New** and then enter the credential information.

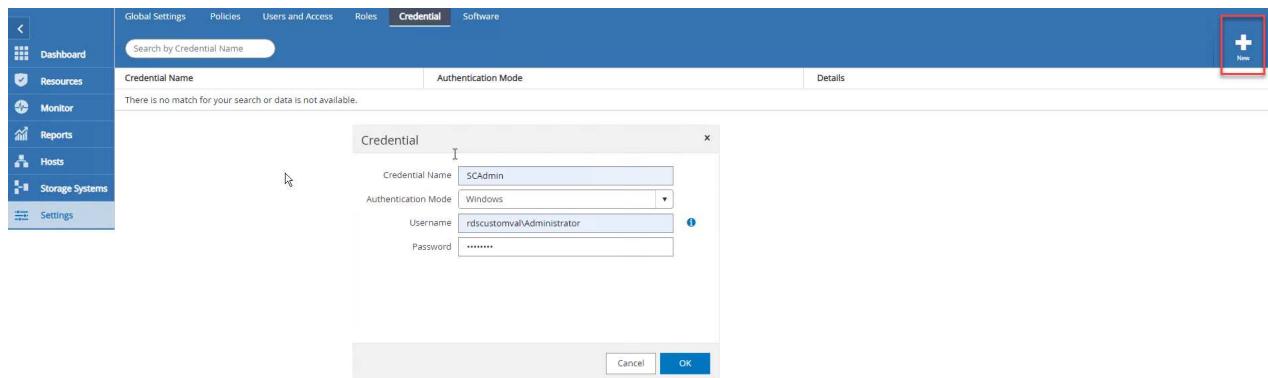

2. Add the storage system by selecting **Storage Systems > New** and the provide the appropriate FSx for ONTAP storage information.

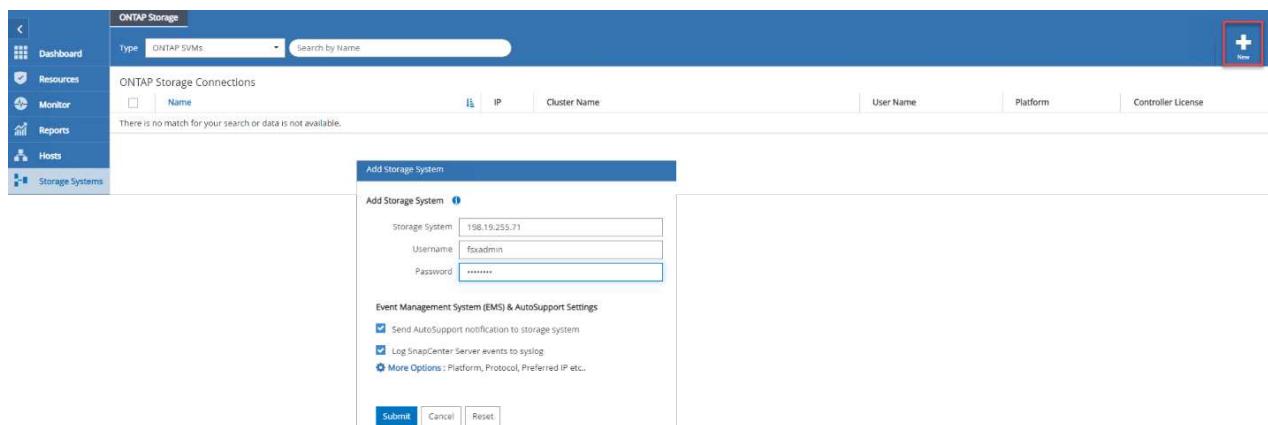

3. Add hosts by selecting **Hosts > Add**, and then provide the host information. SnapCenter automatically installs the Windows and SQL Server plug-in. This process might take some time.

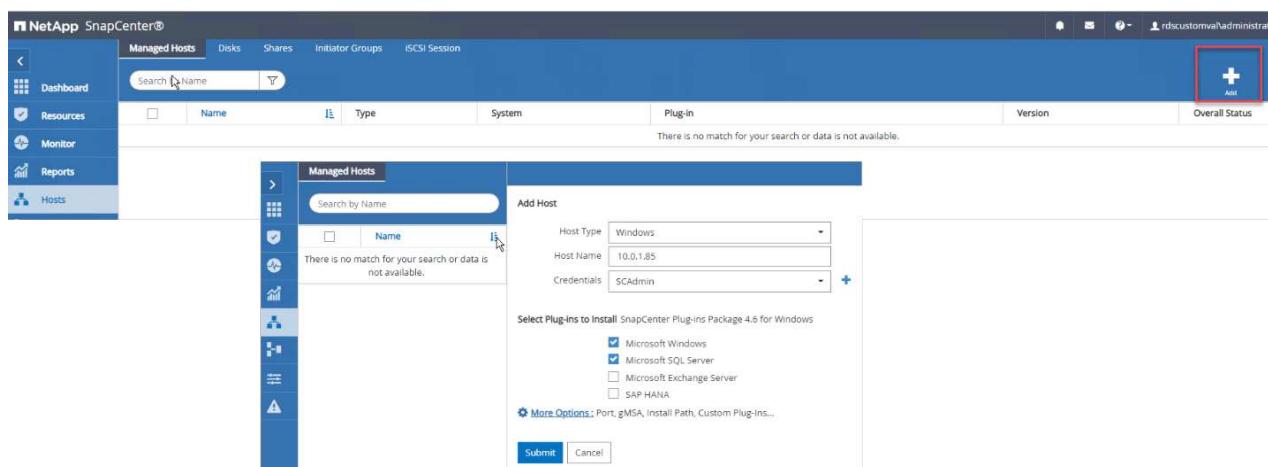

After all Plug-ins are installed, you must configure the log directory. This is the location where the transaction log backup resides. You can configure the log directory by selecting the host and then select configure the log directory.



SnapCenter uses a host log directory to store transaction log backup data. This is at the host and instance level. Each SQL Server host used by SnapCenter must have a host log directory configured to perform log backups. SnapCenter has a database repository, so metadata related to backup, restore, or cloning operations is stored in a central database repository.

The size of the host log directory is calculated as follows:

$$\text{Size of host log directory} = \text{system database size} + (\text{maximum DB LDF size} \times \text{daily log change rate \%}) \times (\text{Snapshot copy retention}) \div (1 - \text{LUN overhead space \%})$$

The host log directory sizing formula assumes the following:

- A system database backup that does not include the tempdb database
- A 10% LUN overhead spacePlace the host log directory on a dedicated volume or LUN. The amount of data in the host log directory depends on the size of the backups and the number of days that backups are retained.

The screenshot shows the 'Managed Hosts' section on the left with a search bar and a table listing hosts. One host, 'RDSAMAZ-FFIDFMR.rdscustomval.com', is selected and highlighted in blue. The main area is titled 'Host Details' and displays the following information:

Host Name	RDSAMAZ-FFIDFMR.rdscustomval.com
Host IP	10.0.1.56
Overall Status	Configure log directory
Host Type	Windows
System	Stand-alone
Credentials	SCAdmin
Plug-ins	SnapCenter Plug-ins package 4.6.0.6965 for Windows
	✓ Microsoft Windows
	✓ Microsoft SQL Server Remove Configure log directory ⓘ

At the bottom, there is a 'More Options' link followed by 'Submit', 'Cancel', and 'Reset' buttons.

If the LUNs have already been provisioned, you can select the mount point to represent the host log directory.

Configure Plug-in for SQL Server

X

Configure the log backup directory for RDSAMAZ-FFIDFMR.rdscustomval.com

Configure host log directory

Host log directory

dedicated disk directory path

Browse

Choose directory on NetApp Storage

 RDSAMAZ-FFIDFMR.rdscustomval.com

- D:\FSxN\Data\
- D:\FSxN\HLD\
- D:\FSxN\Log\

Save

Close

Now you are ready to perform backup, restore and clone operations for SQL Server.

Backup database with SnapCenter

After placing the database and log files on the FSx ONTAP LUNs, SnapCenter can be used to back up the databases. The following processes are used to create a full backup.

Best Practices

- In SnapCenter terms, RPO can be identified as the backup frequency, for example, how frequently you want to schedule the backup so that you can reduce the loss of data to up to few minutes. SnapCenter allows you to schedule backups as frequently as every five minutes. However, there might be a few instances in which a backup might not complete within five minutes during peak transaction times or when the rate of change of data is more in the given time. A best practice is to schedule frequent transaction log backups instead of full backups.
- There are numerous approaches to handle the RPO and RTO. One alternative to this backup approach is to have separate backup policies for data and logs with different intervals. For example, from SnapCenter, schedule log backups in 15-minute intervals and data backups in 6-hour intervals.
- Use a resource group for a backup configuration for Snapshot optimization and the number of jobs to be managed.

- Select **Resources**, and then select **Microsoft SQL Server** *on the drop-down menu on the top left. Select *Refresh Resources.

The screenshot shows the NetApp SnapCenter interface. On the left, a sidebar navigation bar includes links for Dashboard, Resources (which is selected), Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main content area has a title "Microsoft SQL Server". Below it, there's a search bar with dropdown options "View", "Database", and "search by name". A table lists the following databases:

Instance	Host	Last Backup	Overall Status	Type
RDSAMAZ-FFIDFMR	RDSAMAZ-FFIDFMR.rdscustomval.com		Not available for backup	User database
RDSAMAZ-FFIDFMR	RDSAMAZ-FFIDFMR.rdscustomval.com		Not available for backup	User database
RDSAMAZ-FFIDFMR	RDSAMAZ-FFIDFMR.rdscustomval.com		Not available for backup	User database
RDSAMAZ-FFIDFMR	RDSAMAZ-FFIDFMR.rdscustomval.com		Not available for backup	System database
RDSAMAZ-FFIDFMR	RDSAMAZ-FFIDFMR.rdscustomval.com		Not available for backup	System database
RDSAMAZ-FFIDFMR	RDSAMAZ-FFIDFMR.rdscustomval.com		Not protected	User database
RDSAMAZ-FFIDFMR	RDSAMAZ-FFIDFMR.rdscustomval.com		Not available for backup	System database

- Select the database to be backed up, then select **Next** and (+) to add the policy if one has not been created. Follow the **New SQL Server Backup Policy** to create a new policy.

The screenshot shows the "New SQL Server Backup Policy" creation wizard. It consists of five steps: Resource, Policies, Verification, Notification, and Summary. Step 1 (Resource) shows a list of databases: DWConfiguration, DWDiagnostics, DWQueue, master, model, msdb, SeattleRetail, and tempdb. Step 2 (Policies) shows a progress bar with step 2 highlighted. Step 3 (Verification) contains the instruction "Select one or more policies and configure schedules". A dropdown menu shows "Full Backup" and a "+" button to add more policies. Step 4 (Notification) is not visible in the screenshot. Step 5 (Summary) contains the instruction "Configure schedules for selected policies". A table shows a row for "Full Backup" with "None" under "Applied Schedules" and a note: "To schedule operations select a policy that has the appropriate schedule associated, or modify the selected policy to allow schedules." A cursor arrow points to the "Full Backup" row.

- Select the verification server if necessary. This server is the server that SnapCenter runs DBCC CHECKDB after a full backup has been created. Click **Next** for notification, and then select **Summary** to review. After reviewing, click **Finish**.

Resource Policies Verification Notification Summary


Select the verification servers

Verification server Select one or more servers

Configure verification schedules

Policy	Schedule Type	Applied Schedules	Configure Schedules
There is no match for your search or data is not available.			

4. Click **Back up Now** to test the backup. In the pop-up window, select **Backup**.

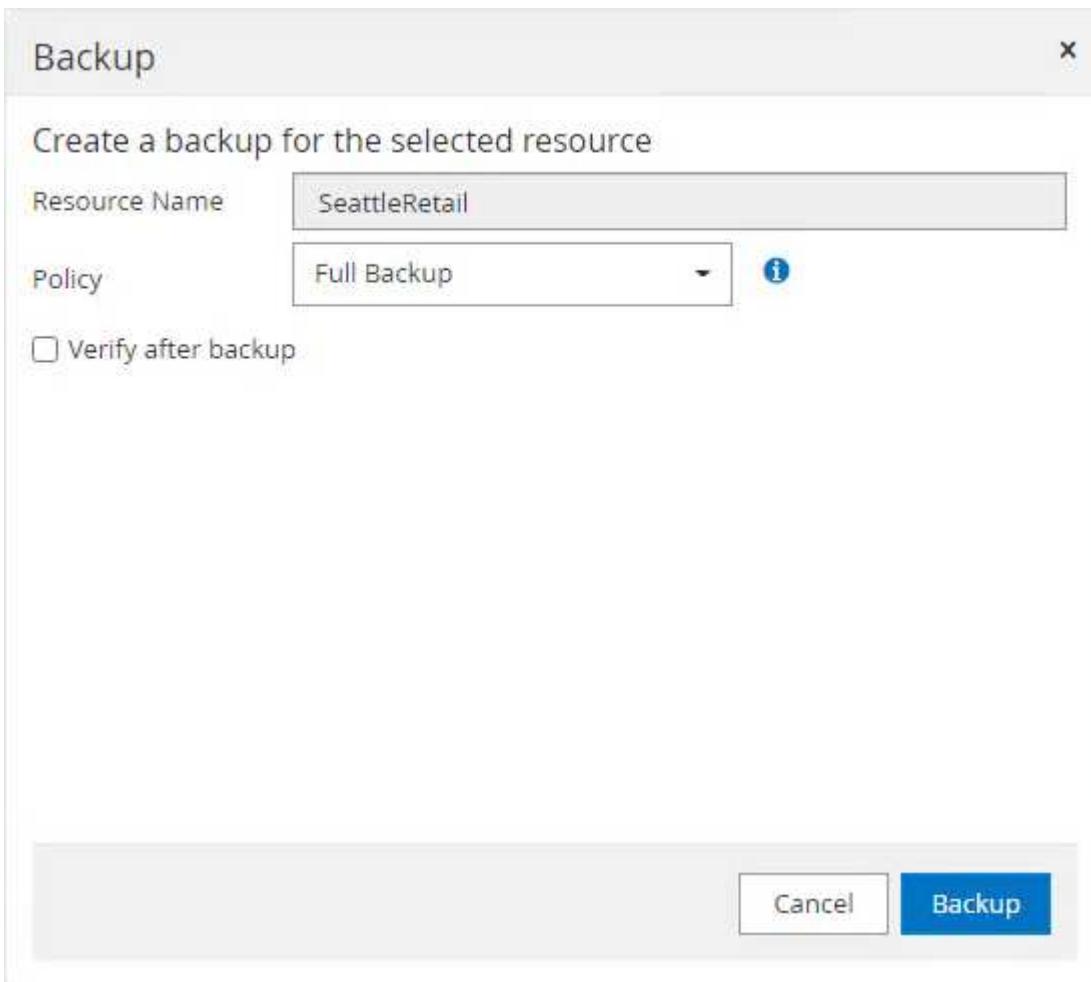

5. Select **Monitor** to verify that the backup has been completed.

ID	Status	Name	Start date	End date	Owner
94	✓	Backup of Resource Group RDSAMAZ-FRIDFMR_SeattleRetail with policy 'Full Backup'	03/29/2022 1:47:30 AM	03/29/2022 1:47:41 AM	RDSCUSTOMVAL\administrator
93	✓	Create Resource Group RDSAMAZ-FRIDFMR_SeattleRetail	03/29/2022 1:45:24 AM	03/29/2022 1:45:26 AM	RDSCUSTOMVAL\administrator
92	✓	Create Policy 'Full Backup'	03/29/2022 1:41:37 AM	03/29/2022 1:41:40 AM	RDSCUSTOMVAL\administrator
91	✓	Discover resources for all hosts	03/29/2022 1:38:12 AM	03/29/2022 1:38:17 AM	RDSCUSTOMVAL\administrator

Best Practices

- Backup the transaction log backup from SnapCenter so that during the restoration process, SnapCenter can read all the backup files and restore in sequence automatically.
- If third party products are used for backup, select Copy backup in SnapCenter to avoid log sequence issues, and test the restore functionality before rolling into production.

Restore database with SnapCenter

One of the major benefits of using FSx ONTAP with SQL Server on EC2 is its ability to perform fast and granular restore at each database level.


Complete the following steps to restore an individual database to a specific point in time or up to the minute with SnapCenter.

1. Select Resources and then select the database that you would like to restore.



The screenshot shows the Microsoft SQL Server Management Studio interface. On the left, a tree view lists databases: Name (DWConfiguration, DW.Diagnostics, DWQueue, master, model, msdb, SeattleRetail, tempdb). The 'SeattleRetail' database is selected. In the center, under 'Manage Copies', there is a summary card: 'Summary Card' (1 Backup, 0 Clones). Below it, a table titled 'Primary Backup(s)' shows one backup entry: 'RDSAMAZ-FFIDFMR_SeattleRetail_RDSAMAZ-FFIDFMR_03-29-2022_01.47.31.3117' (Count: 1, Type: Full backup, End Date: 03/29/2022 1:47:37 AM, Verified: Unverified).

2. Select the backup name that the database needs to be restored from and then select restore.
3. Follow the **Restore** pop-up windows to restore the database.
4. Select **Monitor** to verify that the restore process is successful.

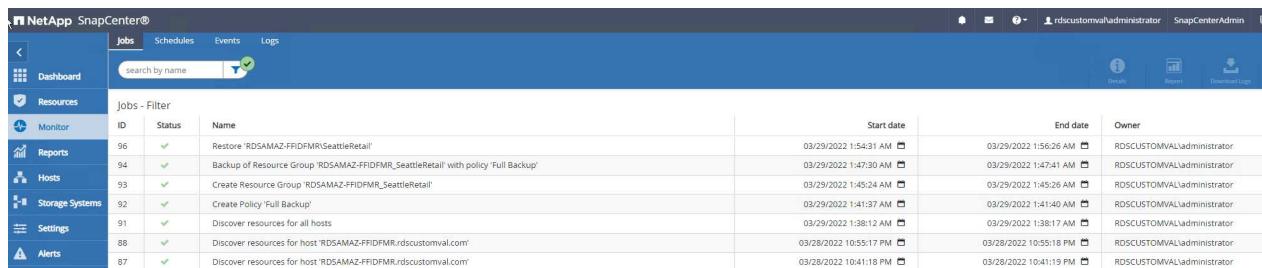

The screenshot shows the NetApp SnapCenter interface. On the left, a sidebar navigation includes Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area is titled 'Jobs - Filter' and displays a table of recent tasks:

ID	Status	Name	Start date	End date	Owner
96	✓	Restore 'RDSAMAZ-FFIDFMR.SeattleRetail'	03/29/2022 1:54:31 AM	03/29/2022 1:56:26 AM	RDSCUSTOMVAL\administrator
94	✓	Backup of Resource Group 'RDSAMAZ-FFIDFMR_SeattleRetail' with policy 'Full Backup'	03/29/2022 1:47:30 AM	03/29/2022 1:47:41 AM	RDSCUSTOMVAL\administrator
93	✓	Create Resource Group 'RDSAMAZ-FFIDFMR_SeattleRetail'	03/29/2022 1:45:24 AM	03/29/2022 1:45:26 AM	RDSCUSTOMVAL\administrator
92	✓	Create Policy 'Full Backup'	03/29/2022 1:41:37 AM	03/29/2022 1:41:40 AM	RDSCUSTOMVAL\administrator
91	✓	Discover resources for all hosts	03/29/2022 1:38:12 AM	03/29/2022 1:38:17 AM	RDSCUSTOMVAL\administrator
88	✓	Discover resources for host 'RDSAMAZ-FFIDFMR.rdscustomval.com'	03/28/2022 10:55:17 PM	03/28/2022 10:55:18 PM	RDSCUSTOMVAL\administrator
87	✓	Discover resources for host 'RDSAMAZ-FFIDFMR.rdscustomval.com'	03/28/2022 10:41:18 PM	03/28/2022 10:41:19 PM	RDSCUSTOMVAL\administrator

Considerations for an instance with a large number of small-to-large size databases

SnapCenter can back up a large number of sizeable databases in an instance or group of instances within a resource group. The size of a database is not the major factor in backup time. The duration of a backup can vary depending on number of LUNs per volume, the load on Microsoft SQL Server, the total number of databases per instance, and, specifically, the I/O bandwidth and usage. While configuring the policy to back up databases from an instance or resource group, NetApp recommends that you restrict the maximum database backed up per Snapshot copy to 100 per host. Make sure the total number of Snapshot copies does not exceed the 1,023-copy limit.

NetApp also recommends that you limit the backup jobs running in parallel by grouping the number of databases instead of creating multiple jobs for each database or instance. For optimal performance of the backup duration, reduce the number of backup jobs to a number that can back up around 100 or fewer databases at a time.

As previously mentioned, I/O usage is an important factor in the backup process. The backup process must wait to quiesce until all the I/O operations on a database are complete. Databases with highly intensive I/O operations should be deferred to another backup time or should be isolated from other backup jobs to avoid affecting other resources within the same resource group that are to be backed up.

For an environment that has six Microsoft SQL Server hosts hosting 200 databases per instance, assuming four LUNs per host and one LUN per volume created, set the full backup policy with the maximum databases backed up per Snapshot copy to 100. Two hundred databases on each instance are laid out as 200 data files distributed equally on two LUNs, and 200 log files are distributed equally on two LUNs, which is 100 files per LUN per volume.

Schedule three backup jobs by creating three resource groups, each grouping two instances that include a total of 400 databases.

Running all three backup jobs in parallel backs up 1,200 databases simultaneously. Depending on the load on the server and I/O usage, the start and end time on each instance can vary. In this instance, a total of 24 Snapshot copies are created.

In addition to the full backup, NetApp recommends that you configure a transaction log backup for critical databases. Make sure that the database property is set to full recovery model.

Best practices

- Do not include the tempdb database in a backup because the data it contains is temporary. Place tempdb on a LUN or an SMB share that is in a storage system volume in which Snapshot copies will not be created.
- A Microsoft SQL Server instance with a high I/O intensive application should be isolated in a different backup job to reduce the overall backup time for other resources.
- Limit the set of databases to be simultaneously backed up to approximately 100 and stagger the remaining set of database backups to avoid a simultaneous process.
- Use the Microsoft SQL Server instance name in the resource group instead of multiple databases because whenever new databases are created in Microsoft SQL Server instance, SnapCenter automatically considers a new database for backup.
- If you change the database configuration, such as changing the database recovery model to the full recovery model, perform a backup immediately to allow up-to-the-minute restore operations.
- SnapCenter cannot restore transaction log backups created outside of SnapCenter.
- When cloning FlexVol volumes, make sure that you have sufficient space for the clone metadata.
- When restoring databases, make sure that sufficient space is available on the volume.
- Create a separate policy to manage and back up system databases at least once a week.

Cloning databases with SnapCenter

To restore a database onto another location on a dev or test environment or to create a copy for business analysis purposes, the NetApp best practice is to leverage the cloning methodology to create a copy of the database on the same instance or an alternate instance.

The cloning of databases that are 500GB on an iSCSI disk hosted on a FSx for ONTAP environment typically takes less than five minutes. After cloning is complete, the user can then perform all the required read/write operation on the cloned database. Most of the time is consumed for disk scanning (diskpart). The NetApp cloning procedure typically take less than 2 minutes regardless of the size of the databases.

The cloning of a database can be performed with the dual method: you can create a clone from the latest backup or you can use clone life-cycle management through which the latest copy can be made available on the secondary instance.

SnapCenter allows you to mount the clone copy on the required disk to maintain the format of the folder structure on the secondary instance and continue to schedule backup jobs.

Clone databases to the new database name in the same instance

The following steps can be used to clone databases to the new database name in the same SQL server instance running on EC2:

1. Select Resources and then the database that need to be cloned.
2. Select the backup name that you would like to clone and select Clone.
3. Follow the clone instructions from the backup windows to finish the clone process.
4. Select Monitor to make sure that cloning is completed.

Clone databases into the new SQL Server instance running on EC2

The following step are used to clone databases to the new SQL server instance running on EC2:

1. Create a new SQL Server on EC2 in the same VPC.
2. Enable the iSCSI protocol and MPIO, and then setup the iSCSI connection to FSx for ONTAP by following step 3 and 4 in the section “Create volumes and LUNs for SQL Server.”
3. Add a new SQL Server on EC2 into SnapCenter by follow step 3 in the section “Installing and setup for SnapCenter.”
4. Select Resource > View Instance, and then select Refresh Resource.
5. Select Resources, and then the database that you would like to clone.
6. Select the backup name that you would like to clone, and then select Clone.

The screenshot shows the NetApp SnapCenter interface. On the left, a sidebar lists databases: DWConfiguration, DWdiagnostics, DWqueue, master, model, msdb, and tempdb. The SeattleRetail database is selected. In the center, under 'Manage Copies', there is a summary card for a 'Primary Backup(s)' named 'RDSAMAZ-FFDFMR_SeaRetail_RDSAMAZ-FFDFMR_03-29-2022_01.47.31.3117'. It shows 1 Backup and 0 Clones. Below this, a table lists the backup details: Count (1), Type (Full backup), End Date (03/29/2022 1:47:37 AM), and Verified (Unverified). At the bottom right of the table are buttons for Rename, Done, Restore, and Delete.

7. Follow the Clone from Backup instructions by providing the new SQL Server instance on EC2 and instance name to finish the clone process.
8. Select Monitor to make sure that cloning is completed.

The screenshot shows the NetApp SnapCenter interface with the 'Jobs' tab selected. A table displays two entries: 'Clone from backup RDSAMAZ-FFDFMR_SeaRetail_RDSAMAZ-FFDFMR_03-29-2022_01.47.31.3117' (Status: Done) and 'Discover resources for all hosts' (Status: Done). The table includes columns for ID, Status, Name, Start date, End date, and Owner.

To learn more about this process, watch the following video:

```
<iframe
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=27f2828
4-433d-4273-8748-
b01200fb3cd7&autoplay=false&offerviewer=false&showtitle=false&showbrand=fa
lse&captions=false&interactivity=all" height="203" width="360"
style="border: 1px solid #464646;" allowfullscreen
allow="autoplay"></iframe>
```

Appendices

Appendix A: YAML file for use in Cloud Formation Template

The following .yaml file can be used with the Cloud Formation Template in AWS Console.

- <https://github.com/NetApp-Automation/fsxn-iscsisetup-cft>

To automate iSCSI LUN creation and NetApp SnapCenter installation with PowerShell, clone the repo from [this GitHub link](#).

Appendix B: Powershell scripts for provisioning volumes and LUNs

The following script is used to provision volumes and LUNs and also to set up iSCSI based on the instruction provided above. There are two PowerShell scripts:

- `_EnableMPIO.ps1`

```
Function Install_MPIO_ssh {
    $hostname = $env:COMPUTERNAME
    $hostname = $hostname.Replace('-', '_')

    #Add schedule action for the next step
    $path = Get-Location
    $path = $path.Path + '\2_CreateDisks.ps1'
    $arg = '-NoProfile -WindowStyle Hidden -File ' +$path
    $schAction = New-ScheduledTaskAction -Execute "Powershell.exe"
    -Argument $arg
    $schTrigger = New-ScheduledTaskTrigger -AtStartup
    $schPrincipal = New-ScheduledTaskPrincipal -UserId "NT
AUTHORITY\SYSTEM" -LogonType ServiceAccount -RunLevel Highest
    $return = Register-ScheduledTask -Action $schAction -Trigger
    $schTrigger -TaskName "Create Vols and LUNs" -Description "Scheduled
Task to run configuration Script At Startup" -Principal $schPrincipal
    #Install -Module Posh-SSH
    Write-host 'Enable MPIO and SSH for PowerShell' -ForegroundColor
Yellow
    $return = Find-PackageProvider -Name 'Nuget' -ForceBootstrap
    -IncludeDependencies
    $return = Find-Module PoSH-SSH | Install-Module -Force
    #Install Multipath-IO with PowerShell using elevated privileges in
Windows Servers
    Write-host 'Enable MPIO' -ForegroundColor Yellow
    $return = Install-WindowsFeature -name Multipath-IO -Restart
}
Install_MPIO_ssh
Remove-Item -Path $MyInvocation.MyCommand.Source
```

- `_CreateDisks.ps1`

```
#Enable MPIO and Start iSCSI Service
Function PrepISCSI {
    $return = Enable-MSDSMAutomaticClaim -BusType iSCSI
    #Start iSCSI service with PowerShell using elevated privileges in
Windows Servers
    $return = Start-service -Name msiscsi
```

```

$return = Set-Service -Name msiscsi -StartupType Automatic
}

Function Create_igroup_vols_luns ($fsxN) {
    $hostname = $env:COMPUTERNAME
    $hostname = $hostname.Replace('-', '_')
    $volsluns = @()
    for ($i = 1;$i -lt 10;$i++) {
        if ($i -eq 9){
            $volsluns
+=(@{volname=('v_'+$hostname+'_log');volsize=$fsxN.logvolsize;lunname=(

'l_'+$hostname+'_log');lunsize=$fsxN.loglunsize})
        } else {
            $volsluns
+=(@{volname=('v_'+$hostname+'_data'+[string]$i);volsize=$fsxN.datavols
ize;lunname=('l_'+$hostname+'_data'+[string]$i);lunsize=$fsxN.datalunsi
ze})
        }
    }
    $secStringPassword = ConvertTo-SecureString $fsxN.password
-AsPlainText -Force
    $credObject = New-Object System.Management.Automation.PSCredential
($fsxN.login, $secStringPassword)
    $igroup = 'igrp_'+$hostname
    #Connect to FSx N filesystem
    $session = New-SSHSession -ComputerName $fsxN.svmip -Credential
$credObject -AcceptKey:$true
    #Create igroup
    Write-host 'Creating igroup' -ForegroundColor Yellow
    #Find Windows initiator Name with PowerShell using elevated
privileges in Windows Servers
    $initport = Get-InitiatorPort | select -ExpandProperty NodeAddress
    $sshcmd = 'igroup create -igroup ' + $igroup + ' -protocol iscsi
-ostype windows -initiator ' + $initport
    $ret = Invoke-SSHCommand -Command $sshcmd -SSHSession $session
    #Create vols
    Write-host 'Creating Volumes' -ForegroundColor Yellow
    foreach ($vollun in $volsluns){
        $sshcmd = 'vol create ' + $vollun.volname + ' -aggregate aggr1
-size ' + $vollun.volsize #+ ' -vserver ' + $vserver
        $return = Invoke-SSHCommand -Command $sshcmd -SSHSession
$session
    }
    #Create LUNs and mapped LUN to igroup
    Write-host 'Creating LUNs and map to igroup' -ForegroundColor
Yellow
    foreach ($vollun in $volsluns){

```

```

        $sshcmd = "lun create -path /vol/" + $vollun.volname + "/" +
$vollun.lunname + " -size " + $vollun.lunsize + " -ostype Windows_2008
" #-vserver " +$vserver
        $return = Invoke-SSHCommand -Command $sshcmd -SSHSession
$session
        #map all luns to igroup
        $sshcmd = "lun map -path /vol/" + $vollun.volname + "/" +
$vollun.lunname + " -igroup " + $igroup
        $return = Invoke-SSHCommand -Command $sshcmd -SSHSession
$session
    }
}

Function Connect_iSCSI_to_SVM ($TargetPortals){
    Write-host 'Online, Initialize and format disks' -ForegroundColor Yellow
    #Connect Windows Server to svm with iSCSI target.
    foreach ($TargetPortal in $TargetPortals) {
        New-IscsiTargetPortal -TargetPortalAddress $TargetPortal
        for ($i = 1; $i -lt 5; $i++){
            $return = Connect-IscsiTarget -IsMultipathEnabled $true
-IsPersistent $true -NodeAddress (Get-iscsiTarget | select
-ExpandProperty NodeAddress)
        }
    }
}

Function Create_Partition_Format_Disks{

    #Create Partition and format disk
    $disks = Get-Disk | where PartitionStyle -eq raw
    foreach ($disk in $disks) {
        $return = Initialize-Disk $disk.Number
        $partition = New-Partition -DiskNumber $disk.Number
-AssignDriveLetter -UseMaximumSize | Format-Volume -FileSystem NTFS
-AllocationUnitSize 65536 -Confirm:$false -Force
        #$return = Format-Volume -DriveLetter $partition.DriveLetter
-FileSystem NTFS -AllocationUnitSize 65536
    }
}

Function UnregisterTask {
    Unregister-ScheduledTask -TaskName "Create Vols and LUNS"
-Confirm:$false
}

Start-Sleep -s 30
$fsxN = @{svmip ='198.19.255.153';login =
'vesadmin';password='net@pp11';datavolsize='10GB';datalunsize='8GB';logv
olsize='8GB';loglunsize='6GB'}

```

```

$TargetPortals = ('10.2.1.167', '10.2.2.12')
PrepISCSI
Create_igroup_vols_luns $fsxN
Connect_iSCSI_to_SVM $TargetPortals
Create_Partition_Format_Disks
UnregisterTask
Remove-Item -Path $MyInvocation.MyCommand.Source

```

Run the file EnableMPIO.ps1 first and the second script executes automatically after the server has been rebooted. These PowerShell scripts can be removed after they have been executed due to credential access to the SVM.

Where to find additional information

- Amazon FSx for NetApp ONTAP

<https://docs.aws.amazon.com/fsx/latest/ONTAPGuide/what-is-fsx-ontap.html>

- Getting Started with FSx for NetApp ONTAP

<https://docs.aws.amazon.com/fsx/latest/ONTAPGuide/getting-started.html>

- Overview of the SnapCenter interface

<https://www.youtube.com/watch?v=lVEBF4kV6Ag&t=0s>

- Tour through SnapCenter navigation pane options

https://www.youtube.com/watch?v=_IDKt-koySQ

- Setup SnapCenter 4.0 for SQL Server plug-in

<https://www.youtube.com/watch?v=MopbUFSdHKE>

- How to back up and restore databases using SnapCenter with SQL Server plug-in

https://www.youtube.com/watch?v=K343qPD5_Ys

- How to clone a database using SnapCenter with SQL Server plug-in

<https://www.youtube.com/watch?v=ogEc4DkGv1E>

TR-4951: Backup and Recovery for Microsoft SQL Server on AWS FSx for ONTAP

Author(s): Niyaz Mohammed, Carine Ngwekwe - NetApp Solutions Engineering

This document covers the steps necessary to perform backup and recovery for Microsoft SQL Server on AWS FSx for ONTAP with SnapCenter. This includes the following information:

- NetApp SnapCenter configuration
- SnapCenter backup operations

- Backup operation for an FCI database
- Backup operation for multiple databases
- Restore and recovery


SnapCenter Configuration

The following steps must be performed for SnapCenter configuration and the protection of Microsoft SQL Server resources. Each of the following steps is detailed in the following sections.

1. Configure sysadmin credentials for the SQL Server backup and restore user.
2. Configure storage settings. Provide Amazon Web Services (AWS) management credential to access the Amazon FSx for NetApp ONTAP storage virtual machines (SVMs) from SnapCenter.
3. Add a SQL Server host to SnapCenter. Deploy and install the required SnapCenter Plug-ins.
4. Configure policies. Define the backup operation type, retention, and optional Snapshot backup replication.
5. Configure and protect the Microsoft SQL Server database.

SnapCenter newly installed user interface

Configure credentials for SQL Server backup and restore the user with sysadmin rights.

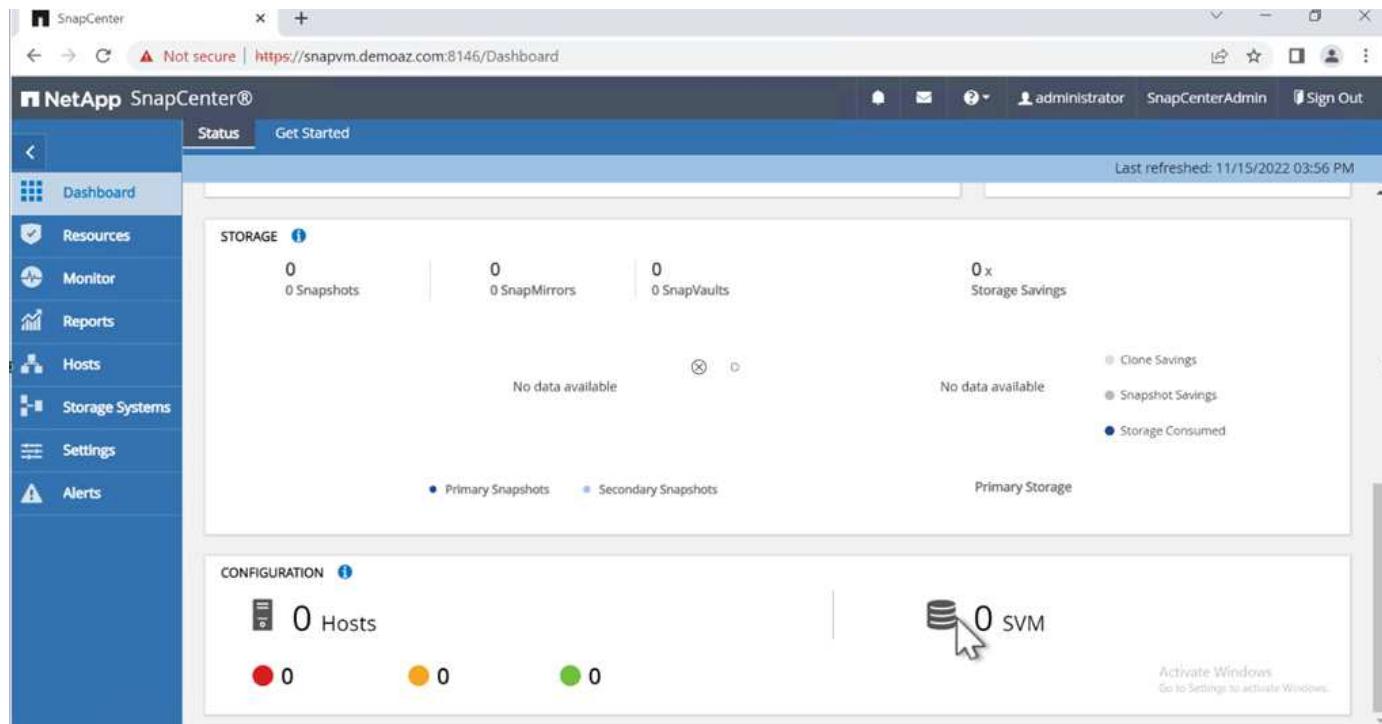

NetApp recommends using role-based access control (RBAC) to delegate data protection and management capabilities to individual users across the SnapCenter and window hosts. The user must have access to the SQL Server hosting the database. For multiple hosts, the username and password must be the same across the various hosts. Furthermore, to enable SnapCenter to deploy the required plug-in on SQL Server hosts, you must register the domain information for SnapCenter to validate your credentials and hosts.

Expand the following sections to see the detailed instructions on how to complete each step.

Add the credentials

Go to **Settings**, select **Credentials**, and click (+).

The screenshot shows the NetApp SnapCenter web interface. The top navigation bar includes links for Global Settings, Policies, Users and Access, Roles, Credential (which is highlighted in blue), and Software. Below the navigation is a search bar labeled "Search by Credential Name". A main table displays columns for "Credential Name" and "Authentication Mode". A message at the bottom of the table states, "There is no match for your search or data is not available." On the left side, there is a vertical sidebar with icons for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings (which is also highlighted in blue), and Alerts.


The new user must have administrator rights on the SQL Server host.

This screenshot shows a modal dialog titled "Credential" for creating a new credential. The form contains four fields: "Credential Name" (set to "Demoaz"), "Authentication Mode" (set to "Windows"), "Username" (set to "demoaz\clusteradmin"), and "Password" (represented by a series of dots). Below the form is a status message "Setting credential..." with a progress bar. At the bottom right are "Cancel" and "OK" buttons.


Configure storage

To configure storage in SnapCenter, complete the following steps:

1. In the SnapCenter UI, select **Storage Systems**. There are two storage types, **ONTAP SVM** and **ONTAP Cluster**. By default, the storage type is **ONTAP SVM**.
2. Click (+) to add the storage system information.

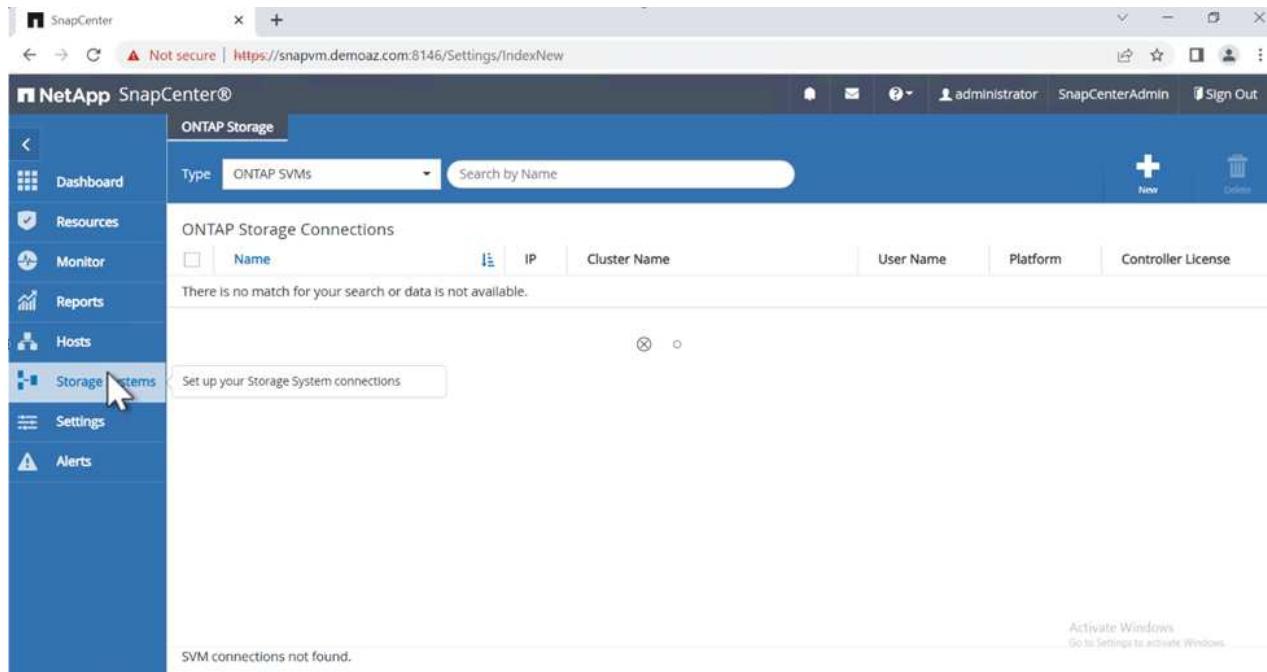

3. Provide the **FSx for ONTAP management endpoint**.

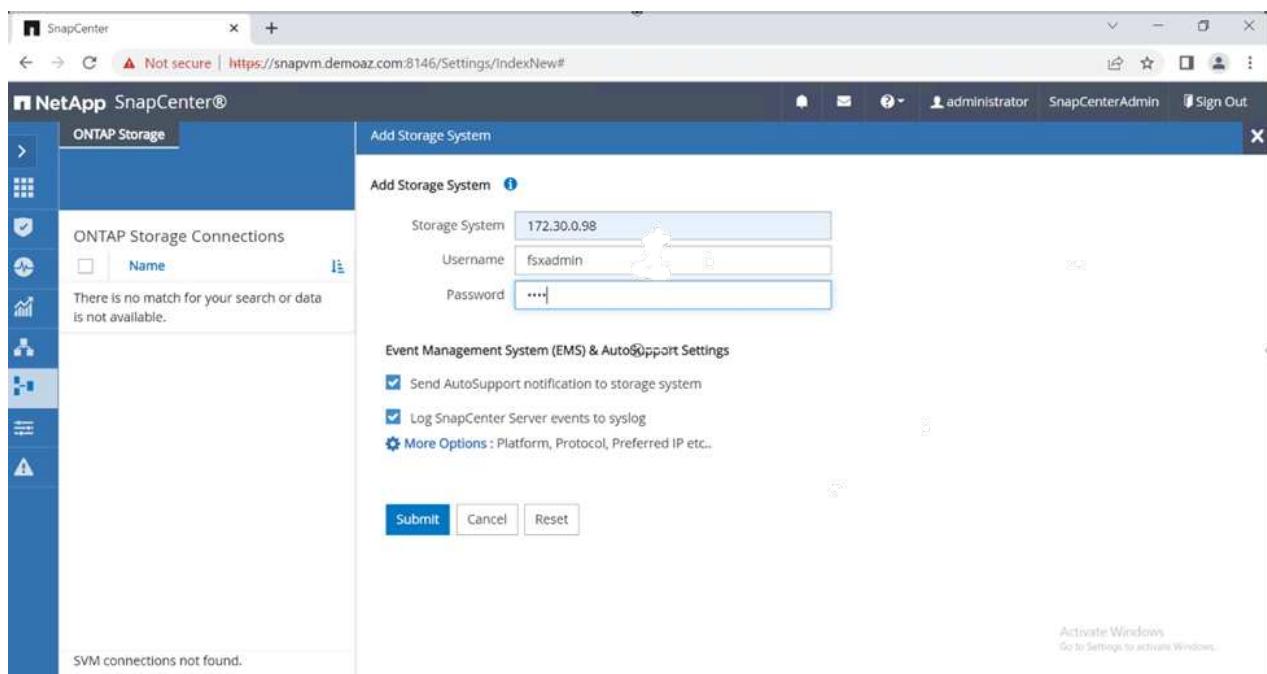

4. The SVM is now configured in SnapCenter.

SnapCenter

Not secure | https://snapvm.demoaz.com:8146/Settings/IndexNew#

NetApp SnapCenter®

ONTAP Storage

Type: ONTAP SVMs Search by Name

ONTAP Storage Connections

Name	IP	Cluster Name	User Name	Platform	Controller License
ESXSVMTESRDS		rdsfsxTest01		PSX	Not applicable

Total 1

Activate Windows
Go to Settings to activate Windows.

The screenshot shows the NetApp SnapCenter web interface. The left sidebar contains navigation links: Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main content area is titled 'ONTAP Storage' and shows 'ONTAP Storage Connections'. A table lists one connection: 'ESXSVMTESRDS' (Cluster Name: rdsfsxTest01, Platform: PSX, Controller License: Not applicable). The top right of the interface includes user information (administrator, SnapCenterAdmin) and a 'Sign Out' link. A 'Not secure' warning is visible at the top. A cursor is positioned over the 'ESXSVMTESRDS' row in the table.

Add a SQL Server host to SnapCenter

To add a SQL Server host, complete the following steps:

1. From the Host tab, click (+) to add the Microsoft SQL Server host.

2. Provide the fully qualified domain name (FQDN) or IP address of the remote host.



The credentials are populated by default.

3. Select the option for Microsoft windows and Microsoft SQL Server and then submit.

The SQL Server packages are installed.

The screenshot shows the NetApp SnapCenter interface. The left sidebar has icons for Dashboard, Resources, Monitor, Reports, Hosts (selected), Storage Systems, Settings, and Alerts. The main content area is titled "Managed Hosts" and lists one host: "FSXCLUSTER.Demoaz.com" (Type: Windows, System: Cluster). A progress bar indicates "Installing plug-in". A message at the bottom right says "Activate Windows" and "Go to Settings to activate Windows".

Name	Type	System	Plug-in	Version	Overall Status
FSXCLUSTER.Demoaz.com	Windows	Cluster			Installing plug-in

1. After the installation is complete, go to the **Resource** tab to verify whether all FSx for ONTAP iSCSI volumes are present.

The screenshot shows the NetApp SnapCenter interface. The left sidebar has icons for Dashboard, Resources (selected), Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main content area is titled "File Systems" and lists six volumes: D:\, E:\, F:\, G:\, H:\, and K:\. All volumes are listed as "Not protected". A message at the bottom right says "Activate Windows" and "Go to Settings to activate Windows".

Name	Host	Storage Layout	Resource Groups	Policies	Last Backup	Overall Status
D:\	FSXCLUSTER.Demo... STER.Demoaz.com	FSXSVMTESRDS:/... _FCIDATA/FCIDATA				Not protected
E:\	FSXCLUSTER.Demo... STER.Demoaz.com	FSXSVMTESRDS:/... _I/FCILOG/FCILOG				Not protected
F:\	FSXCLUSTER.Demo... STER.Demoaz.com	FSXSVMTESRDS:/... _ACKUP/FCIBACKUP				Not protected
G:\	FSXCLUSTER.Demo... STER.Demoaz.com	FSXSVMTESRDS:/... _SNAPLOG/SNAPLOG				Not protected
H:\	FSXCLUSTER.Demo... STER.Demoaz.com	FSXSVMTESRDS:/... _FCITEMP/FCITEMP				Not protected
K:\	FSXCLUSTER.Demo... STER.Demoaz.com	FSXSVMTESRDS:/... _UORUM/FCIQUORUM				Not protected

Configure log directory

To configure a host log directory, complete the following steps:


1. Click the check box. A new tab opens.

The screenshot shows the NetApp SnapCenter web interface. On the left, there's a sidebar with icons for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area is titled "Managed Hosts" and contains a table with three rows. The first row has a checked checkbox and is highlighted in blue. The second and third rows have unchecked checkboxes. The columns are: Name, Type, System, Plug-in, Version, and Overall Status. The first host listed is "FSXCLUSTER.Demoaz.com". The overall status for all hosts is "Configure log directory". At the bottom right of the interface, there's a message: "Activate Windows Go to Settings to activate Windows".

2. Click the **configure log directory** link.

This screenshot shows the "Host Details" page for the host "FSXCLUSTER.Demoaz.com". The left sidebar shows the "Managed Hosts" list with the same three hosts as the previous screen. The main panel displays the host's name, IP address, overall status (which now includes "Configure log directory"), host type (Windows), system (Cluster), credentials (Demoaz), and plug-ins (SnapCenter Plug-ins package 4.7.0.877 for Windows). Under the plug-ins section, there are links for "Microsoft Windows" and "Microsoft SQL Server" with options to "Remove" or "Configure log directory". At the bottom of the panel are "Submit", "Cancel", and "Reset" buttons. The overall status for the host is "Configure log directory".

3. Select the drive for the host log directory and the FCI instance log directory. Click **Save**. Repeat the same process for the second node in the cluster. Close the window.

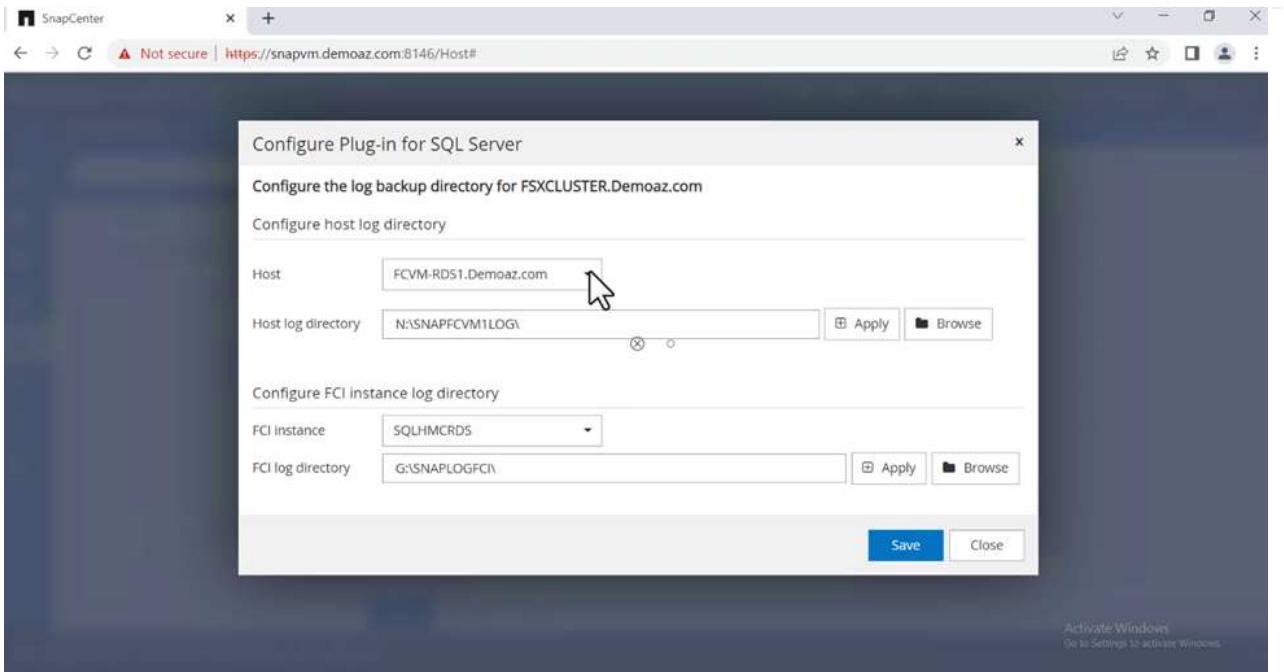

The host is now in a running state.

The screenshot shows the NetApp SnapCenter interface with the 'Managed Hosts' tab selected. The left sidebar includes 'Dashboard', 'Resources' (which is checked), 'Monitor', 'Reports', 'Hosts' (which is selected), 'Storage Systems', 'Settings', and 'Alerts'. The main area displays a table of managed hosts:

	Name	Type	System	Plug-in	Version	Overall Status
<input type="checkbox"/>	FSXCLUSTER.Demoaz.com	Windows	Cluster	Microsoft Windows Server, Microsoft SQL Server	4.7	Running

A hand cursor is pointing at the 'Running' status indicator for the host entry. The status bar at the bottom right says 'Activate Windows Go to Settings to activate Windows.'

1. From the **Resources** tab, we have all the servers and databases.

The screenshot shows the NetApp SnapCenter interface for managing Microsoft SQL Server databases. The left sidebar includes links for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main content area displays a table of databases with columns: Name, Instance, Host, Last Backup, Overall Status, and Type. The table lists seven user databases (INVENTORYDB1 through INVENTORYDB5) and two system databases (master and model). All databases are listed as 'Not protected'. The interface also shows activity metrics at the bottom.

Name	Instance	Host	Last Backup	Overall Status	Type
INVENTORYDB1	SQLHMCARDS	FSXCLUSTER.Demoaz.com		Not protected	User database
INVENTORYDB2	SQLHMCARDS	FSXCLUSTER.Demoaz.com		Not protected	User database
INVENTORYDB3	SQLHMCARDS	FSXCLUSTER.Demoaz.com		Not protected	User database
INVENTORYDB4	SQLHMCARDS	FSXCLUSTER.Demoaz.com		Not protected	User database
INVENTORYDB5	SQLHMCARDS	FSXCLUSTER.Demoaz.com		Not protected	User database
master	SQLHMCARDS	FSXCLUSTER.Demoaz.com		Not protected	System database
model	SQLHMCARDS	FSXCLUSTER.Demoaz.com		Not protected	System database

Configure a backup policy


A backup policy is a set of rules that govern how to manage, schedule, and retain backup. It helps with the backup type and frequency based on your company's SLA.

Expand the following sections to see the detailed instructions on how to complete each step.


Configure back-up operation for an FCI database

To configure a backup policy for an FCI database, complete the following steps:


1. Go to **Settings** and select **Policies** on the top left. Then click **New**.

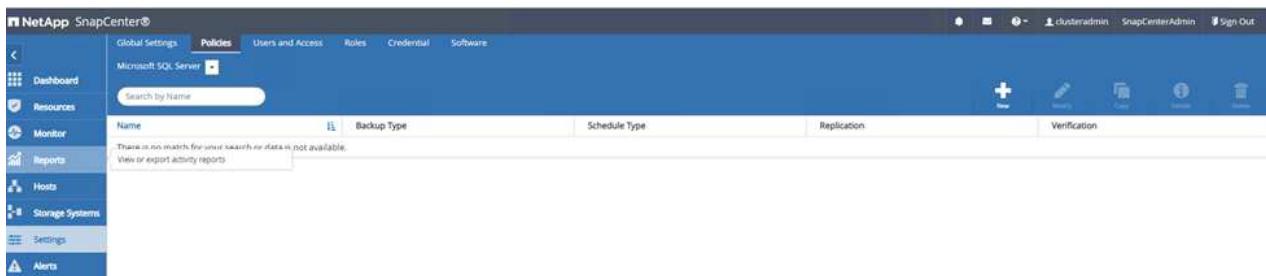


2. Enter the policy name and a description. Click **Next**.

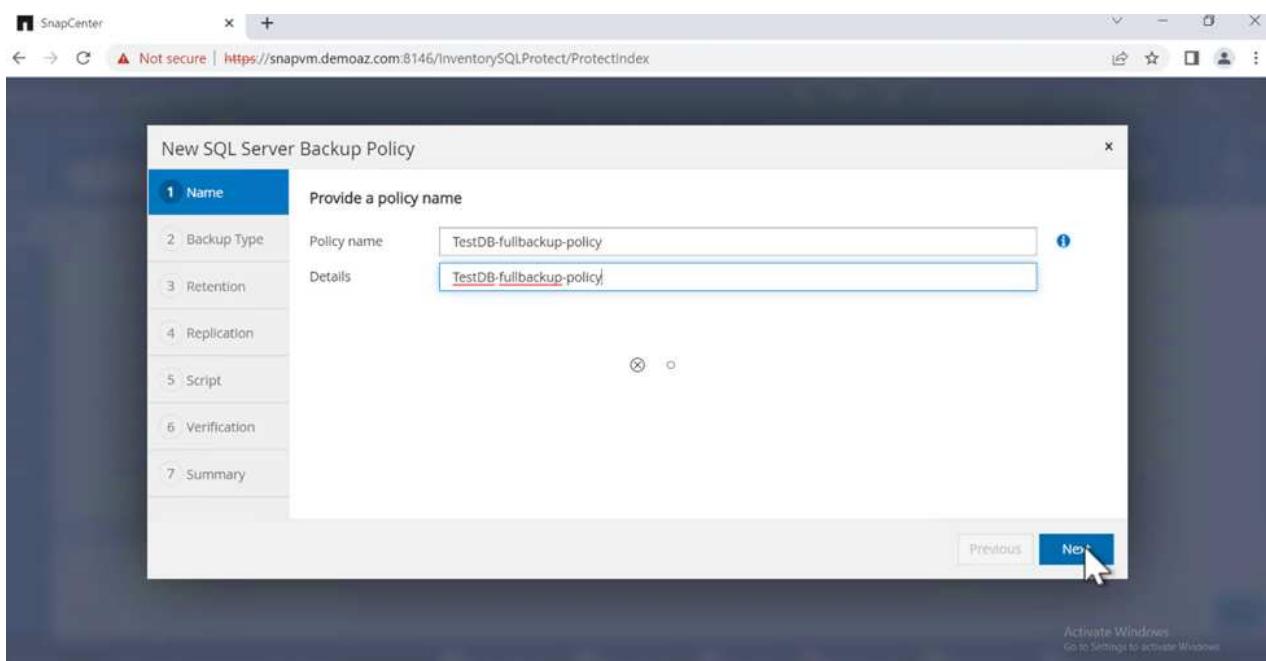


3. Select **Full backup** as the backup type.

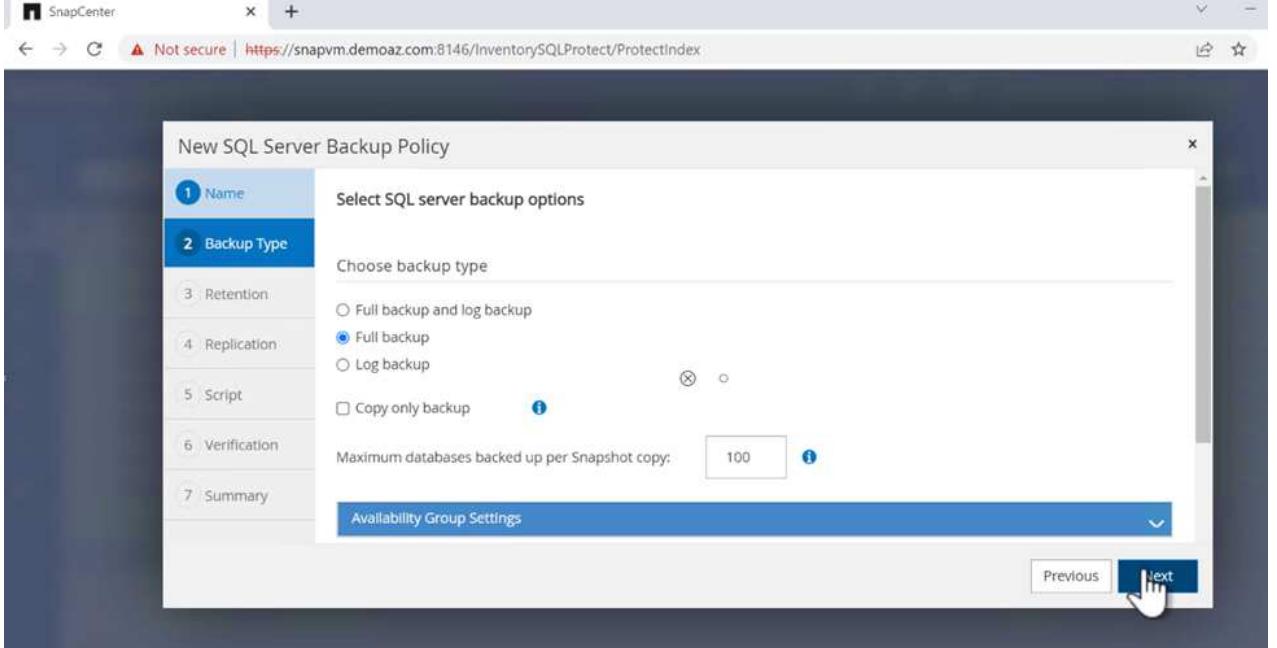


4. Select the schedule frequency (this is based on the company SLA). Click **Next**.

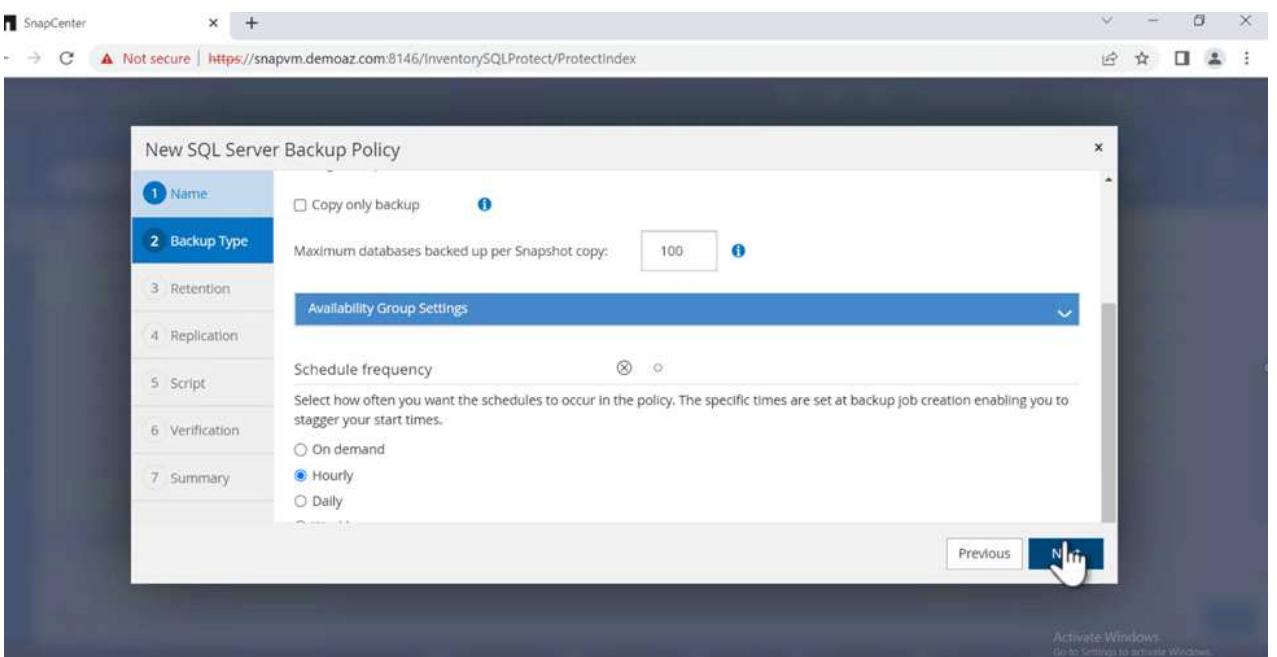

5. Configure the retention settings for the backup.

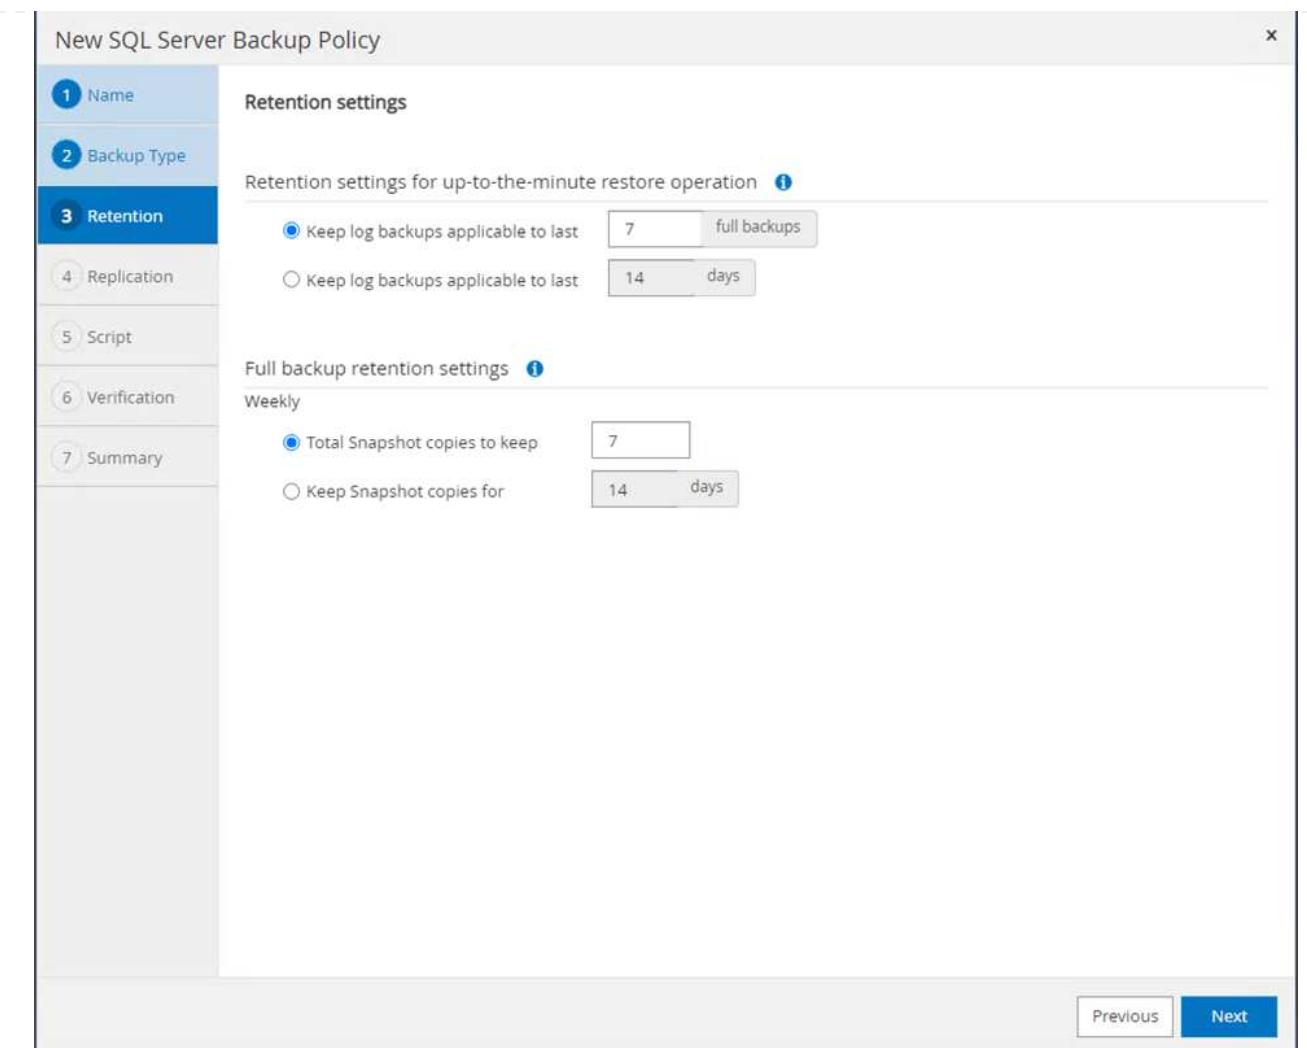

6. Configure the replication options.

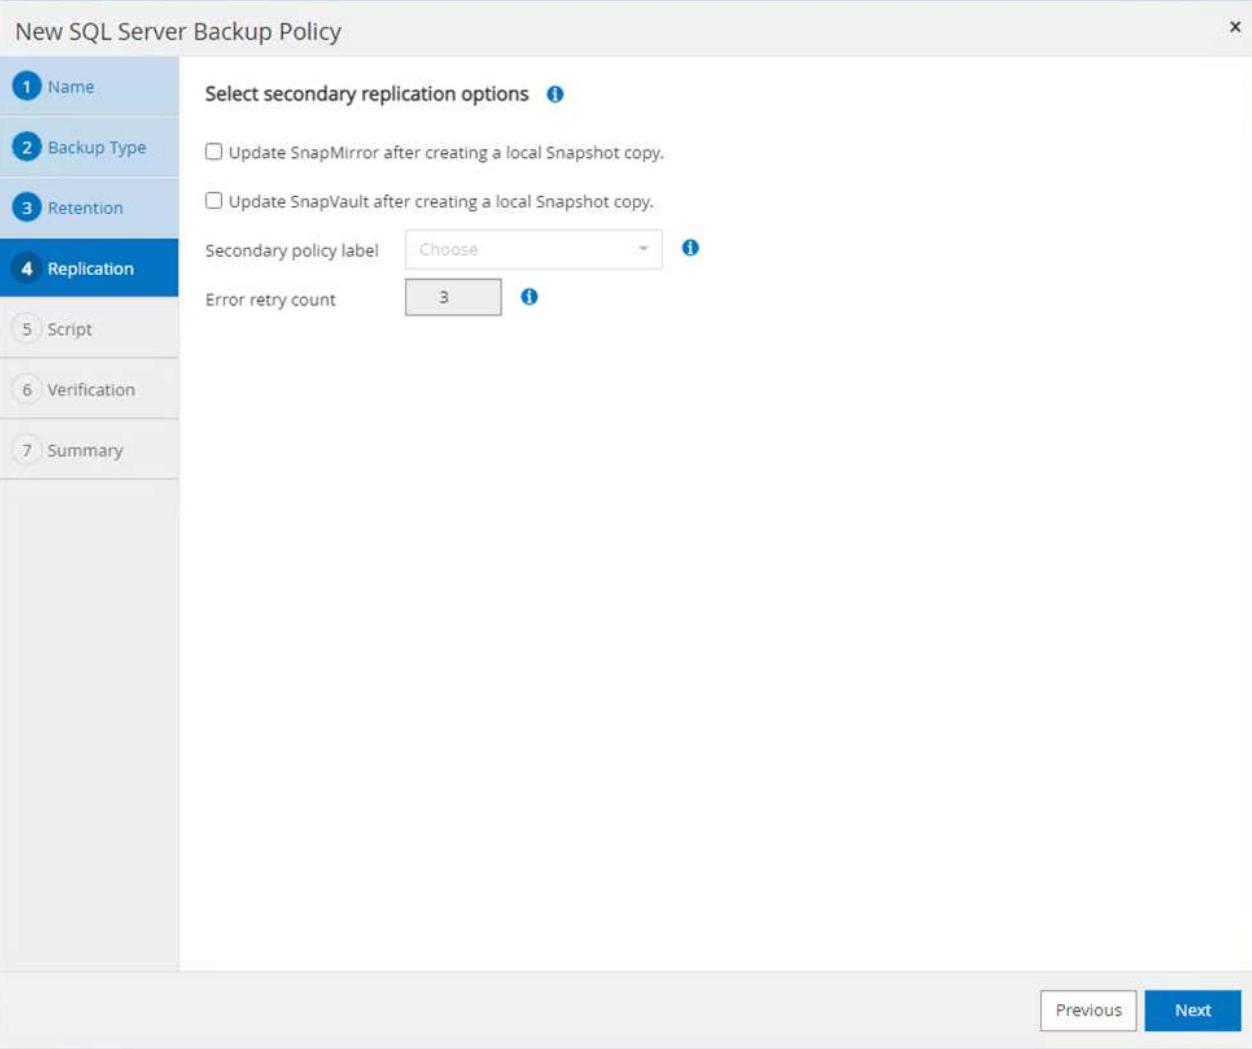

7. Specify a run script to run before and after a backup job is run (if any).

New SQL Server Backup Policy

- 1 Name
- 2 Backup Type
- 3 Retention
- 4 Replication
- 5 Script
- 6 Verification
- 7 Summary

Specify optional scripts to run before performing a backup job

Prescript full path

Prescript arguments

 Choose optional arguments...

Specify optional scripts to run after performing a backup job

Postscript full path

Postscript arguments

 Choose optional arguments...

Script timeout

 60

secs

Previous

Next

8. Run verification based on the backup schedule.

x

New SQL Server Backup Policy

1 Name

Select the options to run backup verification

2 Backup Type

Run verifications for the following backup schedules

Select how often you want the schedules to occur in the policy. The specific verification times are set at backup job creation enabling you to stagger your verification start times.

Weekly

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Database consistency checks options

Limit the integrity structure to physical structure of the database (PHYSICAL_ONLY)

Suppress all information message (NO_INFOMSGS)

Display all reported error messages per object (ALL_ERRORMSG)

Do not check non-clustered indexes (NOINDEX)

Limit the checks and obtain the locks instead of using an internal database Snapshot copy (TABLOCK)

Verification script settings

Script timeout: 60 secs

Prescript full path:

Prescript arguments: Choose optional arguments...

Postscript full path:

Postscript arguments: Choose optional arguments...

Previous Next

9. The **Summary** page provides details of the backup policy. Any errors can be corrected here.

SnapCenter

Not secure | https://snapvm.demoaz.com:8146/InventorySQLProtect/ProtectIndex

New SQL Server Backup Policy

1 Name

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Summary	
Policy name	TestDB-fullbackup-policy
Details	TestDB-fullbackup-policy
Backup type	Full backup
Availability group settings	Backup only on preferred backup replica
Schedule Type	Hourly <input checked="" type="radio"/> <input type="radio"/>
UTM retention	Total backup copies to retain : 7
Hourly Full backup retention	Total backup copies to retain : 7
Replication	none
Backup prescript settings	undefined Prescript arguments:

Previous Finish

Configure and protect MSSQL Server database

1. Set up the starting date and expiration date of the backup policy.

The screenshot shows the 'Database - Protect Resource' interface in NetApp SnapCenter. On the left, a sidebar lists various Microsoft SQL Server databases: DEMODB1, DEMODB2, DEMODB3, INVENTORYDB1, INVENTORYDB2, master, model, msdb, tempdb, and TestDB. The 'TestDB' entry is currently selected. The main pane displays a 5-step wizard: 'Resource' (step 1), 'Policies' (step 2, highlighted in blue), 'Verification' (step 3), 'Notification' (step 4), and 'Summary' (step 5). Below the steps, it says 'Select one or more policies and configure schedules' and shows a dropdown menu with 'TestDB-fullbackup-policy'. Under 'Configure schedules for selected policies', there is a 'Policy' tab showing 'TestDB-fullbackup-policy' and an 'Applied Schedules' section indicating 'None'. A 'Configure Schedules' button is visible, with a hand cursor hovering over it. At the bottom, a message bar says 'Created backup policy TestDB-fullbackup-policy'.

2. Define the schedule for the backup. To do that, click (+) to configure a schedule. Enter the **Start date** and **Expires on** date. Set the time based on the company's SLA.

The screenshot shows the 'Add schedules for policy TestDB-fullbackup-policy' dialog box. It has an 'Hourly' tab selected. The 'Start date' is set to '11/18/2022 03:42 pm'. There is an unchecked checkbox for 'Expires on' with a value of '12/18/2022 03:42 pm'. Below these, the 'Repeat every' field is set to '6 hours 0 mins'. A tooltip message at the bottom states: 'The schedules are triggered in the SnapCenter Server time zone.' At the bottom right of the dialog, there are 'Cancel' and 'OK' buttons, with a hand cursor hovering over the 'OK' button.

3. Configure the verification server. From the drop- down menu, select the server.

The screenshot shows the 'Database - Protect Resource' page in NetApp SnapCenter. On the left, a sidebar lists databases: DEMODB1, DEMODB2, DEMODB3, INVENTORYDB1, INVENTORYDB2, master, model, msdb, tempdb, and TestDB, with TestDB selected. The main area displays a workflow with five steps: Resource, Policies, Verification, Notification, and Summary. Step 1 (Resource) is completed (blue). Step 2 (Policies) is in progress (orange). Step 3 (Verification) is completed (blue). Step 4 (Notification) is in progress (orange). Step 5 (Summary) is not yet reached (grey). A dropdown menu for 'Verification server' shows 'SQLHMCRD(14.0.1000)' selected. Below it, a section for 'Configure verification schedules' includes tabs for 'Policy' (selected), 'Schedule Type', 'Applied Schedules', and 'Configure Schedules'. A message states: 'There is no match for your search or data is not available.' Navigation buttons 'Previous' and 'Next' are at the bottom right.

4. Confirm the configured schedule by clicking the plus sign and confirm.
5. Provide information for email notification. Click **Next**.

The screenshot shows the 'Database - Protect Resource' page in NetApp SnapCenter. The sidebar lists databases: master, model, msdb, tempdb, testdb, master, model, msdb, KTFDB, and tempdb, with KTFDB selected. A message at the top right says: 'If you want to send notifications for scheduled or on demand jobs, an SMTP server must be configured. Continue to the summary page to save your information, and then go to Settings>Global Settings>Notification Server Settings to configure the SMTP server.' The workflow steps are: Resource (blue), Policies (orange), Verification (blue), Notifications (orange), and Summary (grey). A section titled 'Provide email settings' asks to select service accounts or people to notify regarding protection issues. It includes fields for 'Email preference' (Never), 'From' (From email), 'To' (Email to), 'Subject' (Notification), and an unchecked checkbox for 'Attach job report'. Navigation buttons 'Previous' and 'Next' are at the bottom right.

The summary of the backup policy for SQL Server database is now configured.

The screenshot shows the 'Database - Protect Resource' page in NetApp SnapCenter. On the left, a sidebar lists databases: DEMODB1, DEMODB2, DEMODB3, INVENTORYDB1, INVENTORYDB2, master, model, msdb, tempdb, and TestDB, with TestDB selected. The main area displays a 5-step workflow: 1. Resource (selected), 2. Policies, 3. Verification, 4. Notification, and 5. Summary. Step 1 is highlighted with a blue circle. A message bar at the top right says: 'If you want to send notifications for scheduled or on demand jobs, an SMTP server must be configured. Continue to the summary page to save your information, and then go to Settings>Global Settings>Notification Server Settings to configure the SMTP server.' Below the steps, database details are shown: Database name (TestDB), Policy (TestDB-fullbackup-policy: Hourly), Verification servers (SQLHMCARDS), Verification enabled for policy (None), and Send email (No). At the bottom right are 'Previous' and 'Finish' buttons.


SnapCenter backup operations

To create on-demand SQL Server backups, complete the following steps:


1. From the **Resource** view, select the resource and select **Backup now**.

The screenshot shows the 'Resource' view in NetApp SnapCenter. The sidebar lists databases: DEMODB1, DEMODB2, DEMODB3, INVENTORYDB1, INVENTORYDB2, master, model, msdb, tempdb, and TestDB, with TestDB selected. The main area shows a 'Topology' section with icons for Migrate Database, Clone Lifecycle, Remove Protection, and a large 'Black up Now' button, which has a cursor pointing to it. Below this is a 'Manage Copies' section with 'Local copies' showing 0 Backups and 0 Clones. To the right is a 'Summary Card' showing 0 Backups and 0 Clones. Further down are sections for Primary Backup(s) and Backups not found. At the bottom, there's an 'Activity' section showing job status: 0 Completed, 0 Warnings, 0 Failed, 0 Canceled, 0 Running, and 0 Queued.

2. In the **Backup** dialog box, click **Backup**.

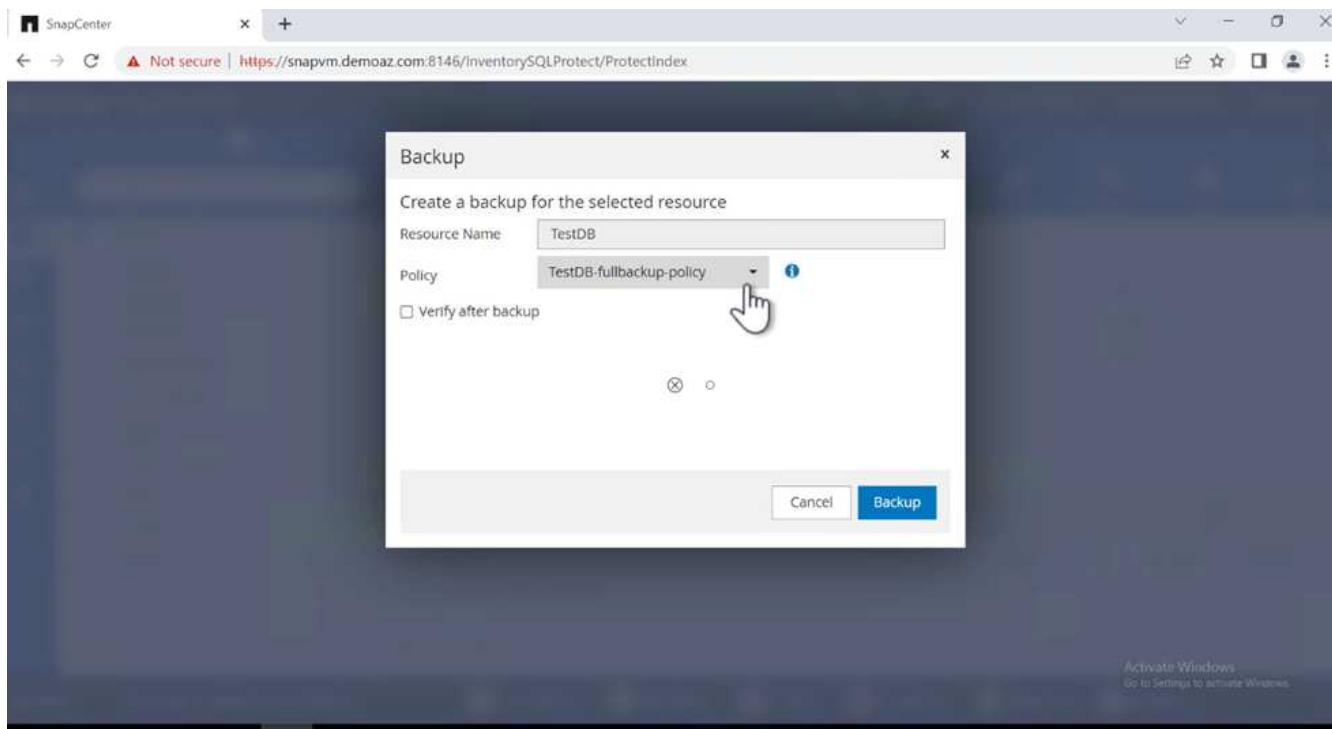

3. A confirmation screen is displayed. Click **Yes** to confirm.

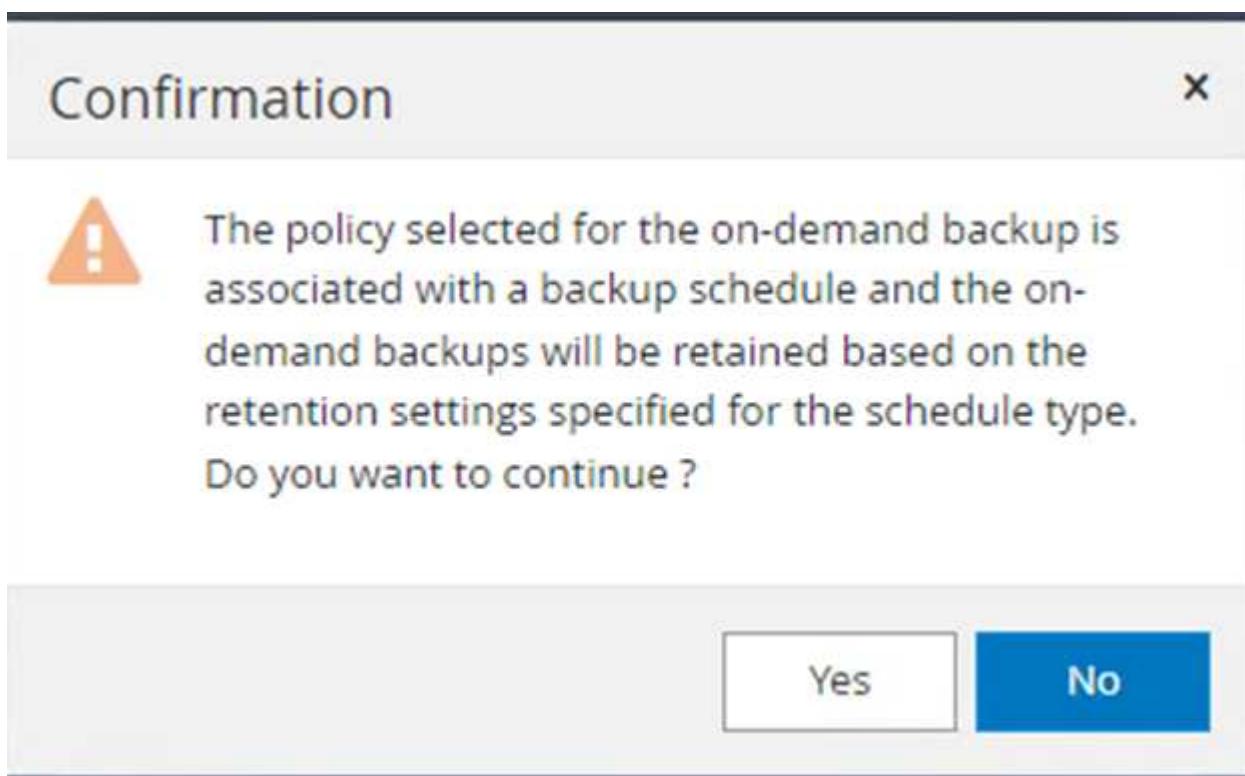

Monitor backup job

1. From the **Monitor** tab, click the job and select **Details** on the right to view the jobs.

The screenshot shows the NetApp SnapCenter interface. The top navigation bar includes links for 'Jobs', 'Schedules', 'Events', and 'Logs'. A search bar labeled 'search by name' is present. On the left, a sidebar lists 'Dashboard', 'Resources' (selected), 'Monitor', 'Reports', 'Hosts', 'Storage Systems', 'Settings', and 'Alerts'. The main content area displays a table titled 'Jobs - Filter' with columns for 'ID', 'Status', 'Name', 'Start date', 'End date', and 'Owner'. A specific job entry is highlighted: 'Backup of Resource Group 'SQLHMCRD5_TestDB' with policy 'TestDB-fullbackup-policy''. The status is green, indicating success. The start date is 11/18/2022 3:43:12 PM and the end date is 11/18/2022 3:47:05 PM. The owner is Administrator. A hand cursor is hovering over the 'Details' button in the top right corner of the job row.

This screenshot shows a 'Job Details' dialog box overlaid on the SnapCenter interface. The dialog title is 'Job Details' and the sub-section is 'Backup of Resource Group 'SQLHMCRD5_TestDB' with policy 'TestDB-fullbackup-policy''. The task tree shows the following steps: Backup of Resource Group 'SQLHMCRD5_TestDB' with policy 'TestDB-fullbackup-policy', fcm-rds1.demoaz.com, Preparing for Backup, Creating SQL Backup, Finalizing Backup, Data Collection (which is currently selected and highlighted in grey), and Send EMS Messages. Below the tree, a message states: 'Task Name: Data Collection Start Time: 11/18/2022 3:47:05 PM End Time: 11/18/2022 3:47:05 PM'. At the bottom of the dialog are three buttons: 'View Logs', 'Cancel Job', and 'Close'. A hand cursor is hovering over the 'Close' button. The background of the dialog has a dark theme.

When the backup is completed, a new entry is shown in the Topology view.

Backup operation for multiple databases

To configure a backup policy for multiple SQL Server databases, create resource group policies by completing the following steps:


1. In the **Resources** tab from the **View** menu, change to a resource group using the drop-down menu.

The screenshot shows the NetApp SnapCenter interface for Microsoft SQL Server. On the left, there's a navigation sidebar with options like Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area is titled 'Microsoft SQL Server' and shows a table of databases. The columns include Instance, Host, Last Backup, Overall Status, and Type. There are 213 databases listed. At the top right of the main area, there's a blue button labeled 'New Resource Group' with a white plus sign. Below the table, there's a status bar with activity metrics: 3 Completed, 0 Warnings, 0 Failed, 0 Canceled, 0 Running, and 0 Queued.

2. Click (+) for a new resource group.


This screenshot shows the same NetApp SnapCenter interface, but the 'View' dropdown has been changed to 'Resource Group'. The main table is empty, displaying the message 'There is no match for your search or data is not available.' Below the table, there's a note: 'Resources are not found. Click Refresh Resources to discover databases in the database view or create new resource group on the discovered databases from the resource view.' At the top right, the 'New Resource Group' button is visible. The status bar at the bottom remains the same as in the previous screenshot.

3. Provide a name and tag. Click Next.

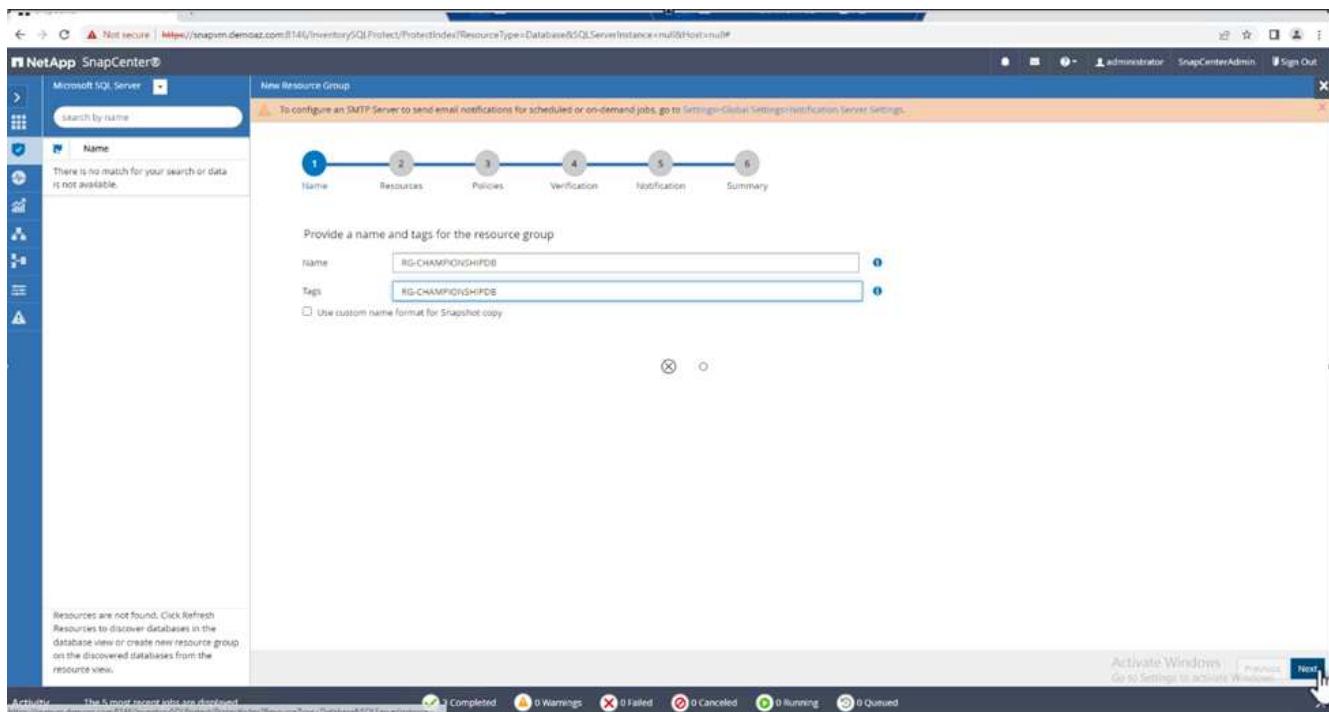


4. Add resources to the resource group:


- **Host.** Select the server from the drop-down menu hosting the database.
- **Resource type.** From the drop-down menu, select **Database**.
- **SQL Server instance.** Select the server.

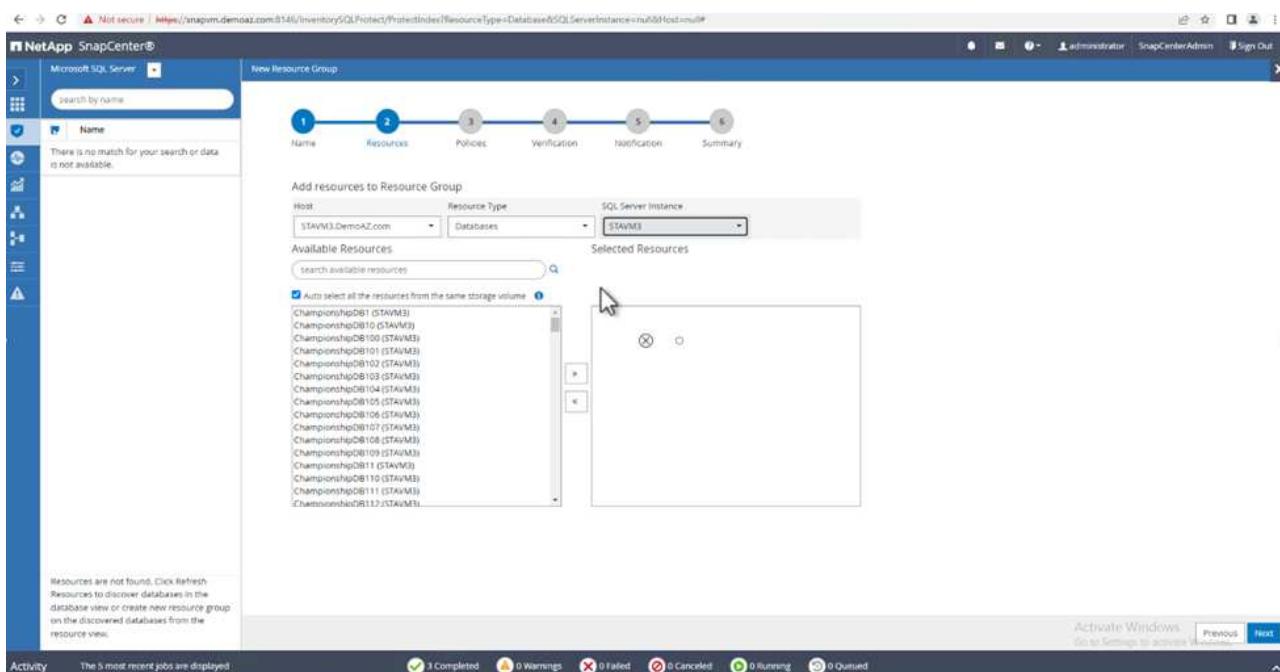


The **option Auto Selects All the Resources from the Same Storage Volume*** is selected by default. Clear the option and select only the databases you need to add to the resource group, Click the arrow to add and click **Next**.

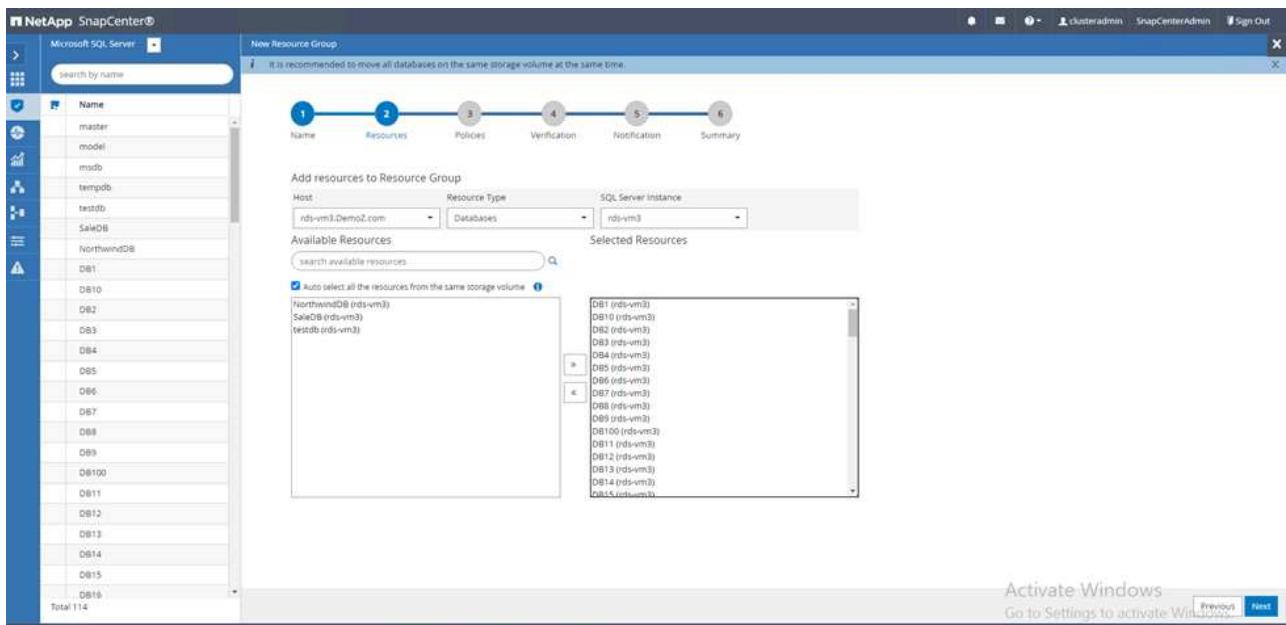


5. On the policies, click (+).

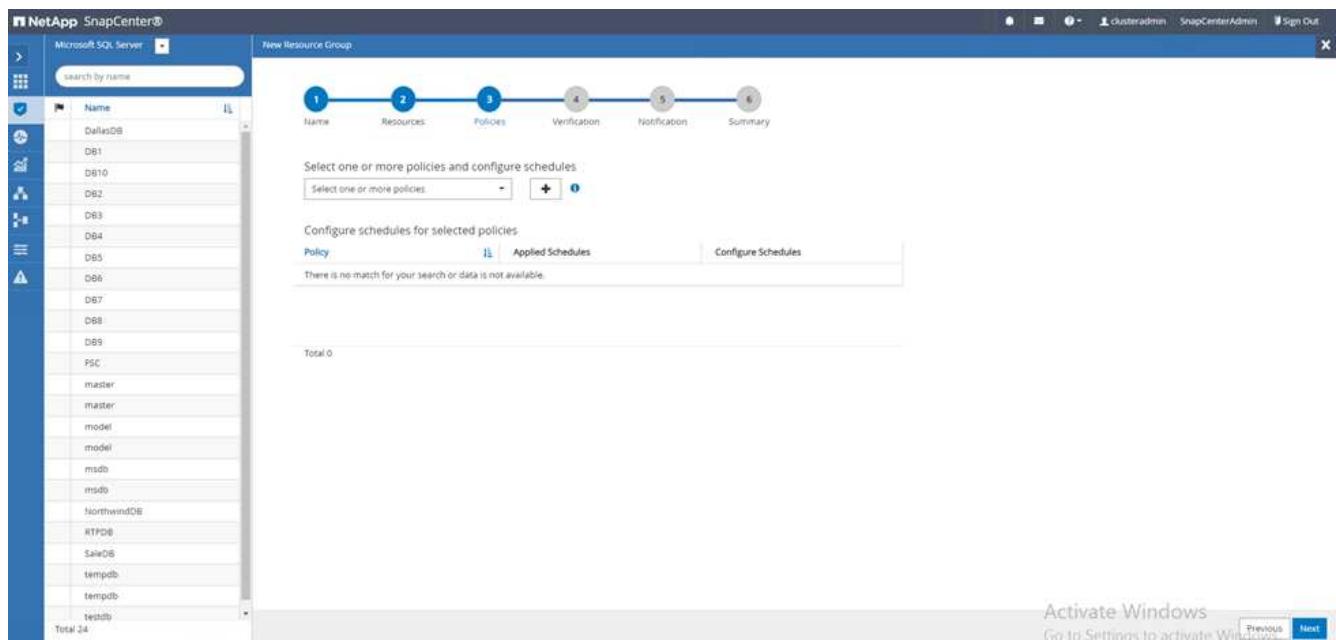


6. Enter the resource group policy name.

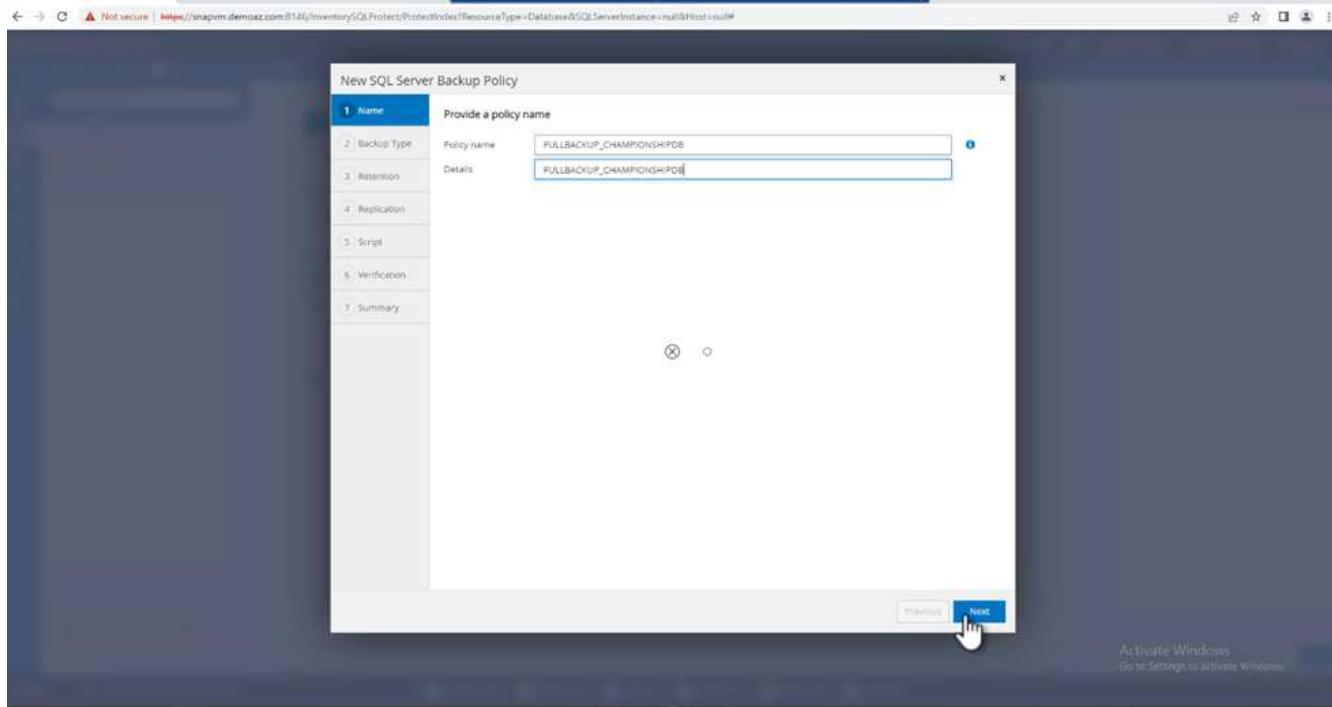


7. Select **Full backup** and the schedule frequency depending on your company's SLA.

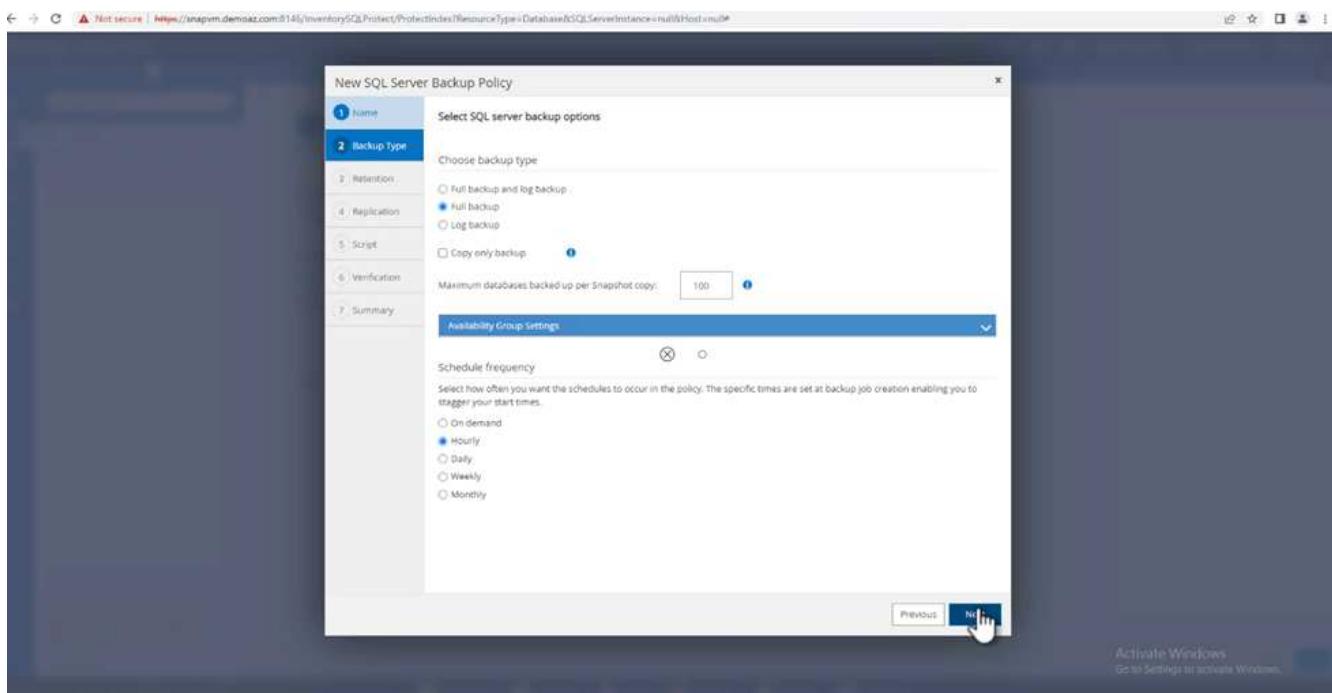

8. Configure the retention settings.

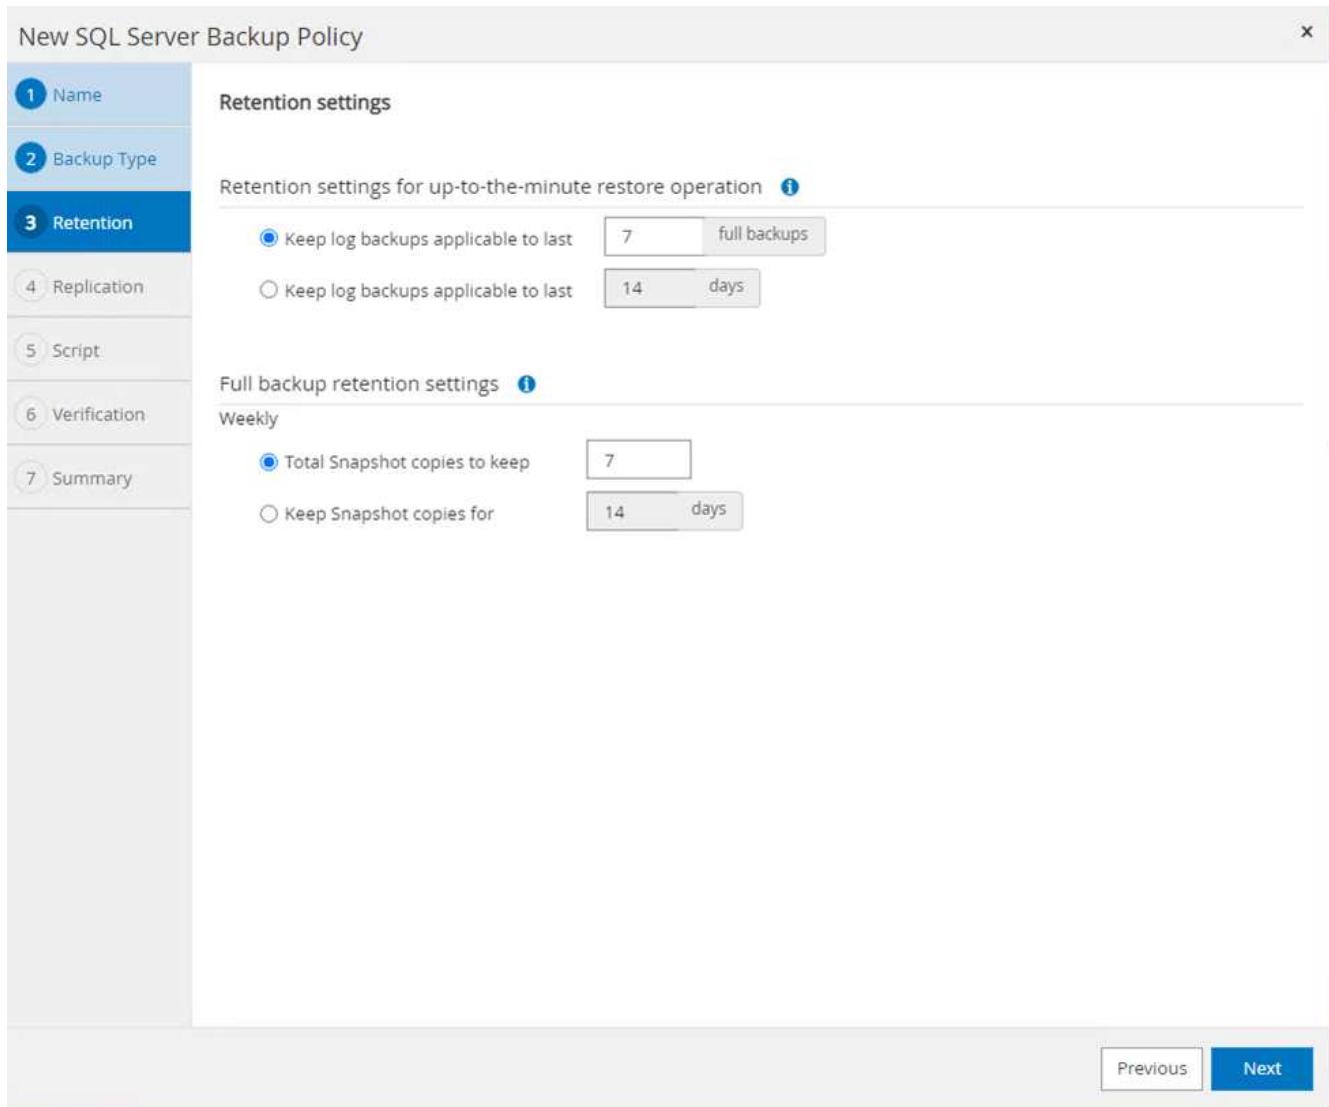

9. Configure the replication options.

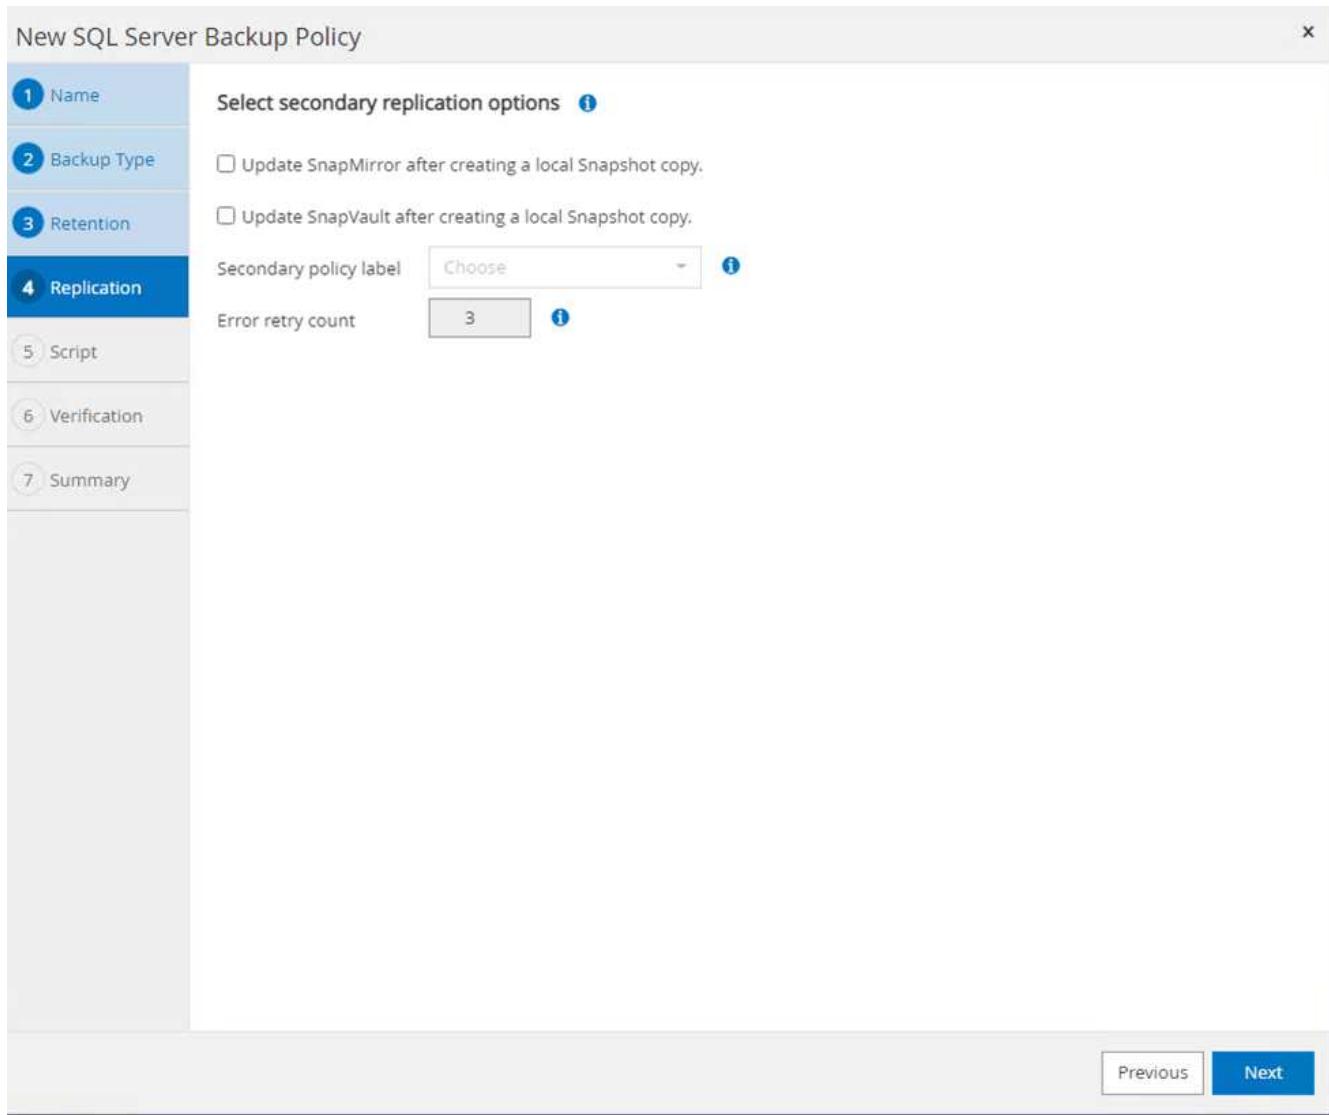

10. Configure the scripts to run before performing a backup. Click **Next**.

New SQL Server Backup Policy

X

1 Name

Specify optional scripts to run before performing a backup job

Prescript full path

Prescript arguments Choose optional arguments...

2 Backup Type

3 Retention

4 Replication

5 Script

Specify optional scripts to run after performing a backup job

Postscript full path

Postscript arguments Choose optional arguments...

6 Verification


7 Summary

Script timeout 60 secs

Previous Next

The screenshot shows the 'New SQL Server Backup Policy' configuration window. The 'Script' tab is active. On the left, a vertical navigation bar lists steps 1 through 7. The 'Script' step is highlighted with a blue background. The main area contains sections for 'Prescript' and 'Postscript' scripts, each with a 'full path' input field and an 'arguments' input field with a 'Choose optional arguments...' placeholder. A 'Script timeout' field shows '60 secs'. At the bottom right are 'Previous' and 'Next' buttons.

11. Confirm the verification for the following backup schedules.

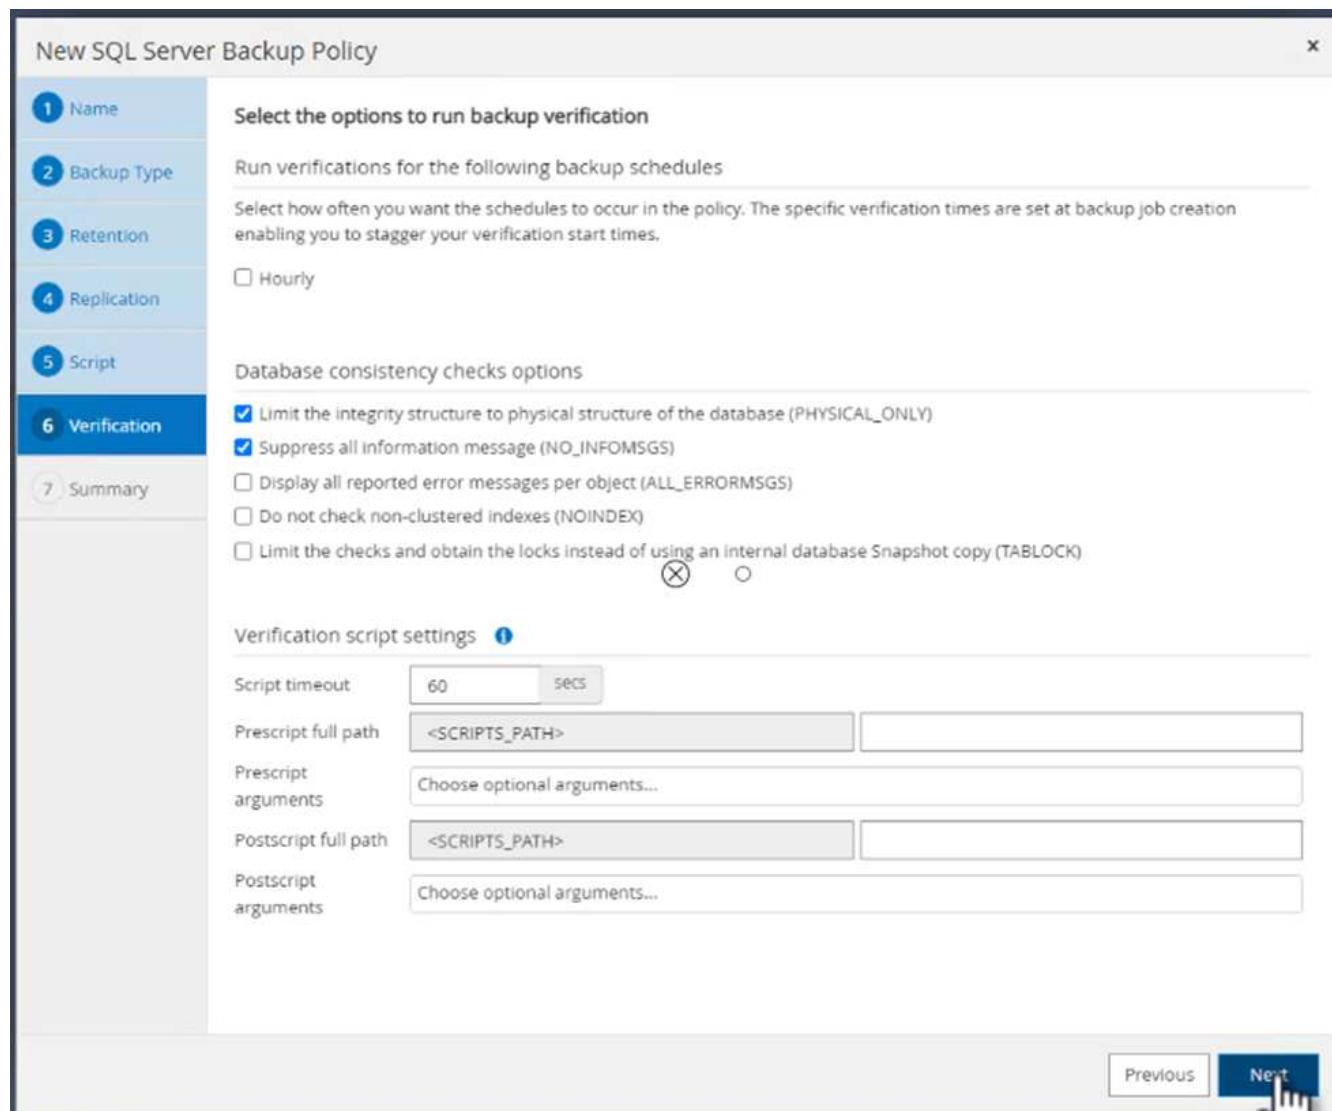

12. On the **Summary** page, verify the information, and click **Finish**.


New SQL Server Backup Policy

1 Name	Summary
2 Backup Type	Policy name: FULLBACKUP_CHAMPIONSHIPDB
3 Retention	Details: FULLBACKUP_CHAMPIONSHIPDB
4 Replication	Backup type: Full backup
5 Script	Availability group settings: Backup only on preferred backup replica
6 Verification	Schedule Type: Hourly UTM retention: Total backup copies to retain : 7
7 Summary	Hourly Full backup retention: Total backup copies to retain : 7 Replication: none Backup prescript settings: undefined Prescript arguments: Backup postscript settings: undefined Postscript arguments: Verification for backup schedule type: Hourly Verification prescript settings: undefined Prescript arguments: Verification postscript settings: undefined Postscript arguments:

[Previous](#) **Finish** 

Configure and protect multiple SQL Server databases

1. Click the (+) sign to configure the start date and the expire- on date.

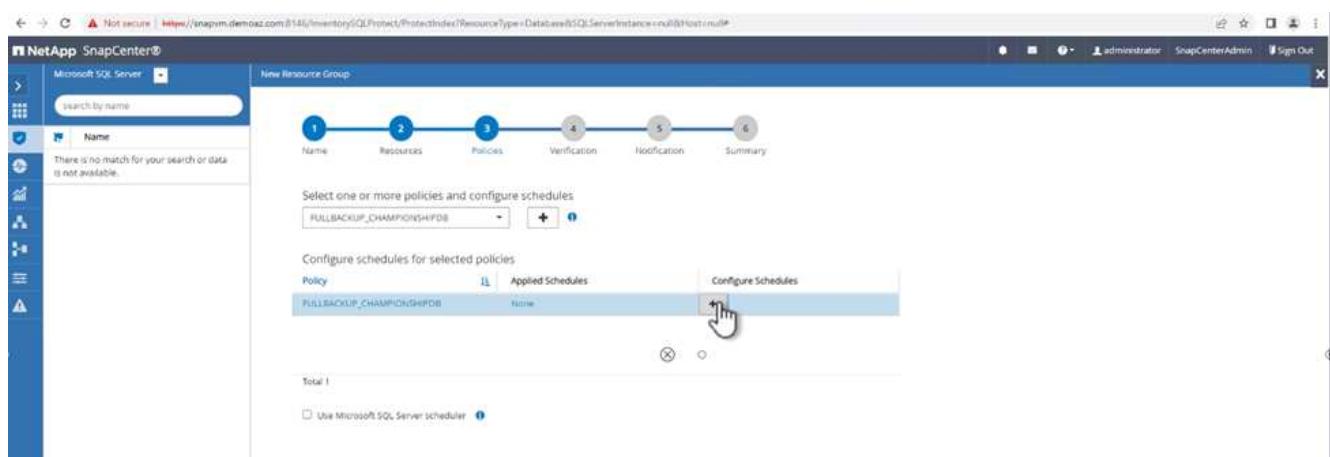

The screenshot shows the NetApp SnapCenter interface for configuring a new resource group for a Microsoft SQL Server database. The left sidebar shows a tree view with 'Microsoft SQL Server' selected. The main pane displays a 'New Resource Group' wizard with six steps: Name, Resources, Policies, Verification, Notification, and Summary. Step 1 is active. A dropdown menu under 'Select one or more policies and configure schedules' shows 'FULLBACKUP_CHAMPIONSHIPDB'. Below it, a table lists the policy 'FULLBACKUP_CHAMPIONSHIPDB' with 'None' applied and a 'Configure Schedules' button highlighted with a cursor. At the bottom, there's a note about using the Microsoft SQL Server scheduler.

2. Set the time.

Add schedules for policy FULLBACKUP_CHAMPIONSHIPDB

X

Hourly

Start date

11/11/2022 05:30 pm



Expires on

12/11/2022 05:27 pm



Repeat every

8



hours

0

mins




The schedules are triggered in the SnapCenter Server time zone.




Cancel

OK




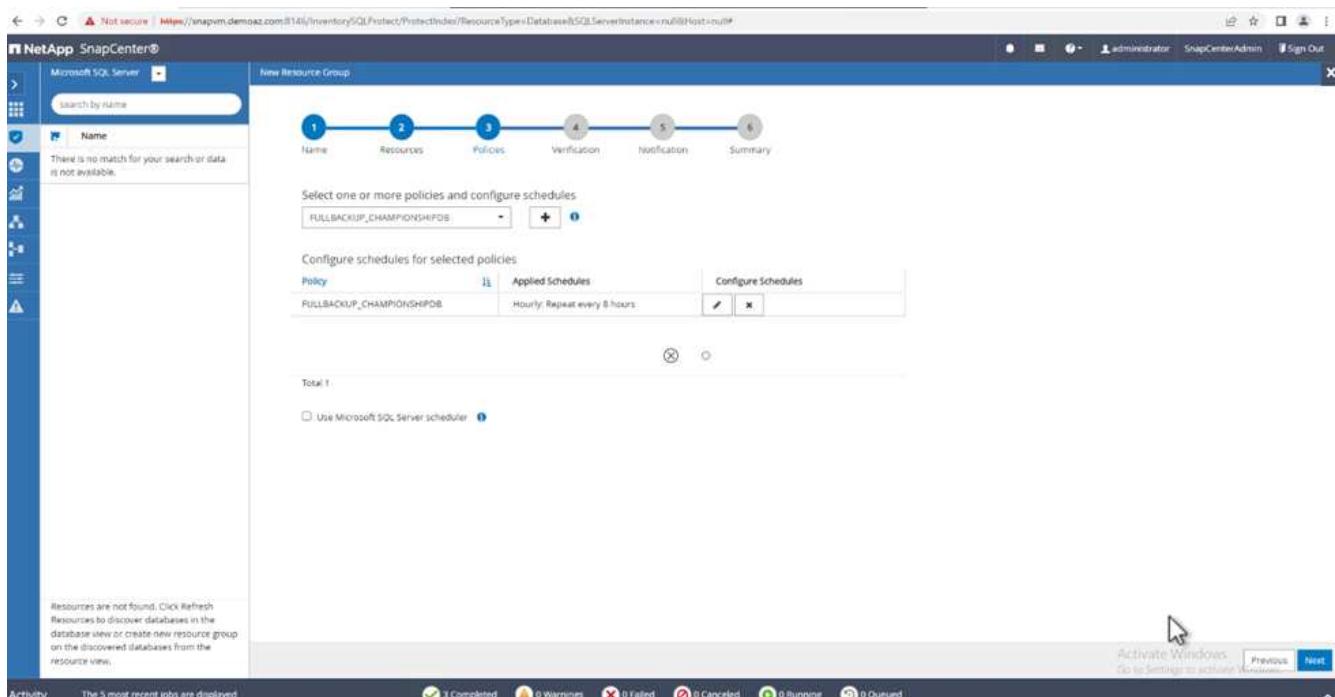


3. From the **Verification** tab, select the server, configure the schedule, and click **Next**.

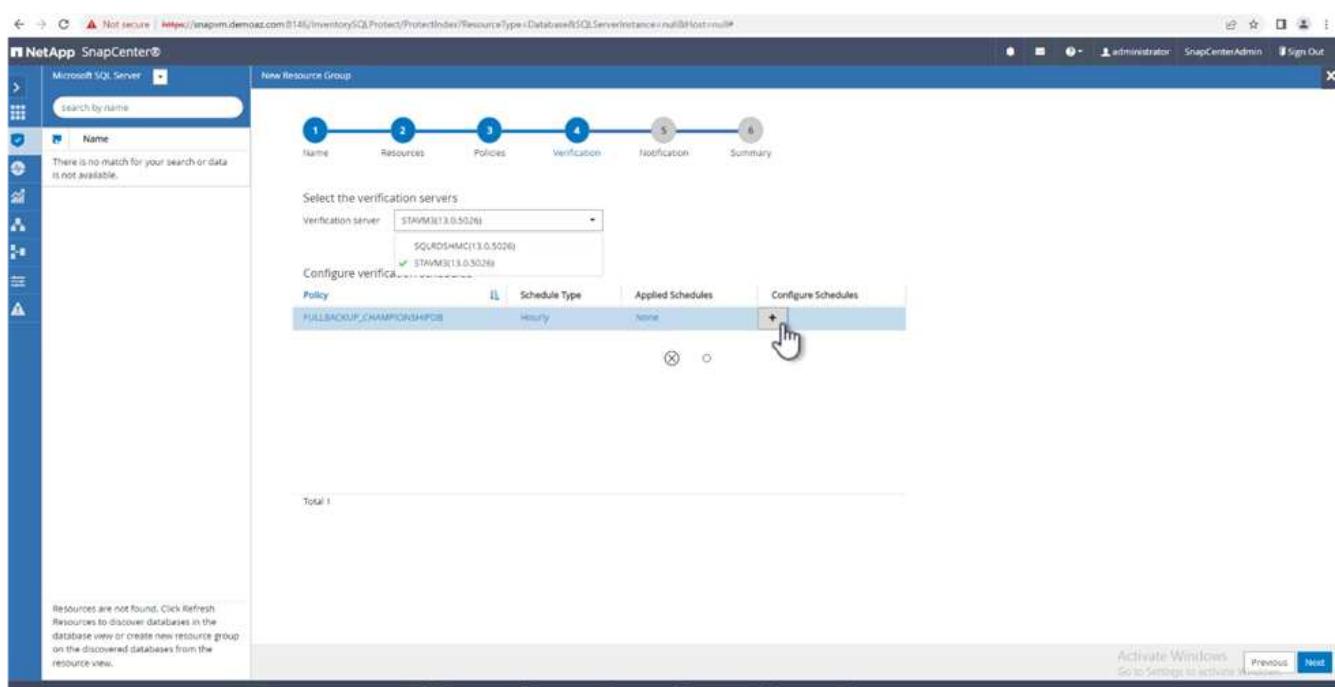

4. Configure notifications to send an email.

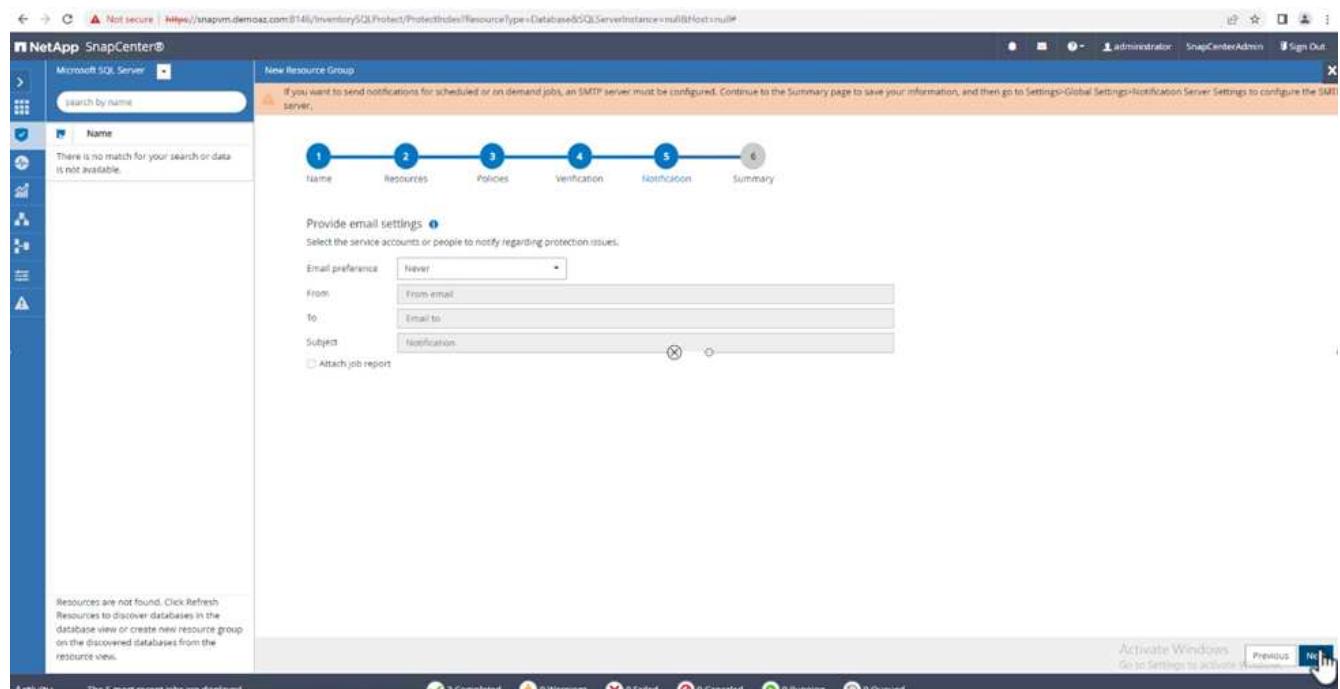

The policy is now configured for backing up multiple SQL Server databases.

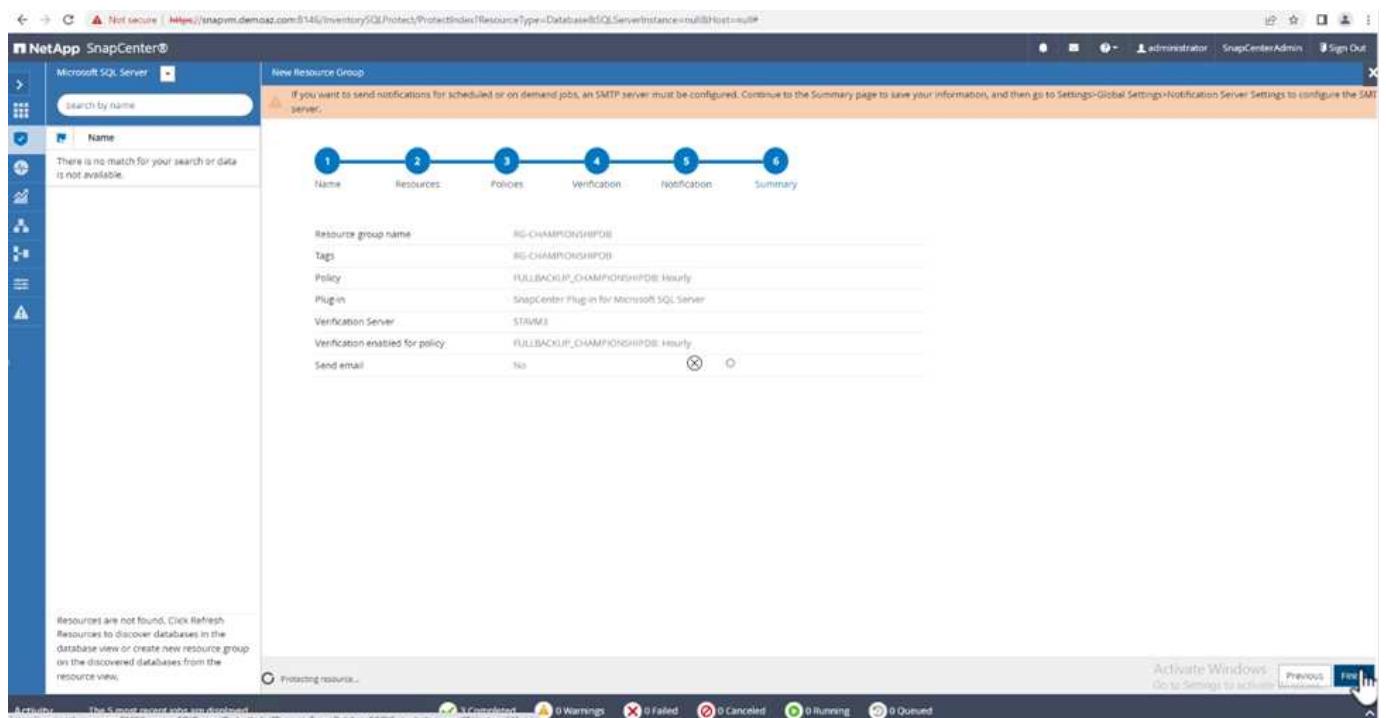

Trigger on-demand backup for multiple SQL Server databases

1. From the **Resource** tab, select view. From the drop-down menu, select **Resource Group**.

IG-O-MMPHNSH6/DS Details

Name	Resource Name	Type	Host
	ChampionshipDB1 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB10 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB100 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB101 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB102 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB103 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB104 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB105 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB106 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB107 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB108 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB109 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB11 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB110 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB111 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB112 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB113 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB114 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB115 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB116 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB117 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB118 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB119 (STAVM3)	SQL Database	STAVM3.DemoAZ.com
	ChampionshipDB12 (STAVM3)	SQL Database	STAVM3.DemoAZ.com

Total 114

Activity The 5 most recent jobs are displayed

Activate Windows Go to Settings to activate Windows.

2. Select the resource group name.
3. Click **Backup now** in the upper right.


RG-1 Details

Name	Resource Name	Type	Host
master	DB1 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
model	DB10 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
msdb	DB2 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
tempdb	DB3 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
testdb	DB4 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
SaleDB	DB5 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
NorthwindDB	DB6 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB1	DB7 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB10	DB8 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB2	DB9 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB3	DB100 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB4	DB11 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB5	DB12 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB6	DB13 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB7	DB14 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB8	DB15 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB9	DB16 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB100	DB17 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB11	DB18 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB12	DB19 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB13	DB20 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB14	DB21 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB15	DB22 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com
DB16	DB23 (rds-vm3)	SQL Database	rds-vm3.DemoAZ.com


Total 114

Activate Windows Go to Settings to activate Windows.

4. A new window opens. Click the **Verify after backup** checkbox and then click backup.

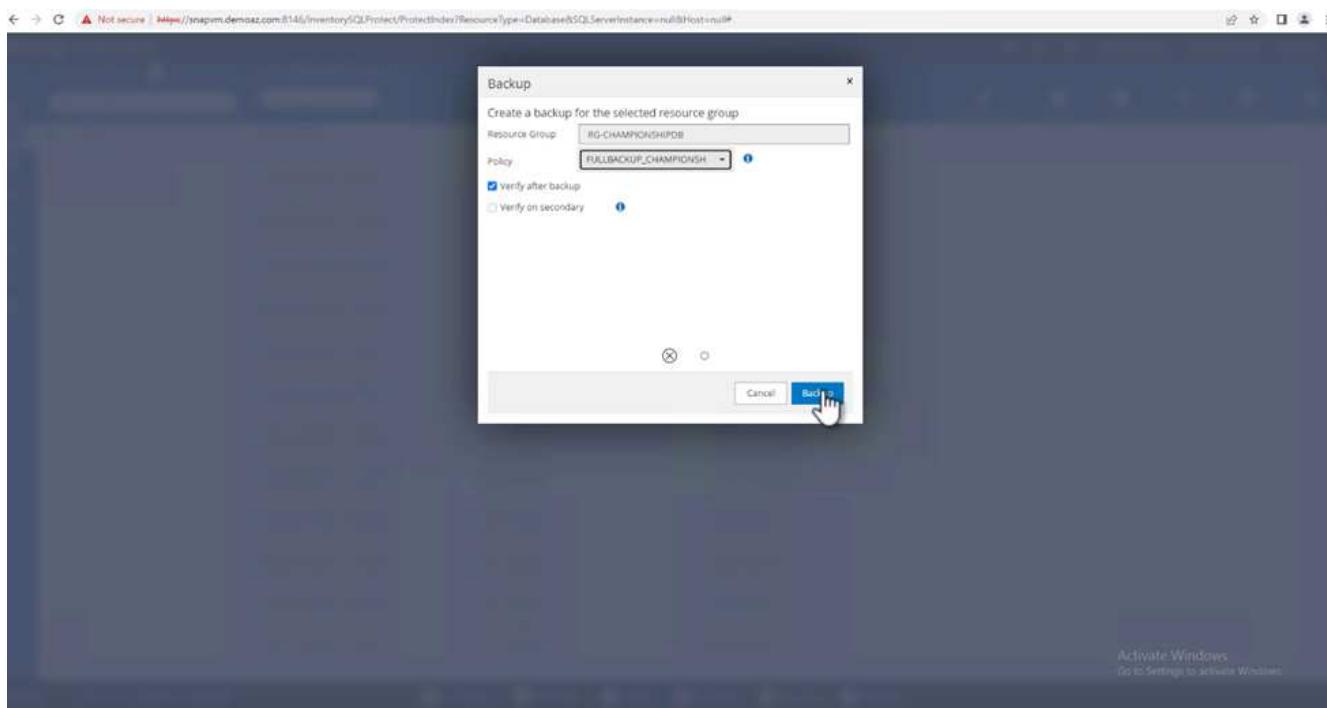


5. A confirmation message is displayed. Click **Yes**.

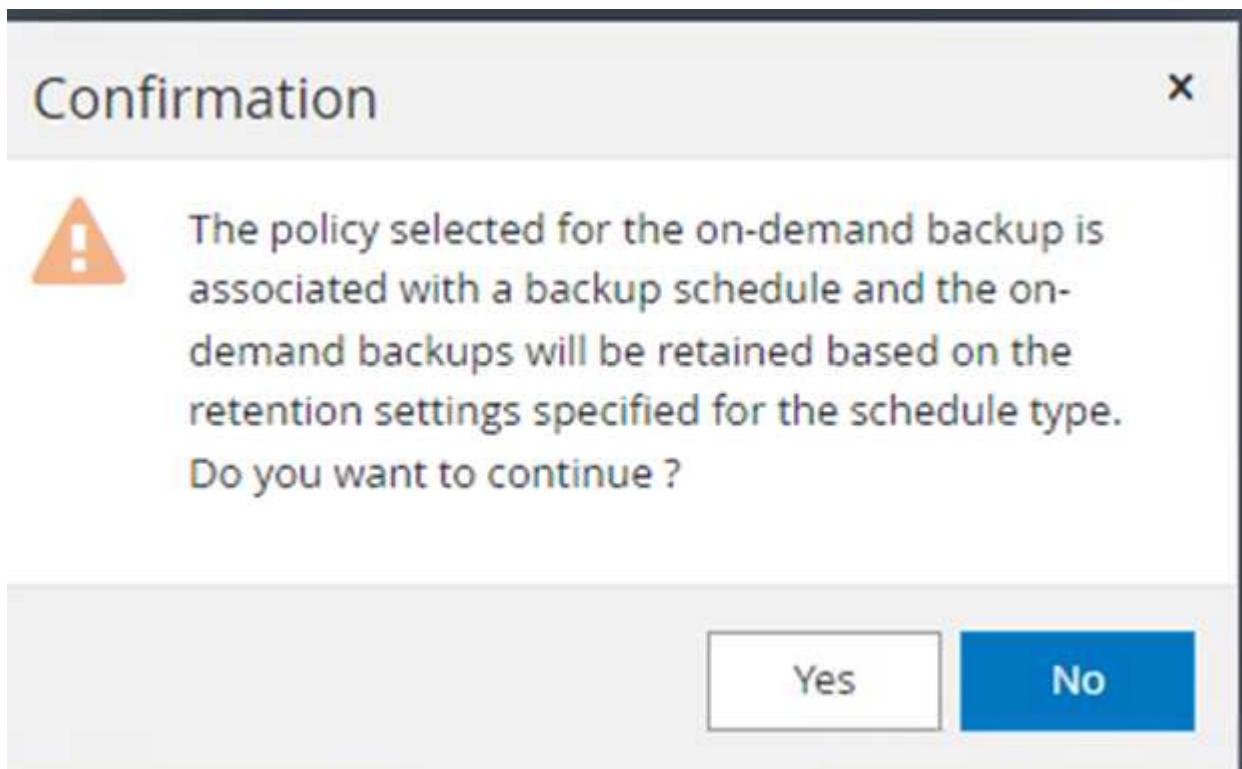

Monitor multiple-database backup jobs

From the left navigation bar, click **Monitor**, select the backup job, and click **Details** to view job progress.

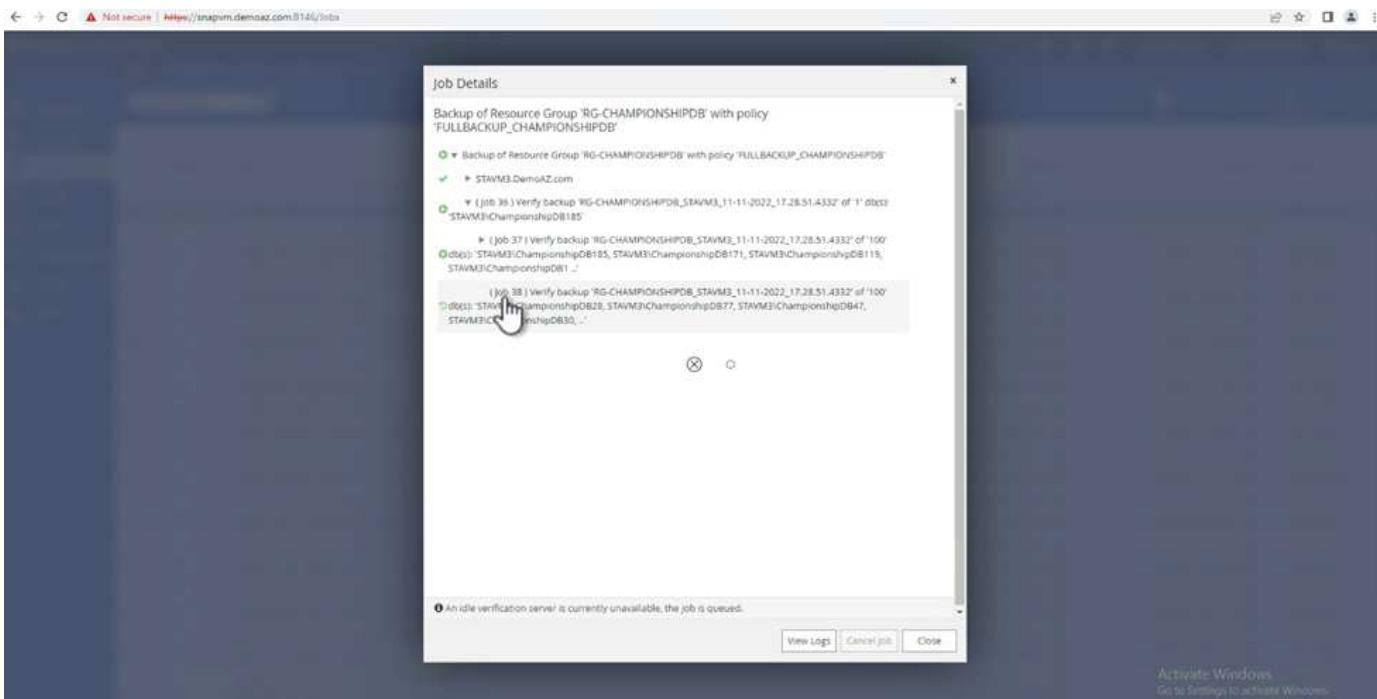

Click the **Resource** tab to see the time it takes for the backup to be completed.

A screenshot of the NetApp SnapCenter 'Resources' tab. It displays a table with columns: Name, Resource Count, Tags, Policies, Last Backup, and Overall Status. One row is selected for 'RG-CHAMPIONSHIPDB', which has a resource count of 200, is tagged with 'RG-CHAMPIONSHIPDB', has a policy of 'FULLBACKUP_CHAMPIONSHIPDB', was last backed up on 11/11/2022 at 5:11:35 PM, and is in an 'Outdated' status. A hand cursor is hovering over the 'Overall Status' column for this row.

Transaction log backup for multiple database backup

SnapCenter supports the full, bulked logged, and simple recovery models. The simple recovery mode does not support transactional log backup.

To perform a transaction log backup, complete the following steps:

1. From the **Resources** tab, change the view menu from **Database** to **Resource group**.

The screenshot shows the NetApp SnapCenter interface for Microsoft SQL Server. The left sidebar includes tabs for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area displays a table of databases with columns for Instance, Host, Last Backup, Overall Status, and Type. The table lists 213 databases, including master, model, msdb, tempdb, and various ChampionshipDBx databases. The 'INSIGHTS' button in the top navigation bar is highlighted with a cursor.

2. Select the resource group backup policy created.
3. Select **Modify Resource Group** in the upper right.

The screenshot shows the NetApp SnapCenter interface for the 'RG-CHAMPIONSHIPDB' resource group. The left sidebar shows the 'Resources' tab is selected. The main area displays a table of resources with columns for Name, Resource Name, Type, and Host. The table lists 213 resources, all of which are SQL Databases on host STAVM3.DemoAZ.com. The 'Modify Resource Group' button is located in the top right corner of the table header.

4. The **Name** section defaults to the backup policy name and tag. Click **Next**.

The **Resources** tab highlights the bases to which the transaction backup policy is to be configured.

The screenshot shows the 'Modify Resource Group' interface in NetApp SnapCenter. The navigation bar at the top includes links for Microsoft SQL Server, search by name, administrator, SnapCenter Admin, and Sign Out. The main window is titled 'Modify Resource Group' and shows a six-step process: Name, Resources, Policies, Verification, Notification, and Summary. Step 1 (Name) is completed. Step 2 (Resources) is currently active, indicated by a blue circle. The 'Available Resources' section shows a dropdown for Host (All) and Resource Type (Instances). A checkbox 'Auto select all the resources from the same storage volume' is checked. The 'Selected Resources' list contains numerous entries for 'ChampionshipDB1 (STAVM3)', 'ChampionshipDB10 (STAVM3)', 'ChampionshipDB11 (STAVM3)', 'ChampionshipDB12 (STAVM3)', 'ChampionshipDB13 (STAVM3)', 'ChampionshipDB14 (STAVM3)', 'ChampionshipDB15 (STAVM3)', 'ChampionshipDB16 (STAVM3)', 'ChampionshipDB17 (STAVM3)', 'ChampionshipDB18 (STAVM3)', 'ChampionshipDB19 (STAVM3)', 'ChampionshipDB20 (STAVM3)', 'ChampionshipDB21 (STAVM3)', 'ChampionshipDB22 (STAVM3)', and 'ChampionshipDB23 (STAVM3)'. A 'Search available resource' input field is present. The bottom of the window displays a progress bar with steps 1 through 6, and a note 'Total 1'.

5. Enter the policy name.

The screenshot shows the 'New SQL Server Backup Policy' dialog box. The left sidebar lists steps: 1 - Name, 2 - Backup Type, 3 - Retention, 4 - Replication, 5 - Script, 6 - Verification, and 7 - Summary. Step 1 (Name) is active, indicated by a blue background. The main area is titled 'Provide a policy name' and contains a 'Policy name' input field with the value 'LOGBACKUP_CHAMPIONSHIPDB'. Below it is a 'Details' input field containing the same value. At the bottom right are 'Previous' and 'Next' buttons, with 'Next' being highlighted in blue. A watermark for 'Activate Windows' is visible in the background.

6. Select the SQL Server backup options.
7. Select log backup.
8. Set the schedule frequency based on your company's RTO. Click **Next**.

New SQL Server Backup Policy X

1 Name Select SQL server backup options

2 Backup Type Choose backup type

Full backup and log backup
 Full backup
 Log backup
 Copy only backup i

Maximum databases backed up per Snapshot copy: i

Availability Group Settings ▼


Schedule frequency

Select how often you want the schedules to occur in the policy. The specific times are set at backup job creation enabling you to stagger your start times.


On demand
 Hourly
 Daily
 Weekly
 Monthly

Previous Next


9. Configure the log backup retention settings. Click **Next**.

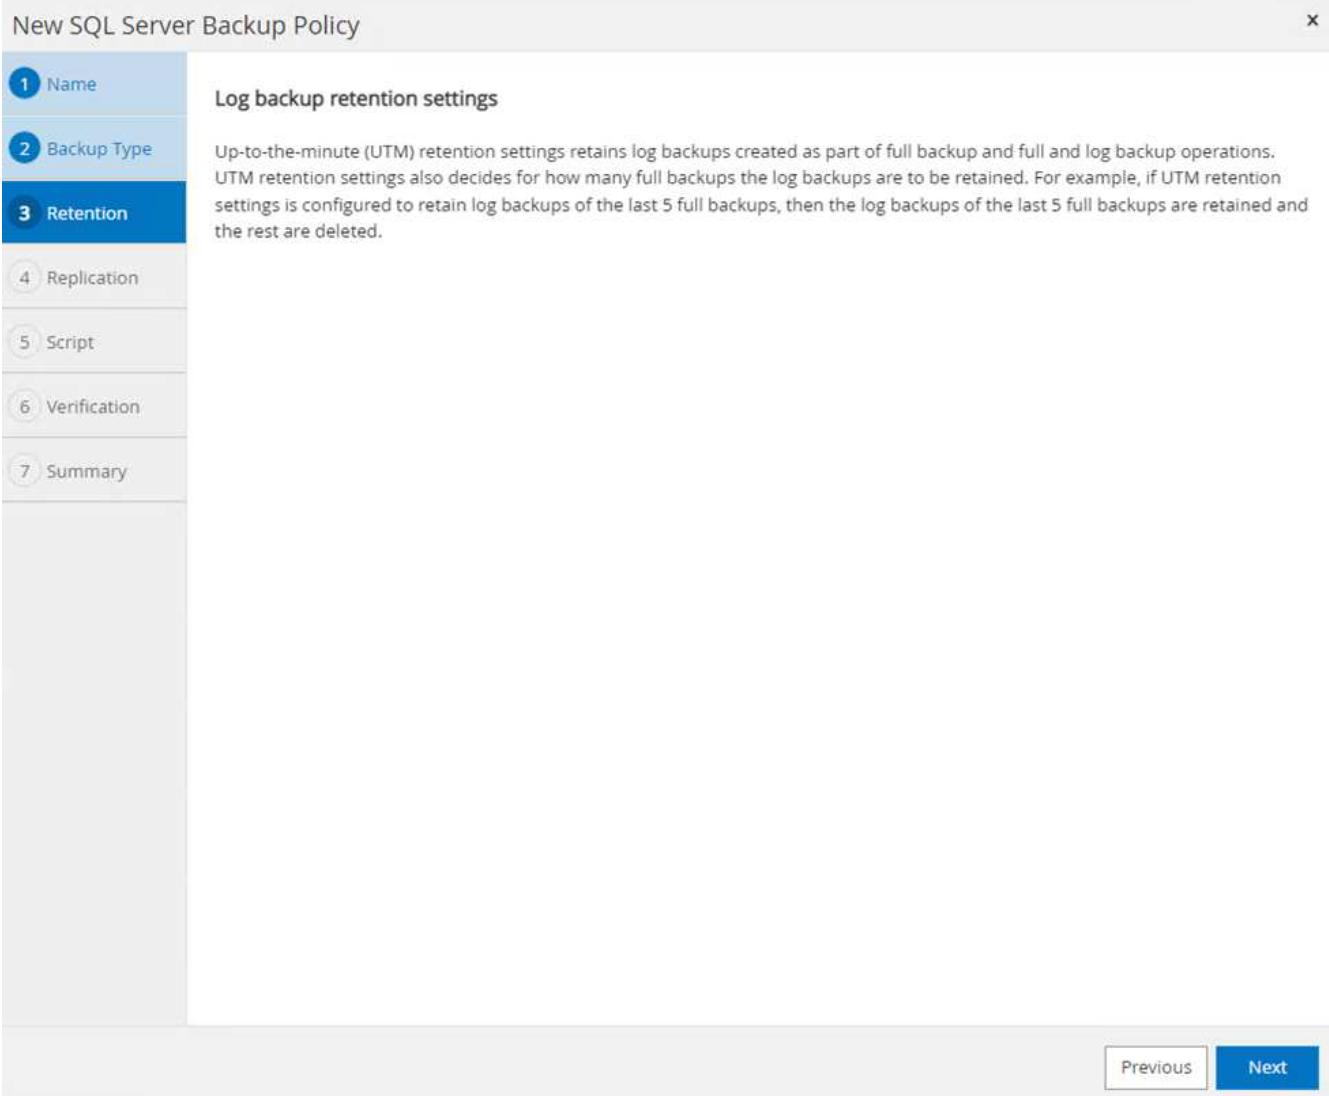


10. (Optional) Configure the replication options.

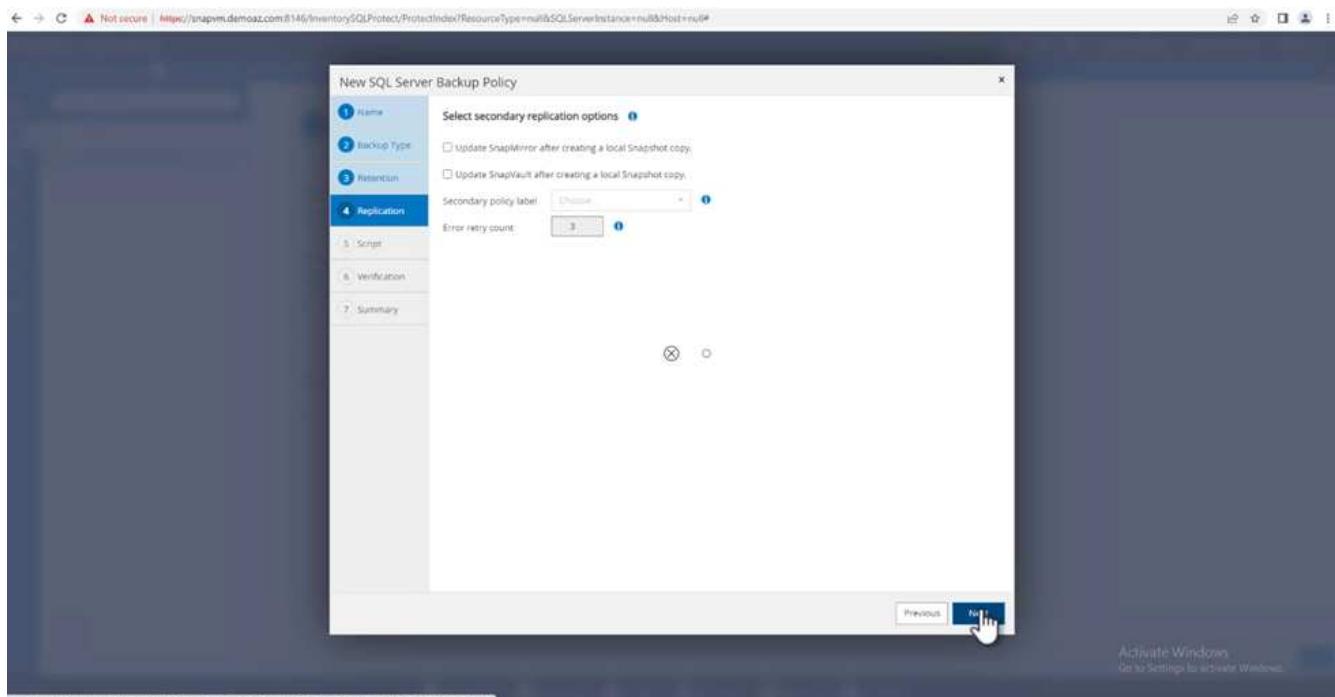


11. (Optional) Configure any scripts to run before performing a backup job.

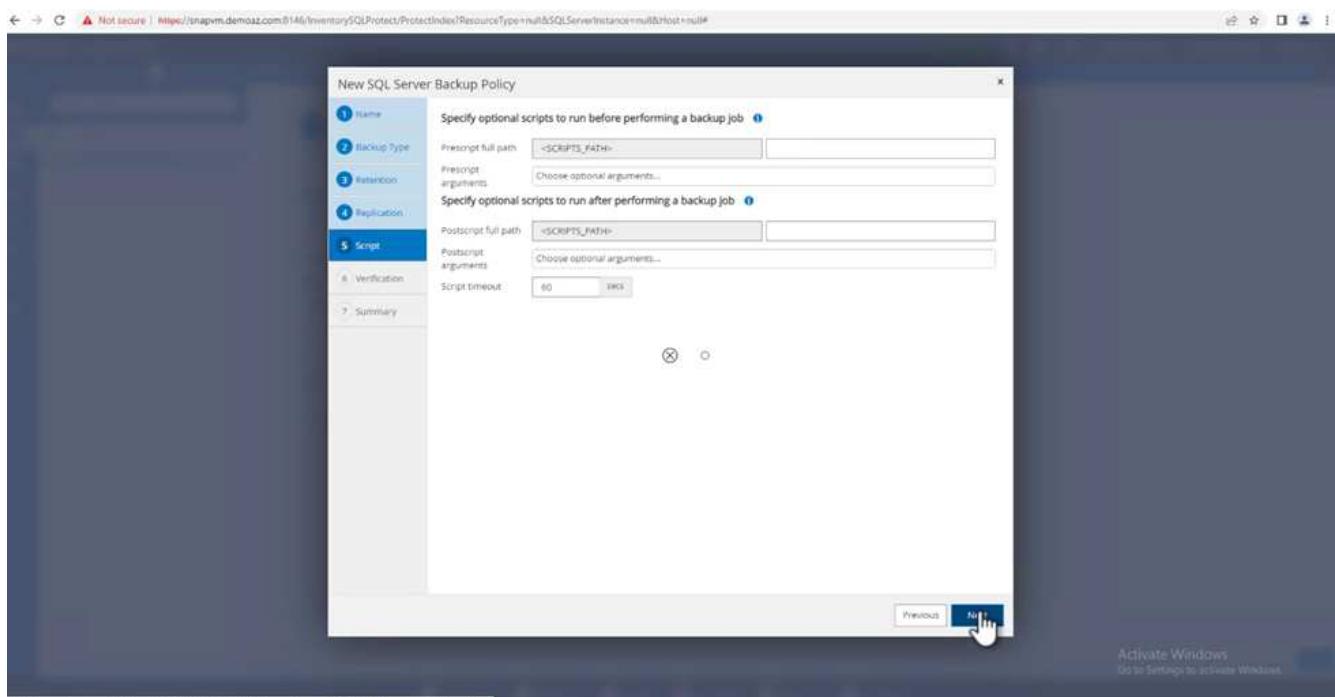

12. (Optional) Configure backup verification.

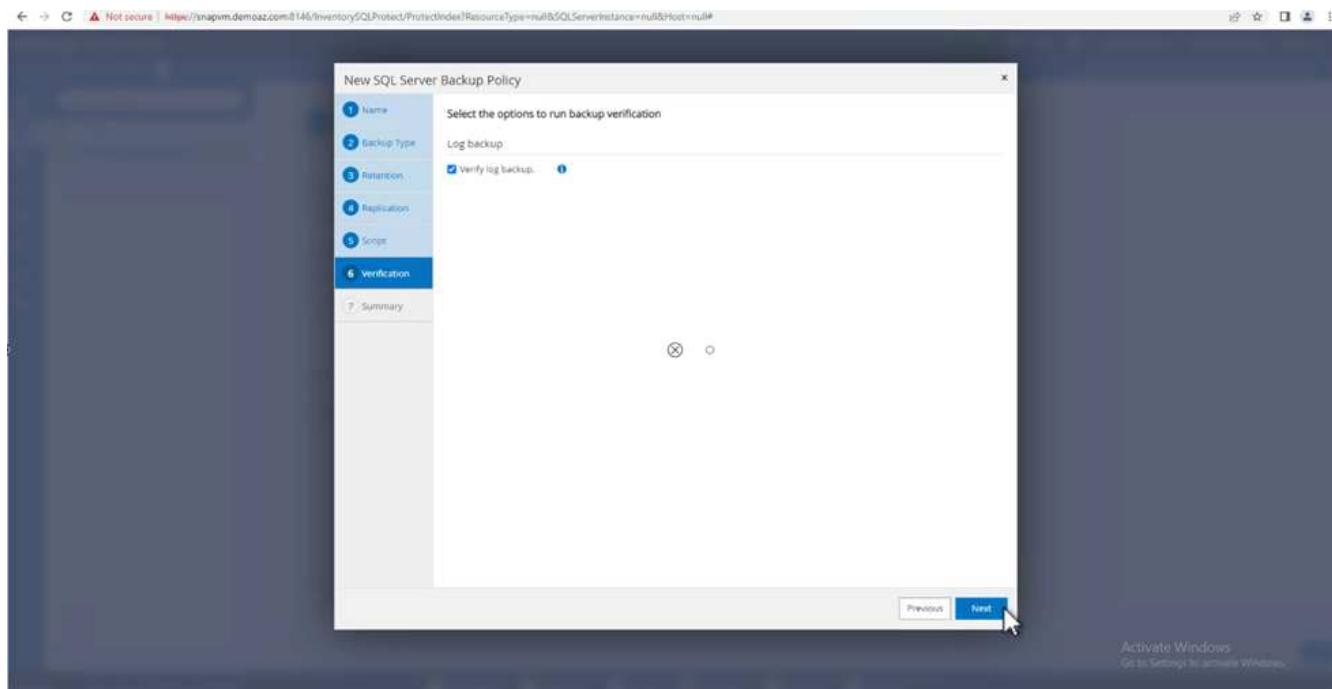

13. On the **Summary** page, click **Finish**.

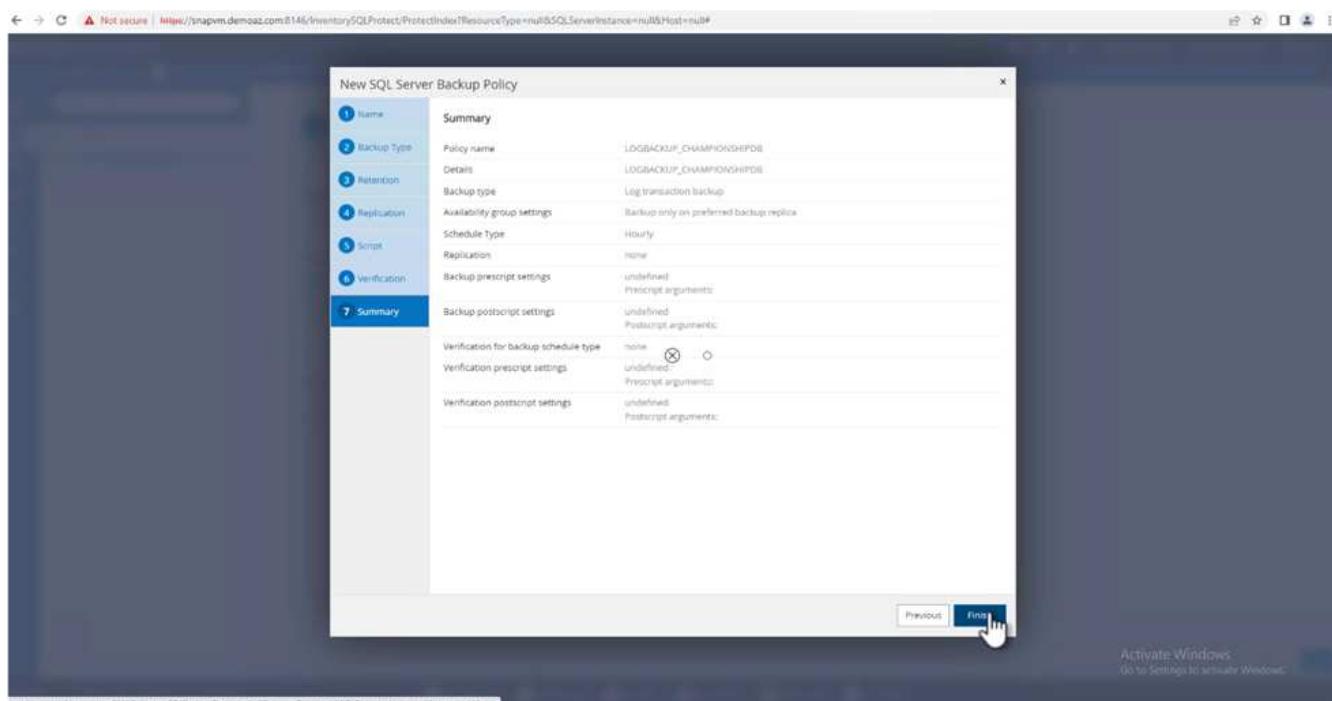

Configure and protect multiple MSSQL Server databases

1. Click the newly created transaction log backup policy.

NetApp SnapCenter®

Microsoft SQL Server

Modify Resource Group

Name: RG-CHAMPIONSHIPDB

Select one or more policies and configure schedules:

FULLBACKUP_CHAMPIONSHIPDB + LOGBACKUP

Configure schedules for selected policies:

Policy	Applied Schedules	Configure Schedules
FULLBACKUP_CHAMPIONSHIPDB	Hourly: Repeat every 8 hours	Edit Delete
LOGBACKUP_CHAMPIONSHIPDB	None	Edit Delete

Total 2

Use Microsoft SQL Server scheduler

Created backup policy LOGBACKUP_CHAMPIONSHIPDB

Activate Windows Go to Settings to activate Windows

2. Set the **Start date** and **Expires on** date.
3. Enter the frequency of the log backup policy depending on the SLA, RTP, and RPO. Click OK.

Add schedules for policy LOGBACKUP_CHAMPIONSHIPDB

Hourly

Start date: 11/11/2022 07:30 pm Edit

Expires on: 12/11/2022 06:30 pm Edit

Repeat every: 2 hours 0 mins

The schedules are triggered on the SnapCenter Server time zone.

Cancel OK

Activate Windows Go to Settings to activate Windows


4. You can see both policies. Click **Next**.

The screenshot shows the 'Modify Resource Group' wizard in the NetApp SnapCenter interface. The current step is 'Policies'. A progress bar at the top shows steps 1 through 6. Step 1 (Name) is highlighted. Step 2 (Resources) is shown with a blue background. Step 3 (Policies) is shown with a light gray background. Step 4 (Verification) is shown with a light gray background. Step 5 (Notification) is shown with a light gray background. Step 6 (Summary) is shown with a light gray background. Below the progress bar, a message says 'Select one or more policies and configure schedules'. A table lists two policies: 'FULLBACKUP_CHAMPIONSHIPDB' and 'LOGBACKUP_CHAMPIONSHIPDB'. Both policies have their 'Applied Schedules' set to 'Hourly: Repeat every 8 hours'. There is a checkbox 'Configure Schedules' which is checked for both policies. Below the table, it says 'Total 2'. At the bottom, there is a checkbox 'Use Microsoft SQL Server scheduler' which is unchecked. The status bar at the bottom shows 'Activity' with 'The 5 most recent jobs are displayed', and job statistics: 3 Completed, 0 Warnings, 0 Failed, 0 Cancelled, 0 Running, and 1 Queued.


5. Configure the verification server.

The screenshot shows the 'Modify Resource Group' wizard in the NetApp SnapCenter interface. The current step is 'Verification'. A progress bar at the top shows steps 1 through 6. Step 1 (Name) is highlighted. Step 2 (Resources) is shown with a blue background. Step 3 (Policies) is shown with a light gray background. Step 4 (Verification) is highlighted with a blue background. Step 5 (Notification) is shown with a light gray background. Step 6 (Summary) is shown with a light gray background. Below the progress bar, a message says 'Select the verification servers'. A dropdown menu shows 'STAVM3(13.0.5026)' selected. Below the dropdown, a table shows a policy 'FULLBACKUP_CHAMPIONSHIPDB' with its 'Schedule Type' set to 'Hourly' and 'Applied Schedules' set to 'Verify after backup'. There is a checkbox 'Configure Schedules' which is checked. Below the table, it says 'Total 1'. At the bottom, there is a checkbox 'Use Microsoft SQL Server scheduler' which is unchecked. The status bar at the bottom shows 'Activity' with 'The 5 most recent jobs are displayed', and job statistics: 3 Completed, 0 Warnings, 0 Failed, 0 Cancelled, 0 Running, and 1 Queued.

6. Configure email notification.

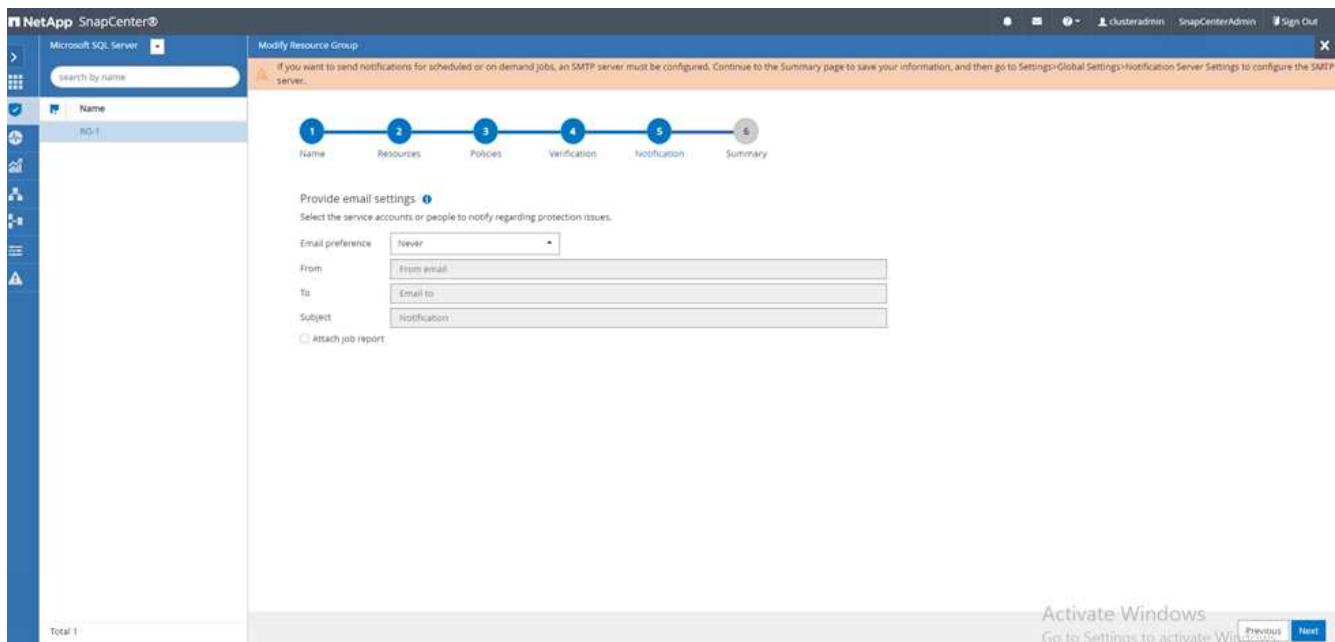

7. On the **Summary** page, click **Finish**.

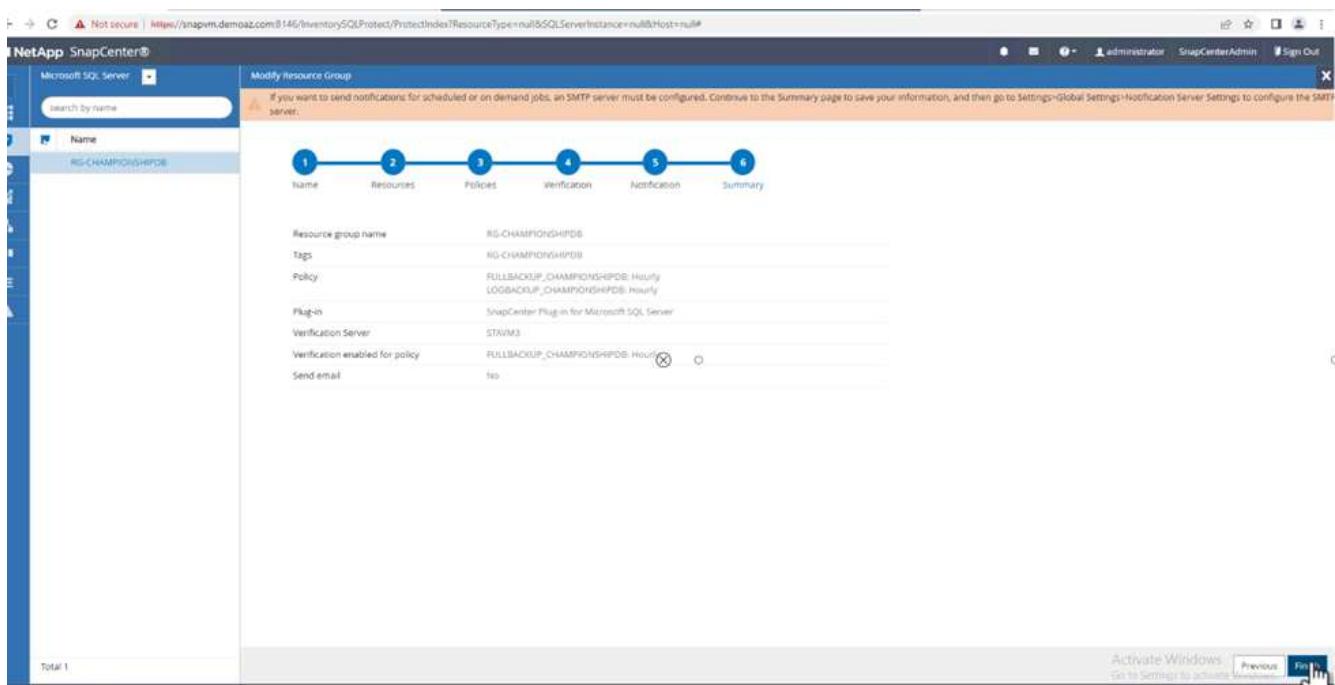

Triggering an on-demand transaction log backup for multiple SQL Server databases

To trigger an on-demand backup of the transactional log for multiple SQL server databases, complete the following steps:


1. On the newly created policy page, select **Backup now** at the upper right of the page.

The screenshot shows the NetApp SnapCenter interface for managing Microsoft SQL Server resources. A specific resource group, RG-CHAMPIONSHIPDB, is selected. The interface displays a table of 24 SQL databases, all of which are listed as 'Type: SQL Database' and 'Host: STAVM3.DemoAZ.com'. A callout box on the left provides instructions for setting up policies, global settings, roles, permissions, and load balancing. The top navigation bar includes options like 'Modify Resource Group', 'Backup Now', 'Liberate', 'Maintenance', 'Edit/View Details', and 'Delete'. A message at the bottom right encourages activating Windows.

- From the pop-up on the **Policy** tab, select the drop-down menu, select the backup policy, and configure the transaction log backup.


This screenshot shows a 'Backup' dialog box overlaid on the previous interface. It prompts the user to create a backup for the selected resource group, 'RG-CHAMPIONSHIPDB'. The 'Policy' dropdown menu is open, displaying two options: 'FULLBACKUP_CHAMPIONSHIPDB' and 'LOGBACKUP_CHAMPIONSHIPDB'. The 'LOGBACKUP_CHAMPIONSHIPDB' option is currently selected and highlighted with a mouse cursor. At the bottom of the dialog box are 'Cancel' and 'Backup' buttons.

- Click **Backup**. A new window is displayed.
- Click **Yes** to confirm the backup policy.

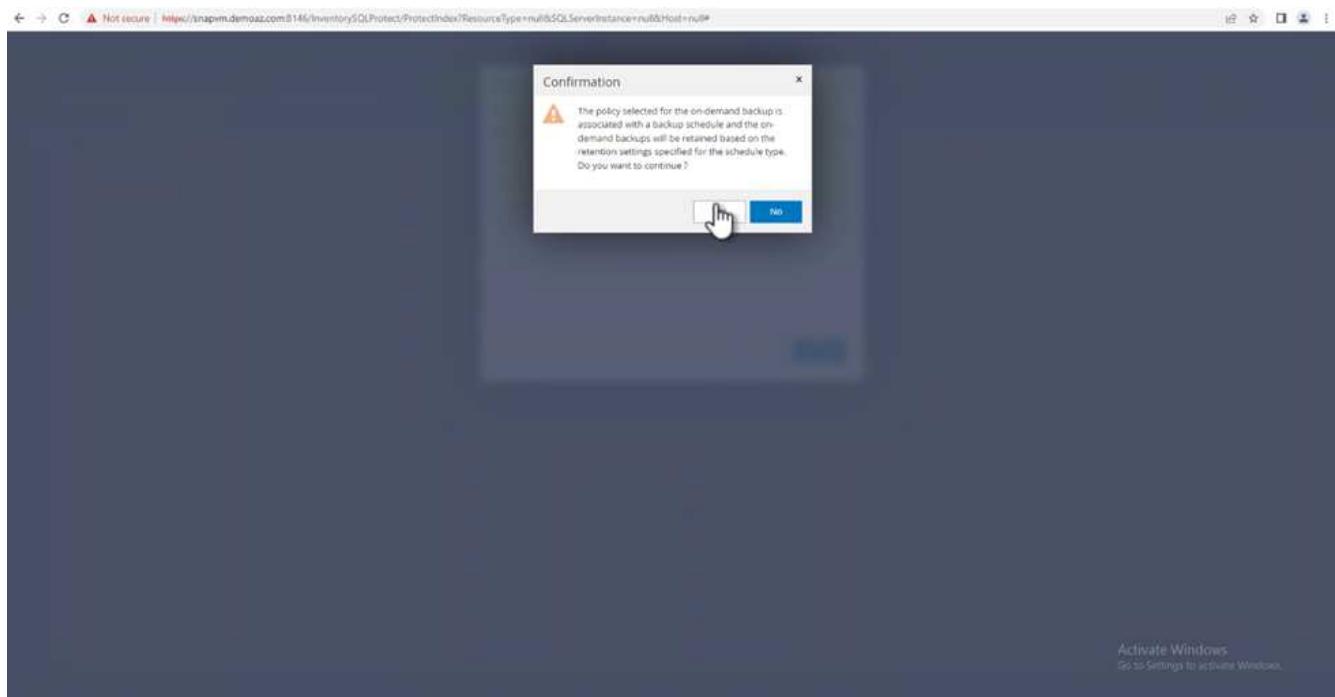

Monitoring

Move to the **Monitoring** tab and monitor the progress of the backup job.

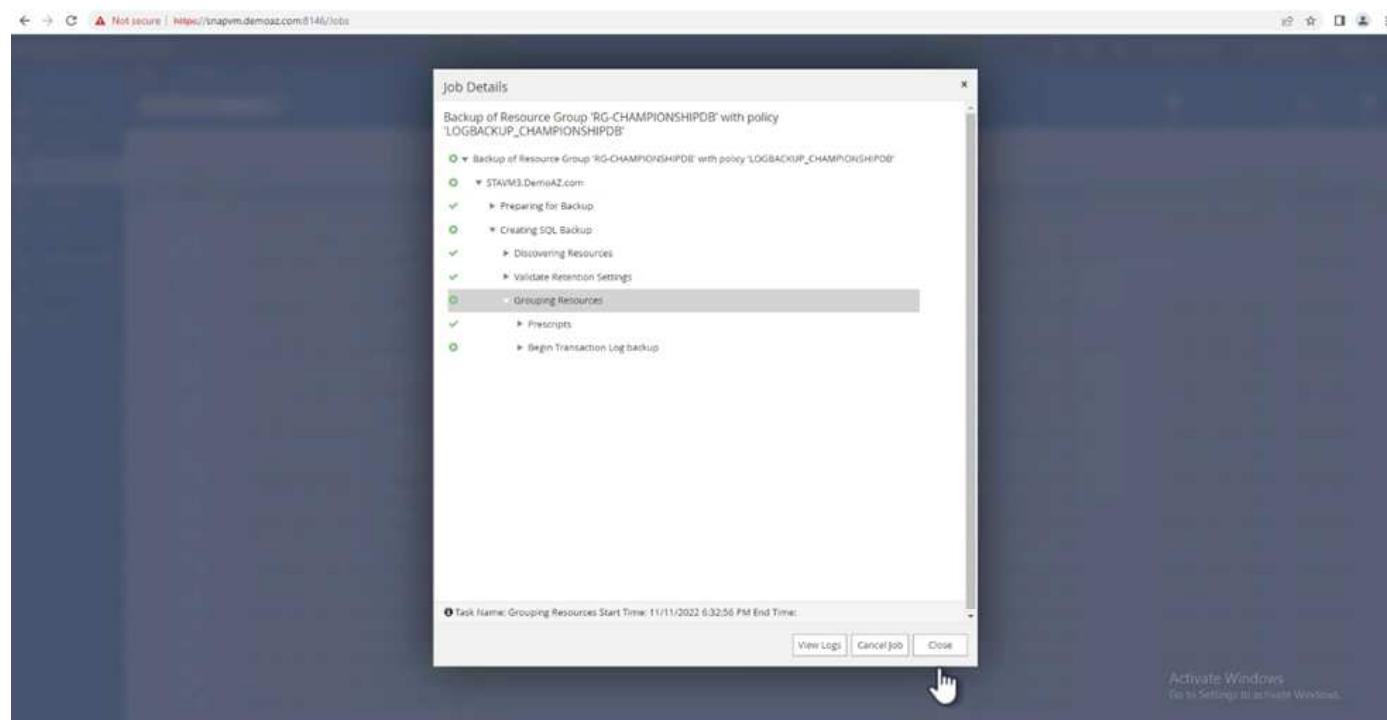

Restore and recovery

See the following prerequisites necessary for restoring a SQL Server database in SnapCenter.

- The target instance must be online and running before a restore job completes.
- SnapCenter operations that are scheduled to run against the SQL Server database must be disabled,


including any jobs scheduled on remote management or remote verification servers.

- If you are restoring custom log directory backups to an alternate host, the SnapCenter server and the plugin host must have the same SnapCenter version installed.
- You can restore the system database to an alternate host.
- SnapCenter can restore a database in a Windows cluster without taking the SQL Server cluster group offline.

Restoring deleted tables on a SQL Server database to a point in time

To restore a SQL Server database to a point in time, complete the following steps:

1. The following screenshot shows the initial state of the SQL Server database before the deleted tables.

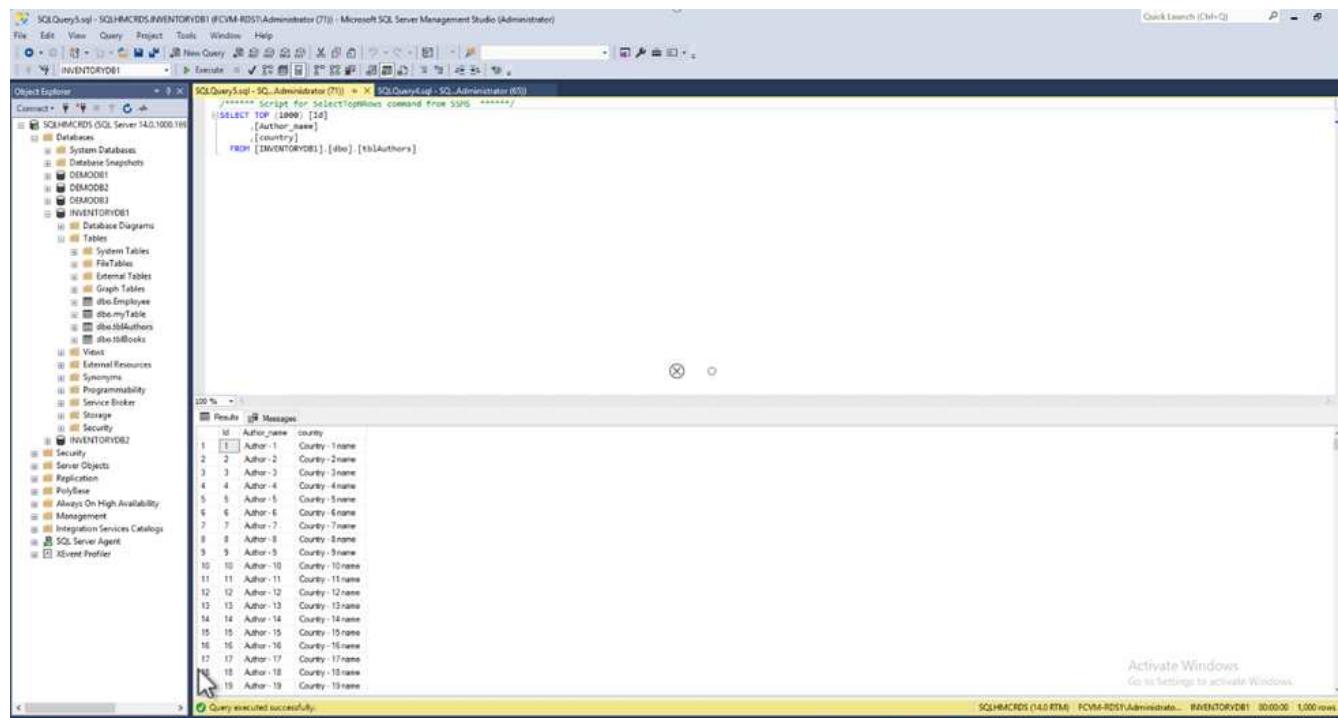

The screenshot shows a Microsoft SQL Server Management Studio (SSMS) interface. The Object Explorer on the left shows the database structure, including the INVENTORYDB1 database which contains several tables like Authors, Employees, and Books. The central Results pane displays a query result set for the Authors table. The query is:

```
***** Script for selectTopNRows command from SSIS. *****
SELECT TOP (2000) [id]
      ,[Author_name]
      ,[Country]
  FROM [INVENTORYDB1].[dbo].[tblAuthors]
```

The results show 20 rows of data:

	Author_name	Country
1	Author -1	Country -1name
2	Author -2	Country -2name
3	Author -3	Country -3name
4	Author -4	Country -4name
5	Author -5	Country -5name
6	Author -6	Country -6name
7	Author -7	Country -7name
8	Author -8	Country -8name
9	Author -9	Country -9name
10	Author -10	Country -10name
11	Author -11	Country -11name
12	Author -12	Country -12name
13	Author -13	Country -13name
14	Author -14	Country -14name
15	Author -15	Country -15name
16	Author -16	Country -16name
17	Author -17	Country -17name
18	Author -18	Country -18name
19	Author -19	Country -19name

At the bottom of the Results pane, a message says "Query executed successfully."

The screenshot shows that 20 rows were deleted from the table.

Object Explorer

SQLMCRD5\INVENTORYDB1 - dbo.tBAuthors - Microsoft SQL Server Management Studio (Administrators)

File Edit View Project Query Designer Tools Windows Help

New Query Open Recent Change Type

SQLQuery1Log - S0...Administrator (51) SQLQuery1 - S0...Administrator (61)

Connect < Connect to Database

SQLMCRD5 (SQL Server 14.0.1000.161)

System Databases Database Snapshots DMFOOB1 DMFOOB2 DMFOOB3 INVENTORYDB1 (Database Diagrams Tables System Tables FkTables External Tables Graph Tables dbo.Employee dbo.myTable dbo.tBAuthors dbo.tBBooks Views Materialized Views Synonyms Programmability Service Broker Storage Security INVENTORYDB2 Security Server Objects Replication PolyBase Always On High Availability Management Integration Services Catalogs SQL Server Agent XEvent Profiler

Authors

ID	Author_name	Country
1	Author - 21	Country - 21 na...
2	Author - 22	Country - 22 na...
3	Author - 23	Country - 23 na...
4	Author - 25	Country - 25 na...
5	Author - 26	Country - 26 na...
6	Author - 27	Country - 27 na...
7	Author - 28	Country - 28 na...
8	Author - 29	Country - 29 na...
9	Author - 30	Country - 30 na...
10	Author - 31	Country - 31 na...
11	Author - 32	Country - 32 na...
12	Author - 33	Country - 33 na...
13	Author - 34	Country - 34 na...
14	Author - 35	Country - 35 na...
15	Author - 36	Country - 36 na...
16	Author - 37	Country - 37 na...
17	Author - 38	Country - 38 na...
18	Author - 39	Country - 39 na...
19	Author - 40	Country - 40 na...
20	Author - 41	Country - 41 na...
21	Author - 42	Country - 42 na...
22	Author - 43	Country - 43 na...
23	Author - 44	Country - 44 na...
24	Author - 45	Country - 45 na...
25	Author - 46	Country - 46 na...
26	Author - 47	Country - 47 na...
27	Author - 48	Country - 48 na...
28	Author - 49	Country - 49 na...
29	Author - 50	Country - 50 na...
30	Author - 51	Country - 51 na...
31	Author - 52	Country - 52 na...
32	Author - 53	Country - 53 na...
33	Author - 54	Country - 54 na...
34	Author - 55	Country - 55 na...
35	Author - 56	Country - 56 na...
36	Author - 57	Country - 57 na...
37	Author - 58	Country - 58 na...
38	Author - 59	Country - 59 na...

Activate Windows Go to Settings to activate Windows.

2. Log into SnapCenter Server. From the **Resources** tab, select the database.

NetApp SnapCenter®

Microsoft SQL Server

View Database search by name

Dashboard Resources Monitor Reports Hosts Storage Systems Settings Alerts

Name	Instance	Host	Last Backup	Overall Status	Type
INVENTORYDB1	SQLHMCRD5	PSXCLUSTER.Demoaz.com	11/16/2022 10:52:44 PM	Backup succeeded	User database
INVENTORYDB2	SQLHMCRD5	PSXCLUSTER.Demoaz.com	11/16/2022 10:59:49 PM	Backup succeeded	User database
master	SQLHMCRD5	PSXCLUSTER.Demoaz.com		Not protected	System database
model	SQLHMCRD5	PSXCLUSTER.Demoaz.com		Not protected	System database
msdb	SQLHMCRD5	PSXCLUSTER.Demoaz.com		Not protected	System database
tempdb	SQLHMCRD5	PSXCLUSTER.Demoaz.com		Not available for backup	System database
DEMO0B1	SQLHMCRD5	PSXCLUSTER.Demoaz.com	11/16/2022 11:03:57 PM	Backup succeeded	User database
DEMO0B2	SQLHMCRD5	PSXCLUSTER.Demoaz.com	11/16/2022 11:03:57 PM	Backup succeeded	User database
DEMO0B3	SQLHMCRD5	PSXCLUSTER.Demoaz.com	11/16/2022 11:03:57 PM	Backup succeeded	User database

Total 9

Activity The 5 most recent jobs are displayed

2 Completed 0 Warnings 0 Failed 0 Canceled 2 Running 1 Queued

Activate Windows Go to Settings to activate Windows.

3. Select the most recent backup.

4. On the right, select **Restore**.

The screenshot shows the NetApp SnapCenter interface for a Microsoft SQL Server. On the left, a sidebar lists databases: INVENTORYDB1, INVENTORYDB2, master, model, msdb, tempdb, DEMO0B1, DEMO0B2, and DEMO0B3. The main pane displays the 'INVENTORYDB1 (SQL.HMCROSS) Topology' with a 'Manage Copies' section showing 4 Backups and 0 Clones. Below this is a table titled 'Primary Backup(s)' listing four full backups from 11/15/2022 at various times. A summary card on the right shows 4 Backups and 0 Clones. At the bottom, there are links to 'Activate Windows' and 'Go to Settings to activate Windows'.



5. A new window is displayed. Select the **Restore** option.
6. Restore the database to the same host where the backup was created. Click **Next**.

The screenshot shows the 'Restore' dialog box. The left sidebar lists steps: 1. Restore scope (selected), 2. Recovery Type, 3. Pre Ops, 4. Post Ops, 5. Notification, and 6. Summary. The main area is titled 'Restore database files using' and contains three radio button options:

- Restore the database to the same host where the backup was created
- Restore the database to an alternate host
- Restore the database using existing database files


A note at the bottom says: 'To configure an SMTP Server to send email notifications for Restore jobs, go to [Settings>Global Settings>Notification Server Settings](#)'. At the bottom right are 'Previous' and 'Next' buttons, and a link to 'Activate Windows'.

7. For the **Recovery type**, select **All log backups**. Click **Next**.

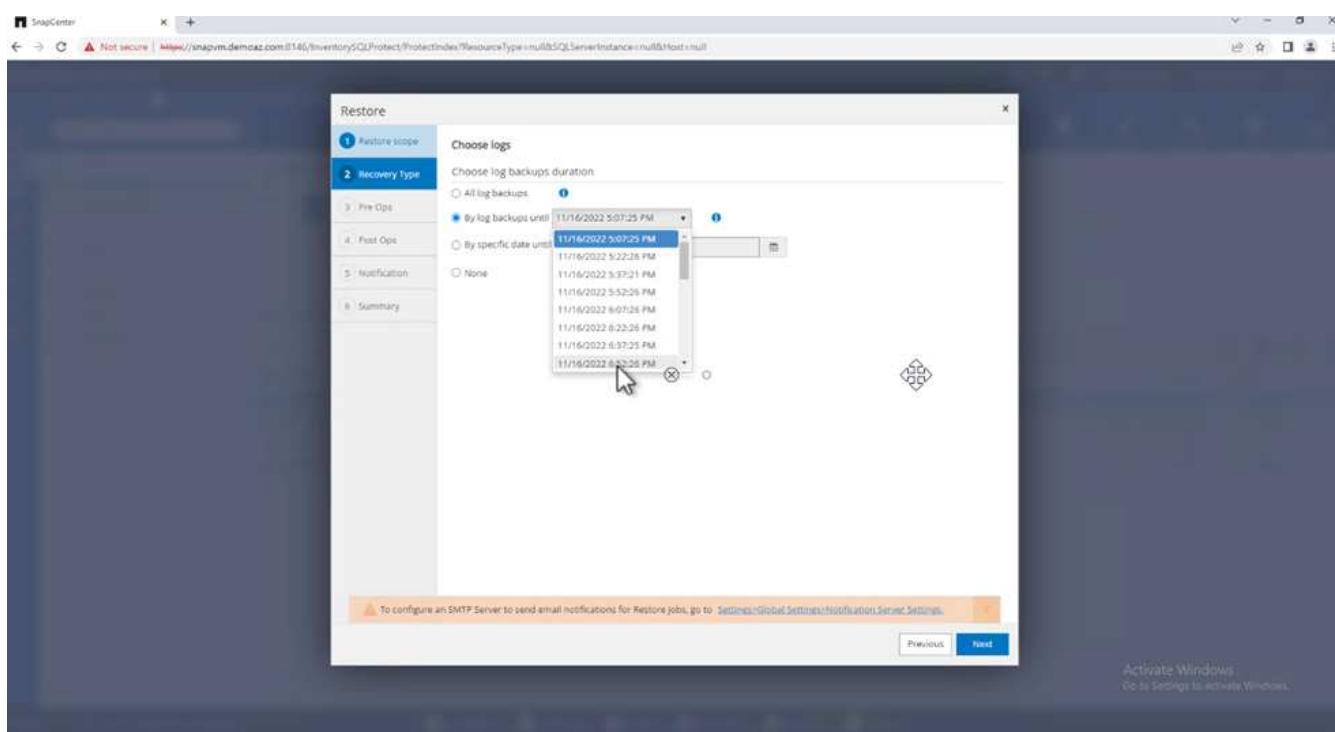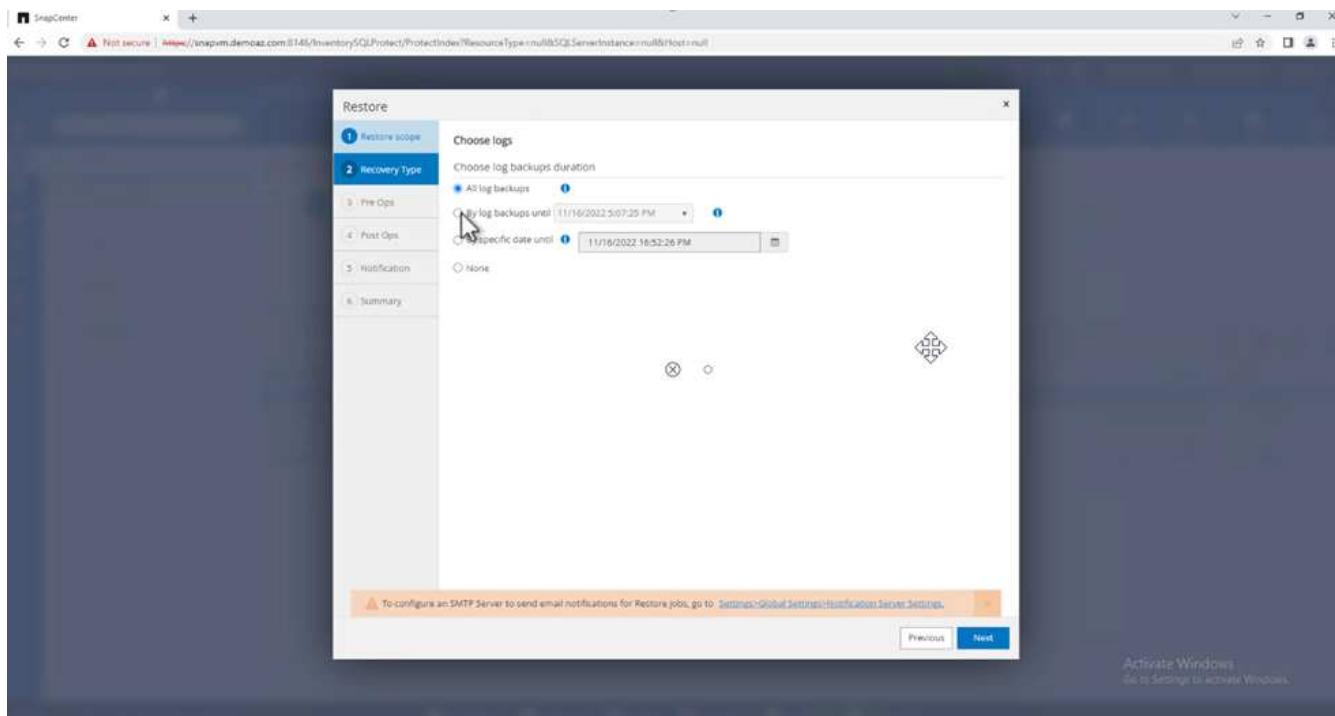


Pre- restore options:

1. Select the option **Overwrite the database with same name during restore**. Click **Next**.

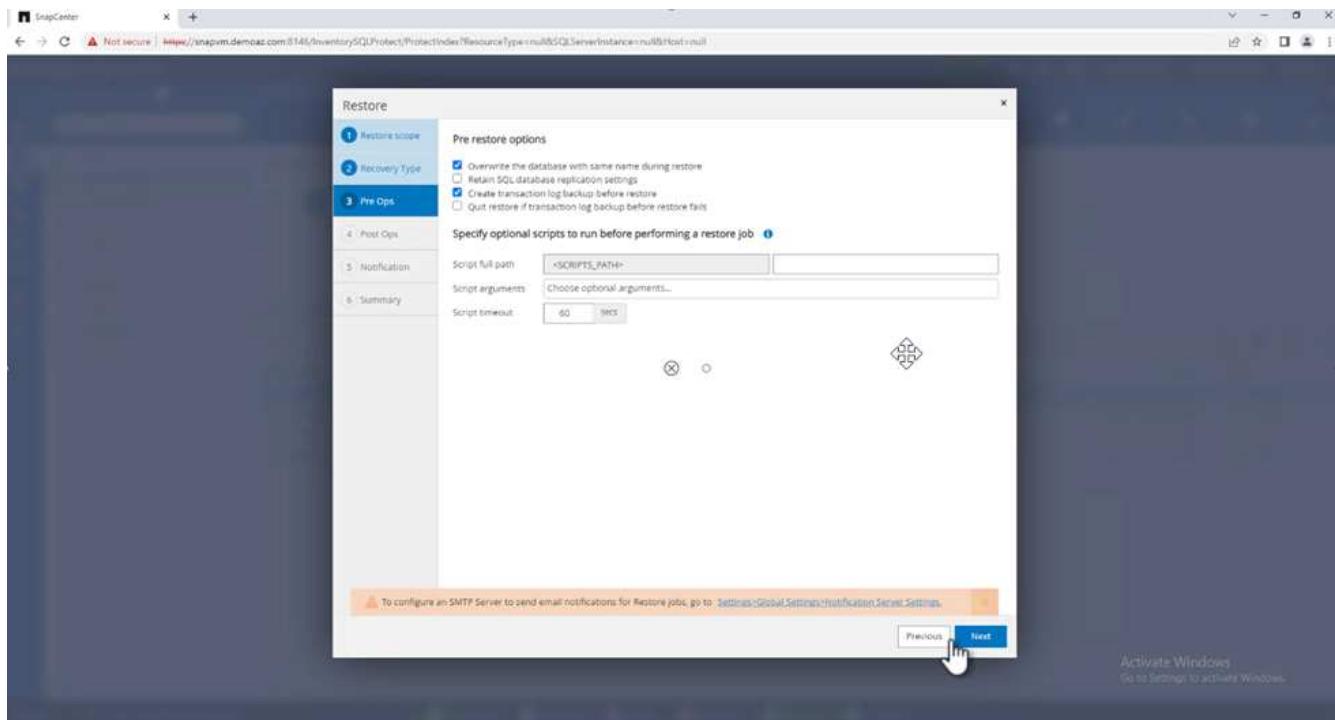


Post- restore options:


1. Select the option **Operational, but unavailable for restoring additional transaction logs**. Click **Next**.

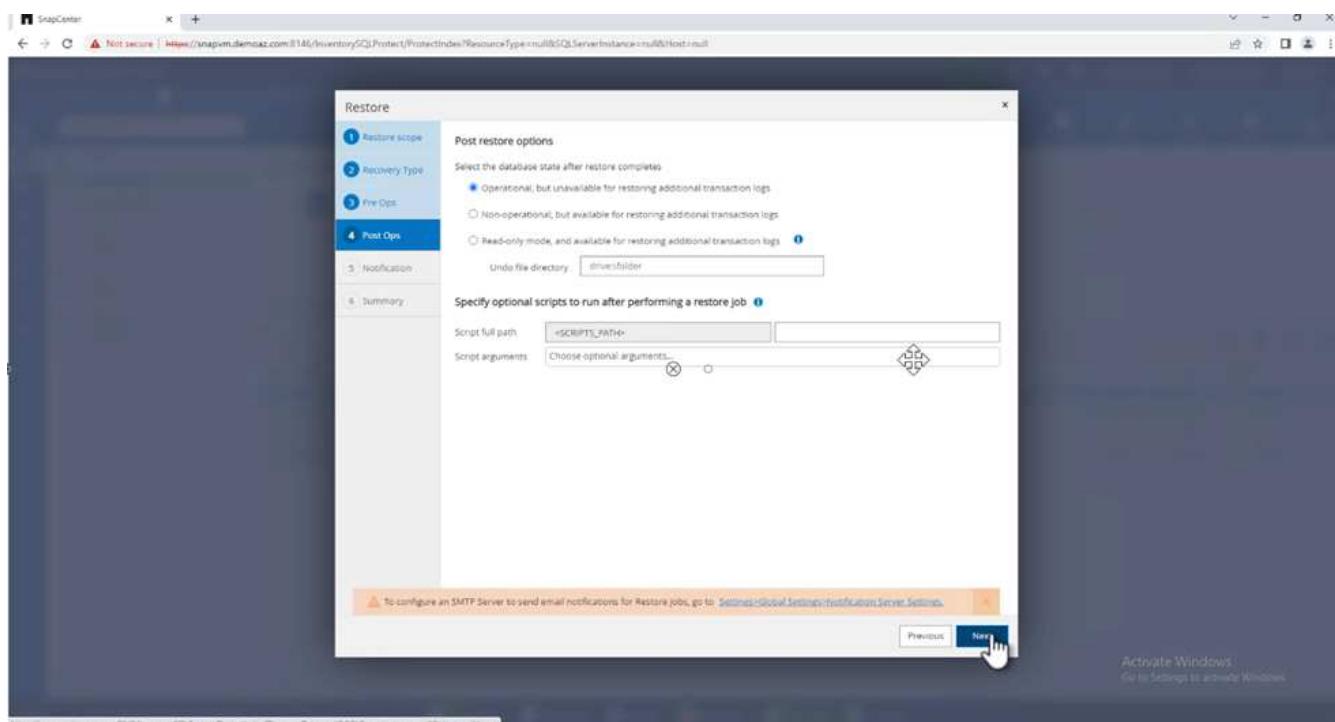

2. Provide the email settings. Click **Next**.

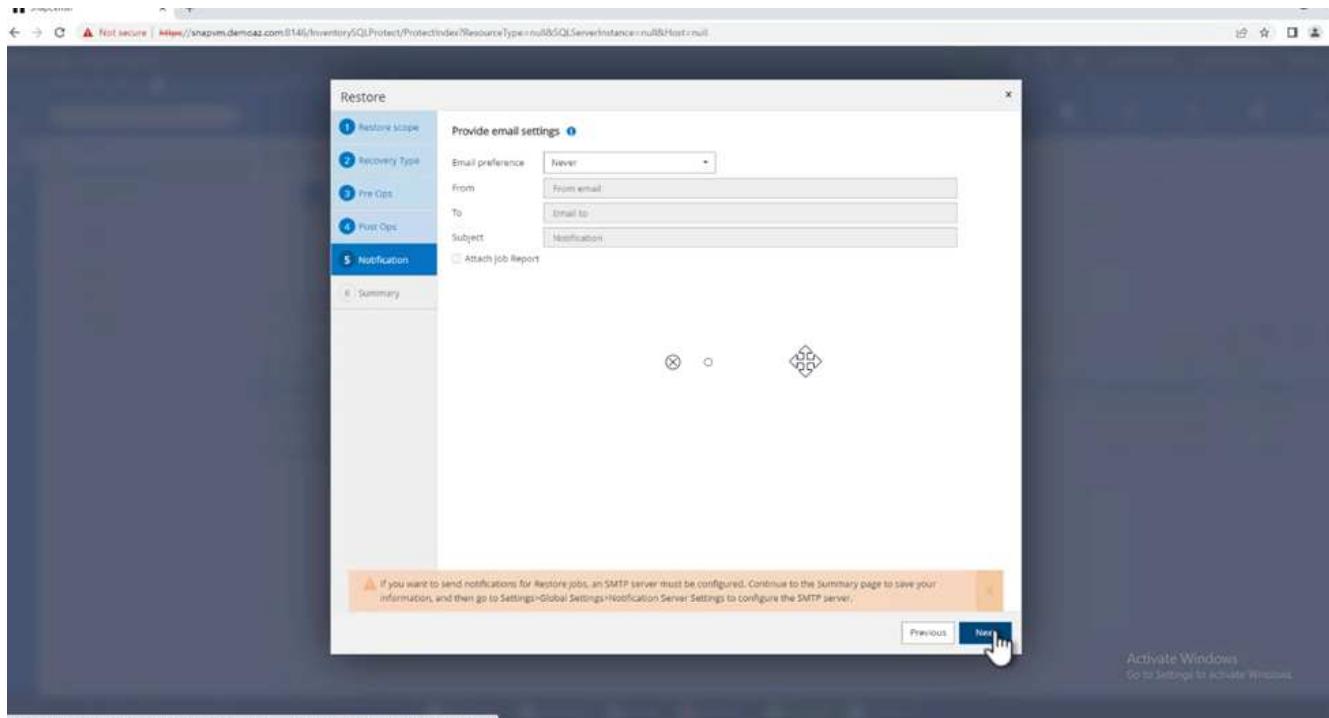

3. On the **Summary** page, click **Finish**.

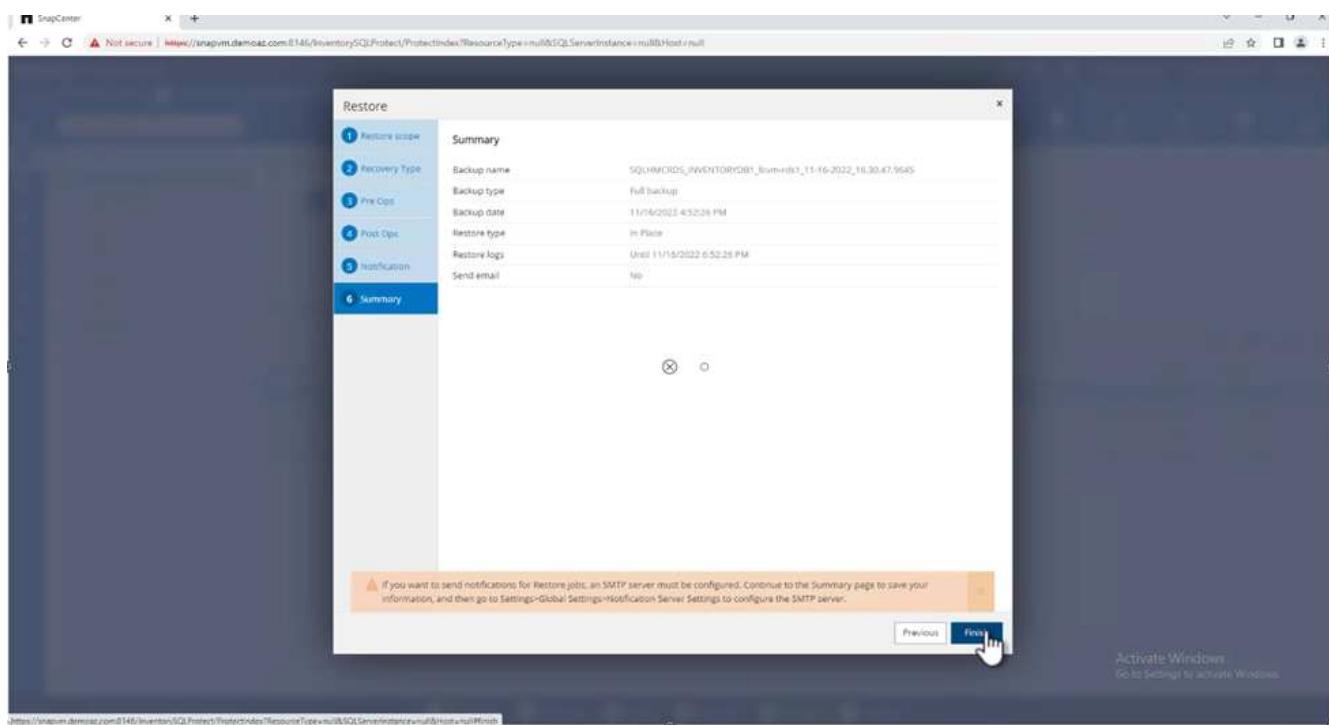

Monitoring the restore progress

1. From the **Monitoring** tab, click the restore job details to view the progress of the restore job.

Screenshot of the NetApp SnapCenter Jobs page. The left sidebar shows navigation links: Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area displays a table of jobs with columns: ID, Status, Name, Start date, End date, and Owner. The table lists numerous backup and restore operations for a resource group named 'SQLHMCRD\$INVENTORYDB\$'. The 'Owner' column consistently shows 'Administrator'. A cursor is hovering over the 'Download Log' button in the top right corner.

2. Restore the job details.

Screenshot of the 'Job Details' dialog box for job 157. The dialog title is 'Job Details' and the sub-title is 'Restore 'SQLHMCRD\$INVENTORYDB\$''. The tree view shows the following tasks:

- Restore 'SQLHMCRD\$INVENTORYDB\$'
- (job 157) Tail log backup of 'SQLHMCRD\$INVENTORYDB\$'
- FQVM-RD\$1.Demoaz.com
 - Preparing for Backup
 - Creating SQL Backup
 - Finalizing Backup
 - Send EMS Messages
- FQVM-RD\$1.Demoaz.com

A tooltip at the bottom indicates: Task Name: Send EMS Messages Start Time: 11/16/2022 11:18:54 PM End Time: 11/16/2022 11:18:54 PM. Buttons at the bottom are 'View Logs', 'Cancel Job', and 'Close'.

3. Return to SQL Server host > database > table are present.

```

SELECT TOP 1000 [Id], [Author_name], [country]
FROM [INVENTORYDB1].[dbo].[tblAuthors]

```

	Author_name	country
1	Author -1	Country -1name
2	Author -2	Country -2name
3	Author -3	Country -3name
4	Author -4	Country -4name
5	Author -5	Country -5name
6	Author -6	Country -6name
7	Author -7	Country -7name
8	Author -8	Country -8name
9	Author -9	Country -9name
10	Author -10	Country -10name
11	Author -11	Country -11name
12	Author -12	Country -12name

Where to find additional information

To learn more about the information that is described in this document, review the following documents and/or websites:

- TR-4714: Best Practices Guide for Microsoft SQL Server using NetApp SnapCenter

<https://www.netapp.com/pdf.html?item=/media/12400-tr4714pdf.pdf>

- Requirements for restoring a database

https://docs.netapp.com/us-en/snapcenter-45/protect-scsql/concept_requirements_for_restoring_a_database.html

- Understanding cloned database lifecycles

<https://library.netapp.com/ecmdocs/ECMP1217281/html/GUID-4631AFF4-64FE-4190-931E-690FCADA5963.html>

TR-4467: SAP with Microsoft SQL Server on Windows - Best practices using NetApp Clustered Data ONTAP and SnapCenter

Marco Schoen, NetApp

TR-4467 provides customers and partners with best practices for deploying clustered NetApp Data ONTAP in support of SAP Business Suite solutions running in a Microsoft SQL Server on Windows environment.

[TR-4467: SAP with Microsoft SQL Server on Windows - Best practices using NetApp Clustered Data ONTAP and SnapCenter](#)

Modernizing your Microsoft SQL Server environment

Optimize operations and unleash the power of your data - on the premises or in the cloud.

TR-4764: Best practices for Microsoft SQL Server with NetApp EF-Series

Mitch Blackburn, Pat Sinthusan, NetApp

This best practices guide is intended to help storage administrators and database administrators successfully deploy Microsoft SQL Server on NetApp EF-Series storage.

[TR-4764: Best practices for Microsoft SQL Server with NetApp EF-Series](#)

Open Source Databases

TR-4956: Automated PostgreSQL High Availability Deployment and Disaster Recovery in AWS FSx/EC2

Allen Cao, Niyaz Mohamed, NetApp

Purpose

PostgreSQL is a widely used open-source database that is ranked number four among the top ten most popular database engines by [DB-Engines](#). On one hand, PostgreSQL derives its popularity from its license-free, open-source model while still possessing sophisticated features. On the other hand, because it is open sourced, there is shortage of detailed guidance on production-grade database deployment in the area of high availability and disaster recovery (HA/DR), particularly in the public cloud. In general, it can be difficult to set up a typical PostgreSQL HA/DR system with hot and warm standby, streaming replication, and so on. Testing the HA/DR environment by promoting the standby site and then switching back to the primary can be disruptive to production. There are well documented performance issues on the primary when read workloads are deployed on streaming hot standby.

In this documentation, we demonstrate how you can do away with an application-level PostgreSQL streaming HA/DR solution and build a PostgreSQL HA/DR solution based on AWS FSx ONTAP storage and EC2 compute instances using storage-level replication. The solution creates a simpler and comparable system and delivers equivalent results when compared with traditional PostgreSQL application-level streaming replication for HA/DR.

This solution is built on proven and mature NetApp SnapMirror storage-level replication technology that is available in AWS-native FSX ONTAP cloud storage for PostgreSQL HA/DR. It is simple to implement with an automation toolkit provided by the NetApp Solutions team. It provides similar functionality while eliminating the complexity and performance drag on the primary site with the application-level streaming-based HA/DR solution. The solution can be easily deployed and tested without affecting the active primary site.

This solution addresses the following use cases:

- Production grade HA/DR deployment for PostgreSQL in the public AWS cloud
- Testing and validating a PostgreSQL workload in the public AWS cloud
- Testing and validating a PostgreSQL HA/DR strategy based on NetApp SnapMirror replication technology

Audience

This solution is intended for the following people:


- The DBA who is interested in deploying PostgreSQL with HA/DR in the public AWS cloud.

- The database solution architect who is interested in testing PostgreSQL workloads in the public AWS cloud.
- The storage administrator who is interested in deploying and managing PostgreSQL instances deployed to AWS FSx storage.
- The application owner who is interested in standing up a PostgreSQL environment in AWS FSx/EC2.

Solution test and validation environment

The testing and validation of this solution was performed in an AWS FSx and EC2 environment that might not match the final deployment environment. For more information, see the section [\[Key Factors for Deployment Consideration\]](#).

Architecture

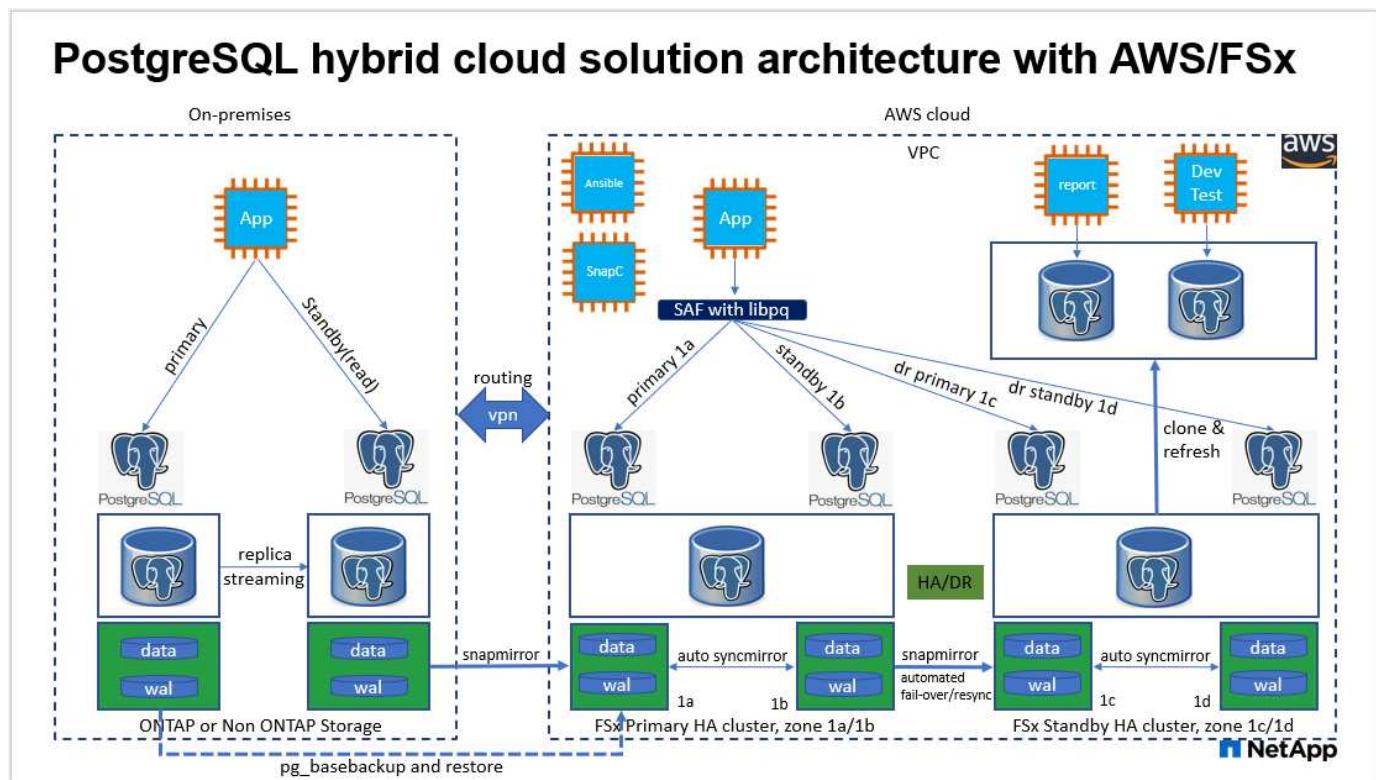

Hardware and software components

Hardware		
FSx ONTAP storage	Current version	Two FSx HA pairs in the same VPC and availability zone as primary and standby HA clusters
EC2 instance for compute	t2.xlarge/4vCPU/16G	Two EC2 T2 xlarge as primary and standby compute instances
Ansible controller	on-prem Centos VM/4vCPU/8G	A VM to host Ansible automation controller either on-premise or in the cloud
Software		
RedHat Linux	RHEL-8.6.0_HVM-20220503-x86_64-2-Hourly2-GP2	Deployed RedHat subscription for testing

Centos Linux	CentOS Linux release 8.2.2004 (Core)	Hosting Ansible controller deployed in on-premises lab
PostgreSQL	Version 14.5	Automation pulls the latest available version of PostgreSQL from the postgresql.ora yum repo
Ansible	Version 2.10.3	Prerequisites for required collections and libraries installed with requirements playbook

Key factors for deployment consideration

- **PostgreSQL database backup, restore, and recovery.** A PostgreSQL database supports a number of backup methods, such as a logical backup using pg_dump, a physical online backup with pg_basebackup or a lower-level OS backup command, and storage-level-consistent snapshots. This solution uses NetApp consistency-group snapshots for PostgreSQL database data and WAL volumes backup, restore, and recovery at the standby site. The NetApp consistency-group volume snapshots sequence I/O as it is written to storage and protect the integrity of database data files.
- **EC2 compute instances.** In these tests and validations, we used the AWS EC2 t2.xlarge instance type for the PostgreSQL database compute instance. NetApp recommends using an M5 type EC2 instance as the compute instance for PostgreSQL in deployment because it is optimized for database workloads. The standby compute instance should always be deployed in the same zone as the passive (standby) file system deployed for the FSx HA cluster.
- **FSx storage HA clusters single- or multi-zone deployment.** In these tests and validations, we deployed an FSx HA cluster in a single AWS availability zone. For production deployment, NetApp recommends deploying an FSx HA pair in two different availability zones. A disaster-recovery standby HA pair for business continuity can be set up in a different region if a specific distance is required between the primary and standby. An FSx HA cluster is always provisioned in a HA pair that is sync mirrored in a pair of active-passive file systems to provide storage-level redundancy.
- **PostgreSQL data and log placement.** Typical PostgreSQL deployments share the same root directory or volumes for data and log files. In our tests and validations, we have separated PostgreSQL data and logs into two separate volumes for performance. A soft link is used in the data directory to point to the log directory or volume that hosts PostgreSQL WAL logs and archived WAL logs.
- **PostgreSQL service startup delay timer.** This solution uses NFS mounted volumes to store the PostgreSQL database file and WAL log files. During a database host reboot, PostgreSQL service might try to start while the volume is not mounted. This results in database service startup failure. A 10 to 15 seconds timer delay is needed for the PostgreSQL database to start up correctly.
- **RPO/RTO for business continuity.** FSx data replication from primary to standby for DR is based on ASYNC, which means that the RPO depends on the frequency of Snapshot backups and SnapMirror replication. A higher frequency of Snapshot copy and SnapMirror replication reduces the RPO. Therefore, there is a balance between potential data loss in the event of a disaster and incremental storage cost. We have determined that Snapshot copy and SnapMirror replication can be implemented in as low as 5 minute intervals for RPO, and PostgreSQL can generally be recovered at the DR standby site in under a minute for the RTO.
- **Database backup.** After a PostgreSQL database is implemented or migrated into AWS FSx storage from an on-premises data center, the data is auto-sync mirrored in the FSx HA pair for protection. Data is further protected with a replicated standby site in case of a disaster. For longer-term backup retention or data protection, NetApp recommends using the built-in PostgreSQL pg_basebackup utility to run a full database backup that can be ported to S3 blob storage.

Solution Deployment

The deployment of this solution can be completed automatically using the NetApp Ansible-based automation toolkit by following the detailed instructions outlined below.

1. Read the instructions in the automation toolkit README.md [na_postgresql_aws_deploy_hadr](#).
2. Watch the following video walk through.

```
<iframe  
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=e479b  
91f-eacd-46bf-bfa1-  
b01200f0015a&autoplay=false&offerviewer=false&showtitle=false&showbrand=  
false&captions=false&interactivity=all" height="203" width="360"  
style="border: 1px solid #464646;" allowfullscreen  
allow="autoplay"></iframe>
```

3. Configure the required parameters files (hosts, host_vars/host_name.yml, fsx_vars.yml) by entering user-specific parameters into the template in the relevant sections. Then use the copy button to copy files to the Ansible controller host.

Prerequisites for automated deployment

Deployment requires the following prerequisites.

1. An AWS account has been set up, and the necessary VPC and network segments have been created within your AWS account.
2. From the AWS EC2 console, you must deploy two EC2 Linux instances, one as the primary PostgreSQL DB server at the primary and one at the standby DR site. For compute redundancy at the primary and standby DR sites, deploy two additional EC2 Linux instances as standby PostgreSQL DB servers. See the architecture diagram in the previous section for more details about the environment setup. Also review the [User Guide for Linux instances](#) for more information.
3. From the AWS EC2 console, deploy two FSx ONTAP storage HA clusters to host the PostgreSQL database volumes. If you are not familiar with the deployment of FSx storage, see the documentation [Creating FSx for ONTAP file systems](#) for step-by-step instructions.
4. Build a Centos Linux VM to host the Ansible controller. The Ansible controller can be located either on-premises or in the AWS cloud. If it is located on-premises, you must have SSH connectivity to the VPC, EC2 Linux instances, and FSx storage clusters.
5. Set up the Ansible controller as described in the section "Set up the Ansible Control Node for CLI deployments on RHEL/CentOS" from the resource [Getting Started with NetApp solution automation](#).
6. Clone a copy of the automation toolkit from the public NetApp GitHub site.

```
git clone https://github.com/NetApp-  
Automation/na_postgresql_aws_deploy_hadr.git
```

7. From the toolkit root directory, execute the prerequisite playbooks to install the required collections and libraries for the Ansible controller.

```
ansible-playbook -i hosts requirements.yml
```

```
ansible-galaxy collection install -r collections/requirements.yml  
--force --force-with-deps
```

8. Retrieve the required EC2 FSx instance parameters for the DB host variables file `host_vars/*` and the global variables file `fsx_vars.yml` configuration.

Configure the hosts file

Input the primary FSx ONTAP cluster management IP and EC2 instances hosts names into the hosts file.

```
# Primary FSx cluster management IP address  
[fsx_ontap]  
172.30.15.33
```

```
# Primary PostgreSQL DB server at primary site where database is  
initialized at deployment time  
[postgresql]  
pgsql_01p ansible_ssh_private_key_file=pgsql_01p.pem
```

```
# Primary PostgreSQL DB server at standby site where postgresql service is  
installed but disabled at deployment  
# Standby DB server at primary site, to setup this server comment out  
other servers in [dr_postgresql]  
# Standby DB server at standby site, to setup this server comment out  
other servers in [dr_postgresql]  
[dr_postgresql] --  
pgsql_01s ansible_ssh_private_key_file=pgsql_01s.pem  
#pgsql_01ps ansible_ssh_private_key_file=pgsql_01ps.pem  
#pgsql_01ss ansible_ssh_private_key_file=pgsql_01ss.pem
```

Configure the `host_name.yml` file in the `host_vars` folder

Enter the appropriate parameters for your system into the blue underlined fields, and then copy and paste the entries into the `host_name.yml` file in the Ansible controller `host_vars` folder.

```
<style>  
div {  
position: relative;  
}
```

```

div button {
position: absolute;
top: 0;
right: 0;
}
button {
transition-duration: 0.4s;
background-color: white;
color: #1563a3;
border: 2px solid #1563a3;
}
button:hover {
background-color: #1563a3;
color: white;
}
#more_datastores_nfs {
display: block;
}
#more_datastores_nfs_button {
display: none;
}

```

</style>

```

<div class="listingblock"><div class="content"><div><button id="copy-
button1" onclick="CopyClassText1()">Copy</button></div><pre><code><div
class="CopyMeClass1" id="CopyMeID1">
#####
#####          Host Variables Configuration          #####
#####

# Add your AWS EC2 instance IP address for the respective PostgreSQL
server host
ansible_host: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>10.61.180.15</i></span>

# "{{groups.postgresql[0]}}" represents first PostgreSQL DB server as
defined in PostgreSQL hosts group [postgresql]. For concurrent multiple
PostgreSQL DB servers deployment, [0] will be incremented for each
additional DB server. For example, "{{groups.postgresql[1]}}" represents
DB server 2, "{{groups.postgresql[2]}}" represents DB server 3 ... As a
good practice and the default, two volumes are allocated to a PostgreSQL
DB server with corresponding /pgdata, /pglogs mount points, which store
PostgreSQL data, and PostgreSQL log files respectively. The number and
naming of DB volumes allocated to a DB server must match with what is
defined in global fsx_vars.yml file by src_db_vols, src_archivelog_vols
parameters, which dictates how many volumes are to be created for each DB

```

server. aggr_name is aggr1 by default. Do not change. lif address is the NFS IP address for the SVM where PostgreSQL server is expected to mount its database volumes. Primary site servers from primary SVM and standby servers from standby SVM.

```

host_datastores_nfs:
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>{{groups.postgresql[0]}}_pgdata</i></span>", aggr_name: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>aggr1</i></span>, lif: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>, size: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>100</i></span>
    - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>{{groups.postgresql[0]}}_pglogs</i></span>", aggr_name: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>aggr1</i></span>, lif: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>172.21.94.200</i></span>, size: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;" /><i>100</i></span>
# Add swap space to EC2 instance, that is equal to size of RAM up to 16G max. Determine the number of blocks by dividing swap size in MB by 128.
swap_blocks: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;" /><i>128</i></span>
# Postgresql user configurable parameters
psql_port: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;" /><i>5432</i></span>
buffer_cache: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;" /><i>8192MB</i></span>
archive_mode: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;" /><i>"on"</i></span>
max_wal_size: <span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-
```

```

decoration:underline;"/><i>5GB</i></span>
client_address: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-decoration:underline; text-
decoration:underline;"><i>172.30.15.0/24</i></span>

</div></code></pre></div></div>
<script>
function CopyClassText1() {
    var textToCopy = document.getElementById("CopyMeID1");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {
        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_datastores_nfs").style.display = "none";
    var command = document.execCommand("copy");
    if (command)
    {
        document.getElementById("copy-button1").innerHTML = "Copied!";
        setTimeout(revert_copy, 3000);
    }
    window.getSelection().removeRange(CopyRange);
    if(currentRange)
    {
        window.getSelection().addRange(currentRange);
    }
}
function revert_copy() {
    document.getElementById("copy-button1").innerHTML = "Copy";
    document.getElementById("more_datastores_nfs").style.display =
"block";
}

function datastoredropdown() {
    document.getElementById("more_datastores_nfs").style.display = "none";
    document.getElementById("more_datastores_nfs_button").style.display =
"block";
    var x=1;
}

```

```

var myHTML = '';
var buildup = '';
var wrapper = document.getElementById("select_more_datastores_nfs");
while (x < 100) {
    buildup += '<option value="' + x + '">' + x + '</option>';
    x++;
}
myHTML += '<a id="more_datastores_nfs">How many extra NFS volumes do
you wish to add?</a><select name="number_of_extra_datastores_nfs"
id="number_of_extra_datastores_nfs">' + buildup + '</select>';
wrapper.innerHTML = myHTML;
}

function adddatastorevolumes() {
    var y =
document.getElementById("number_of_extra_datastores_nfs").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_datastores_nfs");
    while (j < y) {
        j++;
        myHTML += ' - {vol_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"><i>{{groups.oracle[0]}}_u01</i></span>,
aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>aggr01_node02</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"><i>172.21.94.201</i></span>,
size: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"><i>25</i></span>}<br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_datastores_nfs").style.display =
"none";
    document.getElementById("more_datastores_nfs_button").style.display =
"none";
}

</script>

```

Configure the global `fsx_vars.yml` file in the `vars` folder

Input the appropriate parameters for your system into the blue underlined fields, and then copy and paste the entries into the `fsx_vars.yml` file at the Ansible controller host.


```

# Variables for SnapMirror Peering
#####
#####

#Passphrase for cluster peering authentication
passphrase: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>xxxxxxxx</i></span>

#Please enter destination or standby FSx cluster name
dst_cluster_name: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>FsxId0cf8e0bccb14805e8</i></span>

#Please enter destination or standby FSx cluster management IP
dst_cluster_ip: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>172.30.15.90</i></span>

#Please enter destination or standby FSx cluster inter-cluster IP
dst_inter_ip: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>172.30.15.13</i></span>

#Please enter destination or standby SVM name to create mirror relationship
dst_vserver: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>dr</i></span>

#Please enter destination or standby SVM management IP
dst_vserver_mgmt_lif: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>172.30.15.88</i></span>

#Please enter destination or standby SVM NFS lif
dst_nfs_lif: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>172.30.15.88</i></span>

#Please enter source or primary FSx cluster name
src_cluster_name: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>FsxId0cf8e0bccb14805e8</i></span>

```

```

#Please enter source or primary FSx cluster management IP
src_cluster_ip: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>172.30.15.20</i></span>

#Please enter source or primary FSx cluster inter-cluster IP
src_inter_ip: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>172.30.15.5</i></span>

#Please enter source or primary SVM name to create mirror relationship
src_vserver: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>prod</i></span>

#Please enter source or primary SVM management IP
src_vserver_mgmt_lif: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline; text-decoration:underline;"><i>172.30.15.115</i></span>

#####
#####
#
# Variable for PostgreSQL Volumes, lif - source or primary FSx NFS lif address
#
#####
#####

src_db_vols:
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;'><i>{{groups.postgresql[0]}}_pgdata</i></span>", aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>aggr1</i></span>, lif: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>, size: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>100</i></span>}"}

src_archivelog_vols:
  - {vol_name: ""<span <div contenteditable='true' style='color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;'><i>{{groups.postgresql[0]}}_pglogs</i></span>", aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>aggr1</i></span>, lif: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>172.21.94.200</i></span>, size: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>100</i></span>}"}

```

```

weight:bold; font-style:italic; text-
decoration:underline;"/><i>aggr1</i></span>, lif: <span <div
contenteditable="true" style="color:#004EFF; font-weight:bold; font-
style:italic; text-decoration:underline;"/><i>172.21.94.200</i></span>,
size: <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"/><i>100</i></span>

#Names of the Nodes in the ONTAP Cluster
nfs_export_policy: <span <div contenteditable="true" style="color:#004EFF;
font-weight:bold; font-style:italic; text-
decoration:underline;"/><i>default</i></span>

#####
#####
### Linux env specific config variables ###
#####
#####
#####

#NFS Mount points for PostgreSQL DB volumes
mount_points:
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"/><i>/pgdata</i></span>
  - <span <div contenteditable="true" style="color:#004EFF; font-
weight:bold; font-style:italic; text-
decoration:underline;"/><i>/pglogs</i></span>

#RedHat subscription username and password
redhat_sub_username: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"/><i>xxxxx</i></span>
redhat_sub_password: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-
decoration:underline;"/><i>xxxxx</i></span>

#####
#####
### DB env specific install and config variables ###
#####
#####
#The latest version of PostgreSQL RPM is pulled/installed and config file
is deployed from a preconfigured template
#Recovery type and point: default as all logs and promote and leave all
PITR parameters blank

</div></code></pre></div></div>
<script>
```

```

function CopyClassText() {
    var textToCopy = document.getElementById("CopyMeID");
    var currentRange;
    if(document.getSelection().rangeCount > 0)
    {
        currentRange = document.getSelection().getRangeAt(0);
        window.getSelection().removeRange(currentRange);
    }
    else
    {
        currentRange = false;
    }
    var CopyRange = document.createRange();
    CopyRange.selectNode(textToCopy);
    window.getSelection().addRange(CopyRange);
    document.getElementById("more_storage_vlans").style.display = "none";
    document.getElementById("more_nfs_volumes").style.display = "none";
    var command = document.execCommand("copy");
    if (command)
    {
        document.getElementById("copy-button").innerHTML = "Copied!";
        setTimeout(revert_copy, 3000);
    }
    window.getSelection().removeRange(CopyRange);
    if(currentRange)
    {
        window.getSelection().addRange(currentRange);
    }
}
function revert_copy() {
    document.getElementById("copy-button").innerHTML = "Copy";
    document.getElementById("more_storage_vlans").style.display =
"block";
    document.getElementById("more_nfs_volumes").style.display = "block";
}
function storagevlandropdown() {
    document.getElementById("more_storage_vlans").style.display = "none";
    document.getElementById("more_storage_vlans_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_storage_vlans");
    while (x < 10) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
}

```

```

}

myHTML += '<a id="more_storage_vlans_info">How many extra VLANs do you
wish to add?</a><select name="number_of_extra_storage_vlans"
id="number_of_extra_storage_vlans">' + buildup + '</select>';
wrapper.innerHTML = myHTML;
}

function addstoragevlans() {
    var y =
document.getElementById("number_of_extra_storage_vlans").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_storage_vlans");
    while (j < y) {
        j++;
        myHTML += ' - {vlan_id: "203", name: "infra_NFS", protocol: "NFS"}<br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_storage_vlans").style.display =
"none";
    document.getElementById("more_storage_vlans_button").style.display =
"none";
}

function nfsvolumesdropdown() {
    document.getElementById("more_nfs_volumes").style.display = "none";
    document.getElementById("more_nfs_volumes_button").style.display =
"block";
    var x=1;
    var myHTML = '';
    var buildup = '';
    var wrapper = document.getElementById("select_more_nfs_volumes");
    while (x < 100) {
        buildup += '<option value="' + x + '">' + x + '</option>';
        x++;
    }
    myHTML += '<a id="more_nfs_volumes_info">How many extra NFS volumes do
you wish to add?</a><select name="number_of_extra_nfs_volumes"
id="number_of_extra_nfs_volumes">' + buildup + '</select>';
    wrapper.innerHTML = myHTML;
}

```

```

function addnfsvolumes() {
    var y = document.getElementById("number_of_extra_nfs_volumes").value;
    var j=0;
    var myHTML = '';
    var wrapper = document.getElementById("extra_nfs_volumes");
    while (j < y) {
        j++;
        myHTML += ' - {vol_name: <span <div contenteditable="true"
style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>rtpora04_u01</i></span>, aggr_name: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>aggr01_node02</i></span>, lif: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>172.21.94.201</i></span>, size: <span <div contenteditable="true" style="color:#004EFF; font-weight:bold; font-style:italic; text-decoration:underline;"><i>25</i></span>}<br>';
    }
    wrapper.innerHTML = myHTML;
    document.getElementById("select_more_nfs_volumes").style.display =
"none";
    document.getElementById("more_nfs_volumes_button").style.display =
"none";
}

</script>

```

PostgreSQL deployment and HA/DR setup

The following tasks deploy the PostgreSQL DB server service and initialize the database at the primary site on the primary EC2 DB server host. A standby primary EC2 DB server host is then set up at the standby site. Finally, DB volume replication is set up from the primary-site FSx cluster to the standby-site FSx cluster for disaster recovery.

1. Create DB volumes on the primary FSx cluster, and set up postgresql on the primary EC2 instance host.

```
ansible-playbook -i hosts postgresql_deploy.yml -u ec2-user --private
-key psql_01p.pem -e @vars/fsx_vars.yml
```

2. Set up the standby DR EC2 instance host.

```
ansible-playbook -i hosts postgresql_standby_setup.yml -u ec2-user
--private-key psql_01s.pem -e @vars/fsx_vars.yml
```

3. Set up FSx ONTAP cluster peering and database volume replication.

```
ansible-playbook -i hosts fsx_replication_setup.yml -e @vars/fsx_vars.yml
```

4. Consolidate the previous steps into a single-step PostgreSQL deployment and HA/DR setup.

```
ansible-playbook -i hosts postgresql_hadr_setup.yml -u ec2-user -e @vars/fsx_vars.yml
```

5. For setting up a standby PostgreSQL DB host at either the primary or standby sites, comment out all other servers in the hosts file [dr_postgresql] section and then execute the postgresql_standby_setup.yml playbook with the respective target host (such as psql_01ps or standby EC2 compute instance at primary site). Make sure that a host parameters file such as psql_01ps.yml is configured under the host_vars directory.

```
[dr_postgresql] --  
#psql_01s ansible_ssh_private_key_file=psql_01s.pem  
psql_01ps ansible_ssh_private_key_file=psql_01ps.pem  
#psql_01ss ansible_ssh_private_key_file=psql_01ss.pem
```

```
ansible-playbook -i hosts postgresql_standby_setup.yml -u ec2-user  
--private-key psql_01ps.pem -e @vars/fsx_vars.yml
```

PostgreSQL database snapshot backup and replication to standby site

PostgreSQL database snapshot backup and replication to the standby site can be controlled and executed on the Ansible controller with a user-defined interval. We have validated that the interval can be as low as 5 minutes. Therefore, in the case of failure at the primary site, there is 5 minutes of potential data loss if failure occurs right before the next scheduled snapshot backup.

```
*/15 * * * * /home/admin/na_postgresql_aws_deploy_hadr/data_log_snap.sh
```

Failover to Standby Site for DR

For testing the PostgreSQL HA/DR system as a DR exercise, execute failover and PostgreSQL database recovery on the primary standby EC2 DB instance on standby site by executing following playbook. In an actually DR scenario, execute the same for an actually failover to DR site.

```
ansible-playbook -i hosts postgresql_failover.yml -u ec2-user --private  
-key psql_01s.pem -e @vars/fsx_vars.yml
```

Resync Replicated DB volumes after Failover Test

Run resync after the failover test to reestablish database-volume SnapMirror replication.

```
ansible-playbook -i hosts postgresql_standby_resync.yml -u ec2-user  
--private-key psql_01s.pem -e @vars/fsx_vars.yml
```

Failover from primary EC2 DB server to standby EC2 DB server due to EC2 compute instance failure

NetApp recommends running manual failover or using well-established OS cluster-ware that might require a license.

Where to find additional information

To learn more about the information that is described in this document, review the following documents and/or websites:

- Amazon FSx for NetApp ONTAP

<https://aws.amazon.com/fsx/netapp-ontap/>

- Amazon EC2

https://aws.amazon.com/pm/ec2/?trk=36c6da98-7b20-48fa-8225-4784bcfd9843&sc_channel=ps&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2&ef_id=Cj0KCQiA54KfBhCKARIaJzSrdqwQrghn6l71jiWzSeaT9Uh1-vY-VfhJixF-xnv5rWwn2S7RqZOTQ0aAh7eEALw_wcB:G:s&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2

- NetApp Solution Automation

https://docs.netapp.com/us-en/netapp-solutions/automation/automation_introduction.html

SnapCenter for databases

TR-4964: Oracle Database backup, restore and clone with SnapCenter Services

Allen Cao, Niyaz Mohamed, NetApp

Purpose

SnapCenter Services is the SaaS version of the classic SnapCenter database management UI tool that is available through the NetApp BlueXP cloud management console. It is an integral part of the NetApp cloud-backup, data-protection offering for databases such as Oracle and HANA running on NetApp cloud storage. This SaaS-based service simplifies traditional SnapCenter standalone server deployment that generally requires a Windows server operating in a Windows domain environment.

In this documentation, we demonstrate how you can set up SnapCenter Services to backup, restore, and clone Oracle databases deployed to Amazon FSx for ONTAP storage and EC2 compute instances. Although it is much easier to set up and use, SnapCenter Services deliver key functionalities that are available in the legacy SnapCenter UI tool.

This solution addresses the following use cases:

- Database backup with snapshots for Oracle databases hosted in Amazon FSx for ONTAP
- Oracle database recovery in the case of a failure
- Fast and storage-efficient cloning of primary databases for a dev/test environment or other use cases

Audience


This solution is intended for the following audiences:

- The DBA who manages Oracle databases running on Amazon FSx for ONTAP storage
- The solution architect who is interested in testing Oracle database backup, restore, and clone in the public AWS cloud
- The storage administrator who supports and manages the Amazon FSx for ONTAP storage
- The application owner who owns applications that are deployed to Amazon FSx for ONTAP storage

Solution test and validation environment

The testing and validation of this solution was performed in an AWS FSx and EC2 environment that might not match the final deployment environment. For more information, see the section [\[Key Factors for Deployment Consideration\]](#).

Architecture

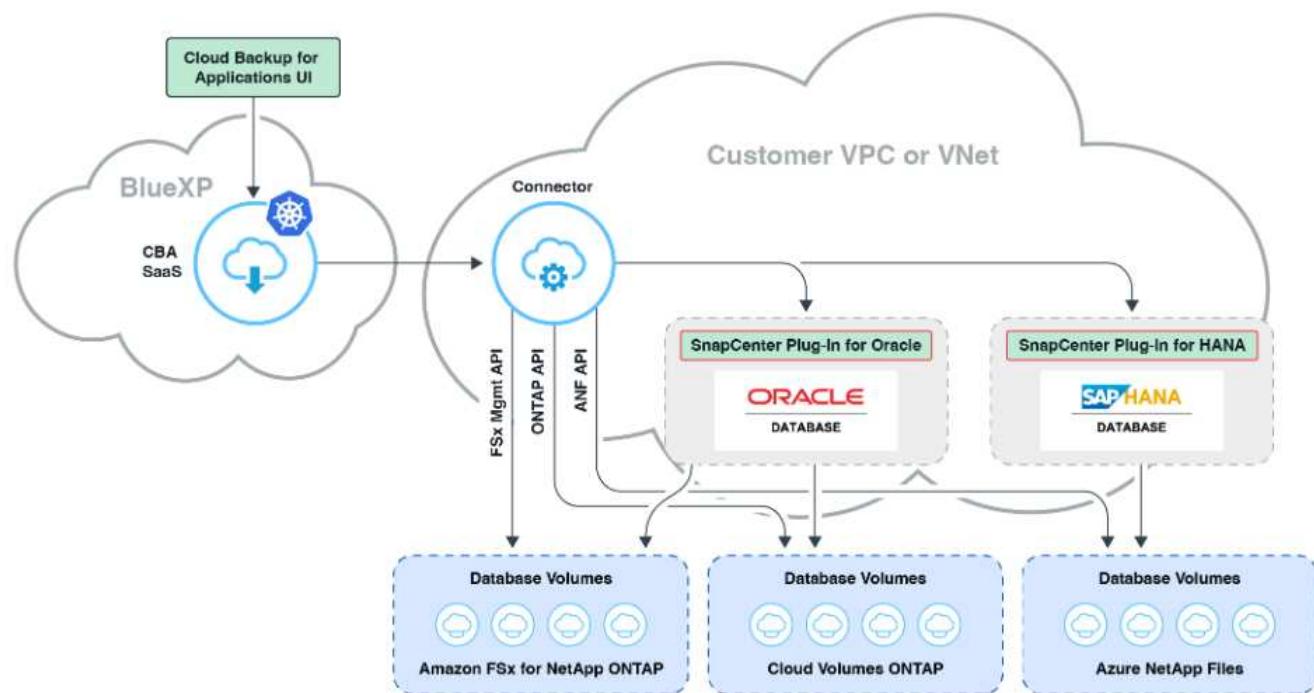

This image provides a detailed picture of Cloud Backup for Application within the BlueXP console, including the UI, the connector, and the resources it manages.

Hardware and software components

Hardware

FSx ONTAP storage	Current version offered by AWS	One FSx HA cluster in the same VPC and availability zone
EC2 instance for compute	t2.xlarge/4vCPU/16G	Two EC2 T2 large EC2 instances, one as primary DB server and the other as clone DB server
Software		
RedHat Linux	RHEL-8.6.0_HVM-20220503-x86_64-2-Hourly2-GP2	Deployed RedHat subscription for testing
Oracle Grid Infrastructure	Version 19.18	Applied RU patch p34762026_190000_Linux-x86-64.zip
Oracle Database	Version 19.18	Applied RU patch p34765931_190000_Linux-x86-64.zip
Oracle OPatch	Version 12.2.0.1.36	Latest patch p6880880_190000_Linux-x86-64.zip
SnapCenter Service	Version	v2.3.1.2324

Key factors for deployment consideration

- **Connector to be deployed in the same VPC as database and FSx.** When possible, the connector should be deployed in the same AWS VPC, which enables connectivity to the FSx storage and the EC2 compute instance.
- **An AWS IAM policy created for SnapCenter connector.** The policy in JSON format is available in the detailed SnapCenter service documentation. When you launch connector deployment with the BlueXP console, you are prompted to set up the prerequisites. The policy should be assigned to the AWS user account that owns the connector.
- **The AWS account access key and the SSH key pair created in the AWS account.** The SSH key pair is assigned to the ec2-user for logging into the connector host and then deploying a database plug-in to the EC2 DB server host. The access key grants permission for provisioning the required connector.
- **A credential added to the BlueXP console setting.** To add Amazon FSx for ONTAP to the BlueXP working environment, a credential that grants permissions to access Amazon FSx for ONTAP from the BlueXP console is set up in the BlueXP console setting.
- **SnapCenter plug-in deployed to the EC2 database instance host.** SnapCenter services make API calls that are executed by the SnapCenter plug-in on the EC2 database instance host. You must deploy it before setting up the services.

Solution deployment

There is extensive NetApp documentation with a broader scope to help you protect your cloud-native application data. The goal of this documentation is to provide step-by-step procedures that cover SnapCenter Service deployment with the BlueXP console to protect your Oracle database deployed to Amazon FSx for ONTAP and an EC2 compute instance. This document fills in certain details that might be missing from more general instructions.

To get started, complete the following steps:

- Read the general instructions [Protect your cloud native applications data](#) and the sections related to Oracle and Amazon FSx for ONTAP.
- Watch the following video walkthrough.

```
<iframe  
src="https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=4b0fd  
212-7641-46b8-9e55-  
b01200f9383a&autoplay=false&offerviewer=false&showtitle=false&showbrand=  
false&captions=false&interactivity=all" height="203" width="360"  
style="border: 1px solid #464646;" allowfullscreen  
allow="autoplay"></iframe>
```

Prerequisites for SnapCenter service deployment

Deployment requires the following prerequisites.

1. A primary Oracle database server on an EC2 instance with an Oracle database fully deployed and running.
2. A Amazon FSx for ONTAP cluster deployed in AWS that is hosting the database above.
3. An optional database server on an EC2 instance that can be used for testing the cloning of an Oracle database to an alternative host for the purpose of supporting a dev/test workload or any use cases that requires a full data set of production Oracle database.
4. If you need help to meet the above prerequisites for Oracle database deployment on Amazon FSx for ONTAP and EC2 compute instance, see [Oracle Database Deployment and Protection in AWS FSx/EC2 with iSCSI/ASM](#).

Onboarding to BlueXP preparation

1. Use the link [NetApp BlueXP](#) to sign up for BlueXP console access.
2. To set up BlueXP to manage AWS cloud resources such as Amazon FSx for ONTAP, you should already have an AWS account set up. You can then log into your AWS account to create an IAM policy for granting SnapCenter service access to an AWS account to use for connector deployment.

The screenshot shows the AWS Identity and Access Management (IAM) console. The left sidebar is collapsed, showing the main navigation menu. The main area displays the 'Summary' tab for a policy named 'snapcenter'. The policy ARN is listed as 'arn:aws:iam::541696183547:policy/snapcenter'. The description is 'Policy to grant snapcenter service permission to create connector in AWS.' Below this, there are tabs for 'Permissions', 'Policy usage', 'Tags', 'Policy versions', and 'Access Advisor'. The 'Permissions' tab is selected, showing a JSON representation of the policy:

```

1 {  
2   "Version": "2012-10-17",  
3   "Statement": [  
4     {  
5       "Effect": "Allow",  
6       "Action": [  
7         "iam:CreateRole",  
8         "iam:DeleteRole",  
9         "iam:PutRolePolicy",  
10        "iam:CreateInstanceProfile",  
11        "iam:DeleteRolePolicy",  
12        "iam:AddRoleToInstanceProfile",  
13        "iam:RemoveRoleFromInstanceProfile",  
14        "iam:DeleteInstanceProfile",  
15        "iam:PassRole",  
16        "iam>ListRoles",  
17        "ec2:DescribeInstanceStatus",  
18        "ec2:RunInstances",  
19        "ec2:ModifyInstanceAttribute",  
20        "ec2>CreateSecurityGroup",  
21        "ec2>DeleteSecurityGroup",  
22        "ec2:DescribeSecurityGroups",  
23        "ec2:RevokeSecurityGroupEgress",  
24        "ec2:AuthorizeSecurityGroupEgress",  
25        "ec2:AuthorizeSecurityGroupIngress",  
26        "ec2:RevokeSecurityGroupIngress",  
27        "ec2>CreateNetworkInterface",  
28        "ec2:DescribeNetworkInterface"  
29      ]  
30    }  
31  ]  
32}  
33

```

The policy should be configured with a JSON string that is available when connector provisioning is launched and you are prompted as a reminder that an IAM policy has been created and granted to an AWS account that is used for connector deployment.

3. You also need the AWS VPC, a key and secrets for your AWS account, an SSH key for EC2 access, a security group, and so on ready for connector provisioning.

Deploy a connector for SnapCenter services

1. Log into the BlueXP console. For a shared account, it is a best practice to create an individual workspace by clicking **Account > Manage Account > Workspace** to add a new workspace.

Manage Account: Automation-team

Overview Members Workspaces BlueXP Connector X

Manage the BlueXP connector Workspaces

+ Add New Workspace

Database	X Edit
Database-2	X Edit
sufians-k8	X Edit
Workspace-1	X Edit

2. Click **Add a Connector** to launch the connector provisioning workflow.

NetApp Cloud Manager

Account Automation-team Workspace new-workspace Connector N/A

Backup & Restore Volumes Restore Applications Virtual Machines Kubernetes Job Monitoring

Backup & Restore
Fully integrated data protection for ONTAP anywhere

Cloud Backup dramatically reduces the complexity of backing up critical structured and unstructured data across your ONTAP hybrid cloud environments to cost-effective object storage. All you need to do is select the source, the target and the protection policy and you're protected

To start your Backup & Restore experience, please deploy our connector

Add a Connector

Simple & intuitive
No backup or cloud expertise required. Simply click the button above and follow the instructions

Hybrid Multicloud
Backup from On-premises or Cloud Volumes ONTAP to AWS, Azure, GCP or StorageGRID

Unmatched Efficiency
Combines incremental, block-level operation with storage efficiencies to reduce time and costs

3. Choose your cloud provider (in this case, **Amazon Web Services**).

Add Connector X

Provider

Choose the cloud provider where you want to run the Connector:



Microsoft Azure



Amazon Web Services



Google Cloud Platform

Continue Back

4. Skip the **Permission**, **Authentication**, and **Networking** steps if you already have them set up in your AWS account. If not, you must configure these before proceeding. From here, you could also retrieve the permissions for the AWS policy that is referenced in the previous section "[Onboarding to BlueXP preparation.](#)"

Add Connector - AWS

X

Deploying a Connector

The Connector is a crucial component for the day-to-day use of Cloud Manager. It's used to connect Cloud Manager's services to your hybrid-cloud environments. The Connector can then manage the resources and processes within your public cloud environment.

Before you begin the deployment process, ensure that you have completed the required preparations. This guide will enable you to focus on the minimum requirements for Connector installation.

Permissions

Set up an IAM role with the required permissions

Authentication

Choose between two AWS authentication methods: AWS keys or assuming an IAM role

Networking

Obtain details about the VPC and subnet in which the Connector will reside

[Skip to Deployment](#)

[Previous](#)

[Continue](#)



5. Enter your AWS account authentication access key and secret key.

Add Connector - AWS

[More Information](#)

X

[1 AWS Credentials](#)

[2 Details](#)

[3 Network](#)

[4 Security Group](#)

[5 Review](#)

AWS Authentication

Region

us-east-1 | US East (N. Virginia)

Select the Authentication Method:

Assume Role

AWS Keys

AWS Access Key

AKIA6JRXA6ZGVFSHMO3

AWS Secret Key

.....

Want to launch an instance without AWS Credentials? ▾

[Previous](#)

[Next](#)



6. Name the connector instance and select **Create Role** under **Details**.

The screenshot shows the 'Add Connector - AWS' wizard at the 'Details' step. The top navigation bar includes 'More Information' and a close button. Below it, five steps are shown: 1. AWS Credentials (selected), 2. Details (highlighted in blue), 3. Network, 4. Security Group, and 5. Review.

Connector Instance Name: SnapCenterSvs

Connector Role: Create Role (radio button selected)

Role Name: Cloud-Manager-Operator-VZzSSP9-SnapCenter

AWS Managed Encryption: Master Key: aws/ebs (default) | Change Key

Buttons: Previous (disabled), Next (blue), and a circular icon with a downward arrow.

7. Configure networking with the proper VPC, subnet, and SSH key pair for EC2 access.

Add BlueXP Connector - AWS

More Information X

AWS Credentials Details Network Security Group Review

Network

Connectivity

VPC:

Subnet:

Key Pair:

Public IP:

Proxy Configuration (Optional)

HTTP Proxy: Example: http://172.16.254.1:8080

Define Credentials for this Proxy

Upload a root certificate

Notice: Ensure that the subnet has internet connectivity through a NAT device or proxy server so that the Connector can communicate with AWS services.

Previous Next



8. Set the security group for the connector.

Add BlueXP Connector - AWS

More Information X

AWS Credentials Details Network Security Group Review

Security Group

The security group must allow inbound HTTP, HTTPS and SSH access.

Assign a security group: Create a new security group Select an existing security group

Security Group Name	Description
default	default VPC security group

1 Security Group

Previous Next



9. Review the summary page and click **Add** to start connector creation. It generally takes about 10 mins to complete deployment. Once completed, the connector instance appears in the AWS EC2 dashboard.

The screenshot shows the 'Review' step of the 'Add BlueXP Connector - AWS' wizard. The configuration details listed are:

Review	
Code for Terraform Automation	
BlueXP Connector Name	aws-snapctr-us-east
AWS Access Key	AKIAJ4H43ZT56IWWR3TI
Region	us-east-1
VPC	vpc-0b522d5e982a50ceb - 172.30.15.0/25
Subnet	172.30.15.0/25 priv-subnet-01
Key Pair	sufi_new
Public IP	Use subnet settings (Disable)
Proxy	None
Security Group	default


At the bottom of the screen, there are two buttons: 'Previous' and 'Add'. To the right of the buttons is a help icon (a speech bubble with a question mark).

10. After the connector is deployed, log into the connector EC2 host as the ec2-user with an SSH key to install the SnapCenter plug-in following these instructions: [Deploy the plug-in using script and add host from UI using manual option](#).


SnapCenter services setup

With the connector deployed, SnapCenter services can now be set up with the following procedure:


1. From **My Working Environment** click **Add working Environment** to discover FSx deployed in AWS.

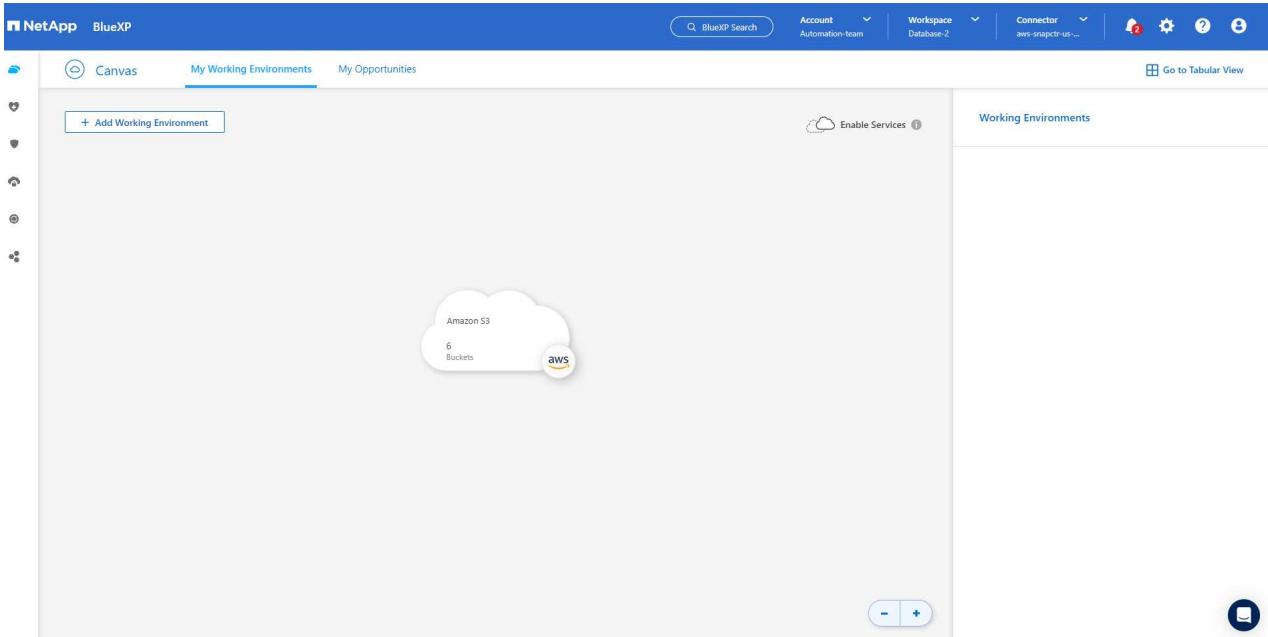


2. Choose **Amazon Web Services** as the location.

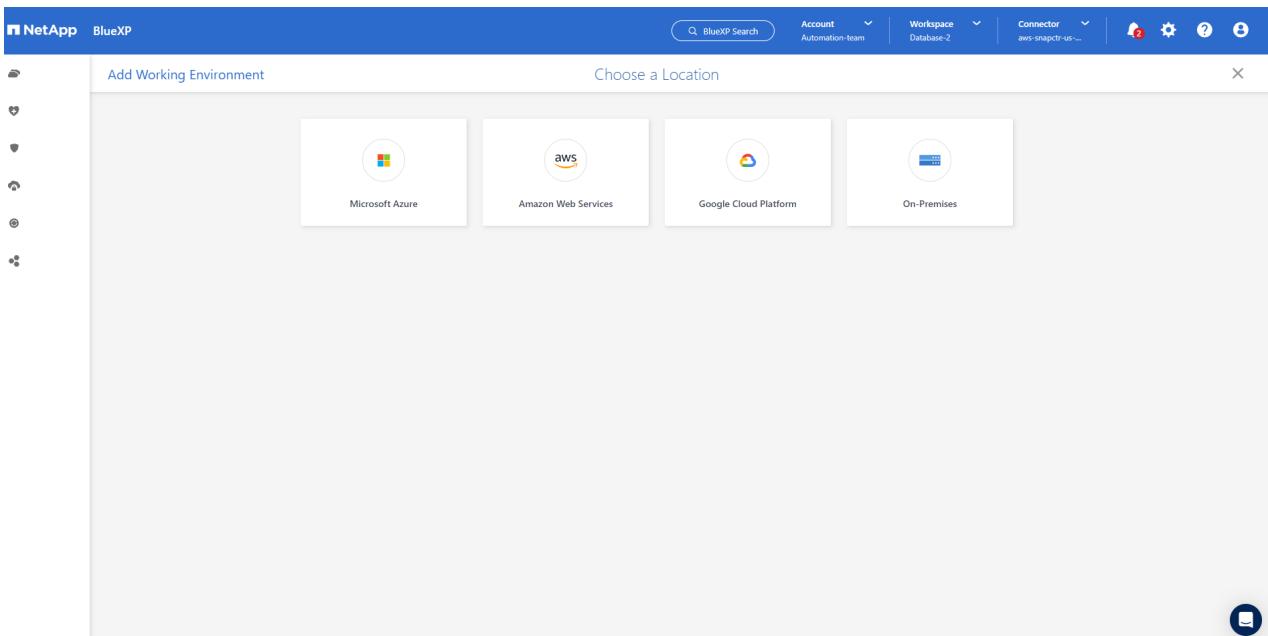

3. Click **Discover Existing** next to **Amazon FSx for ONTAP**.

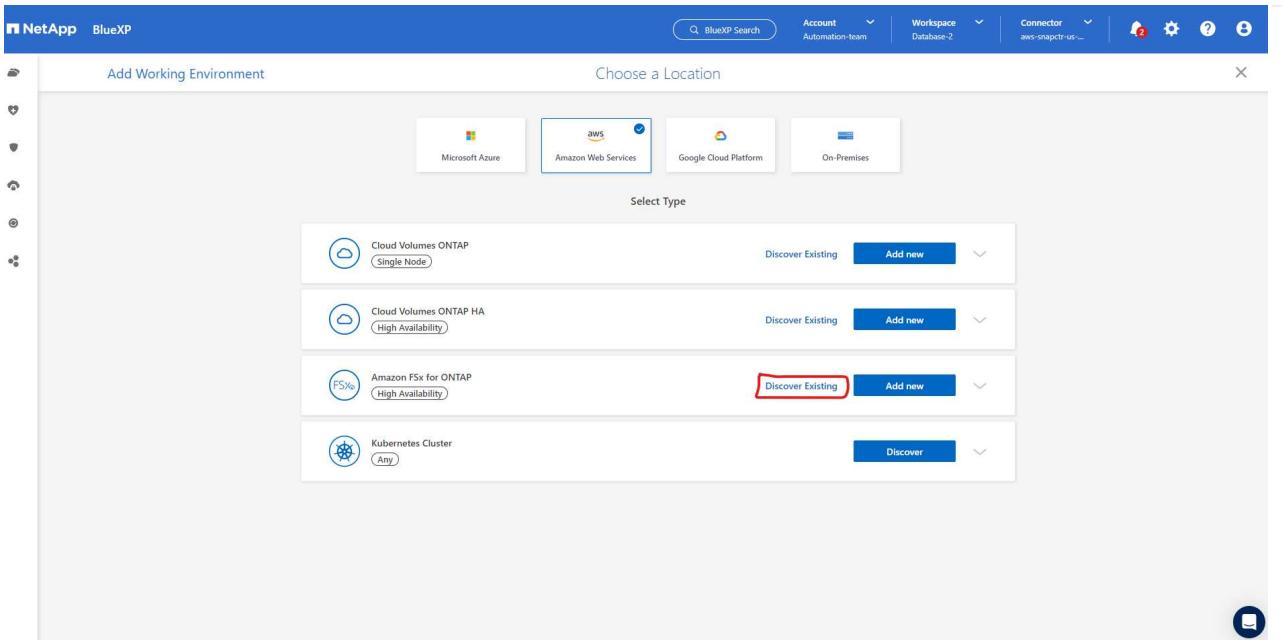

4. Select the credentials that provides BlueXP with the permissions that it needs to manage FSx for ONTAP. If you have not added credentials, you can add it from the **Settings** menu at the top right corner of the BlueXP console.

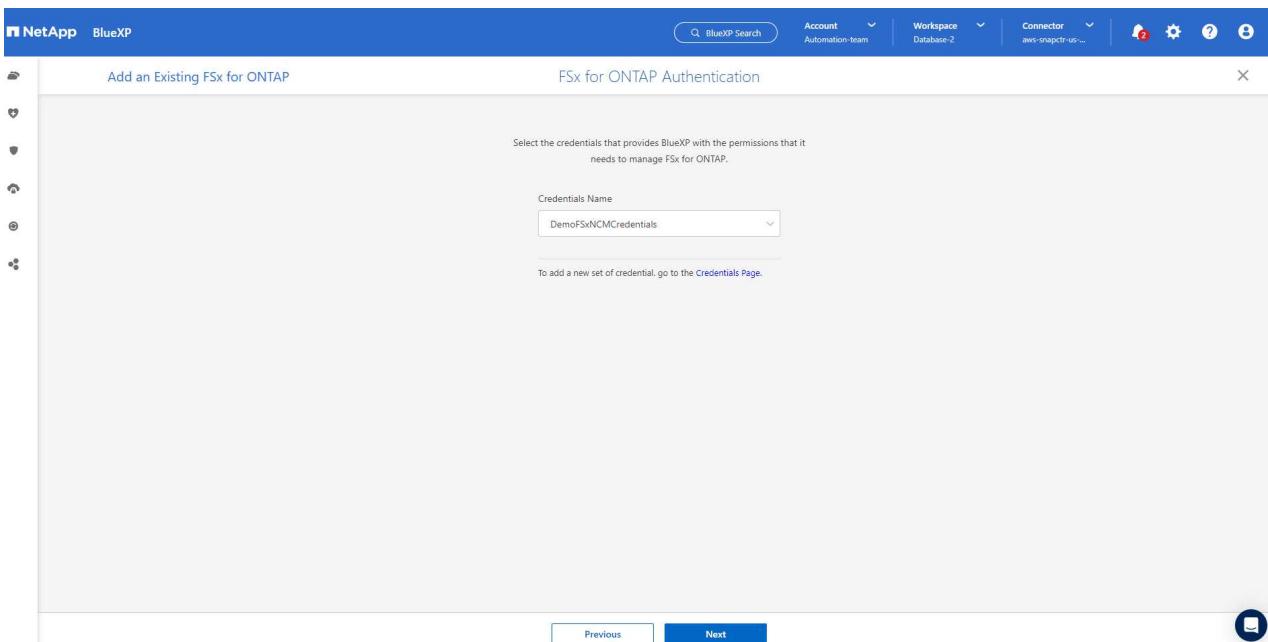

5. Choose the AWS region where Amazon FSx for ONTAP is deployed, select the FSx cluster that is hosting the Oracle database and click Add.

Add an Existing FSx for ONTAP

Select FSx for ONTAP

Choose an AWS region and then select the working environment that you want to add

Region: us-east-1 | US East (N. Virginia)

Name	File System ID	VPC ID	Subnet ID	Management Address	Deployment modal	Tags
fsx_01	fs-02ad7bf3476b741df	vpc-0b522d5e982a...	subnet-04f5fe7073ff5...	management.fs-02ad7bf3476b741df.fsx.us-east...	Single Availability Zone	(4)

Previous Add

6. The discovered Amazon FSx for ONTAP instance now appears in the working environment.

Canvas My Working Environments My Opportunities


+ Add Working Environment

Enable Services


Working Environments

1 FSx for ONTAP (High-Availability)
250 GiB Provisioned Capacity

7. You can log into the FSx cluster with your fsxadmin account credentials.

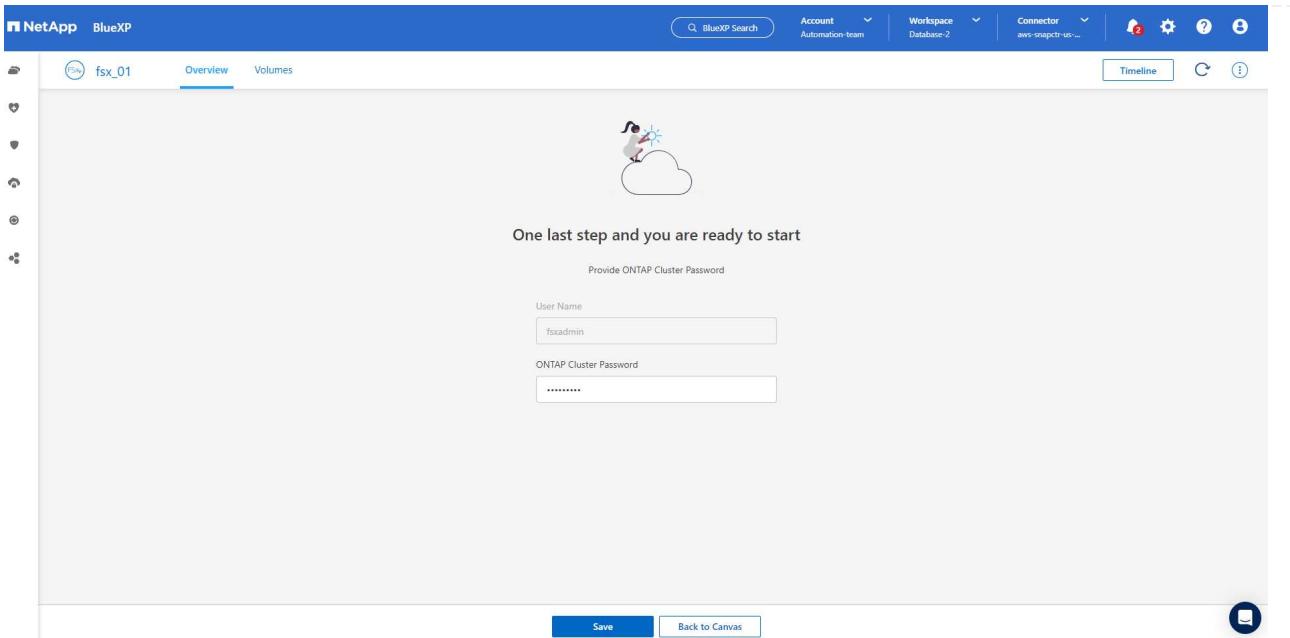

8. After you log into Amazon FSx for ONTAP, review your database storage information (such as database volumes).

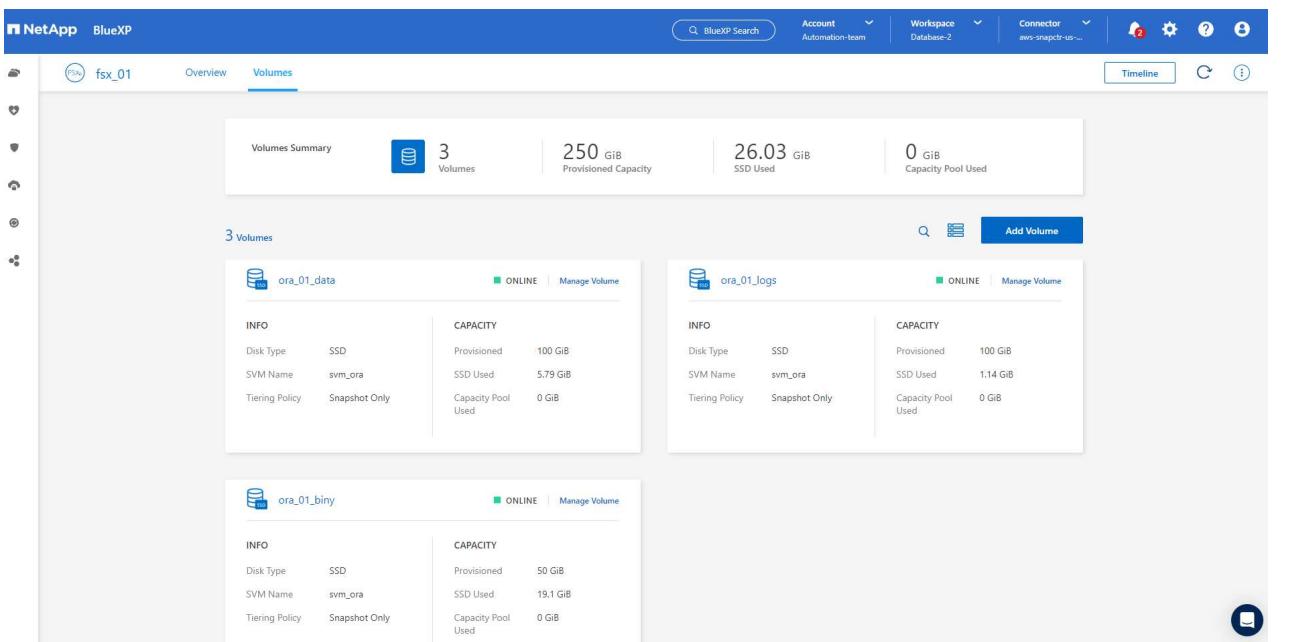

9. From the left-hand sidebar of the console, hover your mouse over the protection icon, and then click **Protection > Applications** to open the Applications launch page. Click **Discover Applications**.

Cloud Backup for Applications

Integrated Data Protection for ONTAP primary

Powered by SnapCenter, delivers application-consistent data protection on to Cloud Object Storage as well as on NetApp Cloud Storage. With proliferation of applications data on cloud, managing these data is challenging and complex. Cloud Backup for Applications offers simplified data management to smoothen organizational IT operations and mitigates the risks associated with loss of application data.

Get started with Cloud Backup for Applications by discovering applications.

[Discover Applications](#)

Streamlined data management
Manage your cloud native applications with one console

Save time & resources
Automated workflows without downtime save organizational

Protect data in minutes
Faster backup and restore operations help you to meet

10. Select **Cloud Native** as the application source type.

Select Application Source Type


Select the application source type that you want to manage.

Hybrid
Applications hosted within your organization's infrastructure.


Cloud Native
Applications that are hosted and run in the cloud using AWS, Azure, GCP, etc..

[Cancel](#) [Next](#)

11. Choose **Oracle** for the application type.

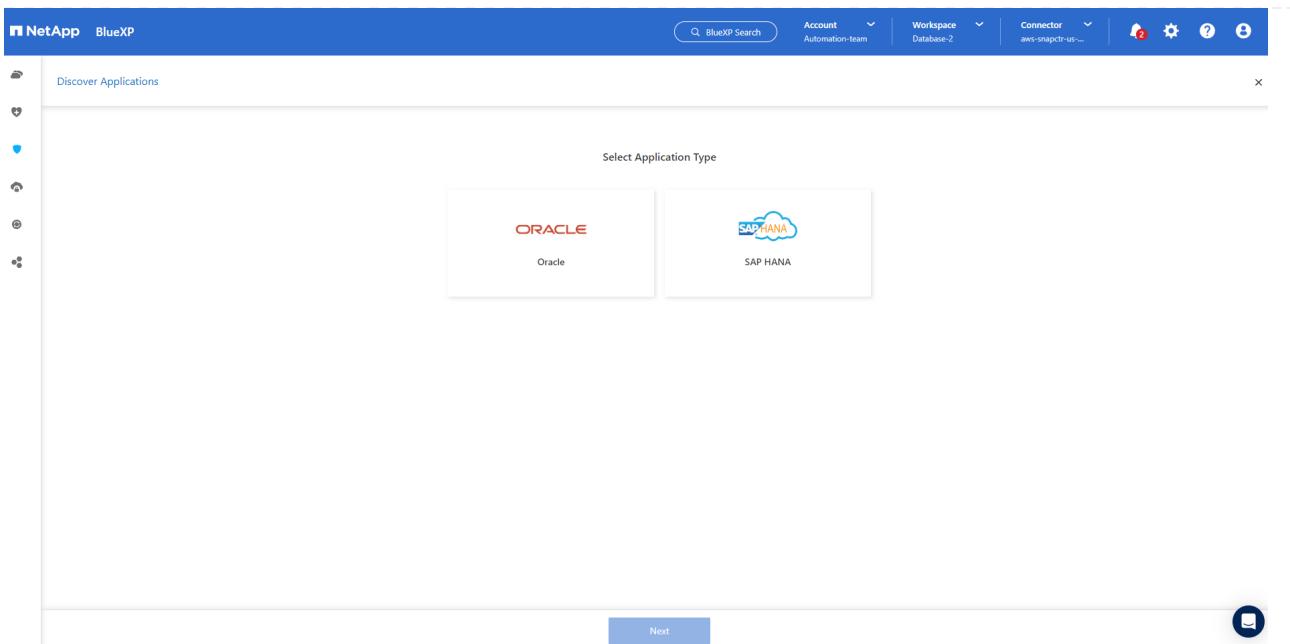

12. Provide the Oracle EC2 instance host details to add a host. Check the box to confirm that the plug-in for Oracle on the host has been installed, because you deploy the plug-in after the connector is provisioned.

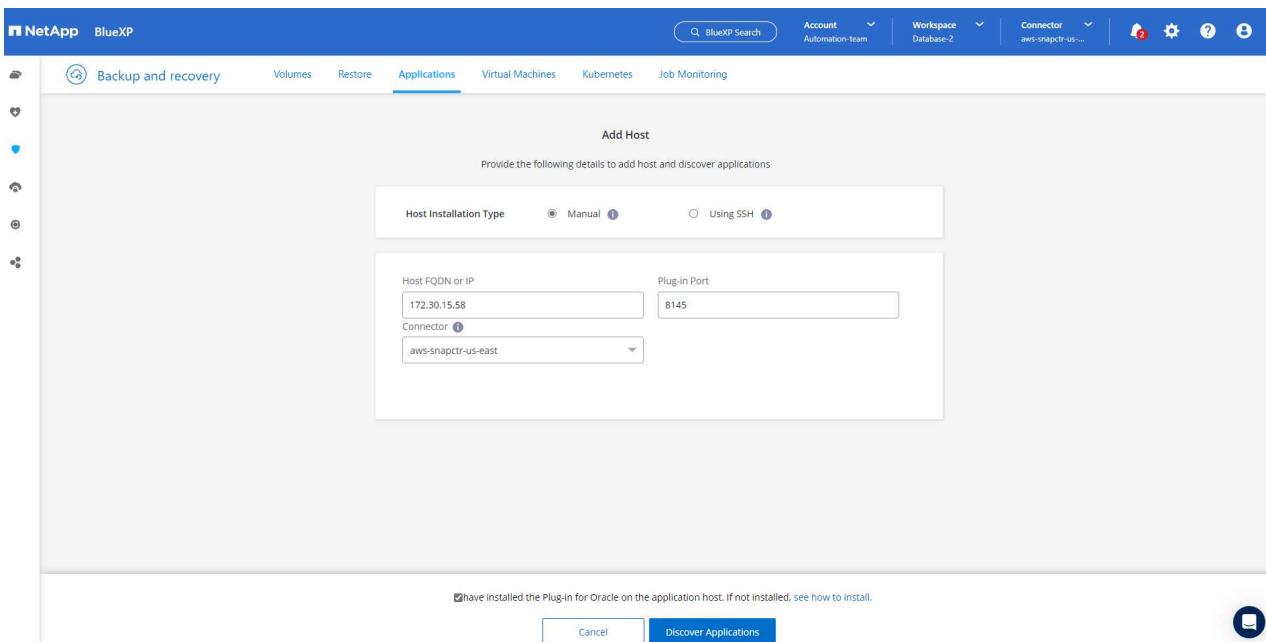

13. Discover the Oracle EC2 host and add it to **Applications**, and any databases on the host are discovered and displayed on the page as well. The database **Protection Status** shows as **Unprotected**.

The screenshot shows the NetApp BlueXP web interface. At the top, there are navigation tabs: Backup and recovery, Volumes, Restore, Applications (which is selected), Virtual Machines, Kubernetes, and Job Monitoring. The top right includes a search bar ('BlueXP Search'), account information ('Account Automation-team'), workspace ('Workspace Database-2'), connector ('Connector aws-snapctr-us-...'), and various system icons.

In the main content area, there's a summary section with counts for Hosts (1), ORACLE (1), and Clone (0). Below this is a table titled 'Application Protection' showing 0 Protected and 1 Unprotected items. The main table lists 'Databases' with one entry: db1, Host Name 172.30.15.58, Policy Name (not visible), Protection Status Unprotected, and a three-dot menu icon.

This completes the initial setup of SnapCenter services for Oracle. The next three sections of this document describe Oracle database backup, restore, and clone operations.

Oracle database backup

- Click the three dots next to the database **Protection Status**, and then click **Policies** to view the default preloaded database protection policies that can be applied to protect your Oracle databases.

The screenshot shows the NetApp BlueXP interface with the Applications tab selected. In the top right, there's a "Protection Status" section with icons for hosts, Oracle applications, and clones. Below it, a tooltip for "Protection Status" indicates 0 Protected and 1 Unprotected. The main table lists one database named "db1" with its host name as 172.30.15.58 and protection status as "Unprotected".

Name	Host Name	Policy Name	Protection Status
db1	172.30.15.58		Unprotected

- You can also create your own policy with a customized backup frequency and backup data-retention window.

The screenshot shows the NetApp BlueXP interface with the Policies section for Oracle selected. It lists four policies:

- Oracle Full Backup for Bronze: FullBackup, Daily: Repeats Every 1 Day, Keeps 14 copies; Weekly: Repeats Every Fri, Keeps 4 copies; Monthly: Repeats Every 1st Day of Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, Oct, Nov.
- Oracle Full Backup for Gold: FullBackup, Hourly: Repeats Every 6 Hrs, Keeps 16 copies; Daily: Repeats Every 1 Day, Keeps 30 copies; Weekly: Repeats Every Fri, Keeps 4 copies; Monthly: Repeats Every 1st Day of Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, Oct, Nov.
- Oracle Full Backup for Silver: FullBackup, Hourly: Repeats Every 12 Hrs, Keeps 6 copies; Daily: Repeats Every 1 Day, Keeps 14 copies; Weekly: Repeats Every Fri, Keeps 4 copies; Monthly: Repeats Every 1st Day of Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, Oct, Nov.
- my_full_bkup: FullBackup, Hourly: Repeats Every 1 Hr, Keeps 3 Days.

- When you are happy with the policy configuration, you can then assign your policy of choice to protect the database.

Cloud Native

Oracle

Application Protection

1 Databases

Manage Databases

Settings

Name Host Name Policy Name Protection Status

db1 172.30.15.58 Unprotected

View Details

Assign Policy

4. Choose the policy to assign to the database.

Assign Policy

Assign a policy to start taking backups of the database "db1"

4 Policies

Policy Name	Backup Type	Schedules
Oracle Full Backup for Bronze	FullBackup	Daily: Repeats Every 1 Day, Keeps 14 copies Weekly: Repeats Every Fri, Keeps 4 copies Monthly: Repeats Every 1st Day of Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, C
Oracle Full Backup for Gold	FullBackup	Hourly: Repeats Every 6 Hrs, Keeps 16 copies Daily: Repeats Every 1 Day, Keeps 30 copies Weekly: Repeats Every Fri, Keeps 4 copies Monthly: Repeats Every 1st Day of Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, C
Oracle Full Backup for Silver	FullBackup	Hourly: Repeats Every 12 Hrs, Keeps 6 copies Daily: Repeats Every 1 Day, Keeps 14 copies Weekly: Repeats Every Fri, Keeps 4 copies Monthly: Repeats Every 1st Day of Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, C
my_full_bkup	FullBackup	Hourly: Repeats Every 1 Hr, Keeps 3 Days

1 - 4 of 4

Cancel Assign

5. After the policy is applied, the database protection status changed to **Protected** with a green check mark.

The screenshot shows the NetApp BlueXP web interface. At the top, there are tabs for Backup and recovery, Volumes, Restore, Applications (which is selected), Virtual Machines, Kubernetes, and Job Monitoring. The Applications section has dropdown filters for Cloud Native (set to Oracle) and Oracle (set to Oracle). Below this, there are summary counts: 1 Hosts, 1 Oracle, and 0 Clones. An Application Protection box shows 1 Protected and 0 Unprotected. A table lists one database named db1 with host 172.30.15.58, policy my_full_bkup, and protection status Protected.

6. The database backup runs on a predefined schedule. You can also run a one-off on-demand backup as shown below.

The screenshot shows the same NetApp BlueXP interface as above. The database db1 is selected, and a context menu is open over its row. The menu options are View Details, On-Demand Backup (which is highlighted with a red border), Assign Policy, and Un-assign Policy.

7. The database backups details can be viewed by clicking **View Details** from the menu list. This includes the backup name, backup type, SCN, and backup date. A backup set covers a snapshot for both data volume and log volume. A log volume snapshot takes place right after a database volume snapshot. You can apply a filter if you are looking for a particular backup in a long list.

The screenshot shows the NetApp BlueXP interface. The top navigation bar includes 'NetApp BlueXP' logo, 'BlueXP Search' search bar, 'Account Automation-team', 'Workspace Database-2', 'Connector aws-snapctr-us...', and various system icons.

The main menu has tabs: 'Backup and recovery' (selected), 'Volumes', 'Restore', 'Applications' (selected), 'Virtual Machines', 'Kubernetes', and 'Job Monitoring'.

The 'Database Details' section for 'db1' displays the following information:

db1	Protected Protection	Oracle Full Backup for Gold Policy Names	Database Type
172.30.15.58	FSx Host Storage	Unreachable Database Version	bKed8yv2T19BJ0V5QyqvA... Agent Id
- Clones	- Parent Database		

Below this, a section titled '8 Backups' lists the following backup details:

Backup Name	Backup Type	SCN	Backup Date	Action
Oracle_Full_Backup_for_Gold_Weekly_db1_2023_03_24_19_12_18_60900_1	Log	2589354	Mar 24, 2023, 3:12:34 pm	Delete
Oracle_Full_Backup_for_Gold_Weekly_db1_2023_03_24_19_11_51_51476_0	Data	2589306	Mar 24, 2023, 3:12:18 pm	...
Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_18_10_31_71953_1	Log	2586621	Mar 24, 2023, 2:10:45 pm	Delete
Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_18_10_03_70535_0	Data	2586557	Mar 24, 2023, 2:10:31 pm	...

Oracle database restore and recovery

- For a database restore, choose the right backup, either by the SCN or backup time. Click the three dots from the database data backup, and then click **Restore** to initiate database restore and recovery.

Database Details

db1 Database Name	Protected Protection	Oracle Full Backup for Gold Policy Names	Database Type
172.30.15.58 Host Name	FSx Host Storage	Unreachable Database Version	bKed8yv2T19Bj0V5QyqVA... Agent Id
- Clones	- Parent Database		

6 Backups

Backup Name	Backup Type	SCN	Backup Date	Action
Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_18_10_31_71953_1	Log	2586621	Mar 24, 2023, 2:10:45 pm	Delete
Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_18_10_03_70535_0	Data	2586557	Mar 24, 2023, 2:10:31 pm	Restore
Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_15_37_04_98851_1	Log	2580577	Mar 24, 2023, 11:37:1	Delete
Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_15_36_33_27205_0	Data	2580524	Mar 24, 2023, 11:37:0	Clone

- Choose your restore setting. If you are sure that nothing has changed in the physical database structure after the backup (such as the addition of a data file or a disk group), you can use the **Force in place restore** option, which is generally faster. Otherwise, do not check this box.

Restore "db1"

Restore Settings

Restore Scope

- All Data Files
Data Files Restore
- Control Files
Control Files Restore

Force in place restore
In place restore will skip the foreign files(files which are not part of the database) validation check. The Oracle database and the ASM disk group will be restored to the point when the backup was created.

Database state will be changed if needed for restore and recovery.

Recovery Scope

- All Logs
- Until System Change Number
- Date and Time
- No Recovery

Archive Log Files Locations: /mnt/log_location001

Open the database or the container database in READ-WRITE mode after recovery.

Previous Next

- Review and start database restore and recovery.

Restore "db1"

Review

Backup Name	Oracle_Full_Backup_for_Gold_Weekly_db1_2023_03_24_19_11_51_51476_0
Restore Scope	All Data Files
Recovery Scope	All Logs
Force In Place Restore	Yes
Open Database or Container Database In READ-WRITE Mode After Recovery	

Previous **Restore**

- From the **Job Monitoring** tab, you can view the status of the restore job as well as any details while it is running.

Backup and recovery Volumes Restore Applications Virtual Machines Kubernetes **Job Monitoring**

Job Monitoring Last Updated: March 24 2023, 15:25:33

Advanced Search & Filtering Timeframe: Last 24 Hours

Jobs(30)

Job ID	Type	Resource Name	Status	Job Name	Start Time
1fdca0bd-a9c8-45aa... 	--	--	Success	Restore for Oracle Database db1 ...	Mar 24 2023, 3:16:28 pr
f6f4fe2d-3040-497f... 	--	--	Success	Backup of db1 oracle database o...	Mar 24 2023, 3:11:51 pr
5e3299f5-29db-4dcc... 	--	--	Success	Backup of db1 oracle database o...	Mar 24 2023, 2:10:03 pr
6da5e51e-1a79-4e7e... 	--	--	Success	Initialize FullBackup backup of po...	Mar 24 2023, 2:10:01 pr

The screenshot shows the NetApp BlueXP web interface. At the top, there are navigation links for Backup and recovery, Volumes, Restore, Applications, Virtual Machines, Kubernetes, and Job Monitoring. The Job Monitoring link is underlined, indicating it is the active page. The main content area displays "Job Details" for a specific job. The job ID is listed as 1fdca0bd-a9c8-45aa-9d7a-05a07cb291f4. Below this, a table titled "Sub-Jobs(6)" lists six sub-jobs with columns for Job Name, Job ID, Start Time, End Time, Duration, and a plus sign icon for additional actions. The sub-jobs are:

Job Name	Job ID	Start Time	End Time	Duration
Restore for Oracle Database db1 using backup ...	1fdca0bd-a9c8-45aa-9d7a-05a07cb291f4	Mar 24 2023, 3:16:28 pm	Mar 24 2023, 3:23:33 pm	7 Minutes
Post Restore Cleanup	2096a8e4-889d-4b2a-9...	Mar 24 2023, 3:23:18 pm	Mar 24 2023, 3:23:32 pm	14 Seconds
Post Restore	fb7b1171-9f6f-4228-9e...	Mar 24 2023, 3:20:06 pm	Mar 24 2023, 3:23:19 pm	3 Minutes
Restore	0f4580d0-6598-458b-a7...	Mar 24 2023, 3:17:49 pm	Mar 24 2023, 3:20:07 pm	2 Minutes

Oracle database clone

To clone a database, launch the clone workflow from the same database backup details page.

1. Select the right database backup copy, click the three dots to view the menu, and choose the **Clone** option.

The screenshot shows the 'Database Details' section of the NetApp BlueXP interface. It displays information for a database named 'db1'. Below this, a table lists two backups: 'Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_13_34_41_30491_1' (Log type) and 'Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_13_34_07_26748_0' (Data type). For the second backup, a context menu is open with options: 'Restore', 'Delete', and 'Clone'. The 'Clone' option is circled in red.

2. Select the **Basic** option if you don't need to change any cloned database parameters.

The screenshot shows the 'Create Clone' wizard. At the top, there are two tabs: 'Clone Details' (selected) and 'Review'. Below this, a section titled 'Select Clone Options' has a radio button for 'Basic' selected. The 'Basic' tab contains fields for 'Clone Host' (set to '172.30.15.58'), 'Clone SID' ('db1clone'), 'Clone Naming Scheme' ('Auto-generated'), and 'Oracle Home' ('/u01/app/oracle/product/19.0.0/db1'). There are also sections for 'Database Credentials' and 'ASM Credentials', each with a 'Add Credential' button. At the bottom of the screen are 'Cancel' and 'Next' buttons.

3. Alternatively, select **Specification file**, which gives you the option of downloading the current init file, making changes, and then uploading it back to the job.

Clone Database of "db1"

Create Clone

Provide following details to create a clone from the database backup "Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_13_34_07_26748_0"

Select Clone Options Basic Specification file

Specification File

db1_3_24_2023_10_14_spec.json [Download File](#)

Clone Host: 172.30.15.58 | Clone SID: db1clone

Database Credentials *Optional* [Add Credential](#)

ASM Credentials *Optional* [Add Credential](#)

Next

4. Review and launch the job.

Clone Database of "db1"

Review

General		Database parameters
Backup Name:	Oracle_Full_Backup_for_Gold_Hourly_db1_2023_03_24_13_34_07_26748_0	
Clone SID:	db1clone	
Clone Host:	172.30.15.58	
Datafile locations:	DATA_db1clone	
Control files:	+DATA_db1clone/db1clone/control/control01.ctf	
Redo logs:	RedoGroup = 1 TotalSize = 1024 Path = +DATA_db1clone/db1clone/redolog redo01_01.log RedoGroup = 2 TotalSize = 1024 Path = +DATA_db1clone/db1clone/redolog redo02_01.log RedoGroup = 3 TotalSize = 1024 Path = +DATA_db1clone/db1clone/redolog redo03_01.log	
Recovery scope:	Until cancel using selected backup's archive logs	

Clone

5. Monitor the cloning job status from the **Job Monitoring** tab.

The screenshot shows the NetApp BlueXP interface with the 'Job Monitoring' tab selected. A specific job is being tracked, with its ID visible in the URL. The interface displays the 'Job Details' section, which includes a table of sub-jobs. The sub-jobs listed are:

Job Name	Job ID	Start Time	End Time	Duration
Cloning Oracle Database db1 as db1clone on h...	cd30abaf-fbe2-4052-a6db-4bf965a8d29b	Mar 24 2023, 1:30:36 pm	--	--
Running pre scripts	5ff152c1-853a-4ec6-a4f...	Mar 24 2023, 1:30:41 pm	Mar 24 2023, 1:30:41 pm	0 Second
Validating clone request	f93a6cc44-2eb2-4c5e-9f...	Mar 24 2023, 1:30:35 pm	Mar 24 2023, 1:30:42 pm	7 Seconds

6. Validate the cloned database on the EC2 instance host.

```
# Multiple entries with the same $ORACLE_SID are not allowed.
#
#+ASM:/u01/app/oracle/product/19.0.0/grid:N
db1:/u01/app/oracle/product/19.0.0/db1:N
# SnapCenter Plug-in for Oracle Database generated entry (DO NOT REMOVE THIS LINE)
db1clone:/u01/app/oracle/product/19.0.0/db1:N
[oracle@ip-172-30-15-58 ~]$ crsctl stat res -t
-----
Name          Target   State        Server           State details
-----
Local Resources
-----
ora.DATA.dg    ONLINE   ONLINE      ip-172-30-15-58      STABLE
ora.DATA_DB1CLONE.dg
    ONLINE   ONLINE      ip-172-30-15-58      STABLE
ora.LISTENER.lsnr
    ONLINE   ONLINE      ip-172-30-15-58      STABLE
ora.LOGS.dg    ONLINE   ONLINE      ip-172-30-15-58      STABLE
ora.LOGS_SCO_2748138658.dg
    ONLINE   ONLINE      ip-172-30-15-58      STABLE
ora.asm        ONLINE   ONLINE      ip-172-30-15-58      Started,STABLE
ora.ons         OFFLINE  OFFLINE     ip-172-30-15-58      STABLE
-----
Cluster Resources
-----
ora.cssd       1        ONLINE   ONLINE      ip-172-30-15-58      STABLE
ora.db1.db      1        ONLINE   ONLINE      ip-172-30-15-58      Open,HOME=/u01/app/o
                                racle/product/19.0.0
                                /db1,STABLE
ora.db1clone.db
    1        ONLINE   ONLINE      ip-172-30-15-58      Open,HOME=/u01/app/o
                                racle/product/19.0.0
                                /db1,STABLE
ora.diskmon     1        OFFLINE  OFFLINE     STABLE
ora.driver.afd  1        ONLINE   ONLINE      ip-172-30-15-58      STABLE
ora.evmd        1        ONLINE   ONLINE      ip-172-30-15-58      STABLE
-----
[oracle@ip-172-30-15-58 ~]$
```

```

[oracle@ip-172-30-15-58 ~]$ export ORACLE_HOME=/u01/app/oracle/product/19.0.0/db1
[oracle@ip-172-30-15-58 ~]$ export ORACLE_SID=db1clone
[oracle@ip-172-30-15-58 ~]$ export PATH=$ORACLE_HOME/bin:$PATH
[oracle@ip-172-30-15-58 ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Fri Mar 24 18:32:21 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.18.0.0.0

SQL> select name, open_mode from v$database;

NAME      OPEN_MODE
----- -----
DB1CLONE  READ WRITE

SQL>

```

Additional information

To learn more about the information that is described in this document, review the following documents and/or websites:

- Set up and administer BlueXP

<https://docs.netapp.com/us-en/cloud-manager-setup-admin/index.html>

- Cloud Backup documentation

<https://docs.netapp.com/us-en/cloud-manager-backup-restore/index.html>

- Amazon FSx for NetApp ONTAP

<https://aws.amazon.com/fsx/netapp-ontap/>

- Amazon EC2

https://aws.amazon.com/pm/ec2/?trk=36c6da98-7b20-48fa-8225-4784bcd9843&sc_channel=ps&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2&ef_id=Cj0KCQiA54KfBhCKARIIsAJzSrdqwQrghn6I71jiWzSeaT9Uh1-vY-VfhJixFxnv5rWwn2S7RqZOTQ0aAh7eEALw_wcB:G:s&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2

Hybrid Cloud Database Solutions with SnapCenter

TR-4908: Hybrid Cloud Database Solutions with SnapCenter Overview

Alan Cao, Felix Melligan, NetApp

This solution provides NetApp field and customers with instructions and guidance for configuring, operating, and migrating databases to a hybrid cloud environment using the NetApp SnapCenter GUI-based tool and the NetApp storage service CVO in public clouds for the following use cases:


- Database dev/test operations in the hybrid cloud
- Database disaster recovery in the hybrid cloud

Today, many enterprise databases still reside in private corporate data centers for performance, security, and/or other reasons. This hybrid cloud database solution enables enterprises to operate their primary databases on site while using a public cloud for dev/test database operations as well as for disaster recovery to reduce licensing and operational costs.

Many enterprise databases, such as Oracle, SQL Server, SAP HANA, and so on, carry high licensing and operational costs. Many customers pay a one-time license fee as well as annual support costs based on the number of compute cores in their database environment, whether the cores are used for development, testing, production, or disaster recovery. Many of those environments might not be fully utilized throughout the application lifecycle.

The solutions provide an option for customers to potentially reduce their licensable cores count by moving their database environments devoted to development, testing, or disaster recovery to the cloud. By using public-cloud scale, redundancy, high availability, and a consumption-based billing model, the cost saving for licensing and operation can be substantial, while not sacrificing any application usability or availability.

Beyond potential database license-cost savings, the NetApp capacity-based CVO license model allows customers to save storage costs on a per-GB basis while empowering them with high level of database manageability that is not available from competing storage services. The following chart shows a storage cost comparison of popular storage services available in the public cloud.

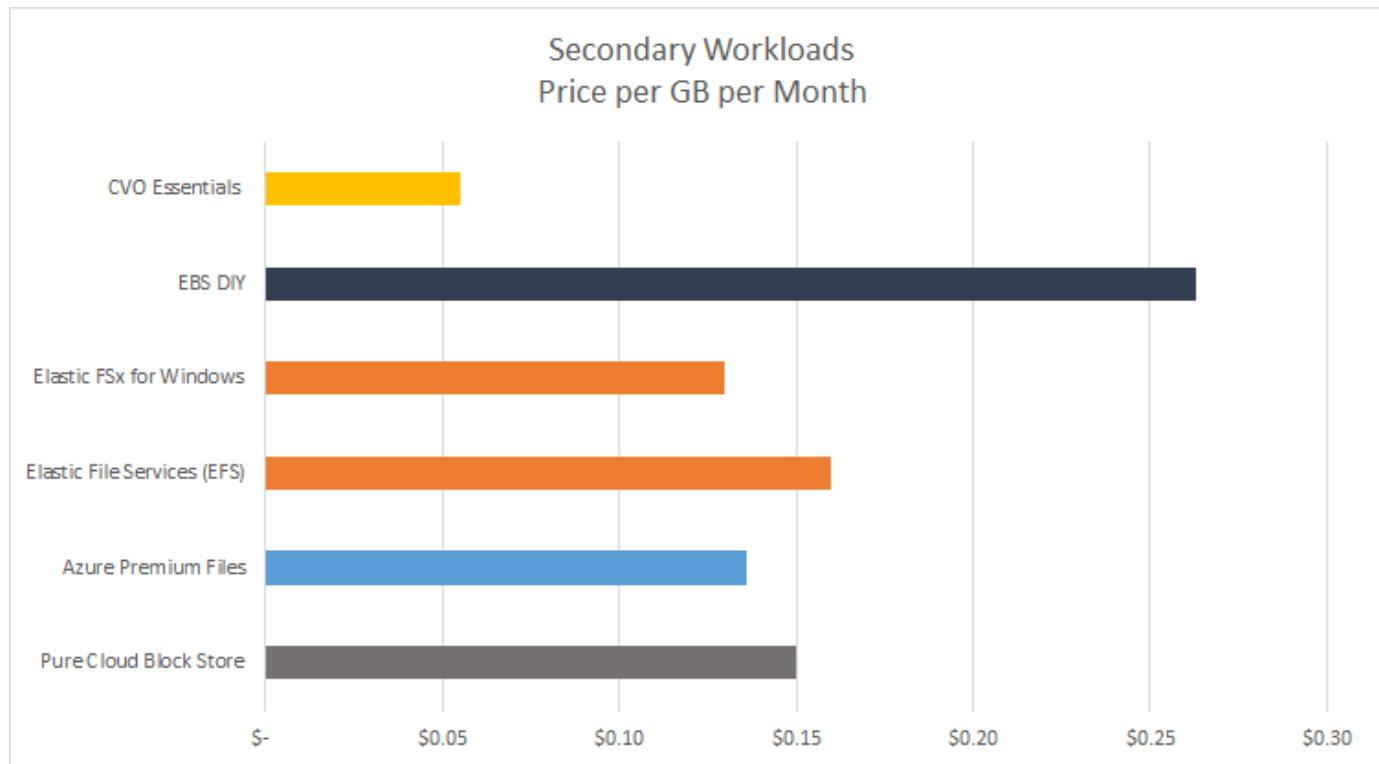

This solution demonstrates that, by using the SnapCenter GUI-based software tool and NetApp SnapMirror technology, hybrid cloud database operations can be easily setup, implemented, and operated.

The following videos demonstrate SnapCenter in action:

- [Backup of an Oracle database across a Hybrid Cloud using SnapCenter](#)

- SnapCenter- Clone DEV/TEST to AWS Cloud for an Oracle database

Notably, although the illustrations throughout this document show CVO as a target storage instance in the public cloud, the solution is also fully validated for the new release of the FSx ONTAP storage engine for AWS.


To test drive the solution and use cases for yourself, a NetApp Lab-on-Demand SL10680 can be requested at following xref:./databases/ [TL_AWS_004 HCoD: AWS - NW,SnapCenter\(OnPrem\)](#).

[Next: Solutions architecture.](#)

Solution Architecture

[Previous: Introduction.](#)

The following architecture diagram illustrates a typical implementation of enterprise database operation in a hybrid cloud for dev/test and disaster recovery operations.

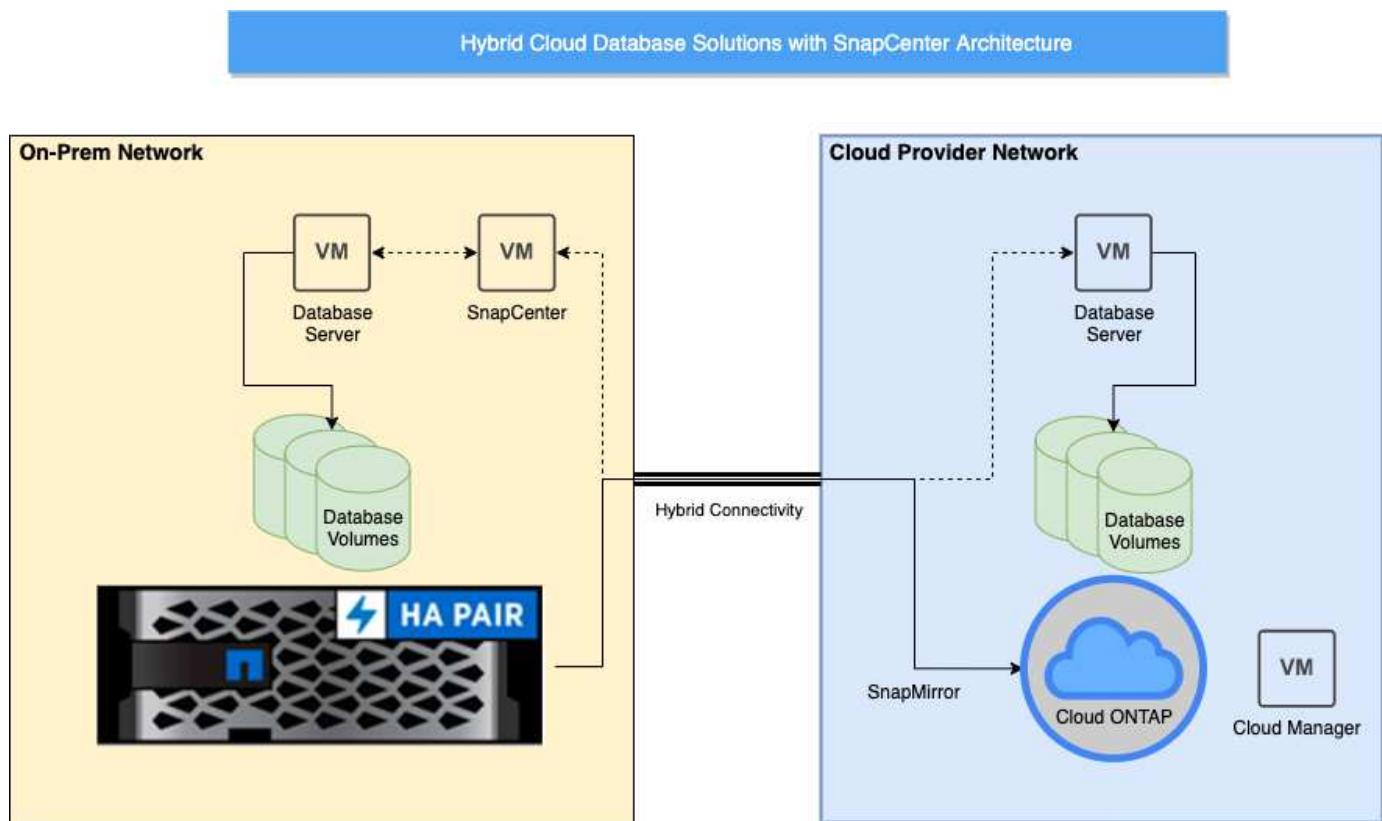

In normal business operations, synchronized database volumes in the cloud can be cloned and mounted to dev/test database instances for applications development or testing. In the event of a failure, the synchronized database volumes in the cloud can then be activated for disaster recovery.

[Next: Solutions requirements.](#)

SnapCenter Requirements

[Previous: Solutions architecture.](#)

This solution is designed in a hybrid cloud setting to support on-premises production databases that can burst to all of the popular public clouds for dev/test and disaster

recovery operations.

This solution supports all databases that are currently supported by SnapCenter, although only Oracle and SQL Server databases are demonstrated here. This solution is validated with virtualized database workloads, although bare-metal workloads are also supported.

We assume that production database servers are hosted on-premises with DB volumes presented to DB hosts from a ONTAP storage cluster. SnapCenter software is installed on-premises for database backup and data replication to the cloud. An Ansible controller is recommended but not required for database deployment automation or OS kernel and DB configuration syncing with a standby DR instance or dev/test instances in the public cloud.

Requirements

Environment	Requirements
On-premises	<p>Any databases and versions supported by SnapCenter</p> <p>SnapCenter v4.4 or higher</p> <p>Ansible v2.09 or higher</p> <p>ONTAP cluster 9.x</p> <p>Intercluster LIFs configured</p> <p>Connectivity from on-premises to a cloud VPC (VPN, interconnect, and so on)</p> <p>Networking ports open</p> <ul style="list-style-type: none">- ssh 22- tcp 8145, 8146, 10000, 11104, 11105
Cloud - AWS	<p>Cloud Manager Connector</p> <p>Cloud Volumes ONTAP</p> <p>Matching DB OS EC2 instances to On-prem</p>
Cloud - Azure	<p>Cloud Manager Connector</p> <p>Cloud Volumes ONTAP</p> <p>Matching DB OS Azure Virtual Machines to On-prem</p>
Cloud - GCP	<p>Cloud Manager Connector</p> <p>Cloud Volumes ONTAP</p> <p>Matching DB OS Google Compute Engine instances to on-premises</p>

[Next: Prerequisites configuration.](#)

Prerequisites configuration

[Previous: Solutions requirements.](#)

Certain prerequisites must be configured both on-premises and in the cloud before the execution of hybrid cloud database workloads. The following section provides a high-level summary of this process, and the following links provide further information about necessary system configuration.

On premises

- SnapCenter installation and configuration
- On-premises database server storage configuration
- Licensing requirements
- Networking and security
- Automation

Public cloud

- A NetApp Cloud Central login
- Network access from a web browser to several endpoints
- A network location for a connector
- Cloud provider permissions
- Networking for individual services

Important considerations:

1. Where to deploy the Cloud Manager Connector?
2. Cloud Volume ONTAP sizing and architecture
3. Single node or high availability?

The following links provide further details:

[On Premises](#)

[Public Cloud](#)

[Next: Prerequisites on-premises.](#)

Prerequisites on-premises

[Previous: Prerequisites configuration.](#)

The following tasks must be completed on-premises to prepare the SnapCenter hybrid-cloud database workload environment.

SnapCenter installation and configuration

The NetApp SnapCenter tool is a Windows-based application that typically runs in a Windows domain environment, although workgroup deployment is also possible. It is based on a multilayered architecture that includes a centralized management server (the SnapCenter server) and a SnapCenter plug-in on the database server hosts for database workloads. Here are a few key considerations for hybrid-cloud deployment.

- **Single instance or HA deployment.** HA deployment provides redundancy in the case of a single SnapCenter instance server failure.
- **Name resolution.** DNS must be configured on the SnapCenter server to resolve all database hosts as well as on the storage SVM for forward and reverse lookup. DNS must also be configured on database servers to resolve the SnapCenter server and the storage SVM for both forward and reverse lookup.


- **Role-based access control (RBAC) configuration.** For mixed database workloads, you might want to use RBAC to segregate management responsibility for different DB platform such as an admin for Oracle database or an admin for SQL Server. Necessary permissions must be granted for the DB admin user.
- **Enable policy-based backup strategy.** To enforce backup consistency and reliability.
- **Open necessary network ports on the firewall.** For the on-premises SnapCenter server to communicate with agents installed in the cloud DB host.
- **Ports must be open to allow SnapMirror traffic between on-prem and public cloud.** The SnapCenter server relies on ONTAP SnapMirror to replicate onsite Snapshot backups to cloud CVO storage SVMs.

After careful pre-installation planning and consideration, click this [SnapCenter installation workflow](#) for details of SnapCenter installation and configuration.


On-premises database server storage configuration

Storage performance plays an important role in the overall performance of databases and applications. A well-designed storage layout can not only improve DB performance but also make it easy to manage database backup and recovery. Several factors should be considered when defining your storage layout, including the size of the database, the rate of expected data change for the database, and the frequency with which you perform backups.

Directly attaching storage LUNs to the guest VM by either NFS or iSCSI for virtualized database workloads generally provides better performance than storage allocated via VMDK. NetApp recommends the storage layout for a large SQL Server database on LUNs depicted in the following figure.

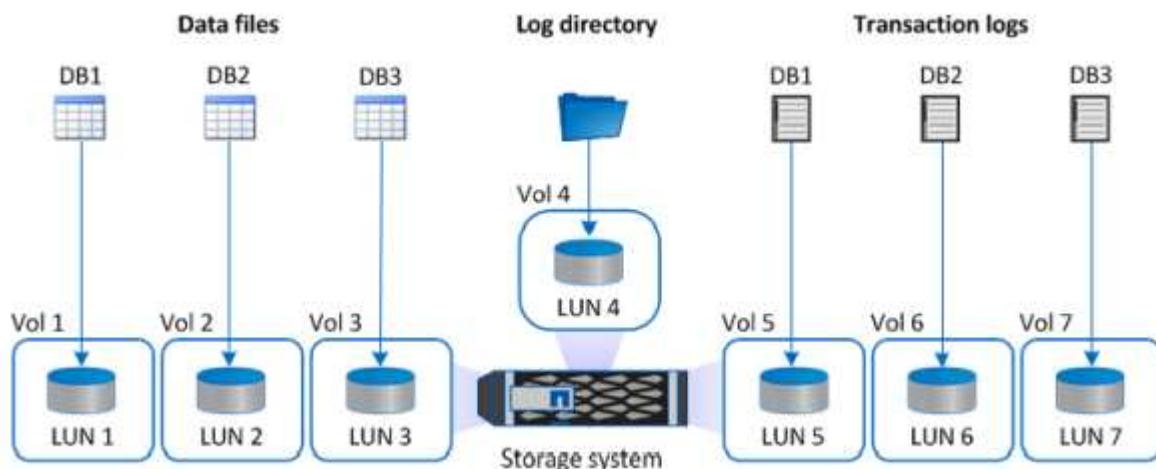

The following figure shows the NetApp recommended storage layout for small or medium SQL Server database on LUNs.

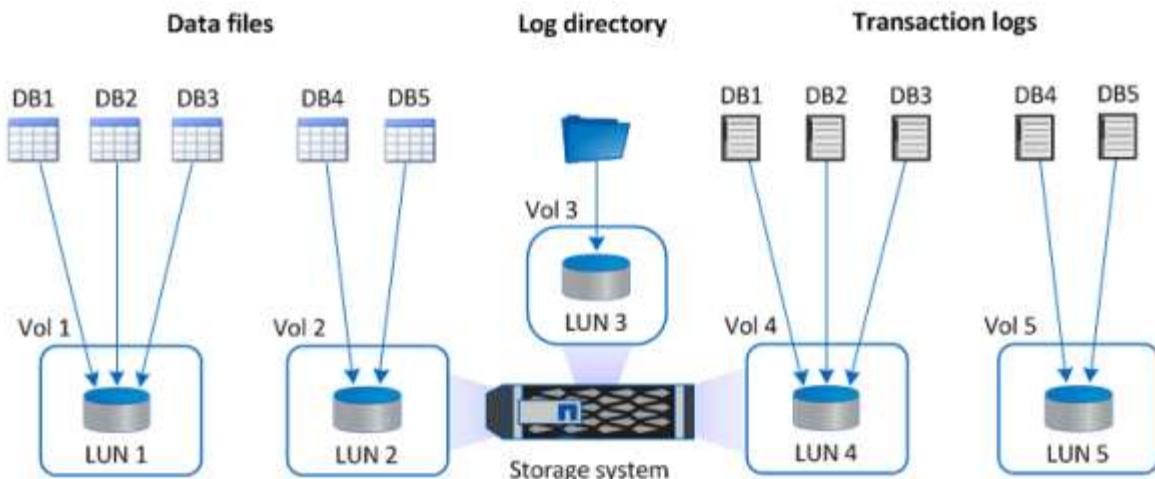

The Log directory is dedicated to SnapCenter to perform transaction log rollup for database recovery. For an extra large database, multiple LUNs can be allocated to a volume for better performance.

For Oracle database workloads, SnapCenter supports database environments backed by ONTAP storage that are mounted to the host as either physical or virtual devices. You can host the entire database on a single or multiple storage devices based on the criticality of the environment. Typically, customers isolate data files on dedicated storage from all other files such as control files, redo files, and archive log files. This helps administrators to quickly restore (ONTAP single-file SnapRestore) or clone a large critical database (petabyte scale) using Snapshot technology within few seconds to minutes.



For mission critical workloads that are sensitive to latency, a dedicated storage volume should be deployed to different types of Oracle files to achieve the best latency possible. For a large database, multiple LUNs (NetApp recommends up to eight) per volume should be allocated to data files.



For smaller Oracle databases, SnapCenter supports shared storage layouts in which you can host multiple databases or part of a database on the same storage volume or LUN. As an example of this layout, you can host data files for all the databases on a +DATA ASM disk group or a volume group. The remainder of the files (redo, archive log, and control files) can be hosted on another dedicated disk group or volume group (LVM). Such a deployment scenario is illustrated below.



To facilitate the relocation of Oracle databases, the Oracle binary should be installed on a separate LUN that is included in the regular backup policy. This ensures that in the case of database relocation to a new server host, the Oracle stack can be started for recovery without any potential issues due to an out-of-sync Oracle binary.

Licensing requirements

SnapCenter is licensed software from NetApp. It is generally included in an on-premises ONTAP license. However, for hybrid cloud deployment, a cloud license for SnapCenter is also required to add CVO to SnapCenter as a target data replication destination. Please review following links for SnapCenter standard capacity-based license for details:

[SnapCenter standard capacity-based licenses](#)

Networking and security

In a hybrid database operation that requires an on-premises production database that is burstable to cloud for dev/test and disaster recovery, networking and security is important factor to consider when setting up the environment and connecting to the public cloud from an on-premises data center.

Public clouds typically use a virtual private cloud (VPC) to isolate different users within a public-cloud platform. Within an individual VPC, security is controlled using measures such as security groups that are configurable based on user needs for the lockdown of a VPC.

The connectivity from the on-premises data center to the VPC can be secured through a VPN tunnel. On the VPN gateway, security can be hardened using NAT and firewall rules that block attempts to establish network connections from hosts on the internet to hosts inside the corporate data center.

For networking and security considerations, review the relevant inbound and outbound CVO rules for your public cloud of choice:

- [Security group rules for CVO - AWS](#)
- [Security group rules for CVO - Azure](#)
- [Firewall rules for CVO - GCP](#)

Using Ansible automation to sync DB instances between on-premises and the cloud - optional

To simplify management of a hybrid-cloud database environment, NetApp highly recommends but does not require that you deploy an Ansible controller to automate some management tasks, such as keeping compute instances on-premises and in the cloud in sync. This is particular important because an out-of-sync compute instance in the cloud might render the recovered database in the cloud error prone because of missing kernel packages and other issues.

The automation capability of an Ansible controller can also be used to augment SnapCenter for certain tasks, such as breaking up the SnapMirror instance to activate the DR data copy for production.

Follow these instruction to set up your Ansible control node for RedHat or CentOS machines: [RedHat/CentOS Ansible Controller Setup](#).

Follow these instruction to set up your Ansible control node for Ubuntu or Debian machines: [Ubuntu/Debian Ansible Controller Setup](#).

Next: Public cloud.

Prerequisites for the public cloud

Previous: [Prerequisites on-premises](#).

Before we install the Cloud Manager connector and Cloud Volumes ONTAP and configure SnapMirror, we must perform some preparation for our cloud environment. This page describes the work that needs to be done as well as the considerations when deploying Cloud Volumes ONTAP.

Cloud Manager and Cloud Volumes ONTAP deployment prerequisites checklist

- A NetApp Cloud Central login
- Network access from a web browser to several endpoints
- A network location for a Connector
- Cloud provider permissions
- Networking for individual services

For more information about what you need to get started, visit our [cloud documentation](#).

Considerations

1. What is a Cloud Manager connector?

In most cases, a Cloud Central account admin must deploy a connector in your cloud or on-premises network. The connector enables Cloud Manager to manage resources and processes within your public cloud environment.

For more information about Connectors, visit our [cloud documentation](#).

2. Cloud Volumes ONTAP sizing and architecture

When deploying Cloud Volumes ONTAP, you are given the choice of either a predefined package or the creation of your own configuration. Although many of these values can be changed later on nondisruptively, there are some key decisions that need to be made before deployment based on the workloads to be deployed in the cloud.

Each cloud provider has different options for deployment and almost every workload has its own unique properties. NetApp has a [CVO sizing tool](#) that can help size deployments correctly based on capacity and performance, but it has been built around some basic concepts which are worth considering:

- Capacity required
- Network capability of the cloud virtual machine
- Performance characteristics of cloud storage

The key is to plan for a configuration that not only satisfies the current capacity and performance requirements, but also looks at future growth. This is generally known as capacity headroom and performance headroom.

If you would like further information, read the documentation about planning correctly for [AWS](#), [Azure](#), and [GCP](#).

3. Single node or high availability?

In all clouds, there is the option to deploy CVO in either a single node or in a clustered high availability pair with two nodes. Depending on the use case, you might wish to deploy a single node to save costs or an HA pair to provide further availability and redundancy.

For a DR use case or spinning up temporary storage for development and testing, single nodes are common since the impact of a sudden zonal or infrastructure outage is lower. However, for any production use case, when the data is in only a single location, or when the dataset must have more redundancy and availability, high availability is recommended.

For further information about the architecture of each cloud's version of high availability, visit the documentation for [AWS](#), [Azure](#) and [GCP](#).

[Next: Getting started overview.](#)

Getting started overview

[Previous: Prerequisites for the public cloud.](#)

This section provides a summary of the tasks that must be completed to meet the prerequisite requirements as outlined in previous section. The following section provide a high level tasks list for both on-premises and public cloud operations. The detailed processes and procedures can be accessed by clicking on the relevant links.

On-premises

- Setup database admin user in SnapCenter
- SnapCenter plugin installation prerequisites
- SnapCenter host plugin installation
- DB resource discovery
- Setup storage cluster peering and DB volume replication
- Add CVO database storage SVM to SnapCenter
- Setup database backup policy in SnapCenter
- Implement backup policy to protect database
- Validate backup

AWS public cloud

- Pre-flight check
- Steps to deploy Cloud Manager and Cloud Volumes ONTAP in AWS
- Deploy EC2 compute instance for database workload

Click the following links for details:

On Premises, Public Cloud - AWS

Getting started on premises

Previous: [Getting started overview.](#)

On Premises

1. Setup database admin user in SnapCenter

The NetApp SnapCenter tool uses role-based access control (RBAC) to manage user resources access and permission grants, and SnapCenter installation creates prepopulated roles. You can also create custom roles based on your needs or applications. It makes sense to have a dedicated admin user ID for each database platform supported by SnapCenter for database backup, restoration, and/or disaster recovery. You can also use a single ID to manage all databases. In our test cases and demonstration, we created a dedicated admin user for both Oracle and SQL Server, respectively.

Certain SnapCenter resources can only be provisioned with the SnapCenterAdmin role. Resources can then be assigned to other user IDs for access.

In a pre-installed and configured on-premises SnapCenter environment, the following tasks might have already have been completed. If not, the following steps create a database admin user:

1. Add the admin user to Windows Active Directory.
2. Log into SnapCenter using an ID granted with the SnapCenterAdmin role.
3. Navigate to the Access tab under Settings and Users, and click Add to add a new user. The new user ID is linked to the admin user created in Windows Active Directory in step 1. . Assign the proper role to the user as needed. Assign resources to the admin user as applicable.

	Name	Type	Roles	Domain
<input type="checkbox"/>	administrator	User	SnapCenterAdmin	demo
<input type="checkbox"/>	oradba	User	App Backup and Clone Admin	demo
<input type="checkbox"/>	soldba	User	App Backup and Clone Admin	demo

2. SnapCenter plugin installation prerequisites

SnapCenter performs backup, restore, clone, and other functions by using a plugin agent running on the DB hosts. It connects to the database host and database via credentials configured under the Setting and Credentials tab for plugin installation and other management functions. There are specific privilege requirements based on the target host type, such as Linux or Windows, as well as the type of database.

DB hosts credentials must be configured before SnapCenter plugin installation. Generally, you want to use an administrator user accounts on the DB host as your host connection credentials for plugin installation. You can also grant the same user ID for database access using OS-based authentication. On the other hand, you can also employ database authentication with different database user IDs for DB management access. If you decide to use OS-based authentication, the OS admin user ID must be granted DB access. For Windows domain-based SQL Server installation, a domain admin account can be used to manage all SQL Servers

within the domain.

Windows host for SQL server:

1. If you are using Windows credentials for authentication, you must set up your credential before installing plugins.
2. If you are using a SQL Server instance for authentication, you must add the credentials after installing plugins.
3. If you have enabled SQL authentication while setting up the credentials, the discovered instance or database is shown with a red lock icon. If the lock icon appears, you must specify the instance or database credentials to successfully add the instance or database to a resource group.
4. You must assign the credential to a RBAC user without sysadmin access when the following conditions are met:
 - The credential is assigned to a SQL instance.
 - The SQL instance or host is assigned to an RBAC user.
 - The RBAC DB admin user must have both the resource group and backup privileges.

Unix host for Oracle:

1. You must have enabled the password-based SSH connection for the root or non-root user by editing sshd.conf and restarting the sshd service. Password-based SSH authentication on AWS instance is turned off by default.
2. Configure the sudo privileges for the non-root user to install and start the plugin process. After installing the plugin, the processes run as an effective root user.
3. Create credentials with the Linux authentication mode for the install user.
4. You must install Java 1.8.x (64-bit) on your Linux host.
5. Installation of the Oracle database plugin also installs the SnapCenter plugin for Unix.

3. SnapCenter host plugin installation



Before attempting to install SnapCenter plugins on cloud DB server instances, make sure that all configuration steps have been completed as listed in the relevant cloud section for compute instance deployment.

The following steps illustrate how a database host is added to SnapCenter while a SnapCenter plugin is installed on the host. The procedure applies to adding both on-premises hosts and cloud hosts. The following demonstration adds a Windows or a Linux host residing in AWS.

Configure SnapCenter VMware global settings

Navigate to Settings > Global Settings. Select "VMs have iSCSI direct attached disks or NFS for all the hosts" under Hypervisor Settings and click Update.

Add Windows host and installation of plugin on the host

1. Log into SnapCenter with a user ID with SnapCenterAdmin privileges.
2. Click the Hosts tab from the left-hand menu, and then click Add to open the Add Host workflow.
3. Choose Windows for Host Type; the Host Name can be either a host name or an IP address. The host name must be resolved to the correct host IP address from the SnapCenter host. Choose the host credentials created in step 2. Choose Microsoft Windows and Microsoft SQL Server as the plugin packages to be installed.

4. After the plugin is installed on a Windows host, its Overall Status is shown as "Configure log directory."

Name	Type	System	Plug-in	Version	Overall Status
rhel2.demo.netapp.com	Linux	Stand-alone	UNIX, Oracle Database	4.5	Running
sql1.demo.netapp.com	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Running
sql-standby.demo.netapp.com	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Configure log directory


5. Click the Host Name to open the SQL Server log directory configuration.

The screenshot shows the NetApp SnapCenter interface. On the left, there's a sidebar with icons for hosts, storage, and logs. The main area has a title bar "NetApp SnapCenter®" and tabs for "Managed Hosts" and "Storage". Under "Managed Hosts", there's a search bar "Search by Name" and a list of hosts: "Name" (checkbox), "rhel2.demo.netapp.com" (checkbox), "sql1.demo.netapp.com" (checkbox), and "sql-standby.demo.netapp.com" (checkbox, selected). To the right, the "Host Details" panel shows: Host Name: sql-standby.demo.netapp.com, Host IP: 10.221.2.56, Overall Status: "Configure log directory" (orange), Host Type: Windows, System: Stand-alone, Credentials: Domain Admin (checkbox), and Plug-ins: "SnapCenter Plug-ins package 4.5.0.6123 for Windows" (checkboxes for Microsoft Windows and Microsoft SQL Server, with "Remove" and "Configure log directory" options). Below this is a link "More Options: Port, gMSA, Install Path, Add Plug-ins...". At the bottom are buttons for "Submit", "Cancel", and "Reset".

6. Click "Configure log directory" to open "Configure Plug-in for SQL Server."

The screenshot shows the "Configure Plug-in for SQL Server" dialog box. The title bar says "Configure Plug-in for SQL Server" and has a close button. The main content area has a header "Configure the log backup directory for sql-standby.demo.netapp.com". Below it is a section "Configure host log directory" with a "Host log directory" label and a "dedicated disk directory path" input field containing the text "dedicated disk directory path". To the right of the input field is a "Browse" button with a folder icon. At the bottom right of the dialog are "Save" and "Close" buttons.

7. Click Browse to discover NetApp storage so that a log directory can be set; SnapCenter uses this log directory to roll up the SQL server transaction log files. Then click Save.

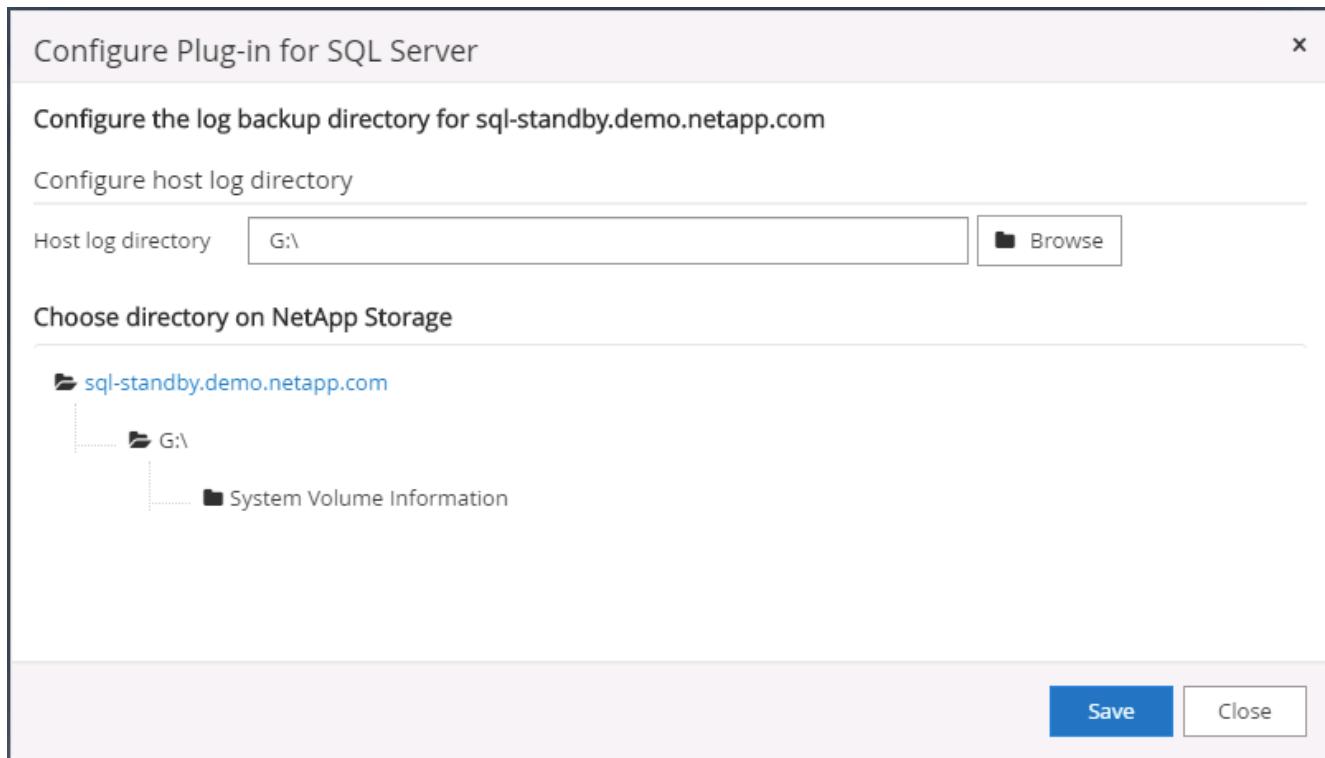

For NetApp storage provisioned to a DB host to be discovered, the storage (on-prem or CVO) must be added to SnapCenter, as illustrated in step 6 for CVO as an example.

- After the log directory is configured, the Windows host plugin Overall Status is changed to Running.

Name	Type	System	Plug-in	Version	Overall Status
rhel2.demo.netapp.com	Linux	Stand-alone	UNIX, Oracle Database	4.5	Running
sql1.demo.netapp.com	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Running
sql-standby.demo.netapp.com	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Running

- To assign the host to the database management user ID, navigate to the Access tab under Settings and Users, click the database management user ID (in our case the sqldba that the host needs to be assigned to), and click Save to complete host resource assignment.

Name	Type	Roles	Domain
administrator	User	SnapCenterAdmin	demo
oradba	User	App Backup and Clone Admin	demo
sqldba	User	App Backup and Clone Admin	demo

Assign Assets

Asset Type: Host

search

<input type="checkbox"/>	Asset Name	
<input type="checkbox"/>	rhel2.demo.netapp.com	
<input type="checkbox"/>	sql1.demo.netapp.com	
<input checked="" type="checkbox"/>	sql-standby.demo.netapp.com	

Save **Close**

Add Unix host and installation of plugin on the host

1. Log into SnapCenter with a user ID with SnapCenterAdmin privileges.
2. Click the Hosts tab from left-hand menu, and click Add to open the Add Host workflow.
3. Choose Linux as the Host Type. The Host Name can be either the host name or an IP address. However, the host name must be resolved to correct host IP address from SnapCenter host. Choose host credentials created in step 2. The host credentials require sudo privileges. Check Oracle Database as the plug-in to be installed, which installs both Oracle and Linux host plugins.

Add Host

Host Type: Linux

Host Name: ora-standby

Credentials: admin

Select Plug-ins to Install SnapCenter Plug-ins Package 4.5 for Linux

Oracle Database
 SAP HANA

[More Options](#) : Port, Install Path, Custom Plug-ins...

Submit **Cancel**

4. Click More Options and select "Skip preinstall checks." You are prompted to confirm the skipping of the preinstall check. Click Yes and then Save.

More Options

Port	8145	i
Installation Path	/opt/NetApp/snapcenter	i
<input checked="" type="checkbox"/> Skip preinstall checks <input checked="" type="checkbox"/> Add all hosts in the oracle RAC		
Custom Plug-ins		
Choose a File Browse Upload		
No plug-ins found.		
Save Cancel		

5. Click Submit to start the plugin installation. You are prompted to Confirm Fingerprint as shown below.

Confirm Fingerprint

Authenticity of the host cannot be determined [i](#)

Host name	Edit	Fingerprint	Valid
ora-standby.demo.netapp.com		ssh-rsa 3072 5C:02:EF:6B:63:54:59:10:84:DF:4D:6B:AB:FB:61:67	

[Confirm and Submit](#) [Close](#)

6. SnapCenter performs host validation and registration, and then the plugin is installed on the Linux host. The status is changed from Installing Plugin to Running.

Name	Type	System	Plug-in	Version	Overall Status
ora-standby.demo.netapp.com	Linux	Stand-alone	UNIX, Oracle Database	4.5	Running
rhel2.demo.netapp.com	Linux	Stand-alone	UNIX, Oracle Database	4.5	Running
sql1.demo.netapp.com	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Running
sql-standby.demo.netapp.com	Windows	Stand-alone	Microsoft Windows Server, Microsoft SQL Server	4.5	Running

7. Assign the newly added host to the proper database management user ID (in our case, oradba).

4. Database resource discovery

With successful plugin installation, the database resources on the host can be immediately discovered. Click the Resources tab in the left-hand menu. Depending on the type of database platform, a number of views are available, such as the database, resources group, and so on. You might need to click the Refresh Resources tab if the resources on the host are not discovered and displayed.

When the database is initially discovered, the Overall Status is shown as "Not protected." The previous screenshot shows an Oracle database not protected yet by a backup policy.

When a backup configuration or policy is set up and a backup has been executed, the Overall Status for the database shows the backup status as "Backup succeeded" and the timestamp of the last backup. The following screenshot shows the backup status of a SQL Server user database.

Name	Instance	Host	Last Backup	Overall Status	Type
master	sql1	sql1.demo.netapp.com		Not available for backup	System database
model	sql1	sql1.demo.netapp.com		Not available for backup	System database
msdb	sql1	sql1.demo.netapp.com		Not available for backup	System database
tempdb	sql1	sql1.demo.netapp.com		Not available for backup	System database
tpcc	sql1	sql1.demo.netapp.com	09/14/2021 2:35:07 PM	Backup succeeded	User database

If database access credentials are not properly set up, a red lock button indicates that the database is not accessible. For example, if Windows credentials do not have sysadmin access to a database instance, then database credentials must be reconfigured to unlock the red lock.

Name	Host	Resource Groups	Policies	State	Type
sql-standby	sql-standby.demo.netapp.com			Running	Standalone ()
sql1	sql1.demo.netapp.com			Running	Standalone (15.0.2000)

The Microsoft SQL Server or Windows credentials are necessary to unlock the selected instance. Click Refresh Resources to run a discovery with the associated Auth.

Name	Host	Resource Groups	Policies	State	Type
sql-standby	sql-standby.demo.netapp.com			Running	Standalone ()
sql1	sql1.demo.netapp.com			Running	Standalone (15.0.2000)

After the appropriate credentials are configured either at the Windows level or the database level, the red lock disappears and SQL Server Type information is gathered and reviewed.

Name	Host	Resource Groups	Policies	State	Type
sql1	sql1.demo.netapp.com			Running	Standalone (15.0.2000)
sql-standby	sql-standby.demo.netapp.com			Running	Standalone (15.0.2000)

5. Setup storage cluster peering and DB volumes replication

To protect your on-premises database data using a public cloud as the target destination, on-premises ONTAP cluster database volumes are replicated to the cloud CVO using NetApp SnapMirror technology. The replicated target volumes can then be cloned for DEV/OPS or disaster recovery. The following high-level steps enable you to set up cluster peering and DB volumes replication.

1. Configure intercluster LIFs for cluster peering on both the on-premises cluster and the CVO cluster instance. This step can be performed with ONTAP System Manager. A default CVO deployment has inter-cluster LIFs configured automatically.

On-premises cluster:

The screenshot shows the ONTAP System Manager interface with the 'NETWORK' tab selected. In the 'IPspaces' section, there are two entries: 'Cluster' (Broadcast Domains Cluster) and 'Default' (Storage VMs, svm_onPrem, Broadcast Domains Default). In the 'Broadcast Domains' section, there are two entries: 'Cluster' (9000 MTU, IPspace: Cluster) and 'Default' (1500 MTU, IPspace: Default, onPrem-01 e0a e0b e0c e0d e0e e0f e0g e0h e0g-100 e0e-200 e0f-201). The 'Network Interfaces' section lists three interfaces: 'onPrem-01_IC' (Status: green, Storage VM: Default, Address: 192.168.0.113, Current Node: onPrem-01, Current Port: e0b, Type: Intercluster), 'onPrem-01_mgmt1' (Status: green, Storage VM: Default, Address: 192.168.0.111, Current Node: onPrem-01, Current Port: e0c, Type: Cluster/Node Mgmt), and 'cluster_mgmt' (Status: green, Storage VM: Default, Address: 192.168.0.101, Current Node: onPrem-01, Current Port: e0a, Type: Cluster/Node Mgmt).

Target CVO cluster:

The screenshot shows the ONTAP System Manager interface with the 'NETWORK' tab selected. In the 'IPspaces' section, there are two entries: 'Cluster' (Broadcast Domains Cluster) and 'Default' (Storage VMs, svm_hybridcvo, Broadcast Domains Default). In the 'Broadcast Domains' section, there are two entries: 'Cluster' (9000 MTU, IPspace: Cluster, hybridcvo-01 e0b, hybridcvo-02 e0b) and 'Default' (9001 MTU, IPspace: Default, hybridcvo-01 e0a, hybridcvo-02 e0a). The 'Network Interfaces' section lists five interfaces: 'hybridcvo-02_mgmt1' (Status: green, Storage VM: Default, Address: 10.221.2.104, Current Node: hybridcvo-02, Current Port: e0a, Type: Cluster/Node Mgmt), 'inter_1' (Status: green, Storage VM: Default, Address: 10.221.1.180, Current Node: hybridcvo-01, Current Port: e0a, Type: Intercluster, Cluster/Node Mgmt), 'inter_2' (Status: green, Storage VM: Default, Address: 10.221.2.250, Current Node: hybridcvo-02, Current Port: e0a, Type: Intercluster, Cluster/Node Mgmt), 'iscsi_1' (Status: green, Storage VM: svm_hybridcvo, Address: 10.221.1.5, Current Node: hybridcvo-01, Current Port: e0a, Protocols: iSCSI, Type: Data), and 'iscsi_2' (Status: green, Storage VM: svm_hybridcvo, Address: 10.221.2.168, Current Node: hybridcvo-02, Current Port: e0a, Protocols: iSCSI, Type: Data). The interfaces 'inter_1' and 'inter_2' are highlighted with a red oval.

2. With the intercluster LIFs configured, cluster peering and volume replication can be set up by using drag-and-drop in NetApp Cloud Manager. See "[Getting Started - AWS Public Cloud](#)" for details.

Alternatively, cluster peering and DB volume replication can be performed by using ONTAP System Manager as follows:

3. Log into ONTAP System Manager. Navigate to Cluster > Settings and click Peer Cluster to set up cluster peering with the CVO instance in the cloud.

The screenshot shows the ONTAP System Manager interface. On the left, the navigation bar includes sections like Overview, Applications, Volumes, LUNs, NVMe Namespaces, Shares, Qtrees, Quotas, Storage VMs, Tiers, NETWORK, EVENTS & JOBS, PROTECTION, HOSTS, CLUSTER (selected), and Settings. The main content area has two tabs: 'Intercluster Settings' and 'UI Settings'. The 'Intercluster Settings' tab is active, displaying Network Interfaces (IP ADDRESS: 192.168.0.113), Cluster Peers (PEERED CLUSTER NAME: hybridcvo, Peer Cluster highlighted with a red box), and Storage VM Peers (PEERED STORAGE VMs: 1). The 'UI Settings' tab shows LOG LEVEL (DEBUG) and INACTIVITY TIMEOUT (30 minutes).

4. Go to the Volumes tab. Select the database volume to be replicated and click Protect.

The screenshot shows the ONTAP System Manager Volumes tab. The left sidebar lists storage-related sections: DASHBOARD, STORAGE (selected), Overview, Applications, Volumes (selected), LUNs, NVMe Namespaces, Shares, Qtrees, Quotas, Storage VMs, Tiers, NETWORK, EVENTS & JOBS, PROTECTION, HOSTS, and CLUSTER. In the main content area, the 'Volumes' tab is selected. A table lists volumes: onPrem_data, rhel2_u01, rhel2_u02, rhel2_u03 (selected and highlighted with a blue border), sql1_data, sql1_log, sql1_snapctr, and svm_onPrem_root. Above the table are buttons for '+ Add', 'Delete', and 'Protect' (highlighted with a red box). To the right of the table, detailed information for rhel2_u03 is shown, including STATUS (Online), STYLE (FlexVol), MOUNT PATH (/rhel2_u03), STORAGE VM (svm_onPrem), LOCAL TIER (onPrem_01_SSD_1), SNAPSHOT POLICY (default), QUOTA (Off), TYPE (Read Write), and SPACE RESERVATION. Performance metrics for Capacity and Latency are also displayed.

5. Set the protection policy to Asynchronous. Select the destination cluster and storage SVM.

The screenshot shows the 'Protect Volumes' dialog in the ONTAP System Manager. The 'PROTECTION POLICY' dropdown is set to 'Asynchronous'. Under 'Source', 'CLUSTER' is 'onPrem' and 'SELECTED VOLUMES' is 'rhel2_u03'. Under 'Destination', 'CLUSTER' is 'hybridcvo' and 'STORAGE VM' is 'svm_hybridcvo'. In the 'Destination Settings' section, there are two matching labels. The 'VOLUME NAME' field has a prefix 'vol_' and a suffix '_dest'. Under 'Configuration Details', the 'Initialize relationship' checkbox is checked, while 'Enable FabricPool' is unchecked.

- Validate that the volume is synced between the source and target and that the replication relationship is healthy.

Source	Destination	Protection Policy	Relationship Health	Relationship Status	Lag
svm_onPrem:rhel2_u03	svm_hybridcvo:rhel2_u03_dr	MirrorAllSnapshots	Healthy	Mirrored	12 seconds

6. Add CVO database storage SVM to SnapCenter

- Log into SnapCenter with a user ID with SnapCenterAdmin privileges.
- Click the Storage System tab from the menu, and then click New to add a CVO storage SVM that hosts replicated target database volumes to SnapCenter. Enter the cluster management IP in the Storage System field, and enter the appropriate username and password.

- Click More Options to open additional storage configuration options. In the Platform field, select Cloud Volumes ONTAP, check Secondary, and then click Save.

Platform	Cloud Volumes ON TM	<input checked="" type="checkbox"/> Secondary
Protocol	HTTPS	
Port	443	
Timeout	60	seconds
<input type="checkbox"/> Preferred IP		
<input type="button" value="Save"/> <input type="button" value="Cancel"/>		

- Assign the storage systems to SnapCenter database management user IDs as shown in [3. SnapCenter host plugin installation](#).

Name	IP	Cluster Name	User Name	Platform	Controller License
svm_hybridcvo	10.0.0.1			CVO	✗
svm_onPrem	192.168.0.101			CVO	✓

7. Setup database backup policy in SnapCenter

The following procedures demonstrates how to create a full database or log file backup policy. The policy can then be implemented to protect databases resources. The recovery point objective (RPO) or recovery time objective (RTO) dictates the frequency of database and/or log backups.

Create a full database backup policy for Oracle

1. Log into SnapCenter as a database management user ID, click Settings, and then click Policies.

The screenshot shows the NetApp SnapCenter interface. The left sidebar has links for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings (which is selected), and Alerts. The main area is titled 'Policies' and shows 'Oracle Database'. A search bar says 'Search by Name'. Below it is a table with columns: Name, Backup Type, Schedule Type, Replication, and Verification. Two rows are listed: 'Oracle Archive Log Backup' (LOG, ONLINE, Hourly, SnapMirror) and 'Oracle Full Online Backup' (FULL, ONLINE, Daily, SnapMirror). Action buttons at the top right include 'New', 'Modify', 'Copy', 'Details', and 'Delete'.

Name	Backup Type	Schedule Type	Replication	Verification
Oracle Archive Log Backup	LOG, ONLINE	Hourly	SnapMirror	
Oracle Full Online Backup	FULL, ONLINE	Daily	SnapMirror	

2. Click New to launch a new backup policy creation workflow or choose an existing policy for modification.

The screenshot shows a modal dialog titled 'Modify Oracle Database Backup Policy'. On the left is a vertical navigation bar with steps 1 through 7: 1. Name, 2. Backup Type, 3. Retention, 4. Replication, 5. Script, 6. Verification, 7. Summary. Step 1 is highlighted. The main area is titled 'Provide a policy name'. It has two fields: 'Policy name' containing 'Oracle Full Online Backup' and 'Details' containing 'Backup all data and log files'. At the bottom right are 'Previous' and 'Next' buttons, with 'Next' being highlighted.

3. Select the backup type and schedule frequency.

Modify Oracle Database Backup Policy

1 Name

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Select Oracle database backup options

Choose backup type

Online backup

Datafiles, control files, and archive logs

Datafiles and control files

Archive logs

Offline backup i

Mount i

Shutdown

Save state of PDBs i

Choose schedule frequency

Select how often you want the schedules to occur in the policy. The specific times are set at backup job creation enabling you to stagger your start times.

On demand

Hourly


Daily

Previous

Next

This screenshot shows the 'Modify Oracle Database Backup Policy' wizard, specifically Step 2: Backup Type. The left sidebar lists steps 1 through 7. The main area is titled 'Select Oracle database backup options'. Under 'Choose backup type', 'Online backup' and 'Datafiles, control files, and archive logs' are selected. Under 'Choose schedule frequency', 'Daily' is selected. At the bottom right are 'Previous' and 'Next' buttons.

4. Set the backup retention setting. This defines how many full database backup copies to keep.

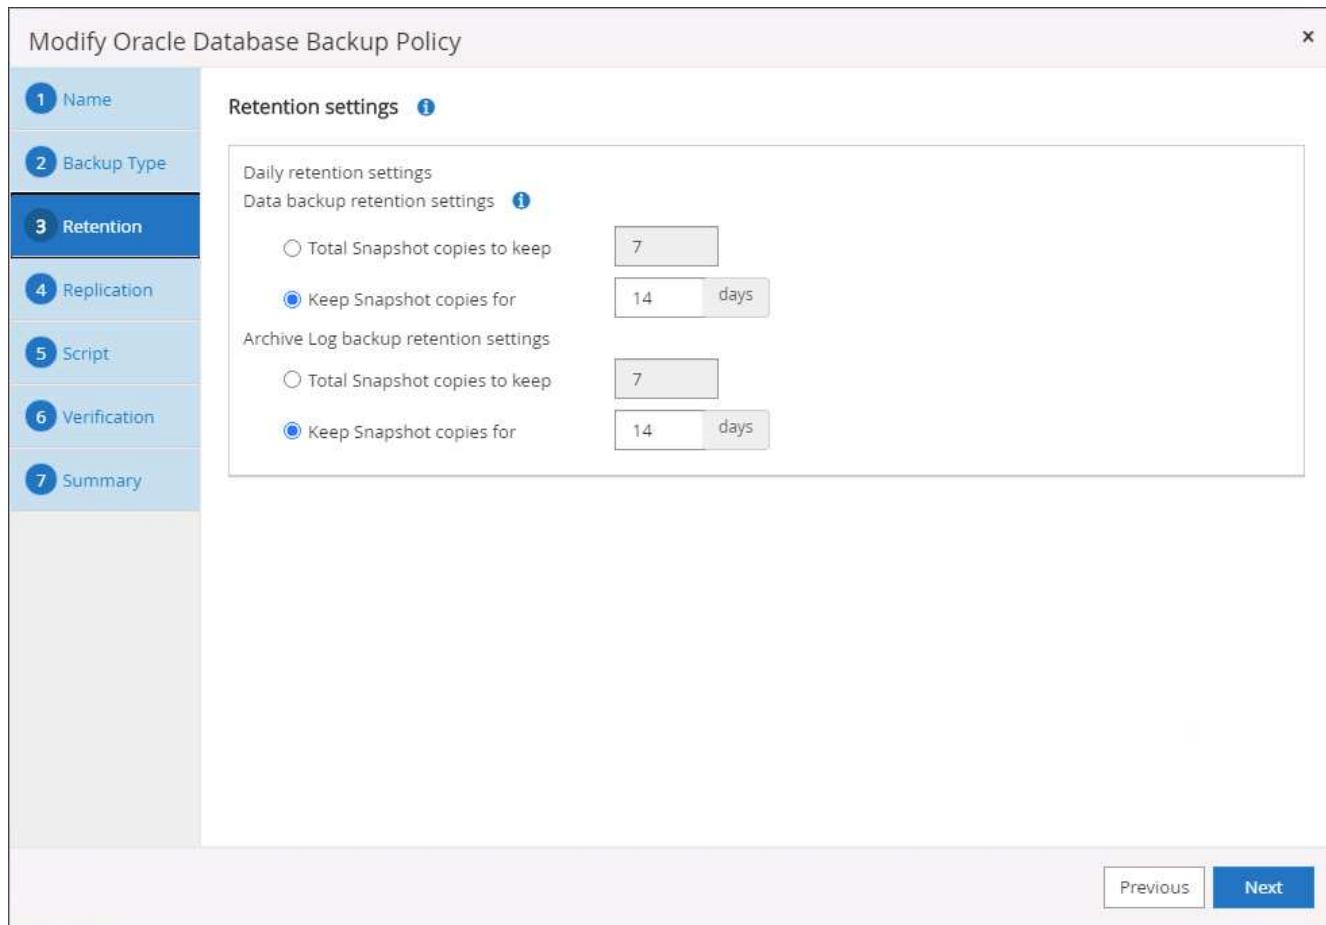

5. Select the secondary replication options to push local primary snapshots backups to be replicated to a secondary location in cloud.

Modify Oracle Database Backup Policy x

1 Name

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Select secondary replication options i

Update SnapMirror after creating a local Snapshot copy.

Update SnapVault after creating a local Snapshot copy.

Secondary policy label Daily i

Error retry count 3 i

Previous Next

6. Specify any optional script to run before and after a backup run.

Modify Oracle Database Backup Policy X

Specify optional scripts to run before and after performing a backup job

1 Name	Prescript full path <input type="text" value="/var/opt/snapcenter/spl/scripts/"/> Enter Prescript path	
2 Backup Type	Prescript arguments <input type="text"/>	
3 Retention	Postscript full path <input type="text" value="/var/opt/snapcenter/spl/scripts/"/> Enter Postscript path	
4 Replication	Postscript arguments <input type="text"/>	
5 Script	Script timeout 60	secs
6 Verification		
7 Summary		

Previous **Next**

7. Run backup verification if desired.

Modify Oracle Database Backup Policy X

1 Name Select the options to run backup verification

2 Backup Type Run Verifications for following backup schedules

Select how often you want the schedules to occur in the policy. The specific verification times are set at backup job creation enabling you to stagger your verification start times.

Daily

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Verification script commands

Script timeout	60	secs
Prescript full path	/var/opt/snapcenter/spl/scripts/	Enter Prescript path
Prescript arguments	Choose optional arguments...	
Postscript full path	/var/opt/snapcenter/spl/scripts/	Enter Postscript path
Postscript arguments	Choose optional arguments...	

Previous Next

8. Summary.

Modify Oracle Database Backup Policy

1 Name	Summary
2 Backup Type	Policy name: Oracle Full Online Backup
3 Retention	Details: Backup all data and log files
4 Replication	Backup type: Online backup
5 Script	Schedule type: Daily
6 Verification	RMAN catalog backup: Disabled
7 Summary	Archive log pruning: None On demand data backup retention: None On demand archive log backup retention: None Hourly data backup retention: None Hourly archive log backup retention: None Daily data backup retention: Delete Snapshot copies older than : 14 days Daily archive log backup retention: Delete Snapshot copies older than : 14 days Weekly data backup retention: None Weekly archive log backup retention: None Monthly data backup retention: None Monthly archive log backup retention: None Replication: SnapMirror enabled , Secondary policy label: Daily , Error retry count: 3
Previous Finish	

Create a database log backup policy for Oracle

1. Log into SnapCenter with a database management user ID, click Settings, and then click Policies.
2. Click New to launch a new backup policy creation workflow, or choose an existing policy for modification.

New Oracle Database Backup Policy X

1 Name

Provide a policy name

Policy name i

Details

2 Backup Type

3 Retention

4 Replication


5 Script

6 Verification


7 Summary

Previous Next

3. Select the backup type and schedule frequency.

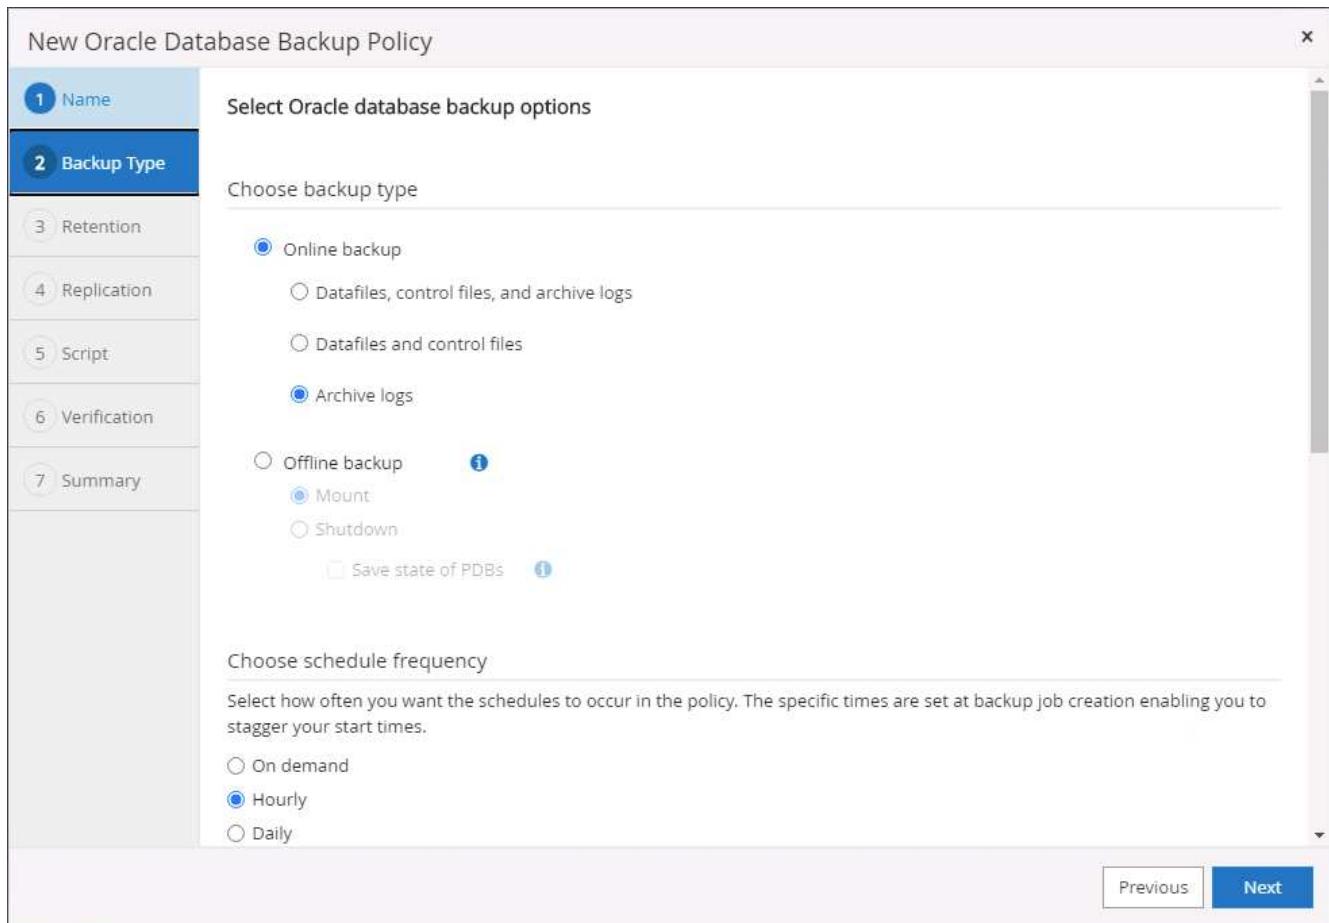

4. Set the log retention period.

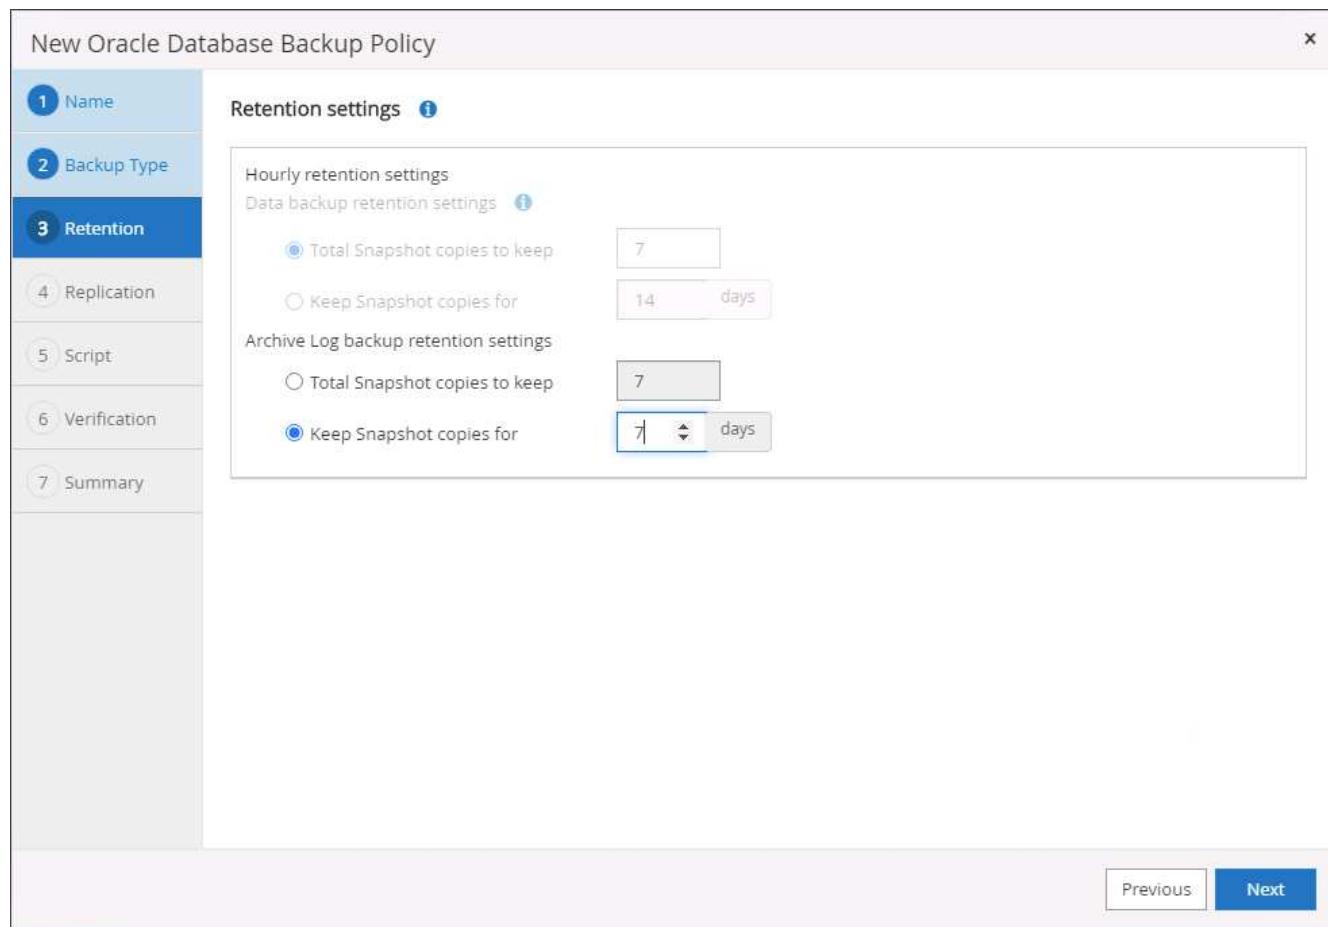

5. Enable replication to a secondary location in the public cloud.

New Oracle Database Backup Policy

1 Name

Select secondary replication options [i](#)

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Secondary policy label [i](#)

Error retry count [i](#)

[Previous](#) [Next](#)

This screenshot shows the 'New Oracle Database Backup Policy' dialog box, specifically step 4: Replication. On the left, a vertical navigation bar lists steps 1 through 7. Step 4 is highlighted in blue. The main area contains a section titled 'Select secondary replication options' with two checkboxes: 'Update SnapMirror after creating a local Snapshot copy.' (which is checked) and 'Update SnapVault after creating a local Snapshot copy.' Below this are two input fields: 'Secondary policy label' with a dropdown menu showing 'Hourly' and an information icon, and 'Error retry count' with a text input field containing '3' and an information icon. At the bottom right are 'Previous' and 'Next' buttons.

6. Specify any optional scripts to run before and after log backup.

New Oracle Database Backup Policy X

Specify optional scripts to run before and after performing a backup job

1 Name	Prescript full path <input type="text" value="/var/opt/snapcenter/spl/scripts/"/> Enter Prescript path	
2 Backup Type	Prescript arguments <input type="text"/>	
3 Retention	Postscript full path <input type="text" value="/var/opt/snapcenter/spl/scripts/"/> Enter Postscript path	
4 Replication	Postscript arguments <input type="text"/>	
5 Script	Script timeout <input type="text" value="60"/> secs	
6 Verification		
7 Summary		

Previous Next

7. Specify any backup verification scripts.

New Oracle Database Backup Policy X

1 Name Select the options to run backup verification

2 Backup Type Run Verifications for following backup schedules

3 Retention Select how often you want the schedules to occur in the policy. The specific verification times are set at backup job creation enabling you to stagger your verification start times.

4 Replication

5 Script

6 Verification Verification script commands

Script timeout 60 secs

Prescript full path /var/opt/snapcenter/spl/scripts/ Enter Prescript path

Prescript arguments Choose optional arguments...

Postscript full path /var/opt/snapcenter/spl/scripts/ Enter Postscript path

Postscript arguments Choose optional arguments...

[Previous](#) [Next](#)

8. Summary.

New Oracle Database Backup Policy

1 Name	Summary
2 Backup Type	Policy name: Oracle Archive Log Backup Details: Backup Oracle archive logs
3 Retention	Backup type: Online backup
4 Replication	Schedule type: Hourly RMAN catalog backup: Disabled
5 Script	Archive log pruning: None
6 Verification	On demand data backup retention: None On demand archive log backup retention: None
7 Summary	Hourly data backup retention: None Hourly archive log backup retention: Delete Snapshot copies older than : 7 days Daily data backup retention: None Daily archive log backup retention: None Weekly data backup retention: None Weekly archive log backup retention: None Monthly data backup retention: None Monthly archive log backup retention: None Replication: SnapMirror enabled , Secondary policy label: Hourly , Error retry count: 3
Previous Finish	

Create a full database backup policy for SQL

1. Log into SnapCenter with a database management user ID, click Settings, and then click Policies.

The screenshot shows the NetApp SnapCenter web interface. On the left is a navigation sidebar with icons for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings (which is selected), and Alerts. The main content area has a header with 'NetApp SnapCenter®' and tabs for 'Policies' (selected) and 'Credential'. A dropdown menu shows 'Microsoft SQL Server'. Below this is a search bar with 'Search by Name'. The main table has columns for 'Name', 'Backup Type', 'Schedule Type', 'Replication', and 'Verification'. A message at the bottom of the table says 'There is no match for your search or data is not available.'

2. Click New to launch a new backup policy creation workflow, or choose an existing policy for modification.

New SQL Server Backup Policy

1 Name

Provide a policy name

Policy name: SQL Server Full Backup i

Details: Backup all data and log files

2 Backup Type

3 Retention


4 Replication

5 Script

6 Verification

7 Summary

Previous Next

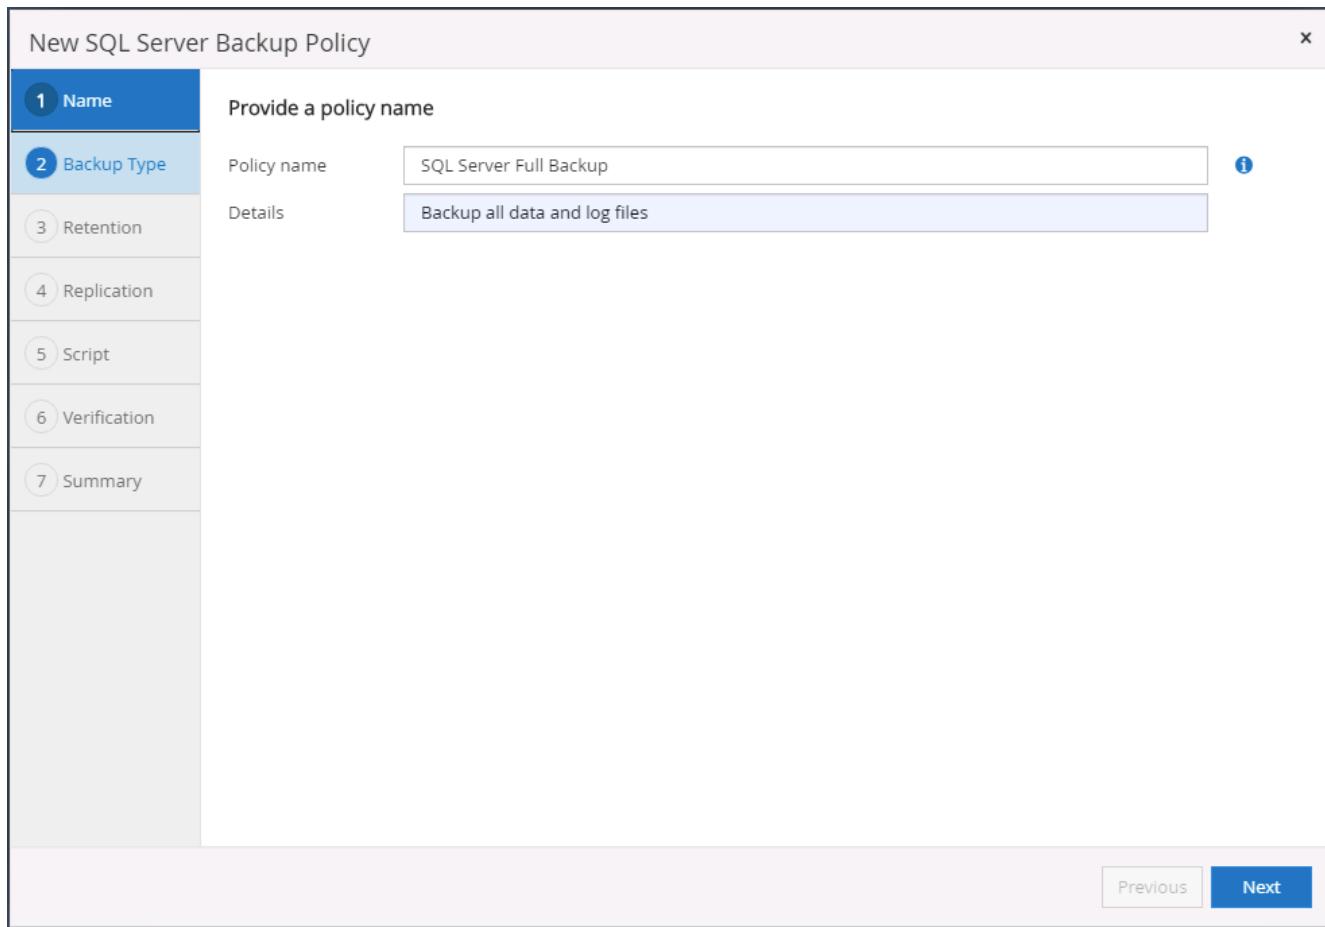

3. Define the backup option and schedule frequency. For SQL Server configured with an availability group, a preferred backup replica can be set.

New SQL Server Backup Policy X

1 Name

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Select SQL server backup options

Choose backup type

Full backup and log backup

Full backup

Log backup

Copy only backup i

Maximum databases backed up per Snapshot copy: 100 i

Availability Group Settings ▼

Schedule frequency

Select how often you want the schedules to occur in the policy. The specific times are set at backup job creation enabling you to stagger your start times.

On demand

Hourly


Daily

Weekly


Monthly

Previous Next

4. Set the backup retention period.

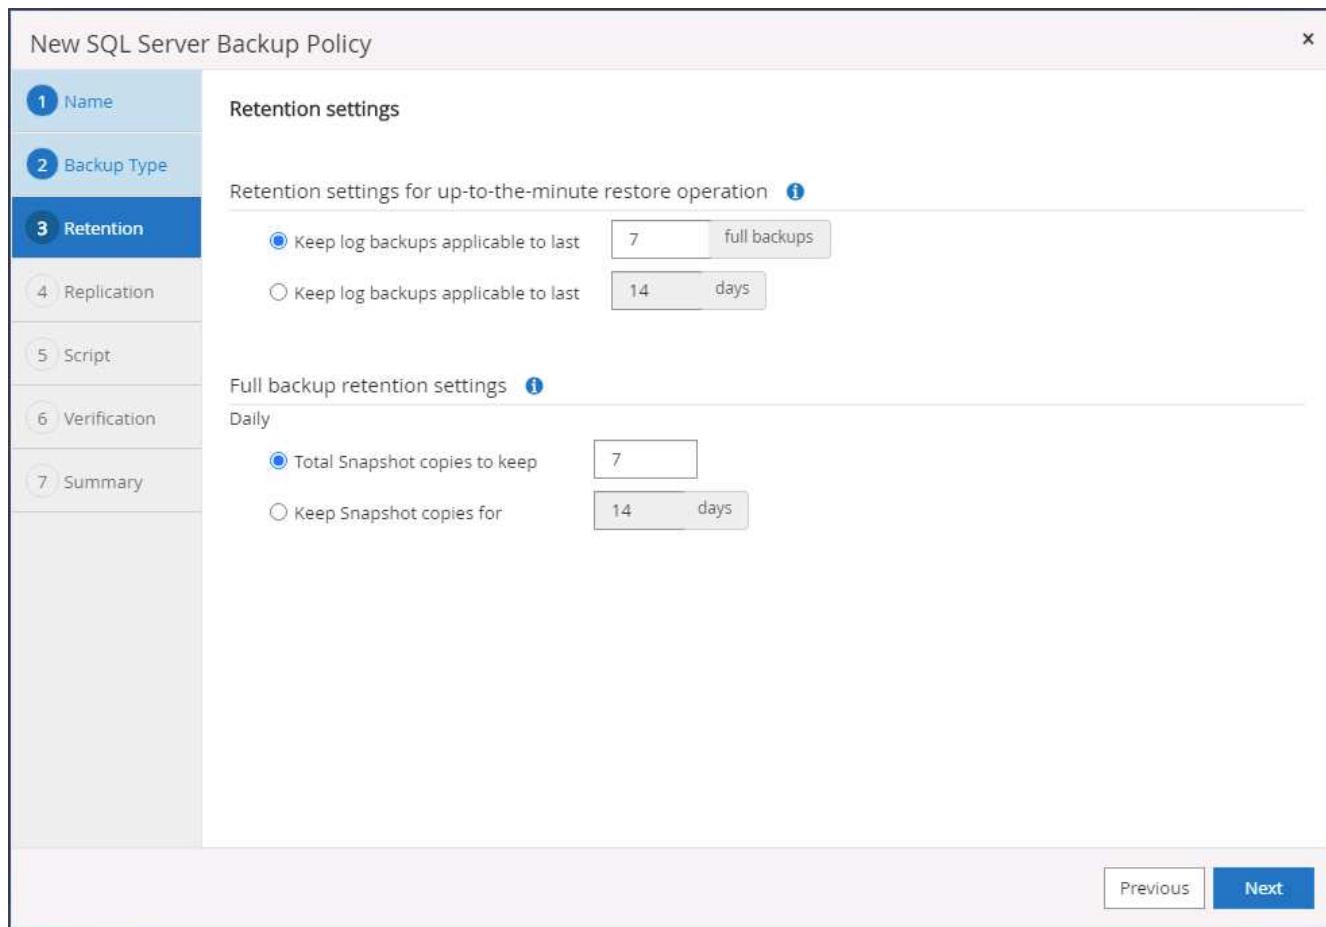

5. Enable backup copy replication to a secondary location in cloud.

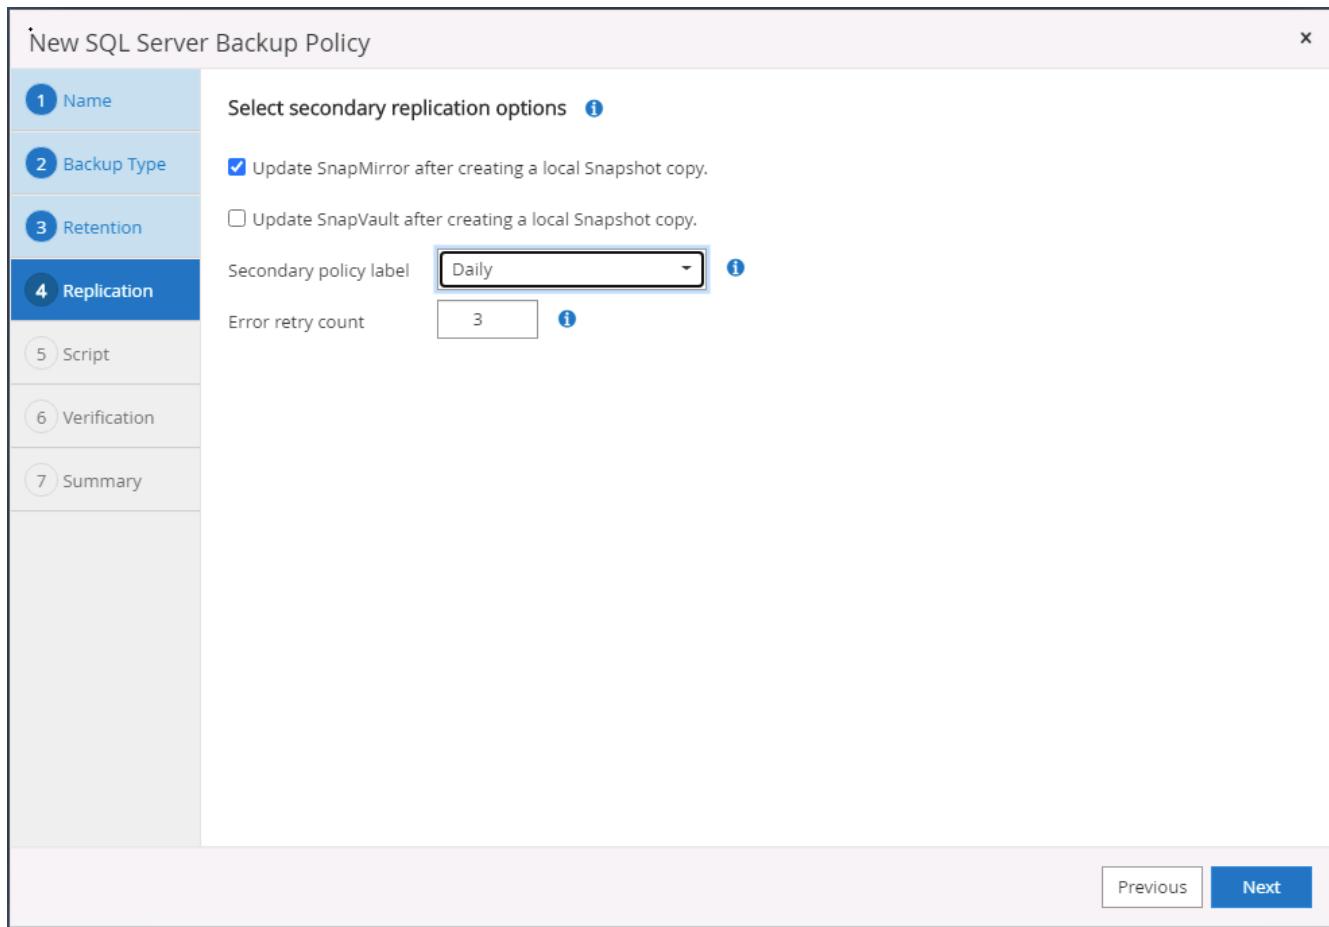

6. Specify any optional scripts to run before or after a backup job.

New SQL Server Backup Policy X

1 Name Specify optional scripts to run before performing a backup job

2 Backup Type Prescript full path

3 Retention Prescript arguments Choose optional arguments...

4 Replication Specify optional scripts to run after performing a backup job

5 Script Postscript full path
Postscript arguments Choose optional arguments...

6 Verification Script timeout 60 secs

7 Summary

Previous Next

7. Specify the options to run backup verification.

New SQL Server Backup Policy

1 Name

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Select the options to run backup verification

Run verifications for the following backup schedules

Select how often you want the schedules to occur in the policy. The specific verification times are set at backup job creation enabling you to stagger your verification start times.

Daily

Database consistency checks options

Limit the integrity structure to physical structure of the database (PHYSICAL_ONLY)

Suppress all information message (NO_INFOMSGS)

Display all reported error messages per object (ALL_ERRORMSGGS)

Do not check non-clustered indexes (NOINDEX)

Limit the checks and obtain the locks instead of using an internal database Snapshot copy (TABLOCK)

Log backup

Verify log backup. i

Verification script settings

Script timeout secs

Previous Next

8. Summary.

New SQL Server Backup Policy X

1 Name	Summary
2 Backup Type	Policy name: SQL Server Full Backup
3 Retention	Details: Backup all data and log files
4 Replication	Backup type: Full backup and log backup
5 Script	Availability group settings: Backup only on preferred backup replica
6 Verification	Schedule Type: Daily UTM retention: Total backup copies to retain : 7 Daily Full backup retention: Total backup copies to retain : 7 Replication: SnapMirror enabled , Secondary policy label: Daily , Error retry count: 3
7 Summary	Backup prescript settings: undefined Prescript arguments: Backup postscript settings: undefined Postscript arguments: Verification for backup schedule type: none Verification prescript settings: undefined Prescript arguments: Verification postscript settings: undefined Postscript arguments:
Previous Finish	

Create a database log backup policy for SQL.

1. Log into SnapCenter with a database management user ID, click Settings > Policies, and then New to launch a new policy creation workflow.

New SQL Server Backup Policy

1 Name

Provide a policy name

Policy name: SQL Server Log Backup

Details: Backup SQL server log

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Previous Next

The screenshot shows the 'New SQL Server Backup Policy' wizard. The 'Name' tab is active. The 'Policy name' field is set to 'SQL Server Log Backup'. The 'Details' field contains the text 'Backup SQL server log'. The sidebar on the left lists other tabs: 'Backup Type', 'Retention', 'Replication', 'Script', 'Verification', and 'Summary'. At the bottom right are 'Previous' and 'Next' buttons.

- Define the log backup option and schedule frequency. For SQL Server configured with a availability group, a preferred backup replica can be set.

New SQL Server Backup Policy X

1 Name

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification

7 Summary

Select SQL server backup options

Choose backup type

Full backup and log backup
 Full backup
 Log backup
 Copy only backup i

Maximum databases backed up per Snapshot copy: 100 i

Availability Group Settings ▼

Schedule frequency

Select how often you want the schedules to occur in the policy. The specific times are set at backup job creation enabling you to stagger your start times.

On demand
 Hourly
 Daily
 Weekly
 Monthly

Previous Next

3. SQL server data backup policy defines the log backup retention; accept the defaults here.

New SQL Server Backup Policy X

1 Name

2 Backup Type

3 Retention

4 Replication

5 Script

6 Verification


7 Summary

Log backup retention settings

Up-to-the-minute (UTM) retention settings retains log backups created as part of full backup and full and log backup operations. UTM retention settings also decides for how many full backups the log backups are to be retained. For example, if UTM retention settings is configured to retain log backups of the last 5 full backups, then the log backups of the last 5 full backups are retained and the rest are deleted.

Previous Next

4. Enable log backup replication to secondary in the cloud.

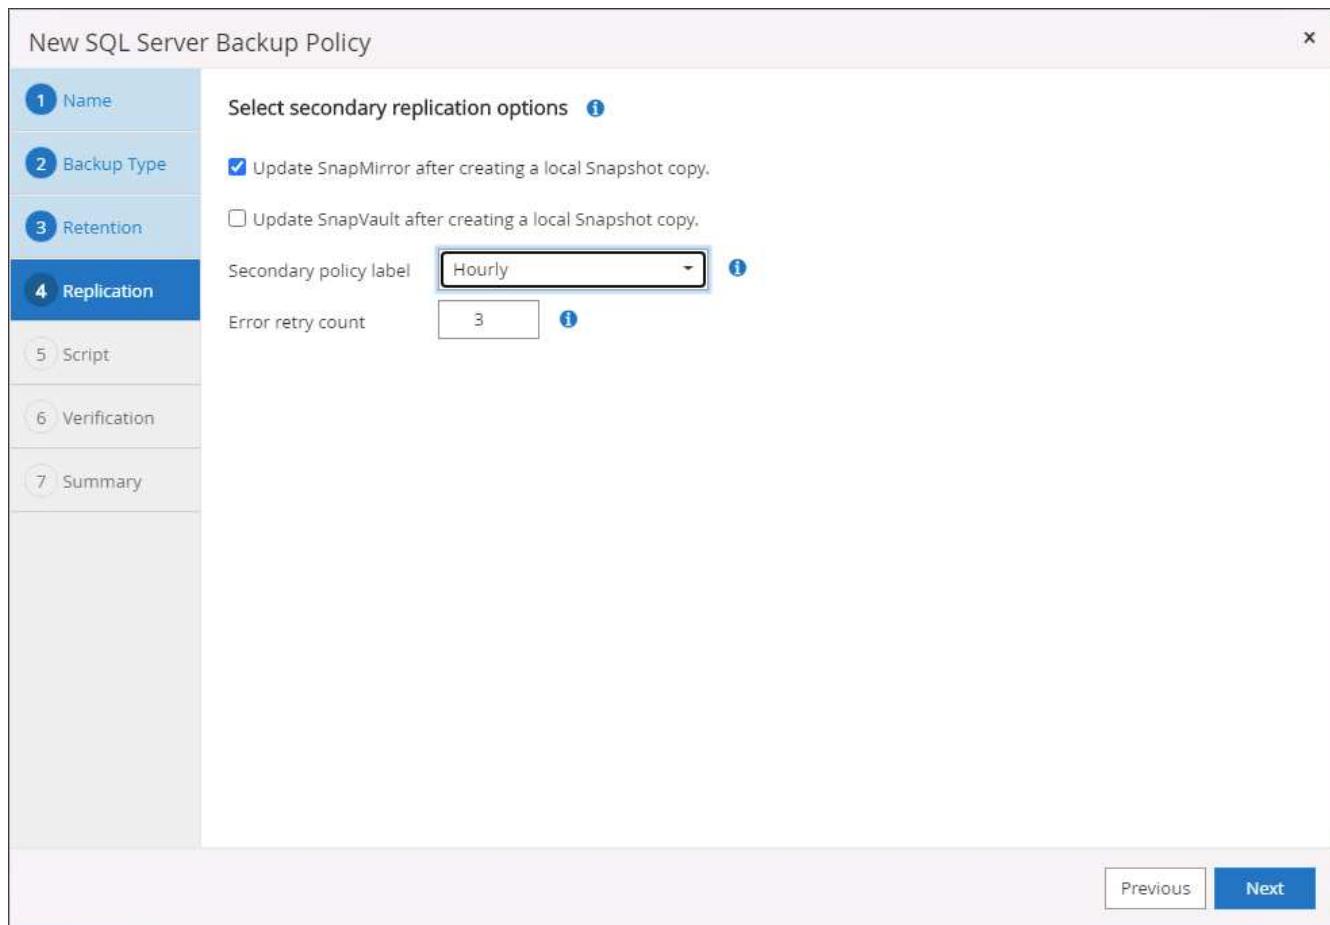

5. Specify any optional scripts to run before or after a backup job.

New SQL Server Backup Policy X

1 Name

Specify optional scripts to run before performing a backup job

Prescript full path

Prescript arguments Choose optional arguments...

2 Backup Type

3 Retention

4 Replication

5 Script

Specify optional scripts to run after performing a backup job

Postscript full path

Postscript arguments Choose optional arguments...

Script timeout 60 secs

6 Verification

7 Summary

Previous Next

6. Summary.

New SQL Server Backup Policy

Step	Setting
1 Name	Summary
2 Backup Type	Policy name: SQL Server Log Backup Details: Backup SQL server log
3 Retention	Backup type: Log transaction backup
4 Replication	Availability group settings: Backup only on preferred backup replica
5 Script	Schedule Type: Hourly Replication: SnapMirror enabled, Secondary policy label: Hourly, Error retry count: 3
6 Verification	Backup prescript settings: undefined Prescript arguments: Backup postscript settings: undefined Postscript arguments:
7 Summary	Verification for backup schedule type: none Verification prescript settings: undefined Prescript arguments: Verification postscript settings: undefined Postscript arguments:

Previous Finish

8. Implement backup policy to protect database


SnapCenter uses a resource group to backup a database in a logical grouping of database resources, such as multiple databases hosted on a server, a database sharing the same storage volumes, multiple databases supporting a business application, and so on. Protecting a single database creates a resource group of its own. The following procedures demonstrate how to implement a backup policy created in section 7 to protect Oracle and SQL Server databases.

Create a resource group for full backup of Oracle


1. Log into SnapCenter with a database management user ID, and navigate to the Resources tab. In the View drop-down list, choose either Database or Resource Group to launch the resource group creation workflow.

Name	Oracle Database Type	Host/Cluster	Resource Group	Policies	Last Backup	Overall Status
cdb2	Single Instance (Multitenant)	rhel2.demo.netapp.com				Not protected


2. Provide a name and tags for the resource group. You can define a naming format for the Snapshot copy and bypass the redundant archive log destination if configured.

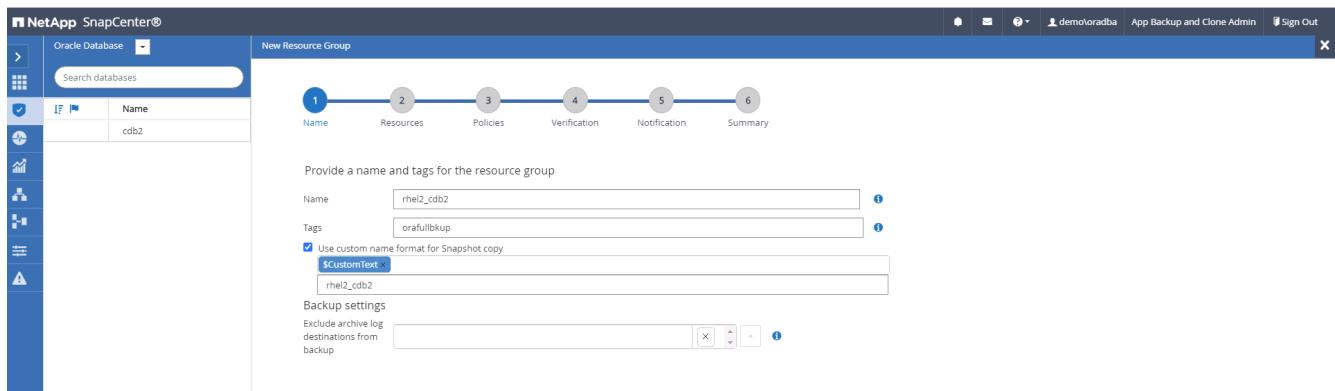


3. Add database resources to the resource group.

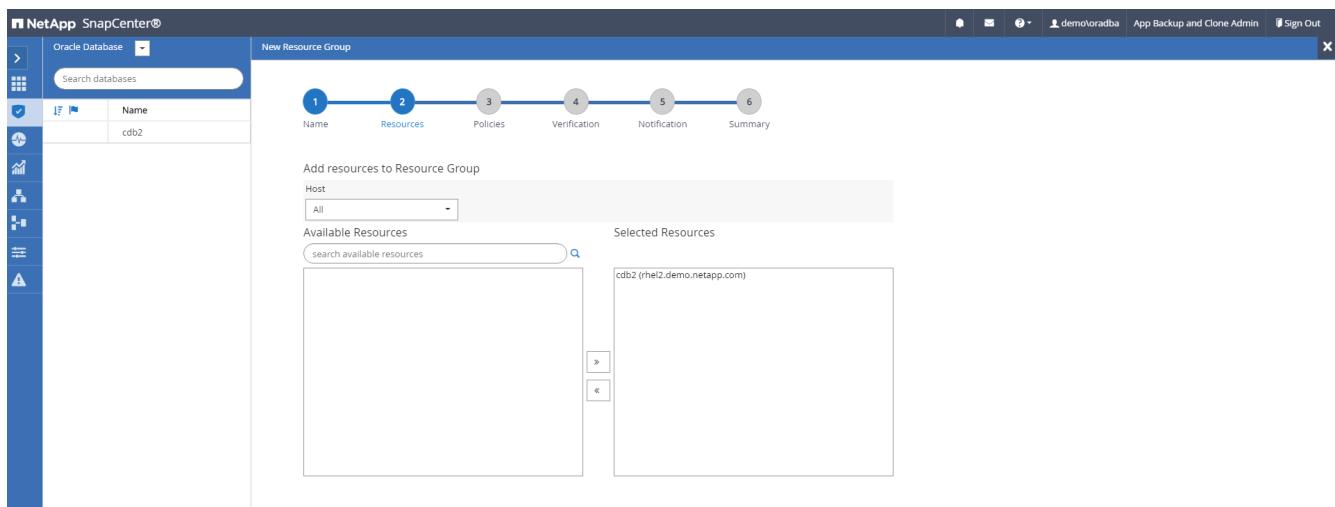


4. Select a full backup policy created in section 7 from the drop-down list.

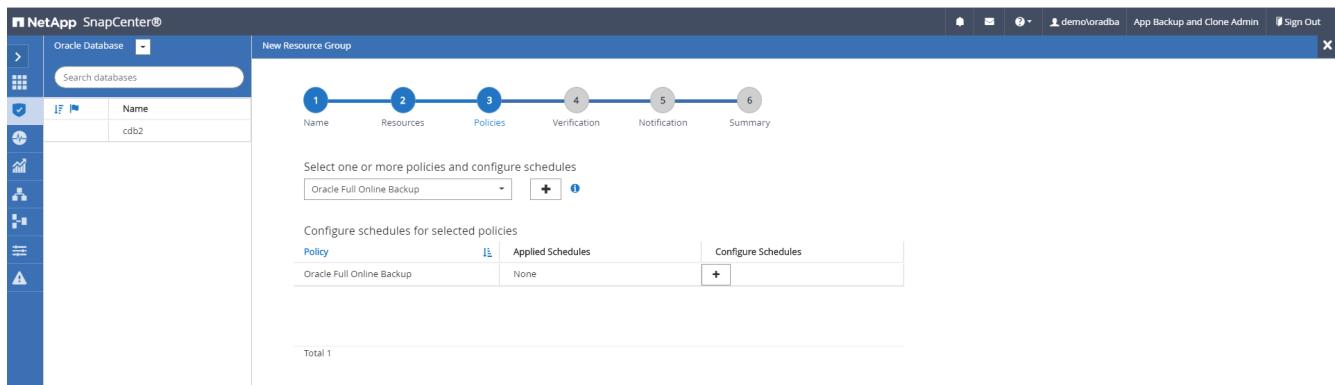


5. Click the (+) sign to configure the desired backup schedule.

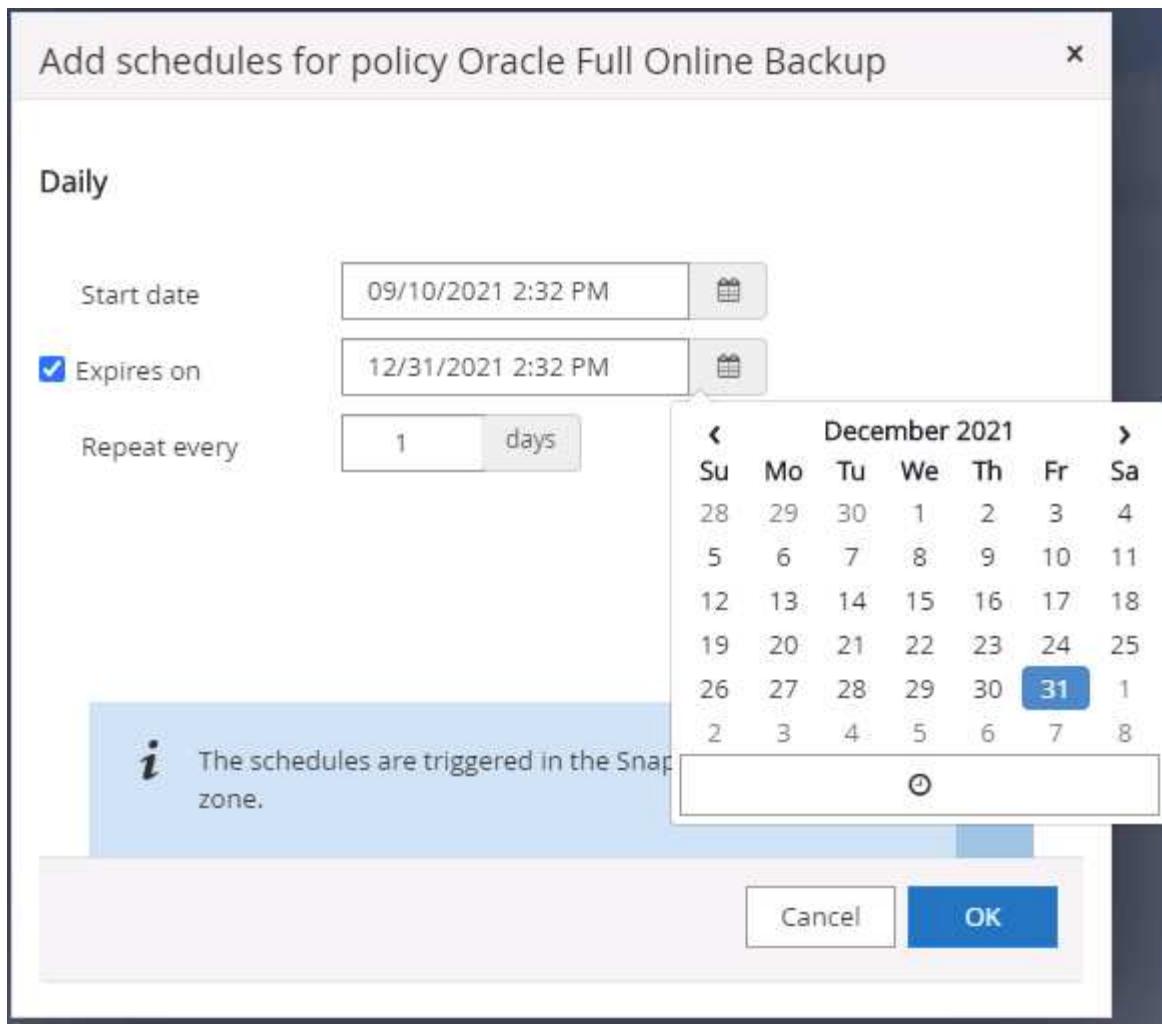


6. Click Load Locators to load the source and destination volume.

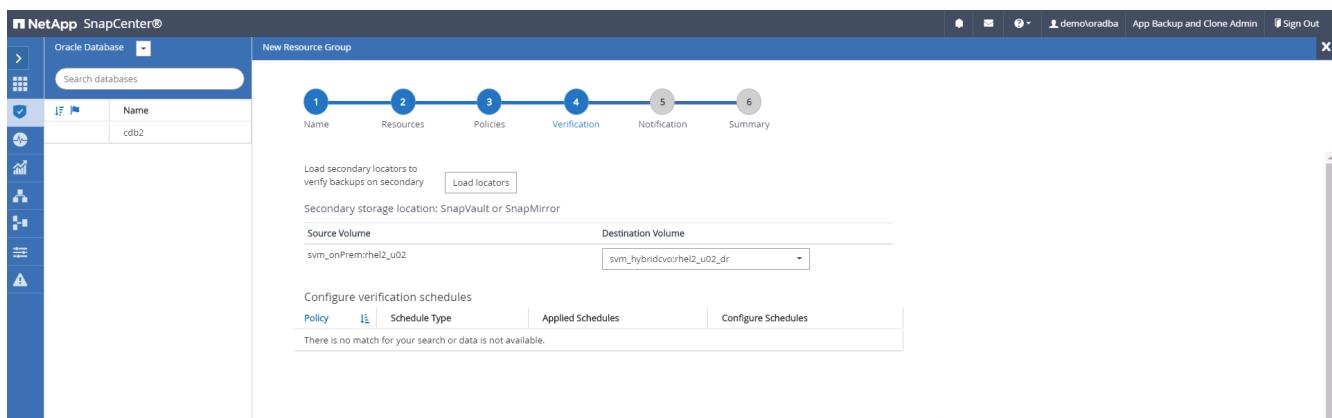

7. Configure the SMTP server for email notification if desired.

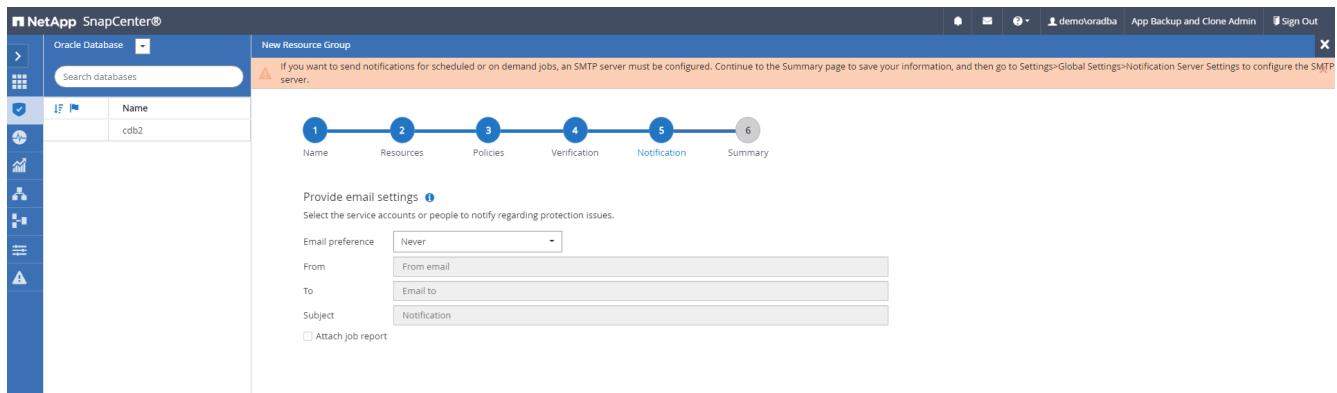


8. Summary.

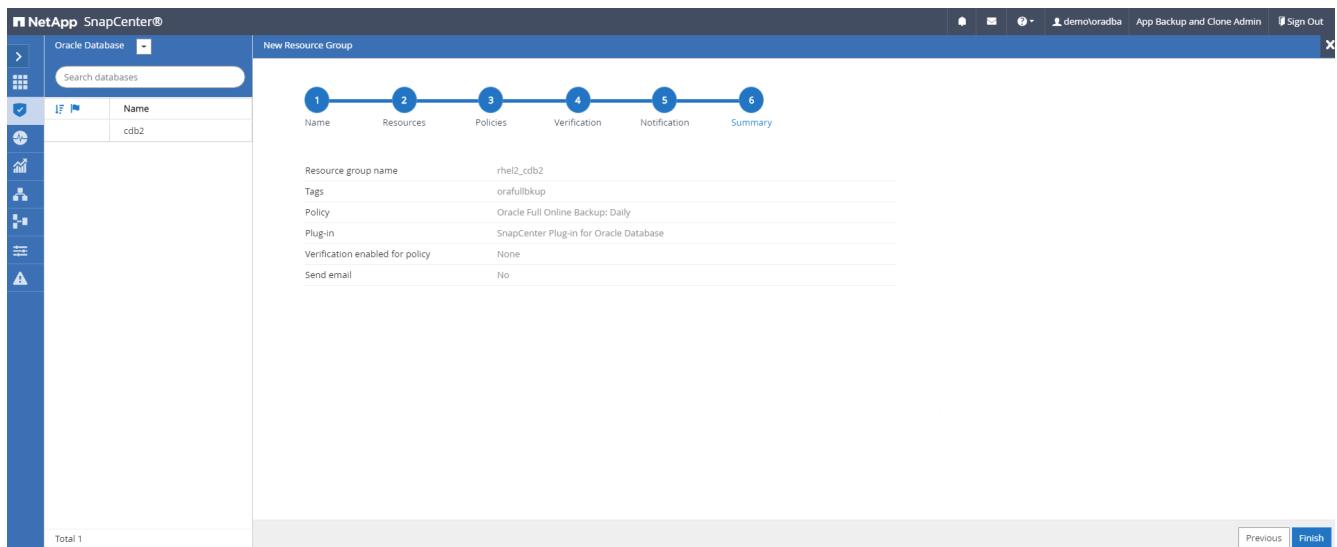


Create a resource group for log backup of Oracle


1. Log into SnapCenter with a database management user ID, and navigate to the Resources tab. In the View drop-down list, choose either Database or Resource Group to launch the resource group creation workflow.

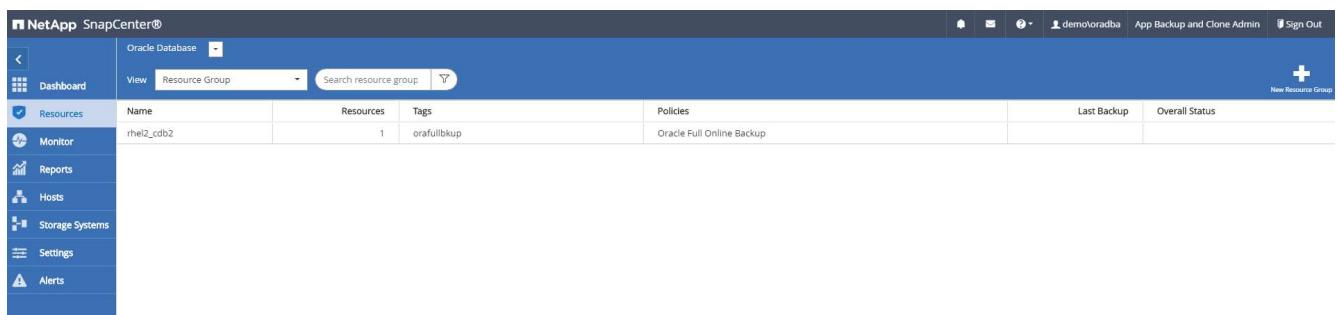


2. Provide a name and tags for the resource group. You can define a naming format for the Snapshot copy and bypass the redundant archive log destination if configured.

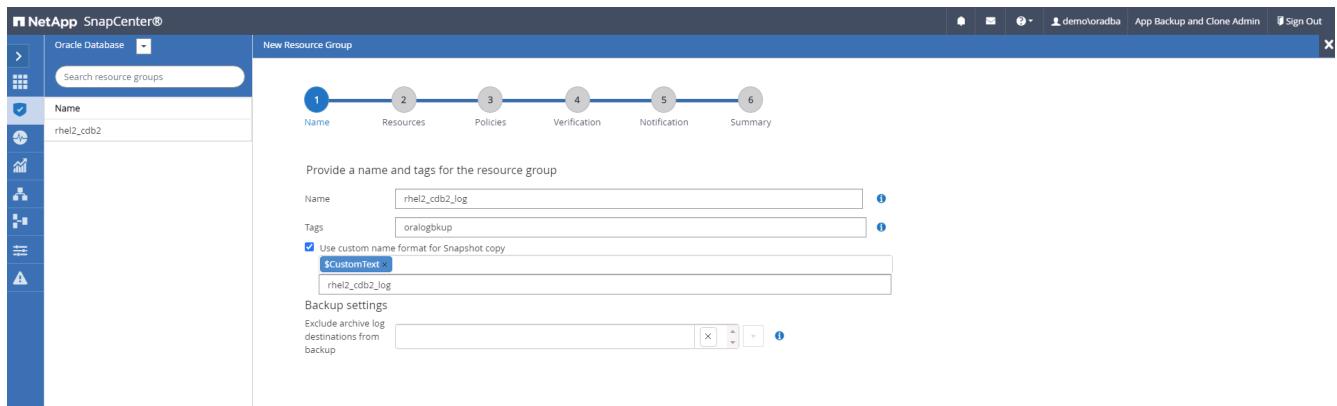

3. Add database resources to the resource group.

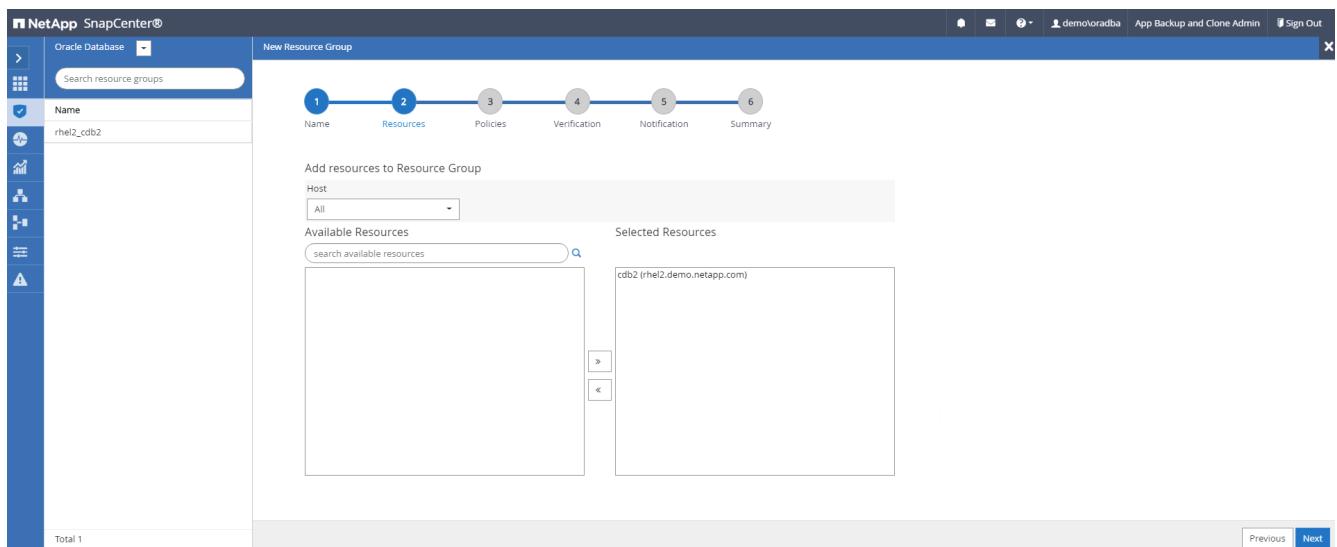

4. Select a log backup policy created in section 7 from the drop-down list.

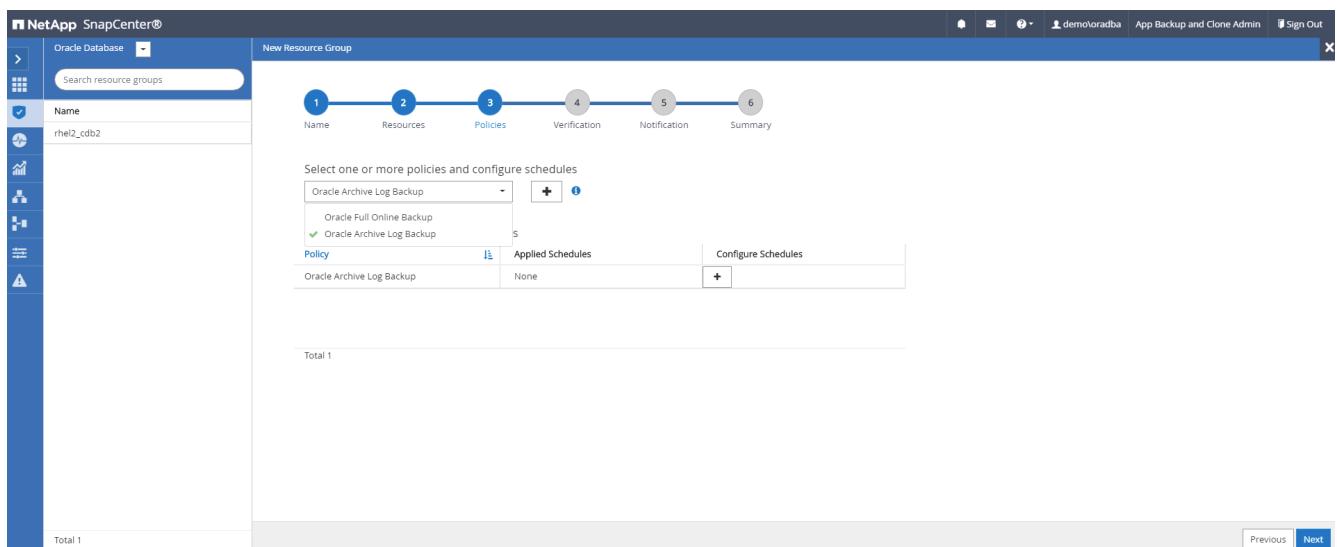

5. Click on the (+) sign to configure the desired backup schedule.

Add schedules for policy Oracle Archive Log Backup x

Hourly

Start date

Expires on

Repeat every hours mins

i The schedules are triggered in the SnapCenter Server time zone. X

Cancel OK

6. If backup verification is configured, it displays here.

NetApp SnapCenter®

Oracle Database

New Resource Group

Name

Search resource groups

1 Name 2 Resources 3 Policies 4 Verification 5 Notification 6 Summary

Configure verification schedules


Policy Schedule Type Applied Schedules Configure Schedules

There is no match for your search or data is not available.


Total 0

Previous Next

7. Configure an SMTP server for email notification if desired.

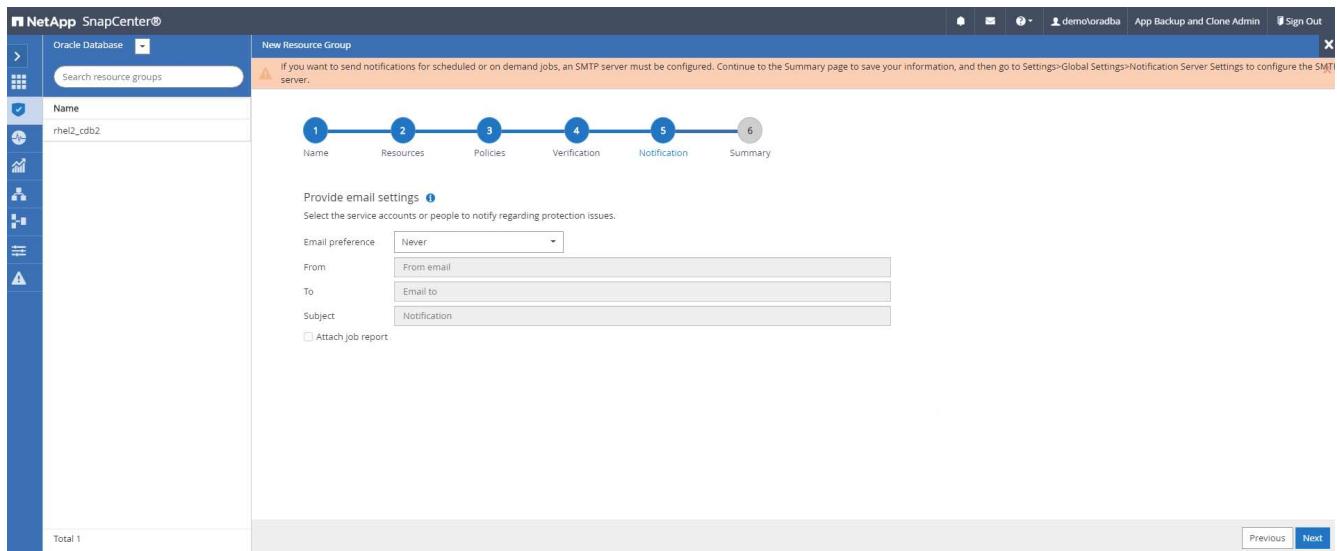


8. Summary.

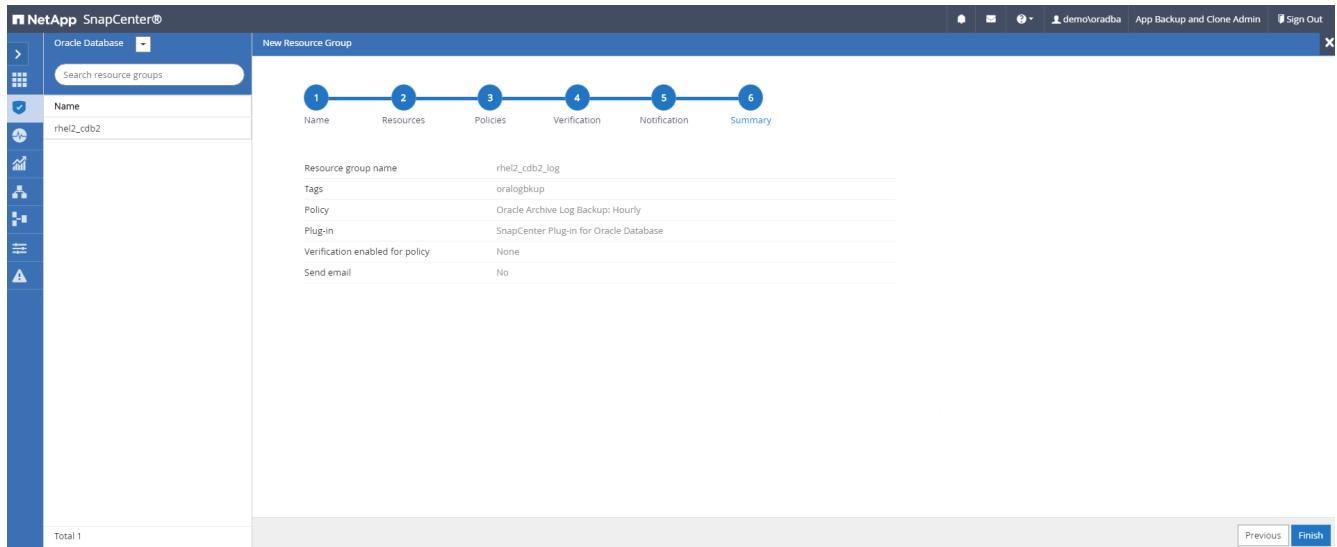


Create a resource group for full backup of SQL Server


1. Log into SnapCenter with a database management user ID, and navigate to the Resources tab. In the View drop-down list, choose either a Database or Resource Group to launch the resource group creation workflow. Provide a name and tags for the resource group. You can define a naming format for the Snapshot copy.

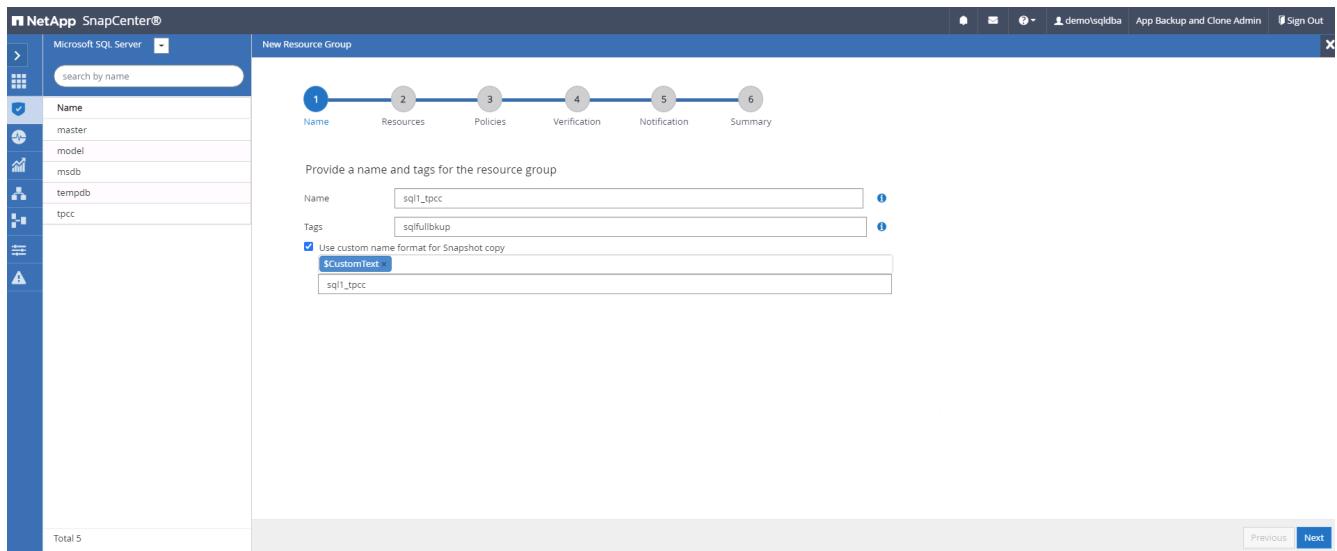


2. Select the database resources to be backed up.

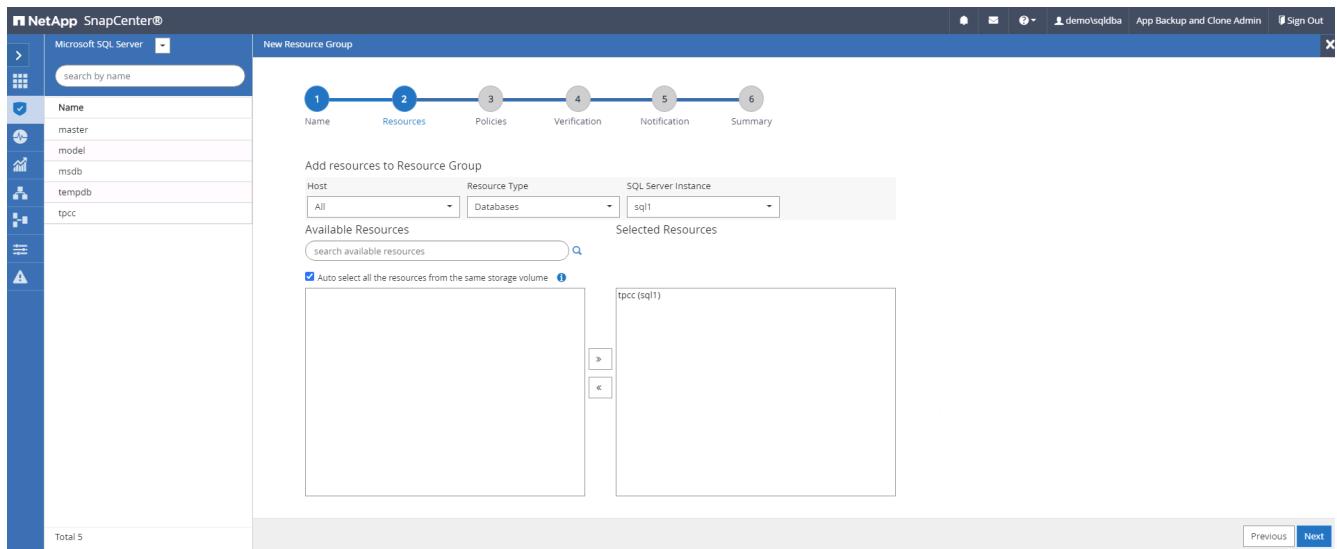


3. Select a full SQL backup policy created in section 7.

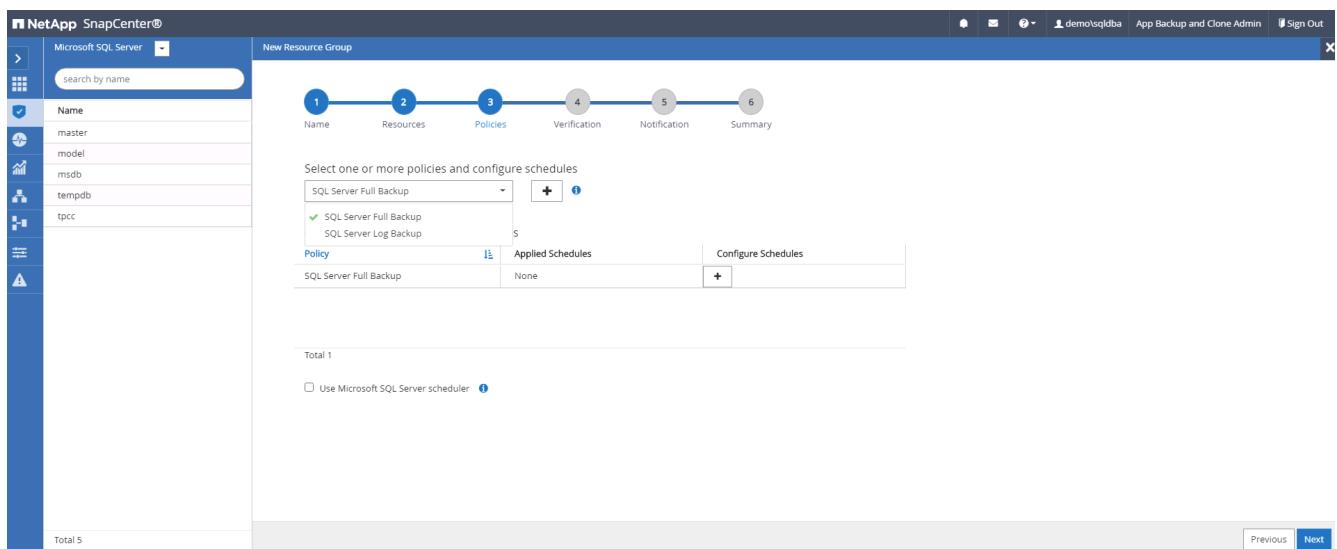


- Add exact timing for backups as well as the frequency.

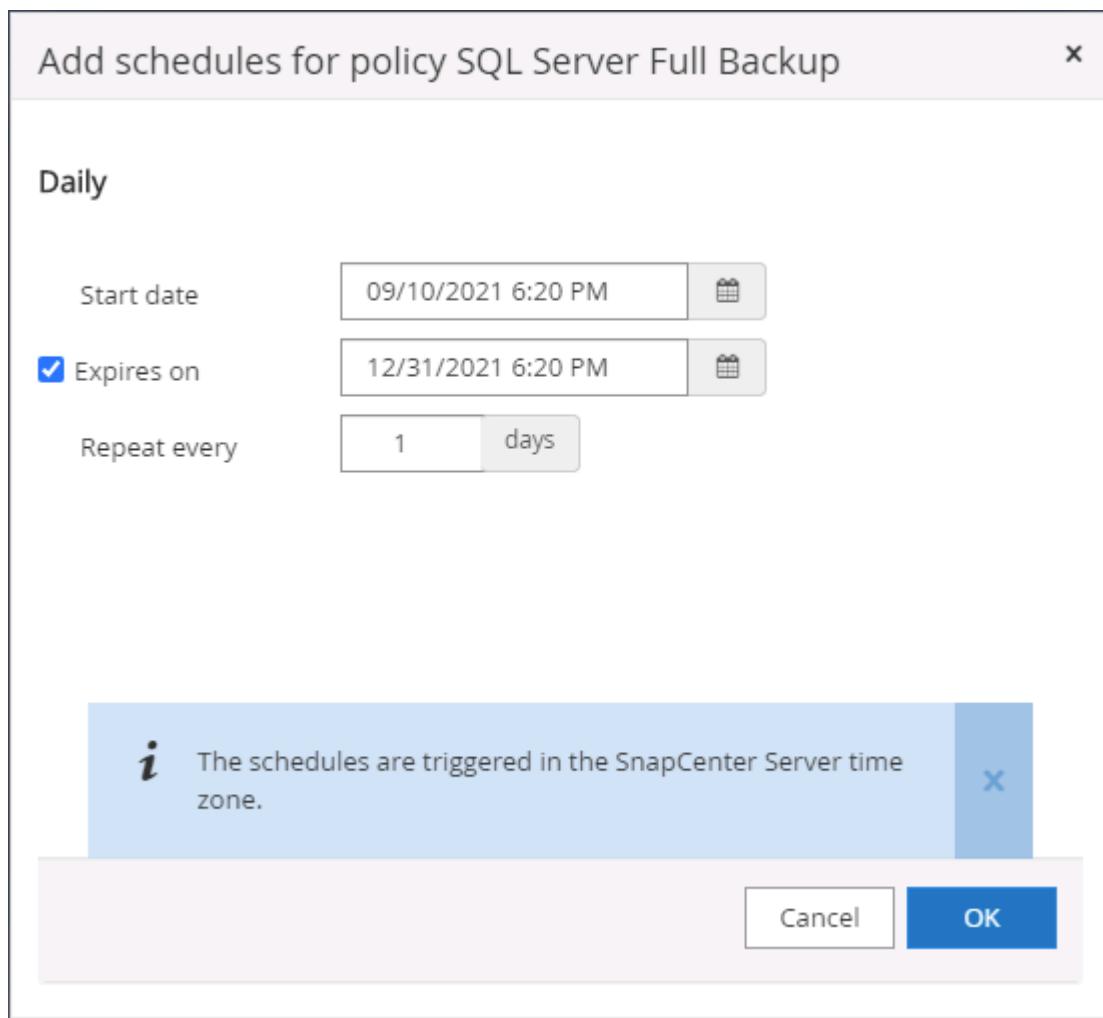


- Choose the verification server for the backup on secondary if backup verification is to be performed. Click Load Locator to populate the secondary storage location.

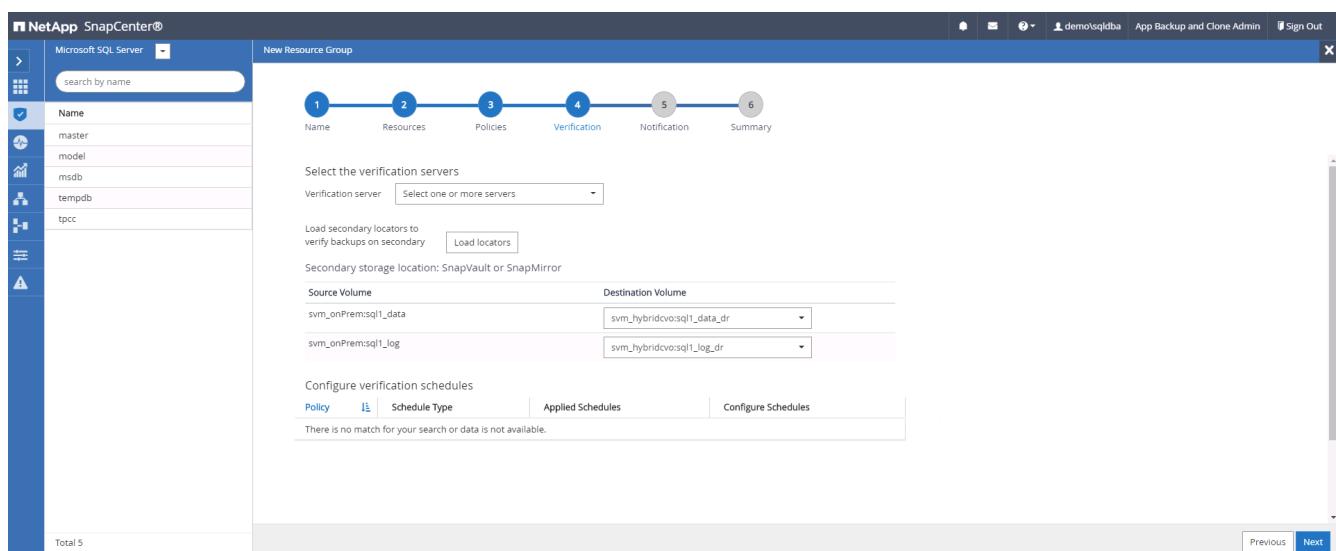

- Configure the SMTP server for email notification if desired.

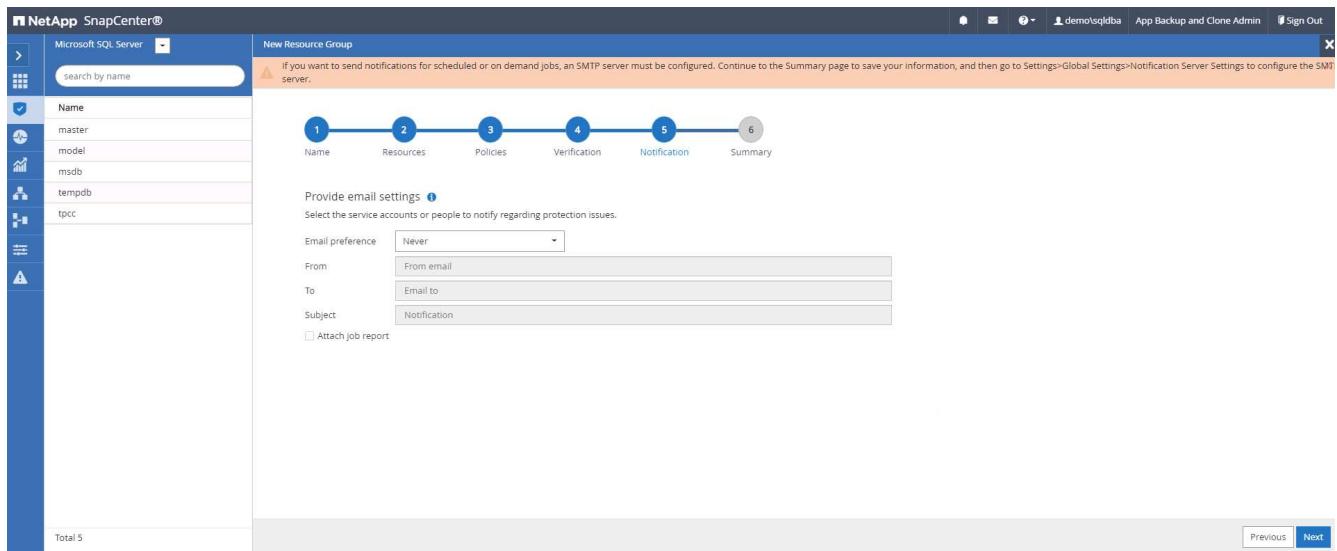


7. Summary.

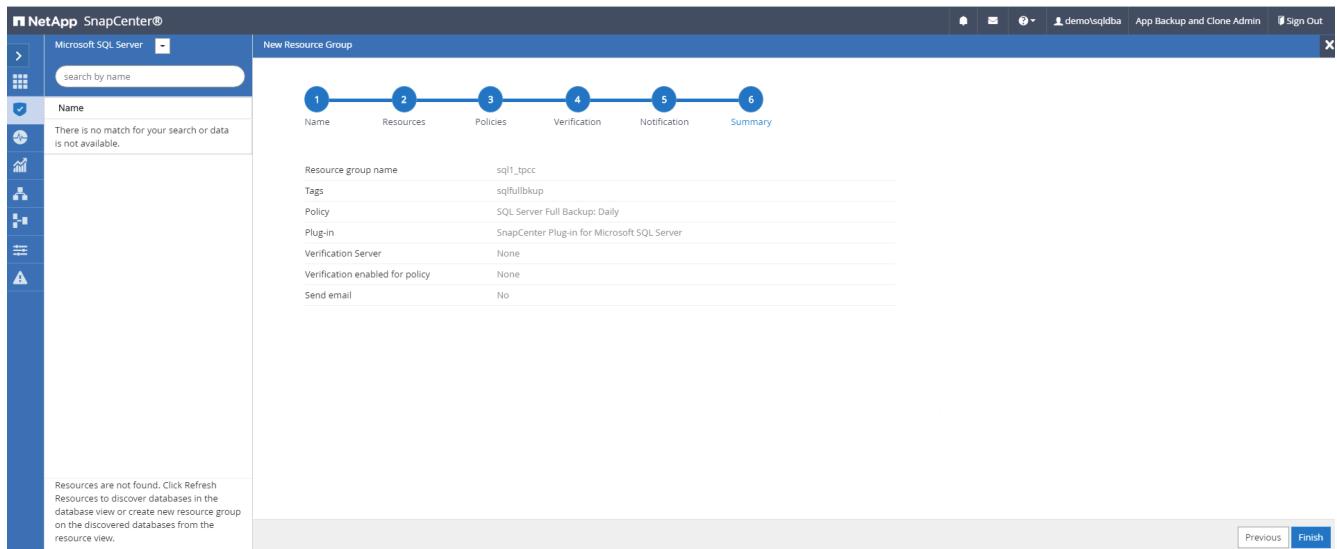


Create a resource group for log backup of SQL Server


1. Log into SnapCenter with a database management user ID, and navigate to the Resources tab. In the View drop-down list, choose either a Database or Resource Group to launch the resource group creation workflow. Provide the name and tags for the resource group. You can define a naming format for the Snapshot copy.

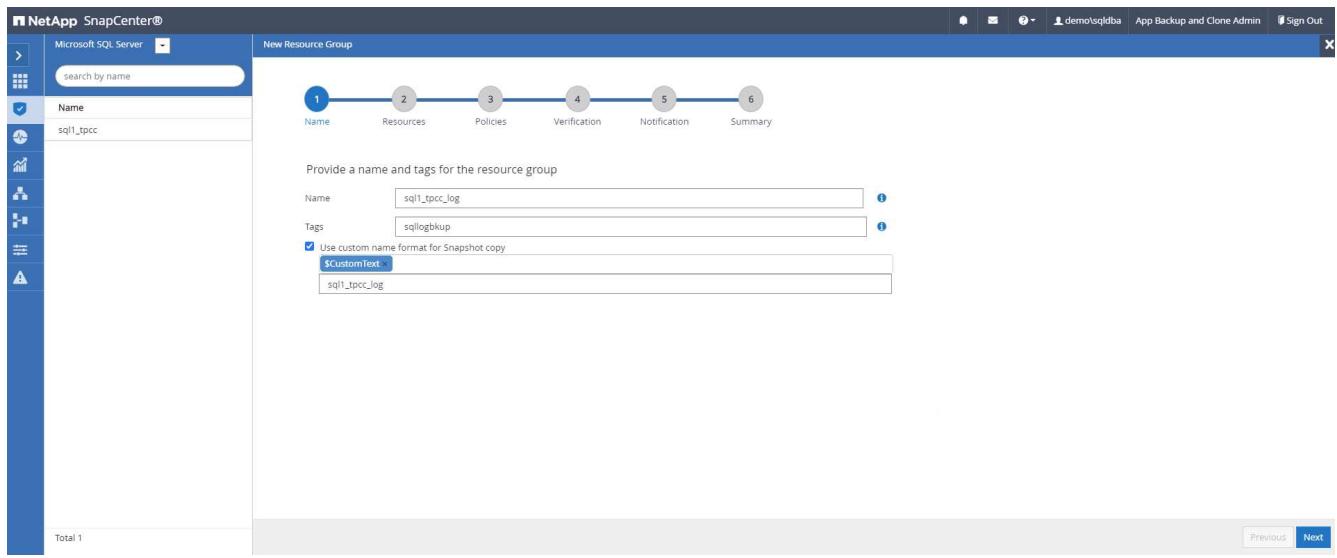


2. Select the database resources to be backed up.

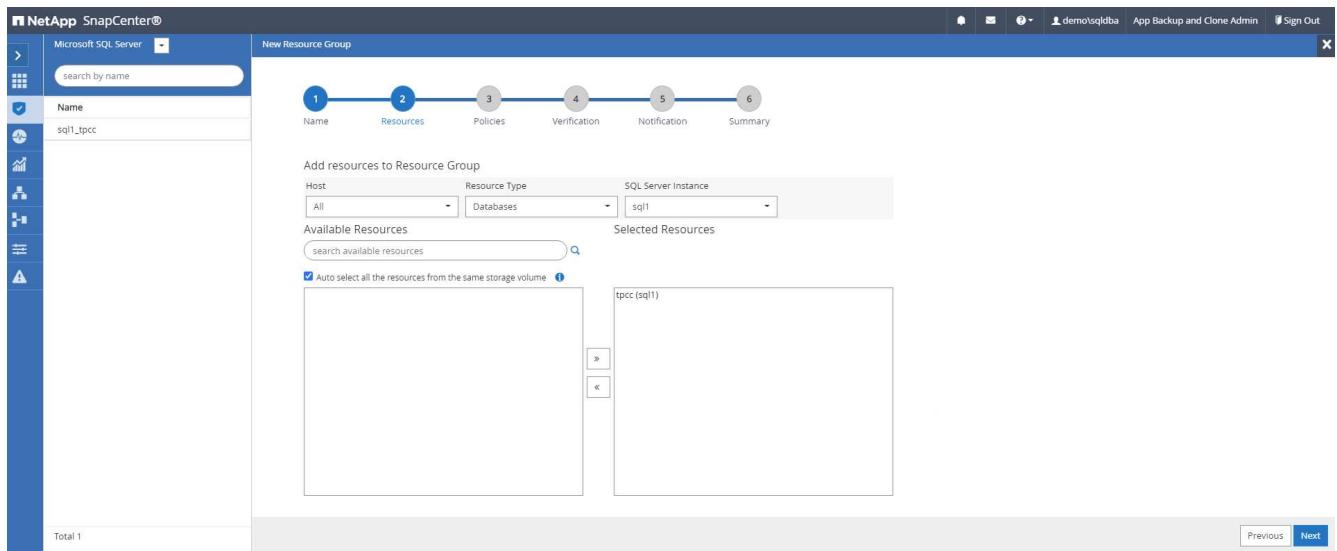


3. Select a SQL log backup policy created in section 7.

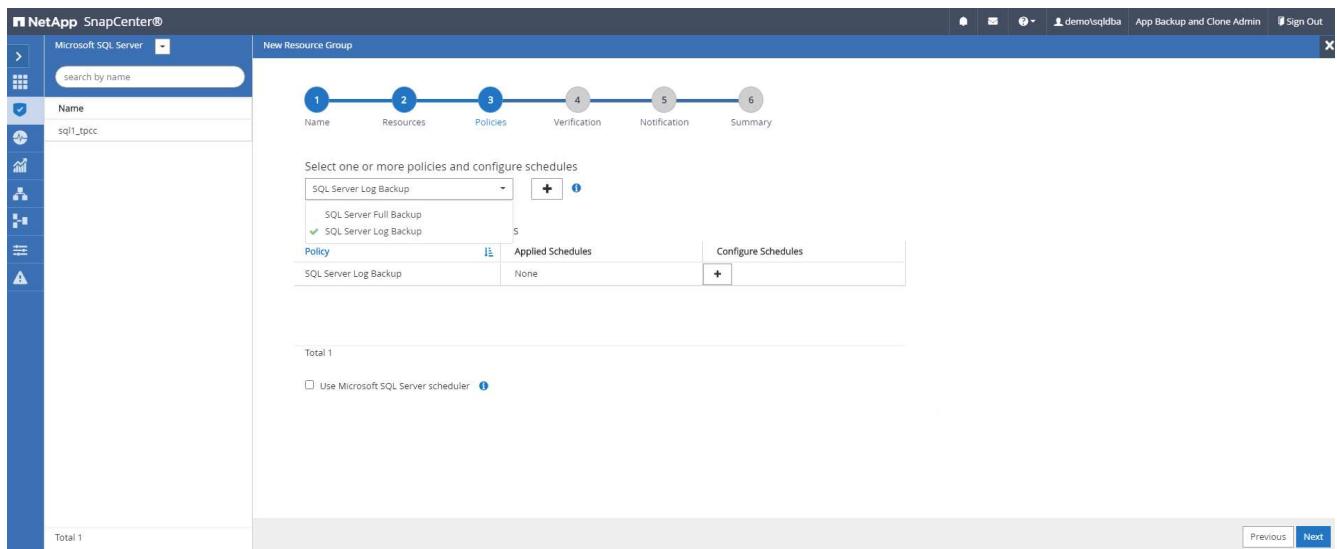


4. Add exact timing for the backup as well as the frequency.

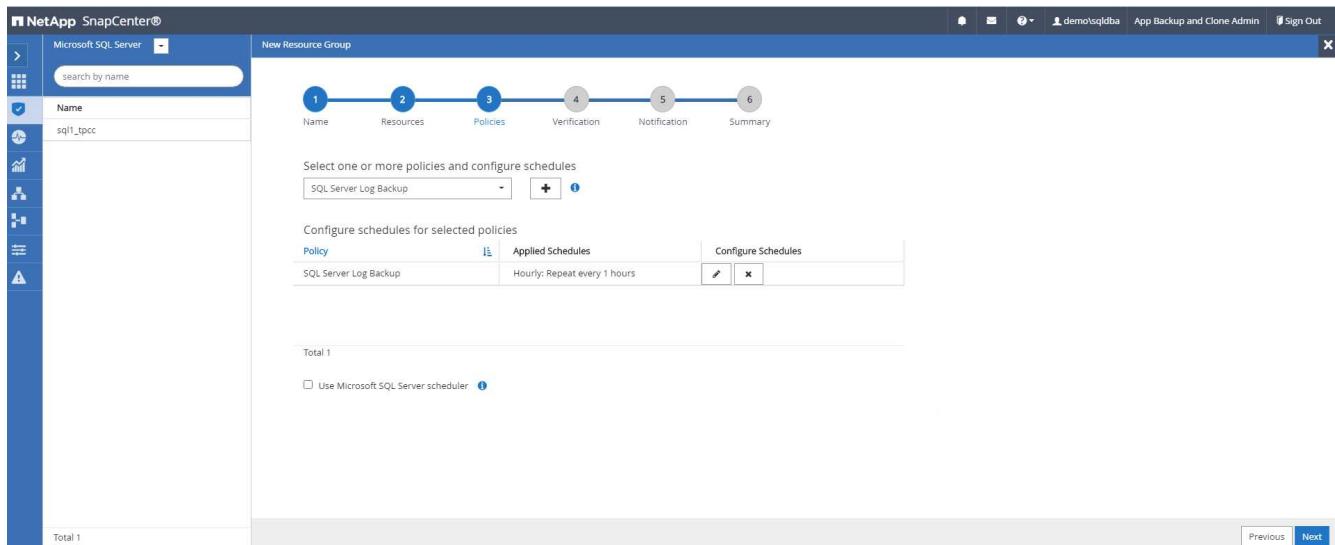


5. Choose the verification server for the backup on secondary if backup verification is to be performed. Click the Load Locator to populate the secondary storage location.

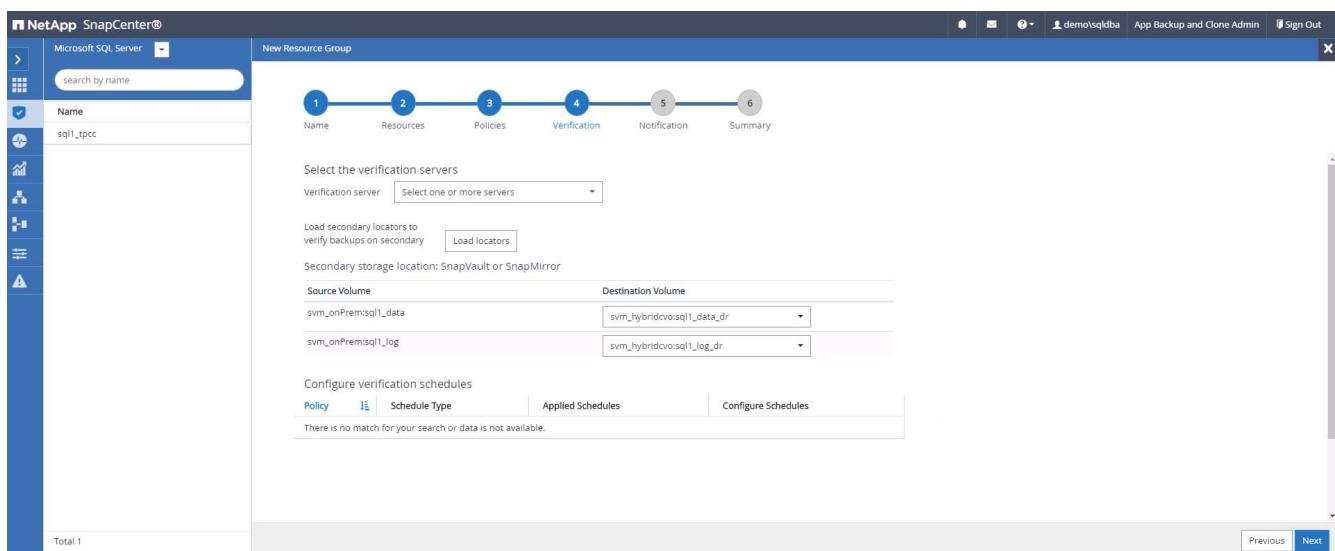

6. Configure the SMTP server for email notification if desired.

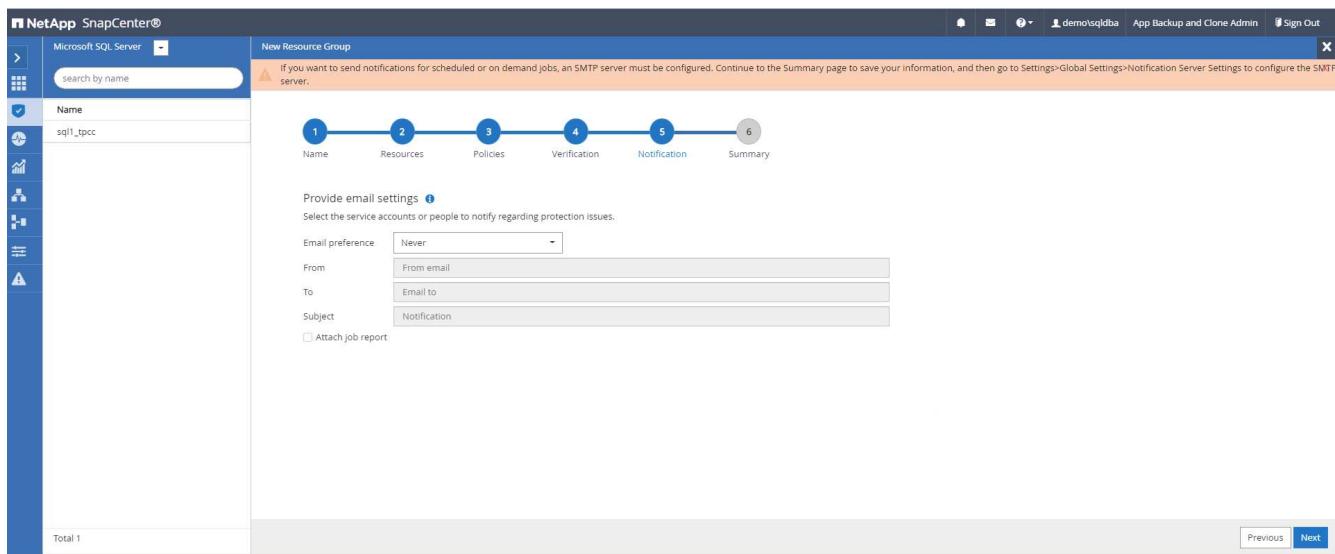

7. Summary.

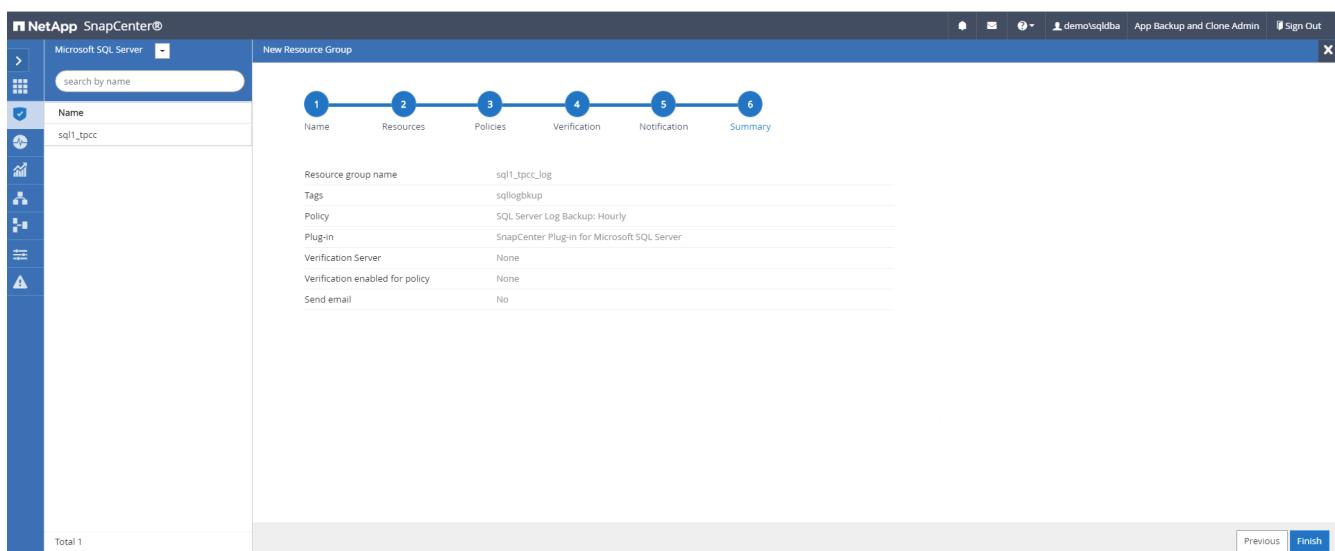

9. Validate backup

After database backup resource groups are created to protect database resources, the backup jobs runs according to the predefined schedule. Check the job execution status under the Monitor tab.

Jobs						
	Jobs	Schedules	Events	Logs		
	Dashboard	<input type="text" value="search by name"/>				
	Resources	Jobs - Filter				
	Monitor	ID	Status	Name	Start date	End date
	Reports	532		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/14/2021 8:35:01 PM	09/14/2021 8:37:10 PM
	Hosts	528		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/14/2021 7:35:01 PM	09/14/2021 7:37:09 PM
	Storage Systems	524		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/14/2021 6:35:01 PM	09/14/2021 6:37:08 PM
	Settings	521		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Full Backup'	09/14/2021 6:25:01 PM	09/14/2021 6:27:14 PM
	Alerts	517		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/14/2021 5:35:01 PM	09/14/2021 5:37:09 PM
		513		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/14/2021 4:35:01 PM	09/14/2021 4:37:08 PM
		509		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/14/2021 3:35:01 PM	09/14/2021 3:37:10 PM
		503		Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/14/2021 2:35:01 PM	09/14/2021 2:37:09 PM

Go to the Resources tab, click the database name to view details of database backup, and toggle between Local copies and mirror copies to verify that Snapshot backups are replicated to a secondary location in the

public cloud.

The screenshot shows the NetApp SnapCenter interface for Oracle Database management. On the left, a sidebar lists databases: cdb2, cdb2dev, cdb2dr, cdb2dr2, and cdb2test. The main panel displays the 'cdb2 Topology' section, which includes a 'Manage Copies' section showing 'Local copies' (197 Backups, 0 Clones) and 'Mirror copies' (197 Backups, 3 Clones). To the right is a 'Summary Card' showing statistics: 394 Backups, 28 Data Backups, 366 Log Backups, and 3 Clones. Below these sections is a table titled 'Primary Backup(s)' listing five backup entries with columns for Backup Name, Count, Type, End Date, Verified, Mounted, RMAN Cataloged, and SCN.

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
rhel2_cdb2_09-23-2021_14.35.03.3242_1	1	Log	09/23/2021 2:35:45 PM	Not Applicable	False	Not Cataloged	6872761
rhel2_cdb2_09-23-2021_14.35.03.3242_0	1	Data	09/23/2021 2:35:30 PM	Unverified	False	Not Cataloged	6872715
rhel2_cdb2_09-22-2021_14.35.02.0014_1	1	Log	09/22/2021 2:35:24 PM	Not Applicable	False	Not Cataloged	6737479
rhel2_cdb2_09-22-2021_14.35.02.0014_0	1	Data	09/22/2021 2:35:14 PM	Unverified	False	Not Cataloged	6737395
rhel2_cdb2_09-21-2021_14.35.02.1884_1	1	Log	09/21/2021 2:35:35 PM	Not Available	False	Not Cataloged	6598735

At this point, database backup copies in the cloud are ready to clone to run dev/test processes or for disaster recovery in the event of a primary failure.

Next: [Getting Started with AWS public cloud](#).

Getting Started with AWS public cloud

Previous: [Getting started on-premises](#).

AWS public cloud



To make things easier to follow, we have created this document based on a deployment in AWS. However, the process is very similar for Azure and GCP.

1. Pre-flight check

Before deployment, make sure that the infrastructure is in place to allow for the deployment in the next stage. This includes the following:

- AWS account
- VPC in your region of choice
- Subnet with access to the public internet
- Permissions to add IAM roles into your AWS account
- A secret key and access key for your AWS user

2. Steps to deploy Cloud Manager and Cloud Volumes ONTAP in AWS



There are many methods for deploying Cloud Manager and Cloud Volumes ONTAP; this method is the simplest but requires the most permissions. If this method is not appropriate for your AWS environment, please consult the [NetApp Cloud Documentation](#).

Deploy the Cloud Manager connector

1. Navigate to [NetApp Cloud Central](#) and log in or sign up.




[Continue to Cloud Manager](#)

Log In to NetApp Cloud Central


Don't have an account yet? [Sign Up](#)

[Forgot your password?](#)


2. After you log in, you should be taken to the Canvas.

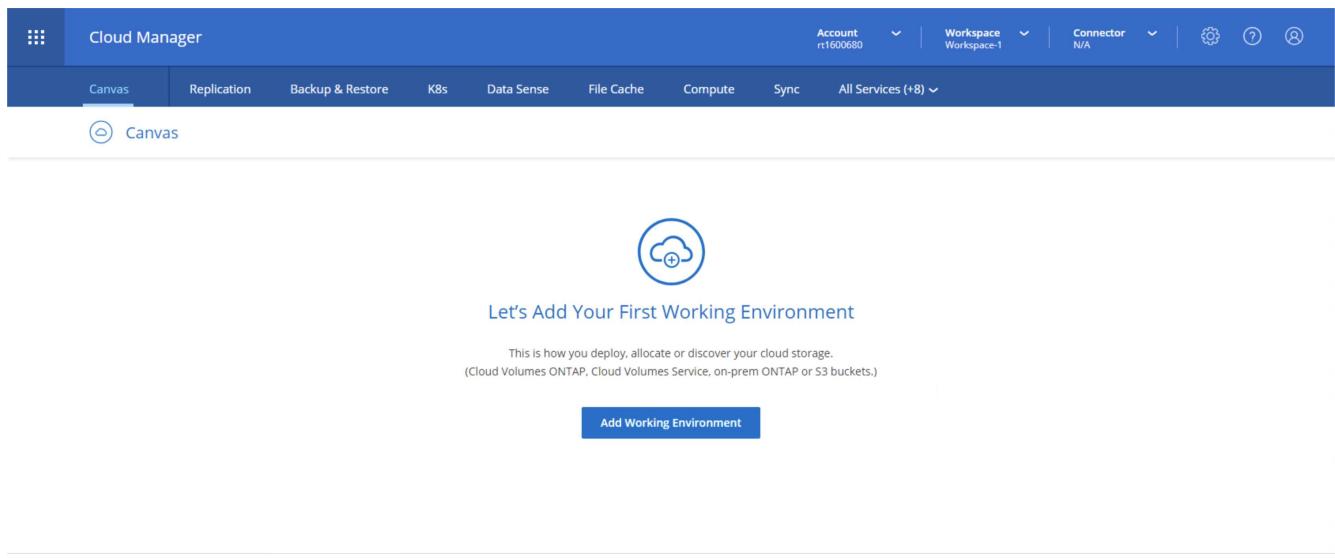


3. Click "Add Working Environment" and choose Cloud Volumes ONTAP in AWS. Here, you also choose whether you want to deploy a single node system or a high availability pair. I have chosen to deploy a high availability pair.

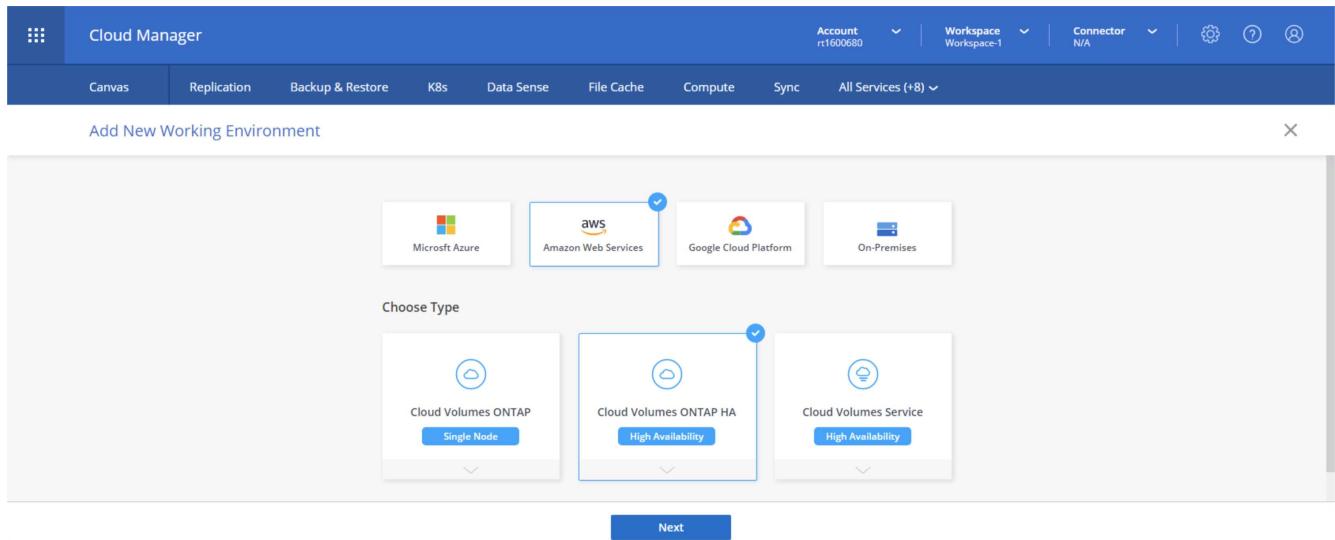


4. If no connector has been created, a pop-up appears asking you to create a connector.

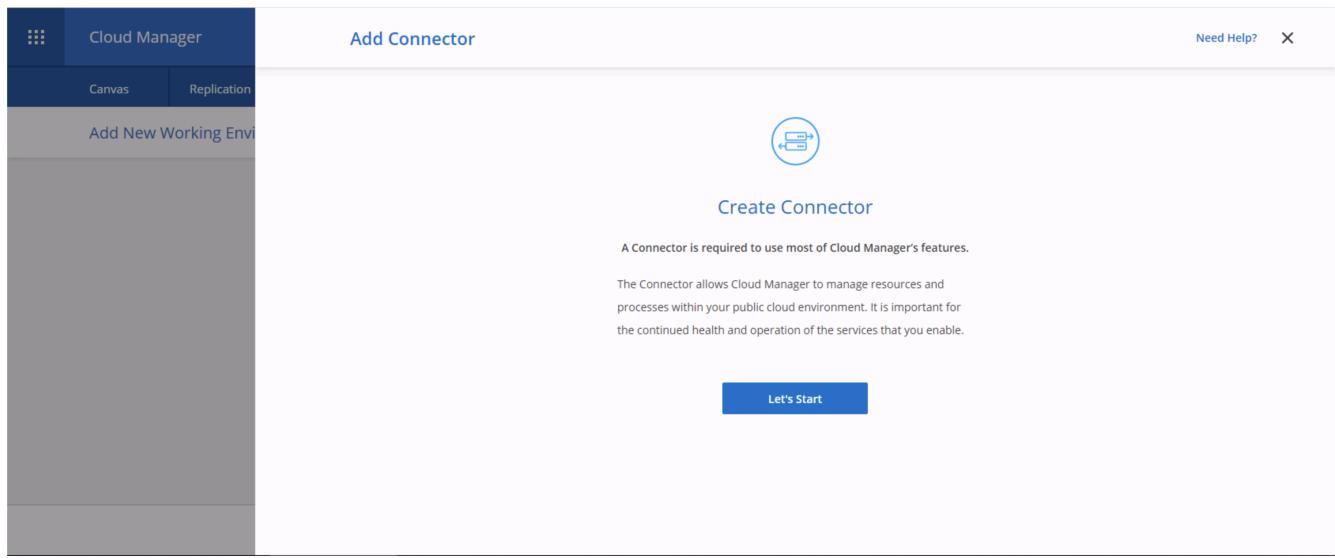

5. Click Lets Start, and then choose AWS.

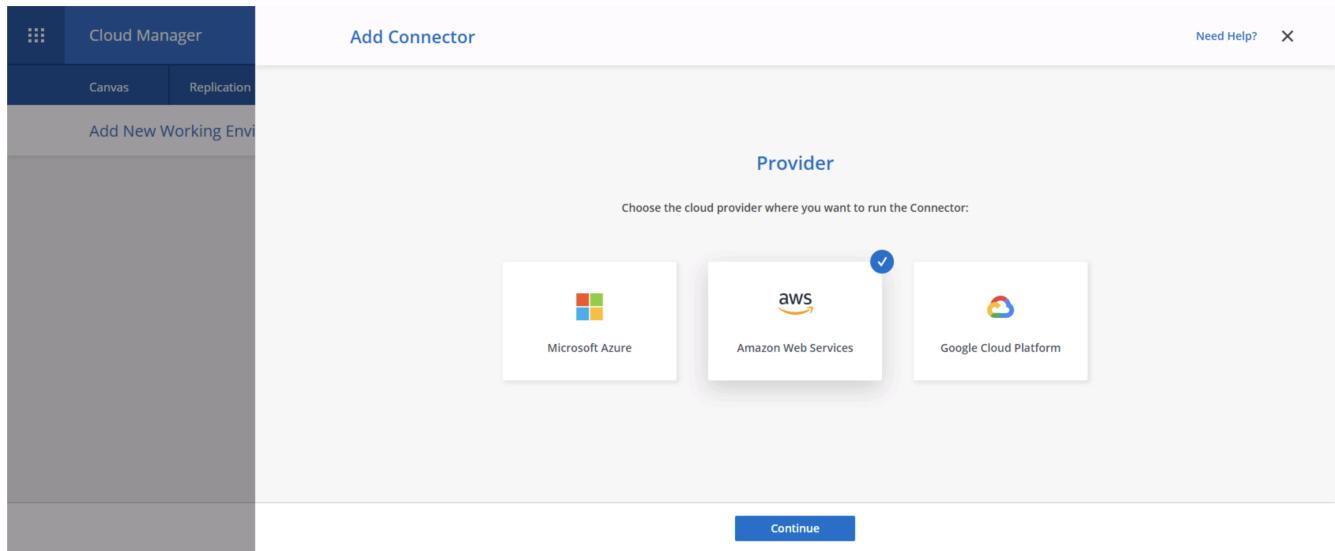

6. Enter your secret key and access key. Make sure that your user has the correct permissions outlined on the [NetApp policies page](#).

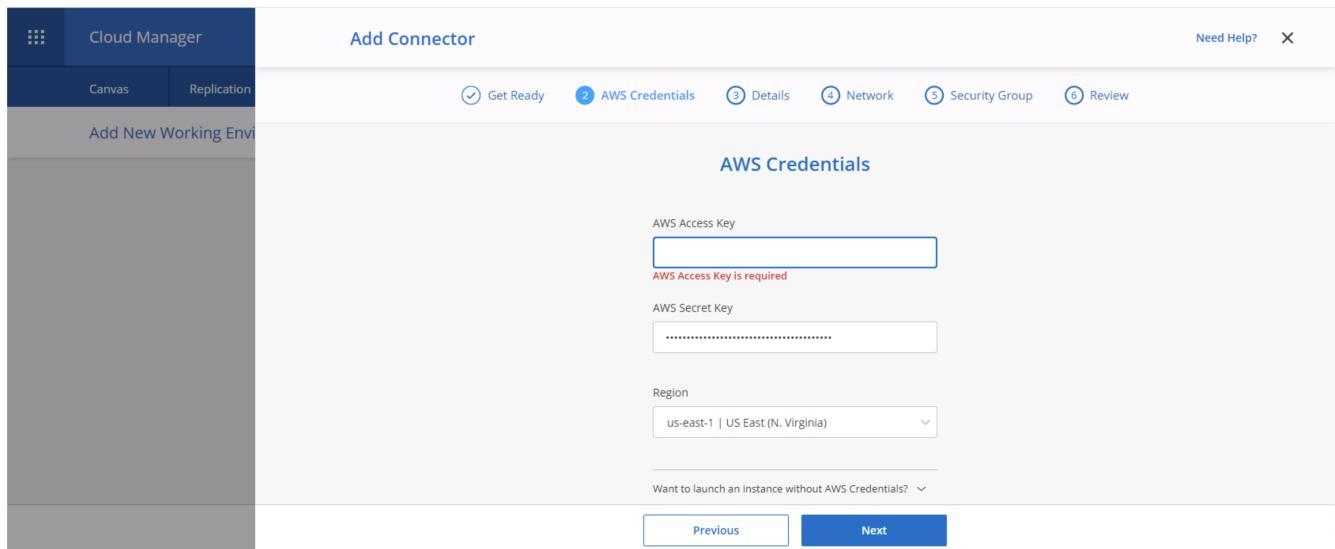

7. Give the connector a name and either use a predefined role as described on the [NetApp policies page](#) or ask Cloud Manager to create the role for you.

Cloud Manager

Add Connector

Get Ready AWS Credentials Details Network Security Group Review

Connector Instance Name: awscloudmanager

Connector Role:

- Create Role
- Select an existing Role

Role Name: Cloud-Manager-Operator-IBNt24

Add Tags to Connector Instance

Previous Next

8. Give the networking information needed to deploy the connector. Verify that outbound internet access is enabled by:
- Giving the connector a public IP address
 - Giving the connector a proxy to work through
 - Giving the connector a route to the public internet through an Internet Gateway

Cloud Manager

Add Connector

Get Ready AWS Credentials Details Network Security Group Review

Connectivity

VPC: vpc-083fcbd79f75dfb6e - 10.221.0.0/16

Subnet: 10.221.4.0/24 | publicSN_us-east-1a_rt1600...

Proxy Configuration (Optional)

HTTP Proxy: Example: http://172.16.254.1:8080

Define Credentials for this Proxy

Upload a root certificate


Key Pair: rt1600680

Public IP


Enable

Previous Next


9. Provide communication with the connector via SSH, HTTP, and HTTPS by either providing a security group or creating a new security group. I have enabled access to the connector from my IP address only.

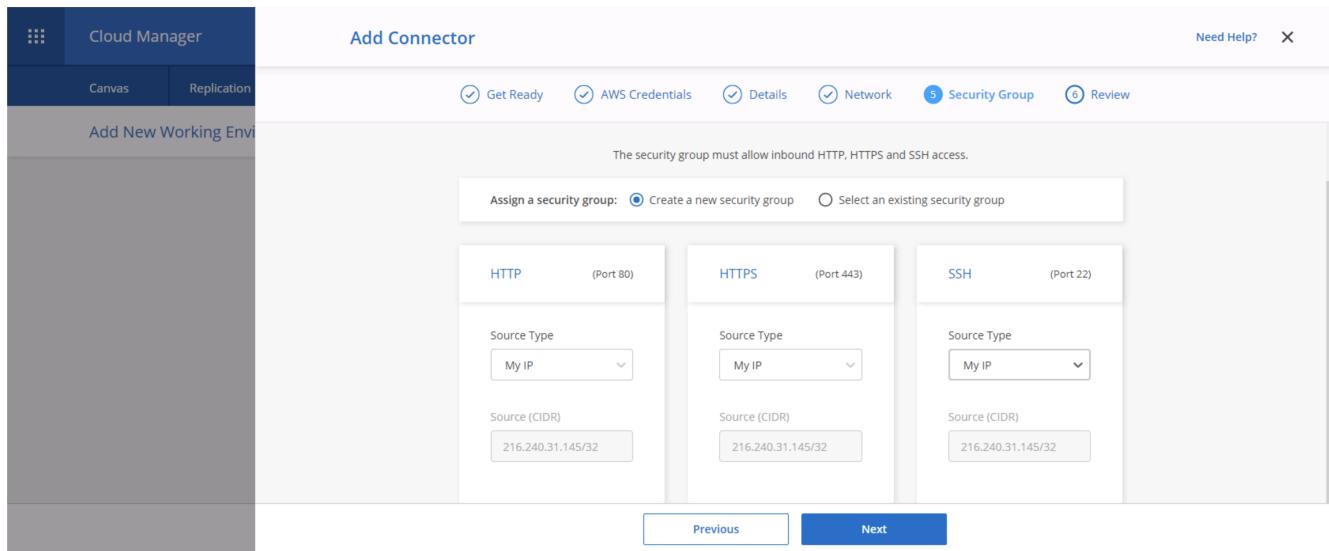


10. Review the information on the summary page and click Add to deploy the connector.

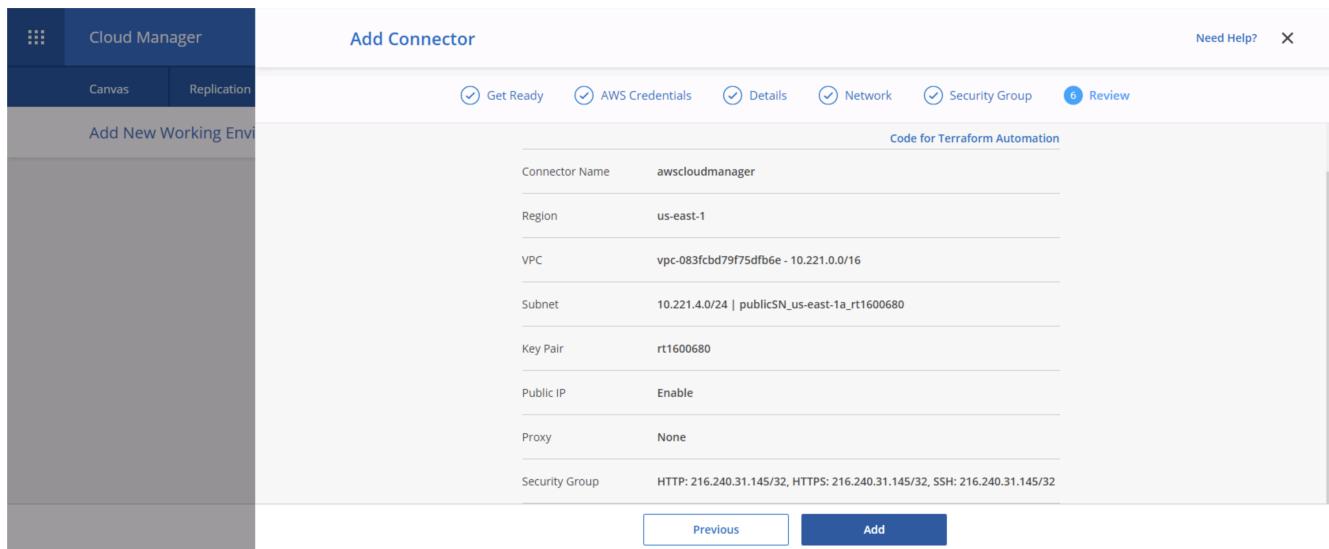

11. The connector now deploys using a cloud formation stack. You can monitor its progress from Cloud Manager or through AWS.

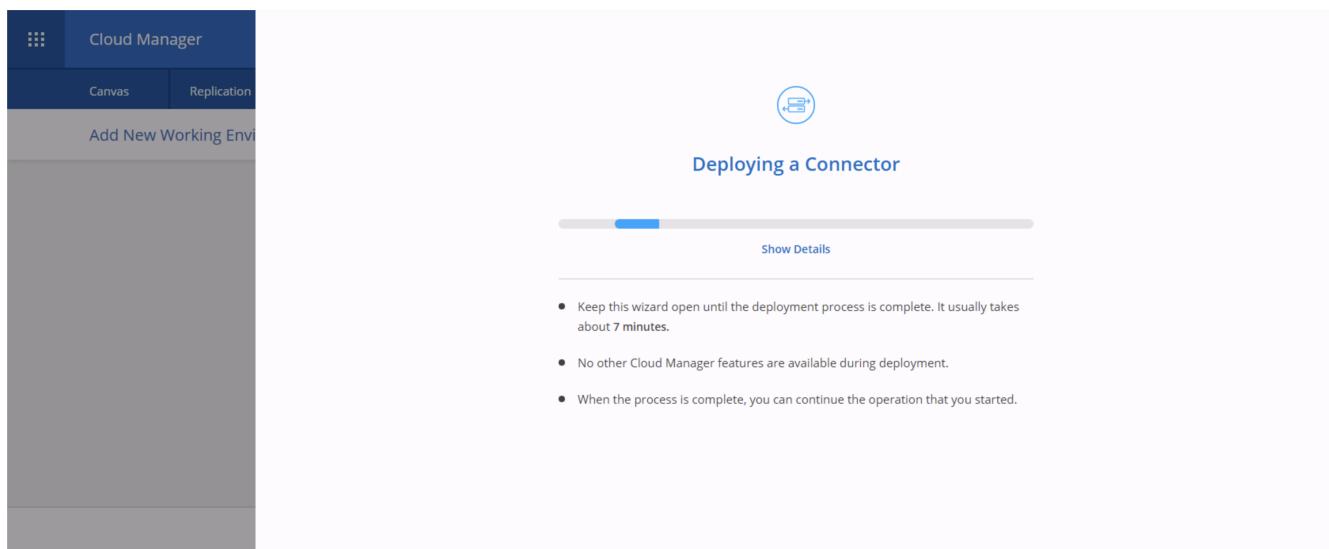


12. When the deployment is complete, a success page appears.

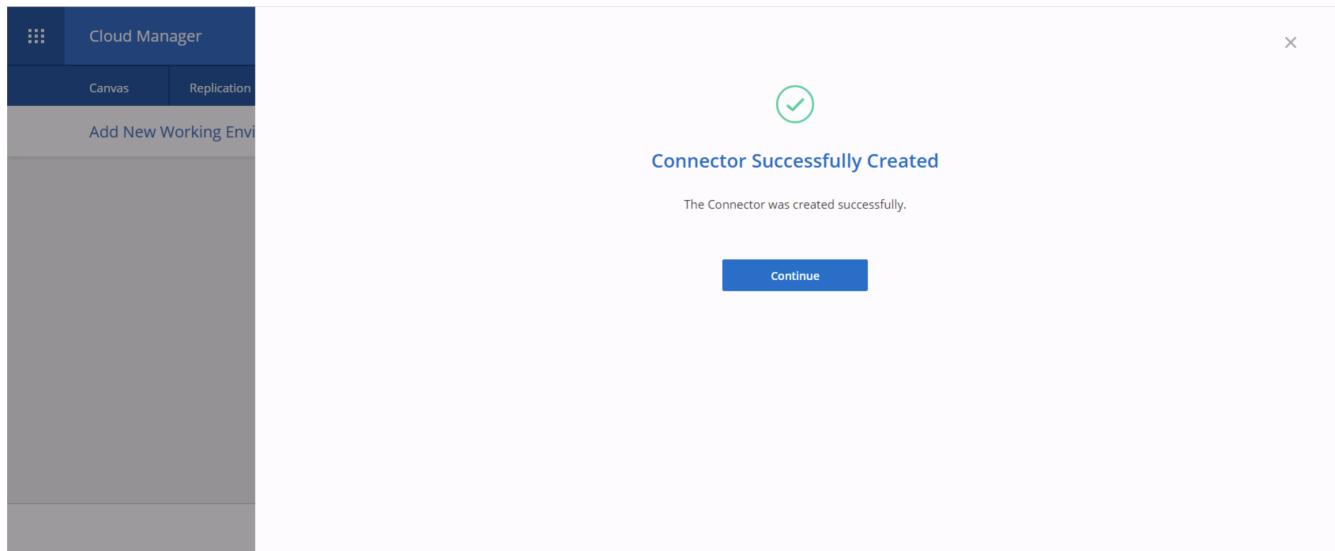

Deploy Cloud Volumes ONTAP

1. Select AWS and the type of deployment based on your requirements.

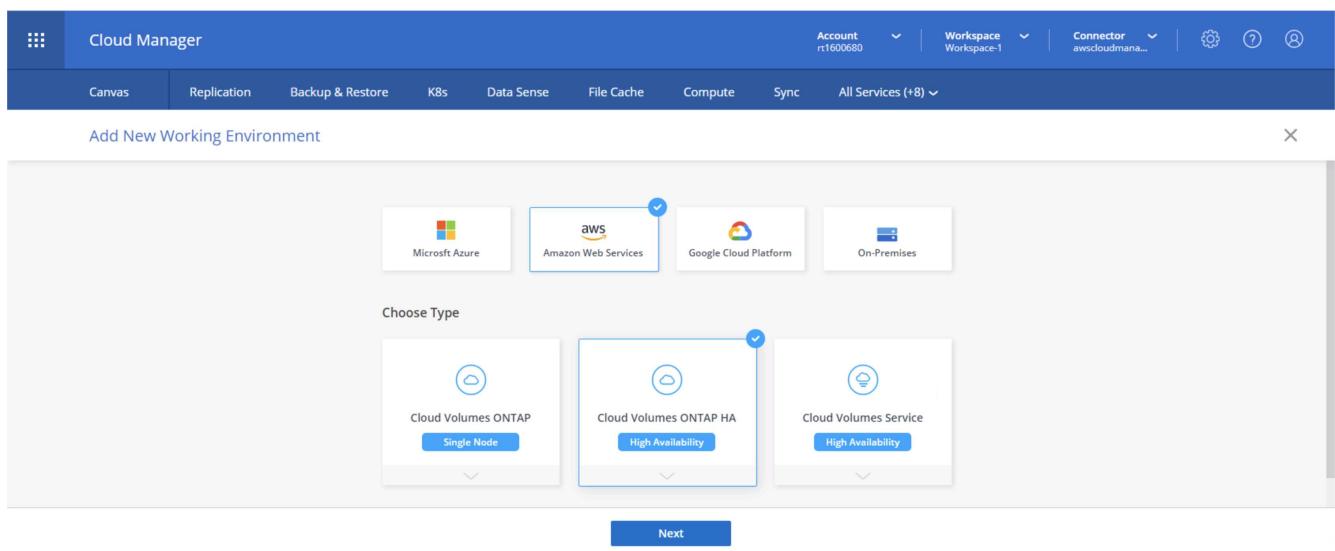

2. If no subscription has been assigned and you wish to purchase with PAYGO, choose Edit Credentials.

Create a New Working Environment

Details and Credentials

↑ Previous Step Instance Profile Credential Name Account ID No subscription is associated Marketplace Subscription Edit Credentials

Details Credentials

Working Environment Name (Cluster Name) User Name
Up to 40 characters admin

+ Add Tags Optional Field | Up to four tags Password

Confirm Password

Continue

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

3. Choose Add Subscription.

Create a New Working Environment

Details and Credentials

↑ Previous Step Instance Profile Credential Name

Associate Subscription to Credentials ⓘ

Credentials Instance Profile | Account ID: 322944748816

Marketplace Subscription No subscription is associated with this credential

+ Add Subscription

Apply Cancel

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

4. Choose the type of contract that you wish to subscribe to. I chose Pay-as-you-go.

Create a New Working Environment

Edit Credentials & Add Subscription

Select a subscription option and click Continue. The AWS Marketplace enables you to view pricing details and then subscribe.

Pay-Per-TiB - Annual Contract
Pay for Cloud Volumes ONTAP with an annual, upfront payment.

Pay-as-you-go
Pay for Cloud Volumes ONTAP at an hourly rate.

The next steps:

- ① AWS Marketplace
Subscribe and then click Set Up Your Account to configure your account.
- ② Cloud Manager
Save your subscription and associate the Marketplace subscription with your AWS credentials.

Continue Cancel

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

5. You are redirected to AWS; choose Continue to Subscribe.

Cloud Manager - Deploy & Manage NetApp Cloud Data Services

Sold by: **NetApp, Inc.**

Start here to deploy and manage Cloud Volumes ONTAP, Cloud Tiering, Cloud Data Sense, Cloud Backup and Cloud Volumes Service. Accelerate critical business apps with speed, [▼ Show more](#)

Overview **Pricing** **Usage** **Support** **Reviews**

Product Overview

NetApp Cloud Manager is the management and automation platform used for deploying and operating NetApp's Cloud Data Services including:

- Cloud Volumes ONTAP - File and block storage for enterprise workloads
- Cloud Backup - Incremental block-level Backup & Restore capabilities for protecting and archiving CVO and On-Premises ONTAP data to S3
- Cloud Tiering - Tiering infrequently-used data to object storage for AFF
- Cloud Data Sense - AI-driven data privacy controls and reporting
- Cloud Manager also manages Cloud Volumes Service on AWS

Cloud Manager eases the day-to-day requirements of operating your cloud storage environment including configuring, provisioning, and monitoring each of your active NetApp Cloud Data Services including their virtual and hardware storage nodes. It offers a

Highlights

- Streamline the deployment of all your NetApp Cloud Volumes ONTAP environments
- Centrally manage your NetApp based storage and replicate across availability zones or to and from your data center
- Enable your IT administrators to audit and track your cloud storage resource spend

6. Subscribe and you are redirected back to NetApp Cloud Central. If you have already subscribed and don't get redirected, choose the "Click here" link.

You are extended multiple offers! Select an offer first and review the pricing information and EULA.

Offer name: NetApp, Inc. for SaaS 2020-07-20- Private Offer - current subscription

You are subscribed to this offer.

By: NetApp, Inc.
Offer ID: offer-hmolsqhv7ii
This offer is going to expire on August 1, 2022 UTC

You are currently subscribed to this product and will be charged for your accumulated usage at the end of your next billing cycle, based on the costs listed in Pricing information on the right.

Having issues signing up for your product?
If you were unable to complete the set-up process for this software, please [click here](#) to be taken to the product's registration area.

You Have Subscribed to a Private Offer


You have subscribed to this private offer on July 21, 2020 UTC. This private offer will expire on August 1, 2022 UTC. Your use of this product after the expiration date of your private offer will be billed at the then current public pricing, which can be found on this product's detail page.

To avoid being charged for use beyond the expiration date of this offer, you can cancel your subscription to this product by August 1, 2022 UTC. Please contact the vendor directly with any questions regarding this offer.


Subscribe

By subscribing to this software, you agree to the pricing terms and the seller's [End User License Agreement \(EULA\)](#). You also agree and acknowledge that AWS may share information about this transaction.


7. You are redirected to Cloud Central where you must name your subscription and assign it to your Cloud Central account.

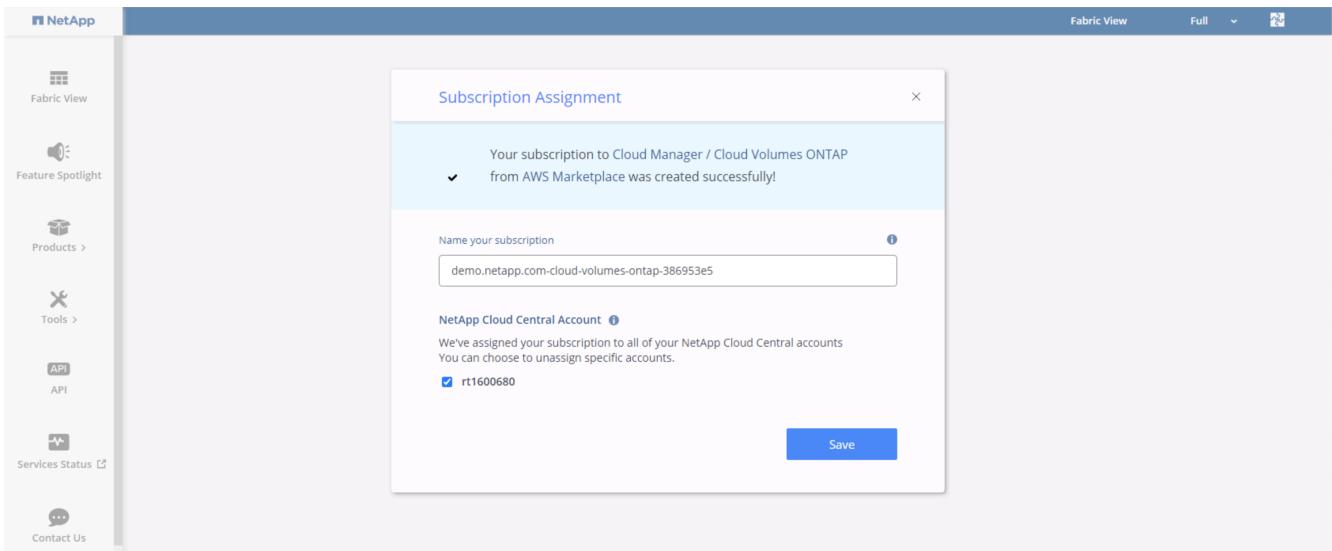

- When successful, a check mark page appears. Navigate back to your Cloud Manager tab.

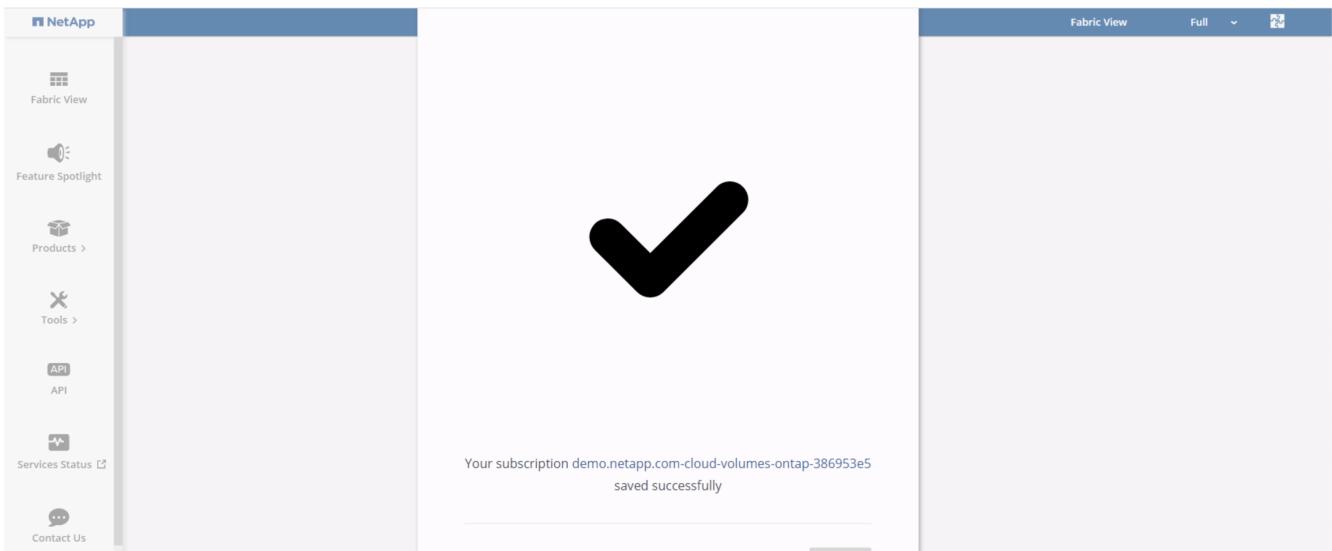

- The subscription now appears in Cloud Central. Click Apply to continue.

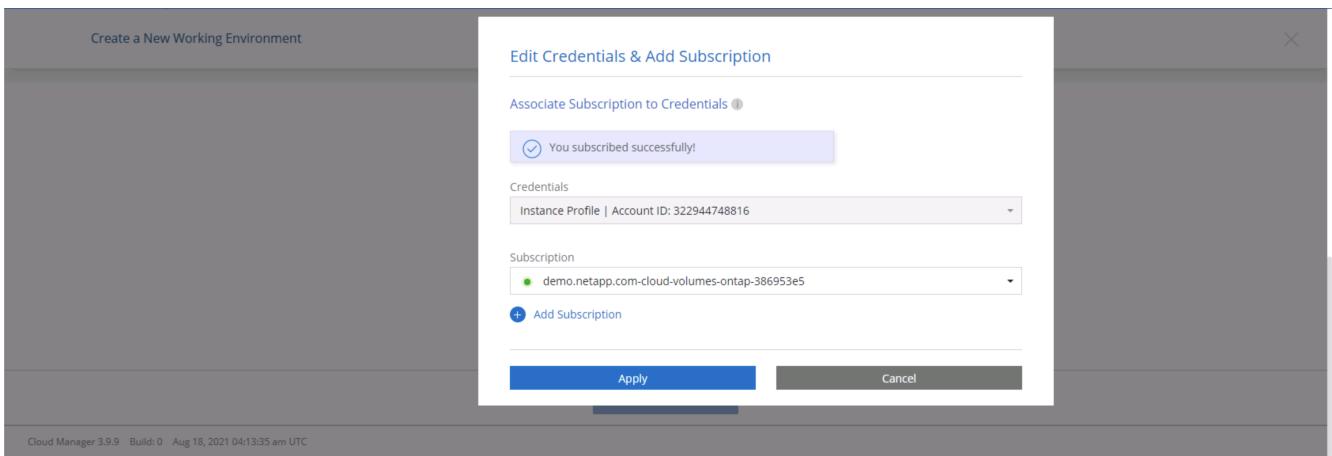

- Enter the working environment details such as:

- Cluster name

- b. Cluster password
- c. AWS tags (Optional)

Cloud Manager

Create a New Working Environment

Details and Credentials

↑ Previous Step Instance Profile: 322944748816 Account ID: demo.netapp.com-cloud-vol... Workspace: Workspace-1 Connector: awscloudman...

↑ Previous Step	Instance Profile: 322944748816	Account ID: demo.netapp.com-cloud-vol...	Edit Credentials
Credential Name:	Marketplace Subscription		

Details

Working Environment Name (Cluster Name): hybridawscvo

Add Tags: Optional Field | Up to four tags

Credentials

User Name: admin

Password: *****

Confirm Password: *****

[Continue](#)

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

11. Choose which additional services you would like to deploy. To discover more about these services, visit the [NetApp Cloud Homepage](#).

Cloud Manager

Create a New Working Environment

Services

↑ Previous Step

Data Sense & Compliance	<input checked="" type="checkbox"/>
Backup to Cloud	<input checked="" type="checkbox"/>
Monitoring	<input checked="" type="checkbox"/>

[Continue](#)

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

12. Choose whether to deploy in multiple availability zones (requires three subnets, each in a different AZ), or a single availability zone. I chose multiple AZs.

The screenshot shows the Cloud Manager interface with the title "Create a New Working Environment" and "HA Deployment Models". It compares "Multiple Availability Zones" and "Single Availability Zone".

- Multiple Availability Zones:**
 - Provides maximum protection against AZ failures.
 - Enables selection of 3 availability zones.
 - An HA node serves data if its partner goes offline.
- Single Availability Zone:**
 - Protects against failures within a single AZ.
 - Single availability zone. HA nodes are in a placement group, spread across distinct underlying hardware.
 - An HA node serves data if its partner goes offline.

Both sections have "Extended Info" links at the bottom.

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

13. Choose the region, VPC, and security group for the cluster to be deployed into. In this section, you also assign the availability zones per node (and mediator) as well as the subnets that they occupy.

The screenshot shows the Cloud Manager interface with the title "Create a New Working Environment" and "Region & VPC".

Configuration fields include:

- AWS Region: US East | N. Virginia
- VPC: vpc-083fcbd79f75dfb6e - 10.221.0.0/16
- Security group: Use a generated security group
- Node 1:
 - Availability Zone: us-east-1a
 - Subnet: 10.221.1.0/24
- Node 2:
 - Availability Zone: us-east-1b
 - Subnet: 10.221.2.0/24
- Mediator:
 - Availability Zone: us-east-1c
 - Subnet: 10.221.3.0/24

A "Continue" button is at the bottom.

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

14. Choose the connection methods for the nodes as well as the mediator.

The screenshot shows the Cloud Manager interface with the title "Create a New Working Environment" and "Connectivity & SSH Authentication".

Configuration fields include:

- Nodes:
 - SSH Authentication Method: Password
- Mediator:
 - Security Group: Use a generated security group
 - Key Pair Name: rt1600680
 - Internet Connection Method: Public IP address

A "Continue" button is at the bottom.

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC



The mediator requires communication with the AWS APIs. A public IP address is not required so long as the APIs are reachable after the mediator EC2 instance has been deployed.

1. Floating IP addresses are used to allow access to the various IP addresses that Cloud Volumes ONTAP uses, including cluster management and data serving IPs. These must be addresses that are not already routable within your network and are added to route tables in your AWS environment. These are required to enable consistent IP addresses for an HA pair during failover. More information about floating IP addresses can be found in the [NetApp Cloud Documentation](#).

The screenshot shows the 'Cloud Manager' interface with the 'Floating IPs' step selected. It includes fields for entering floating IP addresses for cluster management, NFS/CIFS data, SVM management, and an optional floating IP address. A note explains that floating IPs can migrate between HA nodes if failures occur, and it's recommended to set up an AWS transit gateway. A 'Continue' button is at the bottom.

2. Select which route tables the floating IP addresses are added to. These route tables are used by clients to communicate with Cloud Volumes ONTAP.

The screenshot shows the 'Cloud Manager' interface with the 'Route Tables' step selected. It lists two route tables: 'private_rt_rt1600680' and 'public_rt_rt1600680'. Both are checked. A note states that selecting route tables enables client access to the HA pair. An 'Additional Information' link is available. A 'Continue' button is at the bottom.

3. Choose whether to enable AWS managed encryption or AWS KMS to encrypt the ONTAP root, boot, and data disks.

Cloud Manager

Account: rt1600680 | Workspace: Workspace-1 | Connector: awscloudman...

Canvas | Replication | Backup & Restore | K8s | Data Sense | File Cache | Compute | Sync | All Services (+8) | [Create a New Working Environment](#) | [Data Encryption](#) | [X](#)

↑ Previous Step | [AWS Managed Encryption](#)

AWS is responsible for data encryption and decryption operations. Key management is handled by AWS key management services.

Default Master Key: aws/ebs

[Continue](#)

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

4. Choose your licensing model. If you don't know which to choose, contact your NetApp representative.

Cloud Manager

Account: rt1600680 | Workspace: Workspace-1 | Connector: awscloudman...

Canvas | Replication | Backup & Restore | K8s | Data Sense | File Cache | Compute | Sync | All Services (+8) | [Create a New Working Environment](#) | [Cloud Volumes ONTAP Charging Methods & NSS Account](#) | [X](#)

↑ Previous Step | [Cloud Volumes ONTAP Charging Methods](#)

[Learn more about our charging methods](#)

Pay-As-You-Go by the hour

Bring your own license

Freemium (Up to 500GB)

NetApp Support Site Account (*Optional*)

[Learn more about NetApp Support Site \(NSS\) accounts](#)

To register this Cloud Volumes ONTAP to support, you should add NetApp Support Site Account.

Don't have a NetApp Support Site account? Select go to finish deploying this system. After it's created, use the Support Registration option to create an NSS account.

[Add Netapp Support Site Account](#)

[Continue](#)

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

5. Select which configuration best suits your use case. This is related to the sizing considerations covered in the prerequisites page.

Cloud Manager

Account: rt1600680 | Workspace: Workspace-1 | Connector: awscloudman...

Canvas | Replication | Backup & Restore | K8s | Data Sense | File Cache | Compute | Sync | All Services (+8) | [Create a New Working Environment](#) | [Preconfigured Packages](#) | [X](#)

↑ Previous Step | [Select a preconfigured Cloud Volumes ONTAP system that best matches your needs, or create your own configuration. Preconfigured settings can be modified at a later time.](#) | [Change Configuration](#)

 POC and small workloads
Up to 2TB of storage

 Database and application data production workloads
Up to 10TB of storage

 Cost effective DR
Up to 10TB of storage

 Highest performance production workloads
Up to 368TB of storage

[Continue](#)

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

6. Optionally, create a volume. This is not required, because the next steps use SnapMirror, which creates the volumes for us.

Cloud Manager

Create a New Working Environment Create Volume

↑ Previous Step Details & Protection Protocol

Volume Name: Size (GB): Volume size

Snapshot Policy: default

Access Control: Custom export policy

Custom export policy: 10.221.0.0/16

Advanced options

Continue Skip

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

7. Review the selections made and tick the boxes to verify that you understand that Cloud Manager deploys resources into your AWS environment. When ready, click Go.

Cloud Manager

Create a New Working Environment Review & Approve

↑ Previous Step hybridawscvo Show API request

AWS | us-east-1 | HA

I understand that in order to activate support, I must first register Cloud Volumes ONTAP with NetApp. [More information >](#)

I understand that Cloud Manager will allocate the appropriate AWS resources to comply with my above requirements. [More information >](#)

Overview Networking Storage

Storage System:	Cloud Volumes ONTAP HA	HA Deployment Model:	Multiple Availability Zones
License Type:	Cloud Volumes ONTAP Standard	Encryption:	AWS Managed
Capacity Limit:	10TB	Customer Master Key:	aws/ebs

Go

Cloud Manager 3.9.9 Build: 0 Aug 18, 2021 04:13:35 am UTC

8. Cloud Volumes ONTAP now starts its deployment process. Cloud Manager uses AWS APIs and cloud formation stacks to deploy Cloud Volumes ONTAP. It then configures the system to your specifications, giving you a ready-to-go system that can be instantly utilized. The timing for this process varies depending on the selections made.

The screenshot shows the Cloud Manager Canvas interface. At the top, there are tabs for Canvas, Replication, Backup & Restore, K8s, Data Sense, File Cache, Compute, Sync, and All Services (+8). The Account is set to rt1600680, Workspace to Workspace-1, and Connector to awscloudman... The main area displays two cloud icons: one for 'hybridawsco Cloud Volumes ONTAP' labeled 'Initializing' and another for 'Amazon S3' showing 1 Bucket and 1 Region. To the right, a section titled 'Working environments' lists 'Cloud Volumes ONTAP (High-Availability)' and 'Amazon S3'. A 'Go to Tabular View' button is at the top right.

9. You can monitor the progress by navigating to the Timeline.

The screenshot shows the Cloud Manager Timeline interface. The top navigation bar includes tabs for Canvas, Replication, Backup & Restore, K8s, Data Sense, File Cache, Compute, Sync, and All Services (+8). Below the navigation, there are sections for 'Resources' and 'Services'. The 'Resources' section features 'Canvas' (Review CVO, CVS, ANF & On-Premises), 'Digital Wallet' (View & Manage Digital Wallet), and 'Timeline' (View Activity & Events). The 'Services' section includes 'Replication' (Data Replication), 'Backup & Restore' (Data Protection for CVO and On-Premises), 'K8s' (Cloud Native Development), 'Data Sense' (Data Governance & Compliance), 'Compliance' (Privacy & Compliance Controls), 'Tiering' (Lift and DON'T shift), 'Monitoring' (Monitor, Optimize and Secure), 'File Cache' (Consolidate your Data into the Cloud), 'Compute' (Optimize your cloud spend), 'Sync' (Automated Data Synchronization), 'SnapCenter' (Application Data Management), and 'Active IQ' (Digital Advisor). A link to 'https://cloudmanager.netapp.com/timeline' is at the bottom left.

10. The Timeline acts as an audit of all actions performed in Cloud Manager. You can view all of the API calls that are made by Cloud Manager during setup to both AWS as well as the ONTAP cluster. This can also be effectively used to troubleshoot any issues that you face.

The screenshot shows the Cloud Manager interface with the 'Timeline' tab selected. At the top, there are filters: Time (1), Service, Action, Agent (1), Resource, User, Status, and a Reset button. Below the filters is a table with columns: Time, Action, Service, Agent, Resource, User, and Status. The table contains three rows of log entries:

- Aug 18 2021, 9:42:32 pm: Check Connectivity - Cloud Manager - awscloudman... - hybridawscvo - Full Name - Success
- Aug 18 2021, 9:42:00 pm: Create Aws Ha Working Environment - Cloud Manager - awscloudma... - hybridawscvo - Full Name - Pending
- Aug 18 2021, 10:09:39 pm: Describe Operation Status - Cloud Manager - awscloudma... - hybridawscvo - Full Name - Success

- After deployment is complete, the CVO cluster appears on the Canvas, which the current capacity. The ONTAP cluster in its current state is fully configured to allow a true, out-of-the-box experience.

The screenshot shows the Cloud Manager interface with the 'Canvas' tab selected. On the left, there is a 'Working environments' section with two items:

- Cloud Volumes ONTAP (High-Availability) - 1 GiB Allocated Capacity
- Amazon S3 - 0 Buckets


 On the right, there is a 'Working environments' section with the same two items listed. At the bottom right of the canvas area, there are minus and plus buttons for managing environments.

Configure SnapMirror from on-premises to cloud

Now that you have a source ONTAP system and a destination ONTAP system deployed, you can replicate volumes containing database data into the cloud.

For a guide on compatible ONTAP versions for SnapMirror, see the [SnapMirror Compatibility Matrix](#).

- Click the source ONTAP system (on-premises) and either drag and drop it to the destination, select Replication > Enable, or select Replication > Menu > Replicate.

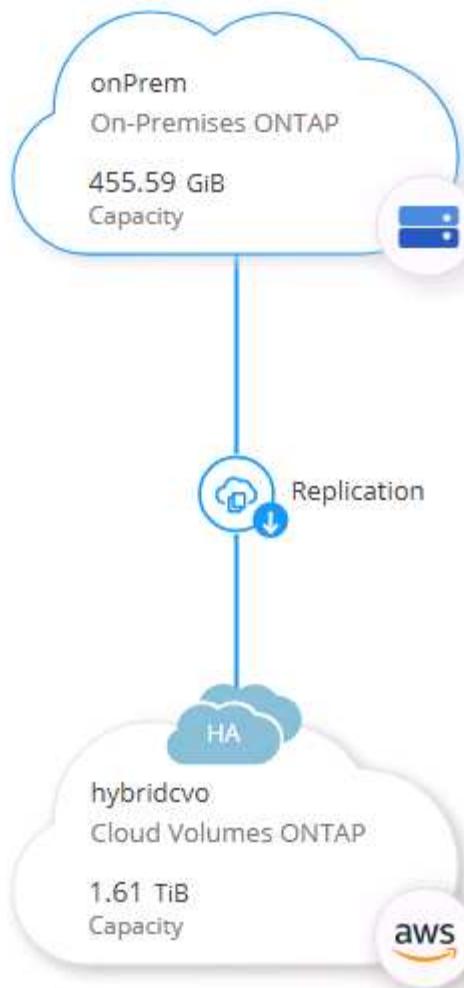

Select Enable.




Or Options.

The screenshot shows the configuration of the 'onPrem' cluster. At the top, there is a circular icon with two servers, followed by the text 'onPrem' and a green square indicating 'On'. To the right are three blue circular icons with symbols for information, more options, and delete. Below this, the word 'DETAILS' is in bold. Under 'DETAILS', the text 'On-PremisesONTAP' is shown. In the 'SERVICES' section, there is another server icon followed by 'Replication' and a green square indicating 'On'. To its right, it says '1 Replication Target' and has a blue circular icon with three dots. A vertical scroll bar is visible on the right side of the window.

Replicate.

This screenshot is similar to the first one but includes a dropdown menu for the 'Replication' service. The 'Replication' section shows '1 Replication Target'. A blue arrow points down to a dropdown menu containing two items: 'View Replications' and 'Replicate'. The 'Replicate' item is highlighted with a blue border. The rest of the interface is identical to the first screenshot, including the 'onPrem' status and the 'Backup & Compliance' service which is currently 'Off'.

2. If you did not drag and drop, choose the destination cluster to replicate to.

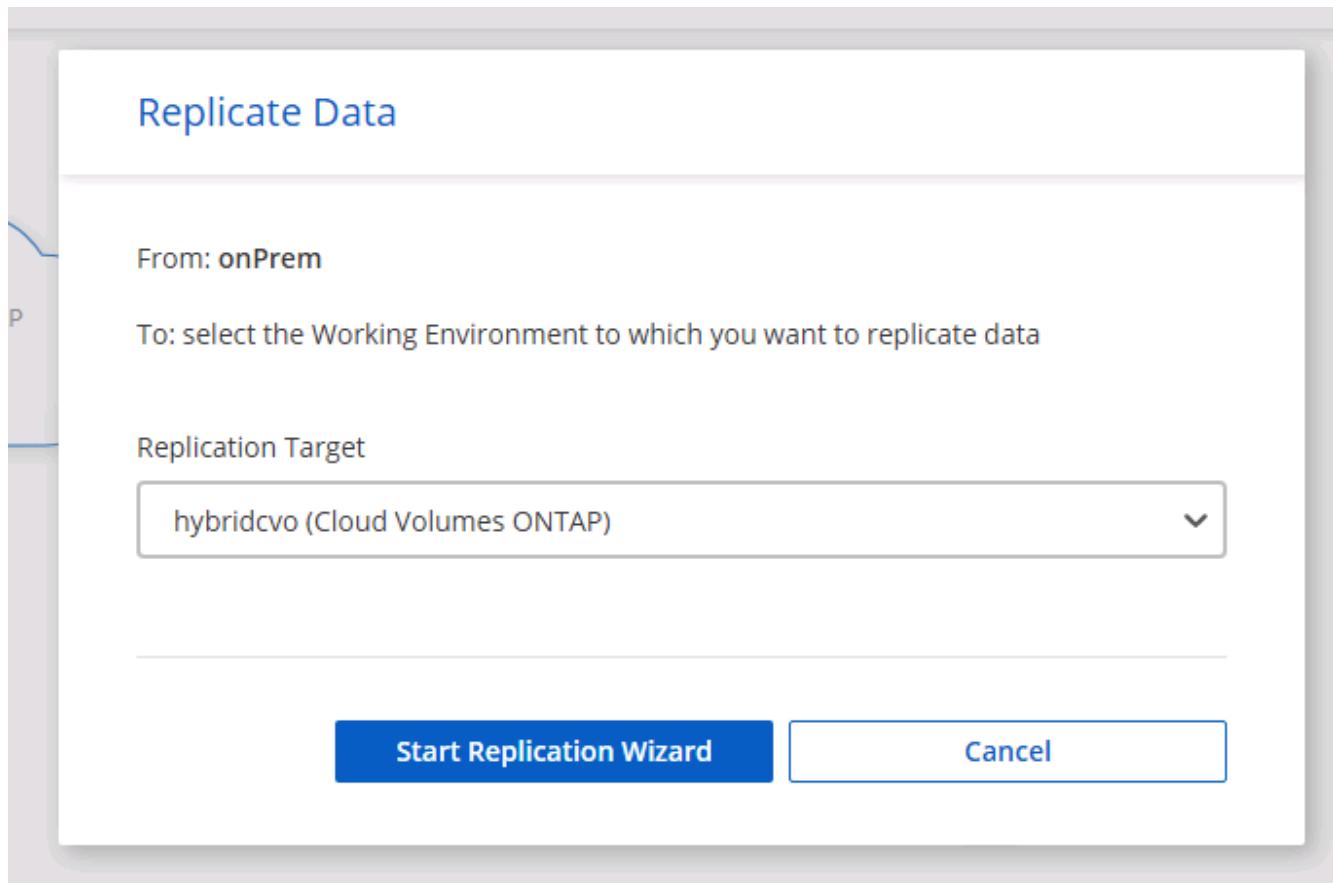

3. Choose the volume that you'd like to replicate. We replicated the data and all log volumes.

Source Volume Selection			
rhel2_u03 INFO Storage VM Name: svm_onPrem Tiering Policy: None Volume Type: RW CAPACITY 100 GB Allocated 7.29 GB Disk Used	rhel2_u03 INFO Storage VM Name: svm_onPrem Tiering Policy: None Volume Type: RW CAPACITY 100 GB Allocated 35.83 MB Disk Used	sql1_data INFO Storage VM Name: svm_onPrem Tiering Policy: None Volume Type: RW CAPACITY 53.37 GB Allocated 45.09 GB Disk Used	
sql1_log INFO Storage VM Name: svm_onPrem Tiering Policy: None Volume Type: RW CAPACITY 21.35 GB Allocated 18.16 GB Disk Used	sql1_snapctr INFO Storage VM Name: svm_onPrem Tiering Policy: None Volume Type: RW CAPACITY 24.87 GB Allocated 21.23 GB Disk Used		
Cloud Manager 3.9.10 Build: 2 Sep 12, 2021 06:47:41 am UTC			

4. Choose the destination disk type and tiering policy. For disaster recovery, we recommend an SSD as the disk type and to maintain data tiering. Data tiering tiers the mirrored data into low-cost object storage and saves you money on local disks. When you break the relationship or clone the volume, the data uses the fast, local storage.

[↑ Previous Step](#)

Destination Disk Type



S3 TIERING

[What are storage tiers?](#) Enabled DisabledNote: If you enable S3 tiering, thin provisioning must be enabled on volumes created in this aggregate.[Continue](#)

Cloud Manager 3.9.10 Build:2 Sep 12, 2021 06:47:41 am UTC

5. Select the destination volume name: we chose [source_volume_name]_dr.

Destination Volume Name

Destination Volume Name

sql1_data_dr

Destination Aggregate

Automatically select the best aggregate ▾

6. Select the maximum transfer rate for the replication. This enables you to save bandwidth if you have a low bandwidth connection to the cloud such as a VPN.

Max Transfer Rate

You should limit the transfer rate. An unlimited rate might negatively impact the performance of other applications and it might impact your Internet performance.

Limited to:

100

MB/s

Unlimited (recommended for DR only machines)

7. Define the replication policy. We chose a Mirror, which takes the most recent dataset and replicates that into the destination volume. You could also choose a different policy based on your requirements.

Replication Policy

Default Policies

Additional Policies

Mirror

Typically used for disaster recovery


[More info](#)

Mirror and Backup (1 month retention)


Configures disaster recovery and long-term retention of backups on the same destination volume

[More info](#)

8. Choose the schedule for triggering replication. NetApp recommends setting a "daily" schedule of for the data volume and an "hourly" schedule for the log volumes, although this can be changed based on requirements.

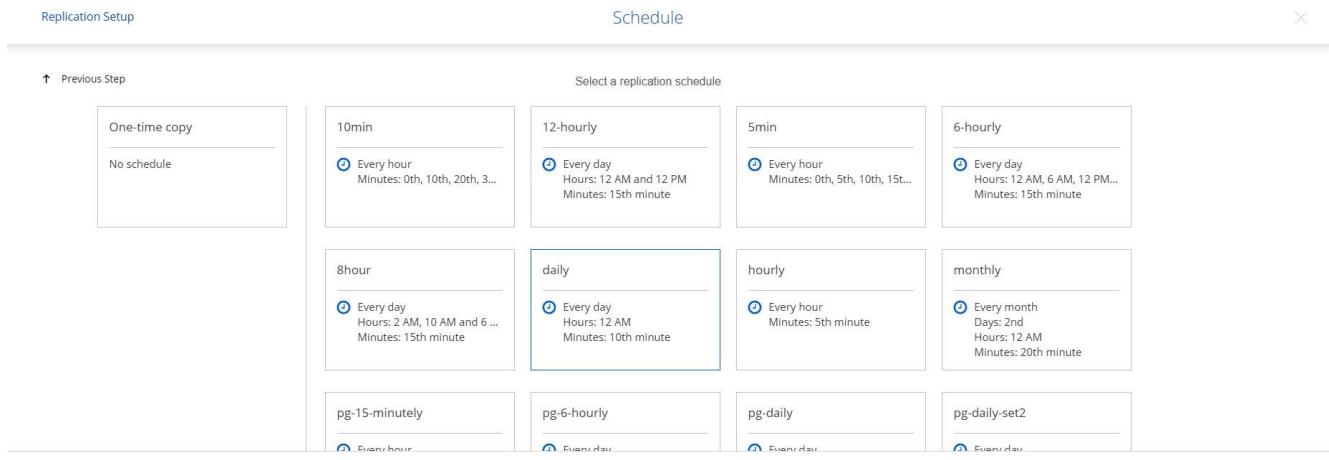

9. Review the information entered, click Go to trigger the cluster peer and SVM peer (if this is your first time replicating between the two clusters), and then implement and initialize the SnapMirror relationship.

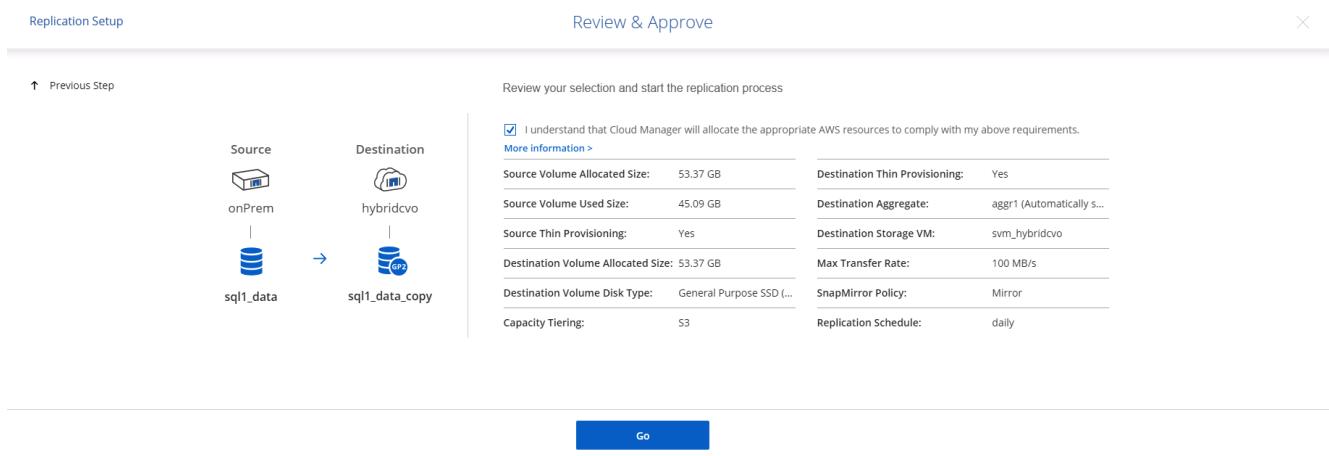

10. Continue this process for data volumes and log volumes.

11. To check all of your relationships, navigate to the Replication tab inside Cloud Manager. Here you can manage your relationships and check on their status.

Health Status	Source Volume	Target Volume	Total Transfer Time	Status	Mirror State	Last Successful Transfer
✓	rhel2_u01 onPrem	rhel2_u01_dr hybridcvo	43 minutes 43 seconds	idle	snapmirrored	Sep 30, 2021, 12:12:50 AM 19.73 MiB
✓	rhel2_u02 onPrem	rhel2_u02_dr hybridcvo	1 hour 37 minutes 59 seconds	idle	snapmirrored	Sep 30, 2021, 2:37:08 PM 239.78 MiB
✓	rhel2_u03 onPrem	rhel2_u03_dr hybridcvo	16 hours 1 minute 9 seconds	idle	snapmirrored	Sep 30, 2021, 4:07:14 PM 225.37 KiB
✓	sql1_data onPrem	sql1_data_dr hybridcvo	1 hour 6 minutes 50 seconds	idle	snapmirrored	Sep 30, 2021, 12:12:28 AM 24.56 KiB
✓	rhel2_u04 onPrem	rhel2_u04_dr hybridcvo	1 hour 1 minute 40 seconds	idle	snapmirrored	Sep 30, 2021, 12:12:30 AM 24.56 KiB
✓	rhel2_u05 onPrem	rhel2_u05_dr hybridcvo	1 hour 1 minute 40 seconds	idle	snapmirrored	Sep 30, 2021, 12:12:30 AM 24.56 KiB
✓	rhel2_u06 onPrem	rhel2_u06_dr hybridcvo	1 hour 1 minute 40 seconds	idle	snapmirrored	Sep 30, 2021, 12:12:30 AM 24.56 KiB

12. After all the volumes have been replicated, you are in a steady state and ready to move on to the disaster recovery and dev/test workflows.

3. Deploy EC2 compute instance for database workload

AWS has preconfigured EC2 compute instances for various workloads. The choice of instance type determines the number of CPU cores, memory capacity, storage type and capacity, and network performance. For the use cases, with the exception of the OS partition, the main storage to run database workload is allocated from CVO or the FSx ONTAP storage engine. Therefore, the main factors to consider are the choice of CPU cores, memory, and network performance level. Typical AWS EC2 instance types can be found here: [EC2 Instance Type](#).

Sizing the compute instance

1. Select the right instance type based on the required workload. Factors to consider include the number of business transactions to be supported, the number of concurrent users, data set sizing, and so on.
2. EC2 instance deployment can be launched through the EC2 Dashboard. The exact deployment procedures are beyond the scope of this solution. See [Amazon EC2](#) for details.

Linux instance configuration for Oracle workload

This section contain additional configuration steps after an EC2 Linux instance is deployed.

1. Add an Oracle standby instance to the DNS server for name resolution within the SnapCenter management domain.
2. Add a Linux management user ID as the SnapCenter OS credentials with sudo permissions without a password. Enable the ID with SSH password authentication on the EC2 instance. (By default, SSH password authentication and passwordless sudo is turned off on EC2 instances.)
3. Configure Oracle installation to match with on-premises Oracle installation such as OS patches, Oracle versions and patches, and so on.
4. NetApp Ansible DB automation roles can be leveraged to configure EC2 instances for database dev/test and disaster recovery use cases. The automation code can be download from the NetApp public GitHub site: [Oracle 19c Automated Deployment](#). The goal is to install and configure a database software stack on an EC2 instance to match on-premises OS and database configurations.

Windows instance configuration for SQL Server workload

This section lists additional configuration steps after an EC2 Windows instance is initially deployed.

1. Retrieve the Windows administrator password to log in to an instance via RDP.
2. Disable the Windows firewall, join the host to Windows SnapCenter domain, and add the instance to the DNS server for name resolution.
3. Provision a SnapCenter log volume to store SQL Server log files.
4. Configure iSCSI on the Windows host to mount the volume and format the disk drive.
5. Again, many of the previous tasks can be automated with the NetApp automation solution for SQL Server. Check the NetApp automation public GitHub site for newly published roles and solutions: [NetApp Automation](#).

[Next: Workflow for dev/test bursting to cloud.](#)

Workflow for dev/test bursting to cloud

[Previous: Getting Started with AWS public cloud.](#)

The agility of the public cloud, the time to value, and the cost savings are all meaningful value propositions for enterprises adopting the public cloud for database application development and testing effort. There is no better tool than SnapCenter to make this a reality. SnapCenter can not only protect your production database on-premises, but can also quickly clone a copy for application development or code testing in the public cloud while consuming very little extra storage. Following are details of the step-by-step processes for using this tool.

Clone an Oracle Database for dev/test from a replicated snapshot backup

1. Log into SnapCenter with a database management user ID for Oracle. Navigate to the Resources tab, which shows the Oracle databases being protected by SnapCenter.

Name	Oracle Database Type	Host/Cluster	Resource Group	Policies	Last Backup	Overall Status
cdb2	Single Instance (Multitenant)	rhel2.demo.netapp.com	rhel2_cdb2 rhel2_cdb2_log	Oracle Archive Log Backup Oracle Full Online Backup	09/17/2021 3:00:09 PM	Backup succeeded

2. Click the intended on-premises database name for the backup topology and the detailed view. If a secondary replicated location is enabled, it shows linked mirror backups.

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
rhel2_cdb2_log_09-17-2021_15.00.01.1317_1	1	Log	09/17/2021 3:00:10 PM	Not Applicable	False	Not Cataloged	5980203
rhel2_cdb2_09-17-2021_14.35.01.4997_1	1	Log	09/17/2021 2:35:21 PM	Not Applicable	False	Not Cataloged	5980629
rhel2_cdb2_09-17-2021_14.35.01.4997_0	1	Data	09/17/2021 2:35:12 PM	Unverified	False	Not Cataloged	5980588
rhel2_cdb2_log_09-17-2021_14.00.01.1042_1	1	Log	09/17/2021 2:00:10 PM	Not Applicable	False	Not Cataloged	5978388
rhel2_cdb2_log_09-17-2021_13.00.01.7389_1	1	Log	09/17/2021 1:00:11 PM	Not Applicable	False	Not Cataloged	5975135
rhel2_cdb2_log_09-17-2021_12.00.01.1142_1	1	Log	09/17/2021 12:00:10 PM	Not Applicable	False	Not Cataloged	5971773
rhel2_cdb2_log_09-17-2021_11.00.01.0895_1	1	Log	09/17/2021 11:00:10 AM	Not ...	False	Not Cataloged	5968474

3. Toggled to the mirrored backups view by clicking mirrored backups. The secondary mirror backup(s) is then displayed.

NetApp SnapCenter®

Oracle Database ▾

Search databases

cdb2 Topology

Manage Copies

Local copies

Mirror copies

Summary Card

368 Backups

16 Data Backups

352 Log Backups

0 Clones

Backup Name

	Count	Type	IF	End Date	Verified	Mounted	RMAN Cataloged	SCN
rhel2_cdb2_log_09-17-2021_15.00.01.1317_1	1	Log		09/17/2021 3:00:10 PM	Not Applicable	False	Not Cataloged	5980203
rhel2_cdb2_09-17-2021_14.35.01.4997_1	1	Log		09/17/2021 2:35:21 PM	Not Applicable	False	Not Cataloged	5980629
rhel2_cdb2_09-17-2021_14.35.01.4997_0	1	Data		09/17/2021 2:35:12 PM	Unverified	False	Not Cataloged	5980588
rhel2_cdb2_log_09-17-2021_14.00.01.1042_1	1	Log		09/17/2021 2:00:10 PM	Not Applicable	False	Not Cataloged	5978388
rhel2_cdb2_log_09-17-2021_13.00.01.7389_1	1	Log		09/17/2021 1:00:11 PM	Not Applicable	False	Not Cataloged	5975135
rhel2_cdb2_log_09-17-2021_12.00.01.1142_1	1	Log		09/17/2021 12:00:10 PM	Not Applicable	False	Not Cataloged	5971773
rhel2_cdb2_log_09-17-2021_11.00.01.0895_1	1	Log		09/17/2021 11:00:10 AM	Not Applicable	False	Not Cataloged	5968474

Total 1

- Choose a mirrored secondary database backup copy to be cloned and determine a recovery point either by time and system change number or by SCN. Generally, the recovery point should be trailing the full database backup time or SCN to be cloned. After a recovery point is decided, the required log file backup must be mounted for recovery. The log file backup should be mounted to target DB server where the clone database is to be hosted.

Mount backups

Choose the host to mount the backup : ora-standby.demo.netapp.com

Mount path : /var/opt/snapcenter/sco/backup_mount/rhel2_cdb2_09-17-2021_14.35.01.4997_1/cdb2

Secondary storage location : Snap Vault / Snap Mirror

Source Volume	Destination Volume
svm_onPrem:rhel2_u03	svm_hybridcvo:rhel2_u03_dr

Mount Cancel

NetApp SnapCenter®

Oracle Database

cdb2 Topology

Manage Copies

Local copies: 184 Backups, 0 Clones

Mirror copies: 184 Backups, 1 Clone

Secondary Mirror Backup(s)

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
rhel2_cdb2_log_09-17-2021_16.00.01.2156_1	1	Log	09/17/2021 4:00:10 PM	Not Applicable	False	Not Cataloged	5985272
rhel2_cdb2_log_09-17-2021_15.00.01.1317_1	1	Log	09/17/2021 3:00:10 PM	Not Applicable	False	Not Cataloged	5982003
rhel2_cdb2_09-17-2021_14.35.01.4997_1	1	Log	09/17/2021 2:35:21 PM	Not Applicable	True	Not Cataloged	5980629
rhel2_cdb2_09-17-2021_14.35.01.4997_0	1	Data	09/17/2021 2:35:12 PM	Unverified	False	Not Cataloged	5980588
rhel2_cdb2_log_09-17-2021_14.00.01.1042_1	1	Log	09/17/2021 2:00:10 PM	Not Applicable	False	Not Cataloged	5978388



If log pruning is enabled and the recovery point is extended beyond the last log pruning, multiple archive log backups might need to be mounted.

- Highlight the full database backup copy to be cloned, and then click the clone button to start the DB clone Workflow.

cdb2 Topology

Backup Name

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
rhel2_cdb2_log_09-17-2021_16.00.01.2156_1	1	Log	09/17/2021 4:00:10 PM	Not Applicable	False	Not Cataloged	5985272
rhel2_cdb2_log_09-17-2021_15.00.01.1317_1	1	Log	09/17/2021 3:00:10 PM	Not Applicable	False	Not Cataloged	5982003
rhel2_cdb2_09-17-2021_14.35.01.4997_1	1	Log	09/17/2021 2:35:21 PM	Not Applicable	True	Not Cataloged	5980629
rhel2_cdb2_09-17-2021_14.35.01.4997_0	1	Data	09/17/2021 2:35:12 PM	Unverified	False	Not Cataloged	5980588
rhel2_cdb2_log_09-17-2021_14.00.01.1042_1	1	Log	09/17/2021 2:00:10 PM	Not Applicable	False	Not Cataloged	5978388

- Choose a proper clone DB SID for a complete container database or CDB clone.

Clone from cdb2

1 Name

Complete Database Clone

Clone SID: cdb2test

Exclude PDBs: Type to find PDBs

PDB Clone

Secondary storage location : Snap Vault / Snap Mirror

Data

Source Volume	Destination Volume
svm_onPrem:rhel2_u02	svm_hybridcvo:rhel2_u02_dr

Logs

Source Volume	Destination Volume
svm_onPrem:rhel2_u03	svm_hybridcvo:rhel2_u03_dr

[Previous](#) [Next](#)

7. Select the target clone host in the cloud, and datafile, control file, and redo log directories are created by the clone workflow.

Clone from cdb2

1 Name

Select the host to create a clone

Clone host

2 Locations

3 Credentials

4 PreOps

5 PostOps

6 Notification

7 Summary

Datafile locations

/u02_cdb2test

Control files

/u02_cdb2test/cdb2test/control/control01.ctl
/u02_cdb2test/cdb2test/control/control02.ctl

Redo logs

Group	Size	Unit	Number of files
RedoGroup 1	200	MB	1
/u02_cdb2test/cdb2test/redolog redo03.log			
RedoGroup 2	200	MB	1

- The None credential name is used for OS-based authentication, which renders the database port irrelevant. Fill in the proper Oracle Home, Oracle OS User, and Oracle OS Group as configured in the target clone DB server.

Clone from cdb2

1 Name

2 Locations

3 Credentials

4 PreOps

5 PostOps

6 Notification

7 Summary

Database Credentials for the clone

Credential name for sys user + ?

Database port

Oracle Home Settings ?

Oracle Home

Oracle OS User

Oracle OS Group

Previous Next

The screenshot shows the Oracle Database Clone wizard interface. The current step is '3 Credentials'. On the left, a vertical navigation bar lists steps 1 through 7. Step 3 is highlighted with a blue background. The main area displays 'Database Credentials for the clone' and 'Oracle Home Settings'. Under Oracle Home Settings, the 'Oracle Home' field contains the path '/u01/app/oracle/product/19800/cdb2', and the 'Oracle OS User' and 'Oracle OS Group' fields both contain 'oracle'. At the bottom right, there are 'Previous' and 'Next' buttons.

9. Specify the scripts to run before clone operation. More importantly, the database instance parameter can be adjusted or defined here.

Clone from cdb2

Specify scripts to run before clone operation

Prescript full path: /var/opt/snapcenter/spl/scripts/ Enter Prescript path

Arguments:

Script timeout: 60 secs


Database Parameter settings

processes	320	X
remote_login_passwordfile	EXCLUSIVE	X
sga_target	4311744512	X
undo_tablespace	UNDOTBS1	X

+ Reset

Previous Next

10. Specify the recovery point either by the date and time or SCN. Until Cancel recovers the database up to the available archive logs. Specify the external archive log location from the target host where the archive log volume is mounted. If target server Oracle owner is different from the on-premises production server, verify that the archive log directory is readable by the target server Oracle owner.

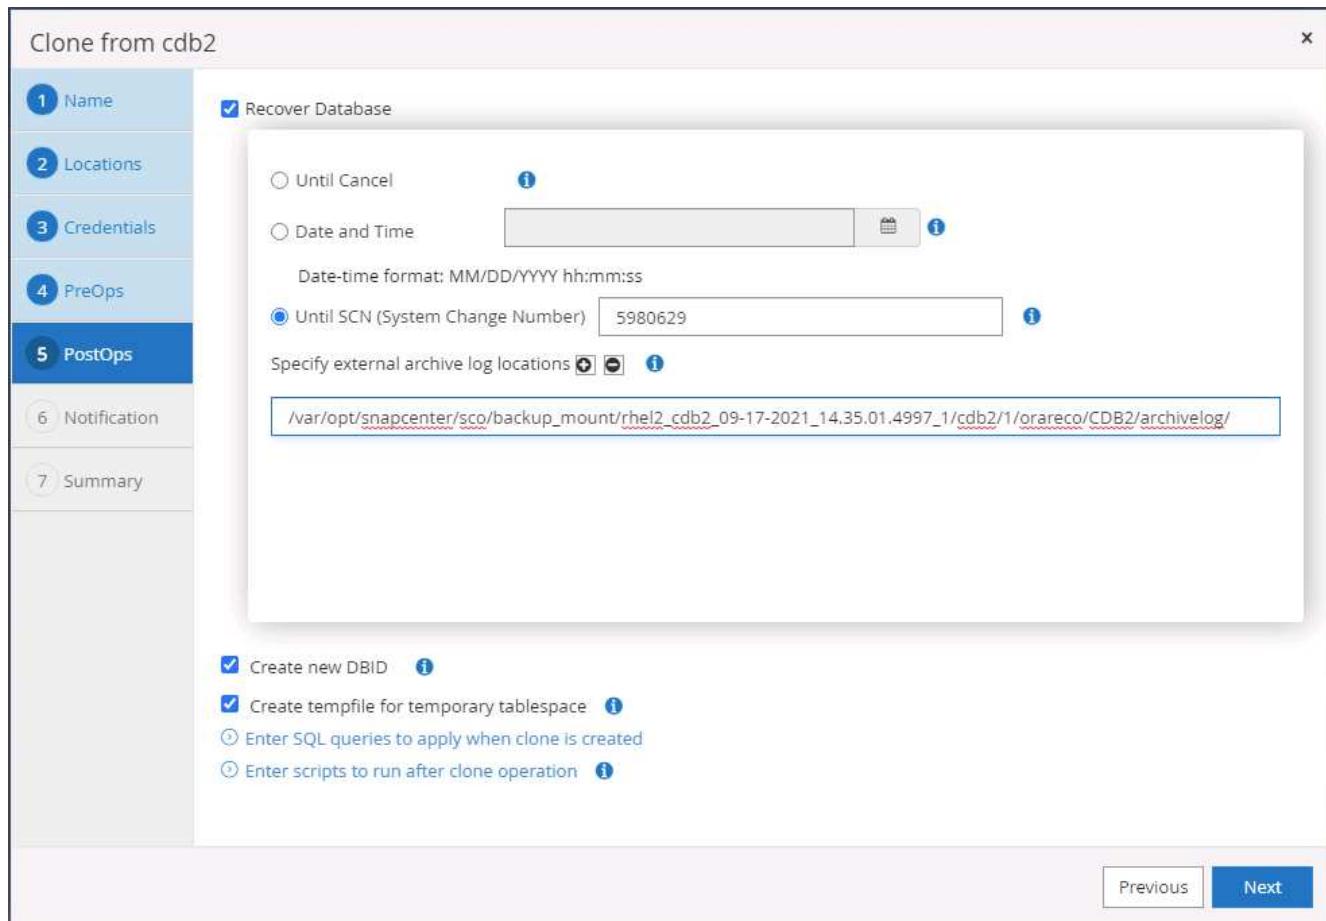

```
oracle@ora-standby:/tmp
[oracle@ora-standby tmp]$ ls /var/opt/snapcenter/sco/backup_mount/rhel2_cdb2_09-17-2021_14.35.01.4997_1/cdb2/1/orareco/CDB2/archivelog/
2021_08_26 2021_08_28 2021_08_30 2021_09_01 2021_09_03 2021_09_05 2021_09_07 2021_09_09 2021_09_11 2021_09_13 2021_09_15 2021_09_17
2021_08_27 2021_08_29 2021_08_31 2021_09_02 2021_09_04 2021_09_06 2021_09_08 2021_09_10 2021_09_12 2021_09_14 2021_09_16
[oracle@ora-standby tmp]$
```

11. Configure the SMTP server for email notification if desired.

Clone from cdb2

Provide email settings i

Email preference	Never
From	From email
To	Email to
Subject	Notification

Attach job report

⚠ If you want to send notifications for Clone jobs, an SMTP server must be configured. Continue to the Summary page to save your information, and then go to Settings>Global Settings>Notification Server Settings to configure the SMTP server.

[Previous](#) [Next](#)

1. Name
2. Locations
3. Credentials
4. PreOps
5. PostOps
6. Notification
7. Summary

12. Clone summary.

Clone from cdb2

1 Name	Summary
2 Locations	Clone from backup rhel2_cdb2_09-17-2021_14.35.01.4997_0
3 Credentials	Clone SID cdb2test
4 PreOps	Clone server ora-standby.demo.netapp.com
5 PostOps	Exclude PDBs none
6 Notification	Oracle home /u01/app/oracle/product/19800/cdb2
7 Summary	Oracle OS user oracle
	Oracle OS group oinstall
	Datafile mountpaths /u02_cdb2test
	Control files /u02_cdb2test/cdb2test/control/control01.ctl /u02_cdb2test/cdb2test/control/control02.ctl
	Redo groups RedoGroup =1 TotalSize =200 Path =/u02_cdb2test/cdb2test/redolog redo03.log RedoGroup =2 TotalSize =200 Path =/u02_cdb2test/cdb2test/redolog redo02.log RedoGroup =3 TotalSize =200 Path =/u02_cdb2test/cdb2test/redolog redo01.log
	Recovery scope Until SCN 5980629
	Prescript full path none
	Prescript arguments
	Postscript full path none
	Postscript arguments

[Previous](#) [Finish](#)

13. You should validate after cloning to make sure that the cloned database is operational. Some additional tasks, such as starting up the listener or turning off the DB log archive mode, can be performed on the dev/test database.

```
oracle@ora-standby:/tmp
[oracle@ora-standby tmp]$ export ORACLE_SID=cdb2test
[oracle@ora-standby tmp]$ export ORACLE_HOME=/u01/app/oracle/product/19800/cdb2
[oracle@ora-standby tmp]$ export PATH=$PATH:$ORACLE_HOME/bin
[oracle@ora-standby tmp]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Fri Sep 17 17:49:29 2021
Version 19.3.0.0.0

Copyright (c) 1982, 2019, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.3.0.0.0

SQL> select name, log_mode from v$database;
NAME      LOG_MODE
-----
CDB2TEST  ARCHIVELOG

SQL> select instance_name, host_name from v$instance;
INSTANCE_NAME
-----
HOST NAME
-----
cdb2test
ora-standby.demo.netapp.com

SQL> show pdbs
          CON_ID CON_NAME           OPEN MODE  RESTRICTED
-----  2 PDB$SEED        READ ONLY  NO
      3 CDB2_PDB1        READ WRITE NO
      4 CDB2_PDB2        READ WRITE NO
      5 CDB2_PDB3        READ WRITE NO

SQL>
```

Clone a SQL database for dev/test from a replicated Snapshot backup

1. Log into SnapCenter with a database management user ID for SQL Server. Navigate to the Resources tab, which shows the SQL Sever user databases being protected by SnapCenter and a target standby SQL instance in the public cloud.

Name	Instance	Host	Last Backup	Overall Status	Type
master	sql1	sql1.demo.netapp.com		Not available for backup	System database
model	sql1	sql1.demo.netapp.com		Not available for backup	System database
msdb	sql1	sql1.demo.netapp.com		Not available for backup	System database
tempdb	sql1	sql1.demo.netapp.com		Not available for backup	System database
tpcc	sql1	sql1.demo.netapp.com	09/16/2021 7:35:05 PM	Backup succeeded	User database
master	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database
model	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database
msdb	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database
tempdb	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database

2. Click on the intended on-premises SQL Server user database name for the backups topology and detailed view. If a secondary replicated location is enabled, it shows linked mirror backups.

Backup Name	Count	Type	End Date	Verified
sql1_tpcc_09-16-2021_18.25.01.4024	1	Full backup	09/16/2021 6:25:05 PM	Unverified
sql1_tpcc_09-15-2021_18.25.01.4604	1	Full backup	09/15/2021 6:25:06 PM	Unverified
sql1_tpcc_09-14-2021_18.25.01.5233	1	Full backup	09/14/2021 6:25:05 PM	Unverified
sql1_tpcc_09-13-2021_18.25.01.4500	1	Full backup	09/13/2021 6:25:05 PM	Unverified
sql1_tpcc_09-12-2021_18.25.01.4016	1	Full backup	09/12/2021 6:25:05 PM	Unverified
sql1_tpcc_09-11-2021_18.25.01.3753	1	Full backup	09/11/2021 6:25:05 PM	Unverified
sql1_tpcc_09-10-2021_18.36.25.5430	1	Full backup	09/10/2021 6:36:29 PM	Unverified

3. Toggle to the Mirrored Backups view by clicking Mirrored Backups. Secondary Mirror Backup(s) are then displayed. Because SnapCenter backs up the SQL Server transaction log to a dedicated drive for recovery, only full database backups are displayed here.

Backup Name	Count	Type	End Date	Verified
sql1_tpcc_09-16-2021_18.25.01.4024	1	Full backup	09/16/2021 6:25:05 PM	Unverified
sql1_tpcc_09-15-2021_18.25.01.4604	1	Full backup	09/15/2021 6:25:06 PM	Unverified
sql1_tpcc_09-14-2021_18.25.01.5233	1	Full backup	09/14/2021 6:25:05 PM	Unverified
sql1_tpcc_09-13-2021_18.25.01.4500	1	Full backup	09/13/2021 6:25:05 PM	Unverified
sql1_tpcc_09-12-2021_18.25.01.4016	1	Full backup	09/12/2021 6:25:05 PM	Unverified
sql1_tpcc_09-11-2021_18.25.01.3753	1	Full backup	09/11/2021 6:25:05 PM	Unverified
sql1_tpcc_09-10-2021_18.36.25.5430	1	Full backup	09/10/2021 6:36:29 PM	Unverified

4. Choose a backup copy, and then click the Clone button to launch the Clone from Backup workflow.

Backup Name	Count	Type	End Date	Verified
sql1_tpcc_09-19-2021_18.25.01.4134	1	Full backup	09/19/2021 6:25:05 PM	Unverified
sql1_tpcc_09-18-2021_18.25.01.3963	1	Full backup	09/18/2021 6:25:05 PM	Unverified
sql1_tpcc_09-17-2021_18.25.01.4218	1	Full backup	09/17/2021 6:25:05 PM	Unverified
sql1_tpcc_09-16-2021_18.25.01.4024	1	Full backup	09/16/2021 6:25:05 PM	Unverified
sql1_tpcc_09-15-2021_18.25.01.4604	1	Full backup	09/15/2021 6:25:06 PM	Unverified
sql1_tpcc_09-14-2021_18.25.01.5233	1	Full backup	09/14/2021 6:25:05 PM	Unverified
sql1_tpcc_09-13-2021_18.25.01.4500	1	Full backup	09/13/2021 6:25:05 PM	Unverified

Clone Options

Clone settings

- Clone server: Choose
- Clone instance: Nothing selected
- Clone name: tpcc

Choose mount option

- Auto assign mount point
- Auto assign volume mount point under path

Secondary storage location : Snap Vault / Snap Mirror

Source Volume	Destination Volume
svm_onPrem:sql1_data	svm_hybridcvo:sql1_data_dr
svm_onPrem:sql1_log	svm_hybridcvo:sql1_log_dr

Next

5. Select a cloud server as the target clone server, clone instance name, and clone database name. Choose either an auto-assign mount point or a user-defined mount point path.

Clone from backup x

1 Clone Options

Clone settings

Clone server	sql-standby.demo.netapp.com	i
Clone instance	sql-standby	i
Clone name	tpcc_clone	

Choose mount option

Auto assign mount point i


Auto assign volume mount point under path full file path i

Secondary storage location : Snap Vault / Snap Mirror

Source Volume	Destination Volume
svm_onPrem:sql1_data	svm_hybridcvo:sql1_data_dr
svm_onPrem:sql1_log	svm_hybridcvo:sql1_log_dr

Previous Next

6. Determine a recovery point either by a log backup time or by a specific date and time.

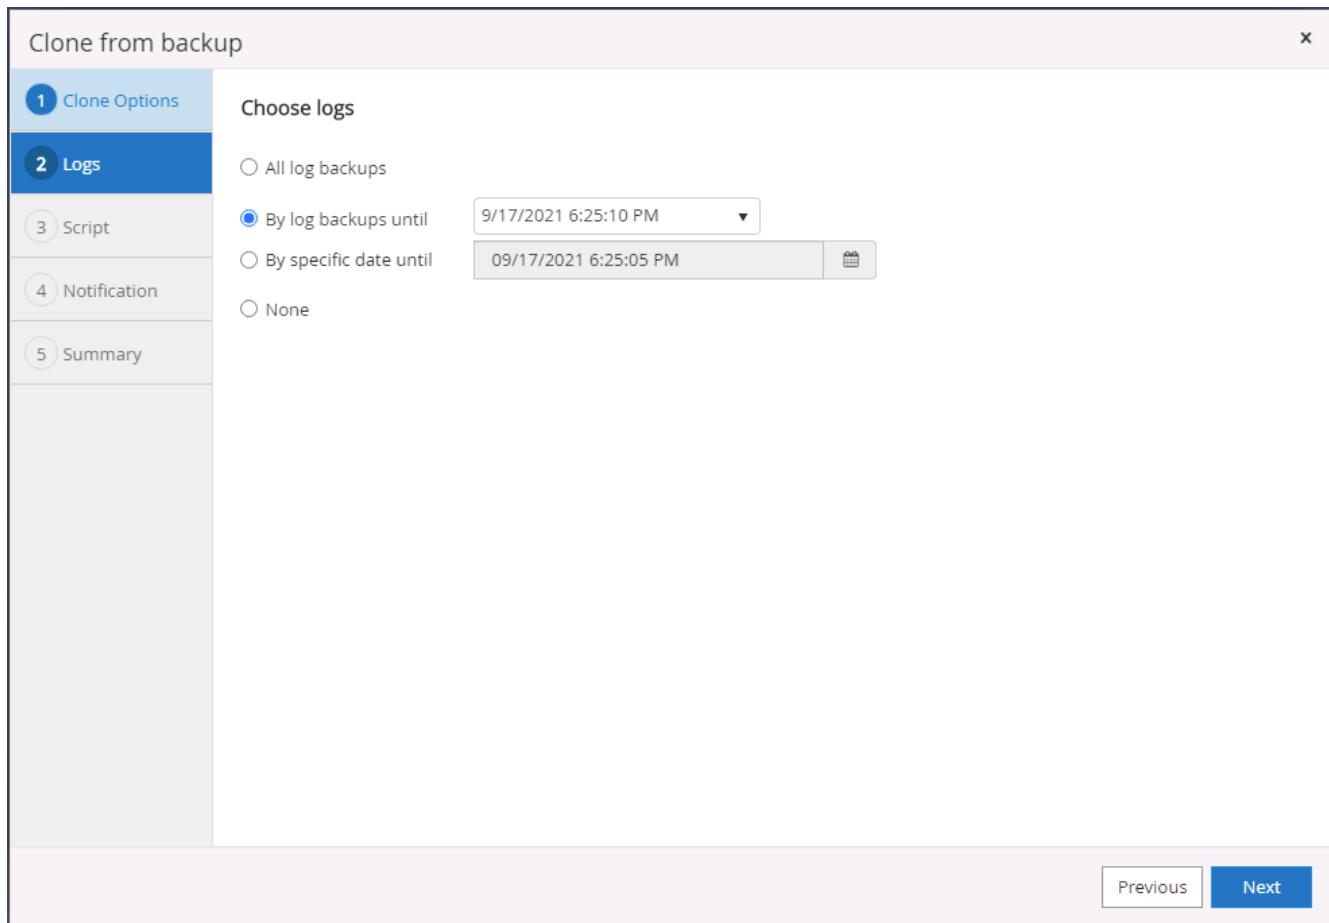

7. Specify optional scripts to run before and after the cloning operation.

Clone from backup

X

1 Clone Options

2 Logs

3 Script

4 Notification

5 Summary

Specify optional scripts to run before and after performing a clone from backup job

Prescript full path

Prescript arguments Choose optional arguments...

Postscript full path

Postscript arguments Choose optional arguments...

Script timeout 60 secs

Previous **Next**

This screenshot shows the 'Clone from backup' configuration dialog. The 'Script' tab is selected. It includes fields for specifying optional scripts to run before and after the clone operation, including Prescript and Postscript paths and arguments, and a script timeout setting. Navigation buttons for 'Previous' and 'Next' are visible at the bottom.

8. Configure an SMTP server if email notification is desired.

Clone from backup X

1 Clone Options

2 Logs

3 Script

4 Notification

5 Summary

Provide email settings i

Email preference	Never
From	From email
To	Email to
Subject	Notification

Attach Job Report

⚠ If you want to send notifications for Clone jobs, an SMTP server must be configured. Continue to the Summary page to save your information, and then go to Settings>Global Settings>Notification Server Settings to configure the SMTP server. X

Previous Next

9. Clone Summary.

Clone from backup

1 Clone Options

2 Logs

3 Script

4 Notification

5 Summary

Summary	
Clone server	sql-standby.demo.netapp.com
Clone instance	sql-standby
Clone name	tpcc_dev
Mount option	Auto assign volume mount point under custom path
Prescript full path	None
Prescript arguments	
Postscript full path	None
Postscript arguments	
Send email	No

Previous **Finish**

- Monitor the job status and validate that the intended user database has been attached to a target SQL instance in the cloud clone server.

ID	Status	Name	Start date	End date	Owner
766	✓	Clone from backup 'sql1_tpcc_09-16-2021_18:25:01.4024'	09/16/2021 8:05:25 PM	09/16/2021 8:06:17 PM	demo\sqldba
763	✓	Discover resources for all hosts	09/16/2021 7:56:49 PM	09/16/2021 7:56:54 PM	demo\sqldba
761	✓	Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/16/2021 7:59:00 PM	09/16/2021 7:59:08 PM	demo\sqldba
760	⚠	Discover resources for all hosts	09/16/2021 7:19:05 PM	09/16/2021 7:19:09 PM	demo\sqldba
759	⚠	Discover resources for all hosts	09/16/2021 7:18:43 PM	09/16/2021 7:18:48 PM	demo\sqldba
756	⚠	Discover resources for all hosts	09/16/2021 6:59:51 PM	09/16/2021 6:59:56 PM	demo\sqldba
753	✓	Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/16/2021 6:35:00 PM	09/16/2021 6:37:07 PM	demo\sqldba
750	✓	Backup of Resource Group 'sql1_tpcc' with policy 'SQL Server Full Backup'	09/16/2021 6:25:01 PM	09/16/2021 6:27:14 PM	demo\sqldba
749	✓	Discover resources for host 'sql-standby.demo.netapp.com'	09/16/2021 6:19:00 PM	09/16/2021 6:19:05 PM	Demo\administrator
745	✓	Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/16/2021 5:35:00 PM	09/16/2021 5:37:08 PM	demo\sqldba

Post-clone configuration

- An Oracle production database on-premises is usually running in log archive mode. This mode is not necessary for a development or test database. To turn off log archive mode, log into the Oracle DB as sysdba, execute a log mode change command, and start the database for access.
- Configure an Oracle listener, or register the newly cloned DB with an existing listener for user access.
- For SQL Server, change the log mode from Full to Easy so that the SQL Server dev/test log file can be readily shrunk when it is filling up the log volume.

Refresh clone database

1. Drop cloned databases and clean up the cloud DB server environment. Then follow the previous procedures to clone a new DB with fresh data. It only takes few minutes to clone a new database.
2. Shutdown the clone database, run a clone refresh command by using the CLI. See the following SnapCenter documentation for details: [Refresh a clone](#).

Where to go for help?

If you need help with this solution and use cases, join the [NetApp Solution Automation community support Slack channel](#) and look for the solution-automation channel to post your questions or inquiries.

Next: [Disaster recovery workflow](#).


Disaster recovery workflow

Previous: [Workflow for dev/test bursting to cloud](#).

Enterprises have embraced the public cloud as a viable resource and destination for disaster recovery. SnapCenter makes this process as seamless as possible. This disaster recovery workflow is very similar to the clone workflow, but database recovery runs through the last available log that was replicated to cloud to recover all the business transactions possible. However, there are additional pre-configuration and post-configuration steps specific to disaster recovery.

Clone an on-premises Oracle production DB to cloud for DR

1. To validate that the clone recovery runs through last available log, we created a small test table and inserted a row. The test data would be recovered after a full recovery to last available log.

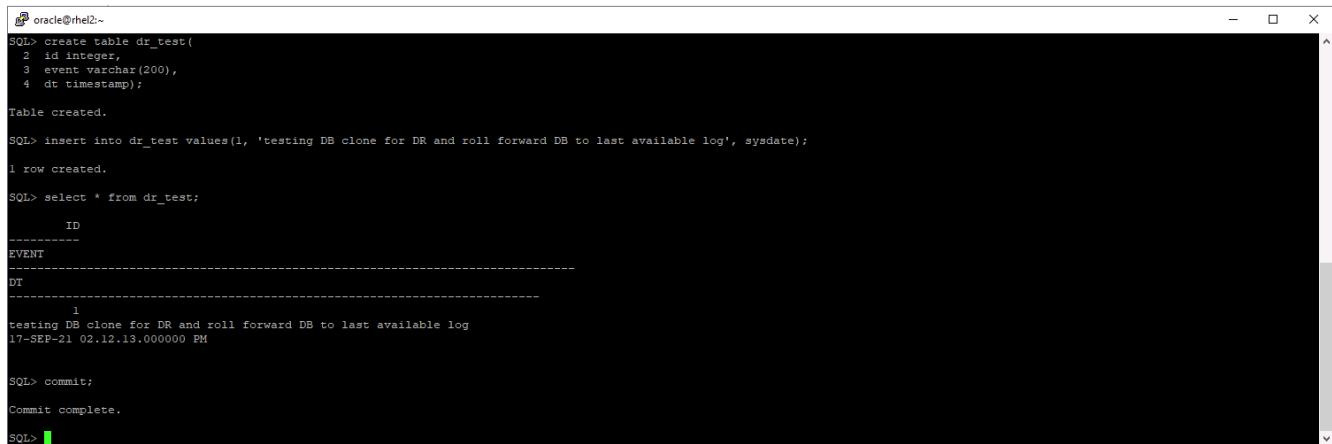

```
oracle@rhel2:~$ SQL> create table dr_test (
  2  id integer,
  3  event varchar(200),
  4  dt timestamp);
Table created.

SQL> insert into dr_test values(1, 'testing DB clone for DR and roll forward DB to last available log', sysdate);
1 row created.

SQL> select * from dr_test;
      ID
      --
EVENT
-----
DT
-----
      1
testing DB clone for DR and roll forward DB to last available log
17-SEP-21 02.12.13.000000 PM

SQL> commit;
Commit complete.

SQL>
```

2. Log into SnapCenter as a database management user ID for Oracle. Navigate to the Resources tab, which shows the Oracle databases being protected by SnapCenter.

The screenshot shows the NetApp SnapCenter interface. The top navigation bar includes links for App Backup and Clone Admin and Sign Out. On the left, a sidebar menu lists Dashboard, Resources (selected), Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main content area displays a table of Oracle Database resources. One row is selected, showing details: Name (rhe12_cdb2), Resources (1), Tags (orafullbkup), Policies (Oracle Full Online Backup), Last Backup (09/17/2021 2:38:16 PM), and Overall Status (Completed). A 'New Resource Group' button is located in the top right corner of the main content area.

3. Select the Oracle log resource group and click Backup Now to manually run an Oracle log backup to flush the latest transaction to the destination in the cloud. In a real DR scenario, the last transaction recoverable depends on the database log volume replication frequency to the cloud, which in turn depends on the RTO or RPO policy of the company.

This screenshot shows the 'rhe12_cdb2_log' resource group details page. The top navigation bar and sidebar are identical to the previous screenshot. The main content area shows a table with one row: Name (rhe12_cdb2), Resource Name (cdb2), Type (Oracle Database), and Host (rhe12.demo.netapp.com). Below the table, there are four buttons: Modify Resource Group, Back up Now (highlighted in blue), Maintenance, and Delete.

A modal dialog box titled 'Backup' is displayed. The header says 'Create a backup for the selected resource group'. Inside, the 'Resource Group' field contains 'rhe12_cdb2_log' and the 'Policy' dropdown is set to 'Oracle Archive Log Backup'. At the bottom, there are 'Cancel' and 'Backup' buttons, with 'Backup' being the primary action button.



Asynchronous SnapMirror loses data that has not made it to the cloud destination in the database log backup interval in a disaster recovery scenario. To minimize data loss, more frequent log backup can be scheduled. However there is a limit to the log backup frequency that is technically achievable.

4. Select the last log backup on the Secondary Mirror Backup(s), and mount the log backup.

The screenshot shows the NetApp SnapCenter interface for Oracle Database management. On the left, a sidebar lists databases: cdb2, cdb2dev, and cdb2test. The main pane displays 'cdb2 Topology' with a diagram showing 'Local copies' (185 Backups, 0 Clones) connected to 'Mirror copies' (185 Backups, 2 Clones). A summary card on the right provides an overview of backups: 370 Backups, 16 Data Backups, 354 Log Backups, and 2 Clones. Below this, a table titled 'Secondary Mirror Backup(s)' lists three log backups:

Backup Name	Count	Type	End Date	Verified	Mounted	RMAN Cataloged	SCN
rhel2_cdb2_log_09-17-2021_18.20.04.1177_1	1	Log	09/17/2021 6:20:13 PM	Not Applicable	False	Not Cataloged	5994710
rhel2_cdb2_log_09-17-2021_18.00.01.2424_1	1	Log	09/17/2021 6:00:09 PM	Not Applicable	False	Not Cataloged	5992079
rhel2_cdb2_log_09-17-2021_17.00.01.1566_1	1	Log	09/17/2021 5:00:20 PM	Not Applicable	False	Not Cataloged	5988842

The dialog box is titled 'Mount backups'. It asks 'Choose the host to mount the backup' (set to 'ora-standby.demo.netapp.com') and specifies the 'Mount path' as '/var/opt/snapcenter/sco/backup_mount/rhel2_cdb2_log_09-17-2021_18.20.04.1177_1/cdb2'. It also shows the 'Secondary storage location : Snap Vault / Snap Mirror' section with 'Source Volume' set to 'svm_onPrem:rhel2_u03' and 'Destination Volume' set to 'svm_hybridcvo:rhel2_u03_dr'. At the bottom are 'Mount' and 'Cancel' buttons.

5. Select the last full database backup and click Clone to initiate the clone workflow.

Total 3

Backup Name	Count	Type	IF	End Date	Verified	Mounted	RMAN Cataloged	SCN
rhel2_cdb2_log_09-17-2021_18.20.04.1177_1	1	Log		09/17/2021 6:20:13 PM	Not Applicable	True	Not Cataloged	5994710
rhel2_cdb2_log_09-17-2021_18.00.01.2424_1	1	Log		09/17/2021 6:00:09 PM	Not Applicable	False	Not Cataloged	5992079
rhel2_cdb2_log_09-17-2021_17.00.01.1566_1	1	Log		09/17/2021 5:00:20 PM	Not Applicable	False	Not Cataloged	5988842
rhel2_cdb2_log_09-17-2021_16.00.01.2156_1	1	Log		09/17/2021 4:00:10 PM	Not Applicable	False	Not Cataloged	5985272
rhel2_cdb2_log_09-17-2021_15.00.01.1317_1	1	Log		09/17/2021 3:00:10 PM	Not Applicable	False	Not Cataloged	5982003
rhel2_cdb2_09-17-2021_14.35.01.4997_1	1	Log		09/17/2021 2:35:21 PM	Not Applicable	False	Not Cataloged	5980629
rhel2_cdb2_09-17-2021_14.35.01.4997_0	1	Data		09/17/2021 2:35:12 PM	Unverified	False	Not Cataloged	5980588

6. Select a unique clone DB ID on the host.

Clone from cdb2

1 Name

Complete Database Clone

Clone SID:

PDB Clone

Secondary storage location : Snap Vault / Snap Mirror

2 Locations

3 Credentials

4 PreOps

5 PostOps

6 Notification

7 Summary

Data

Source Volume	Destination Volume
svm_onPrem:rhel2_u02	<input type="text" value="svm_hybridcvo:rhel2_u02_dr"/>

Logs

Source Volume	Destination Volume
svm_onPrem:rhel2_u03	<input type="text" value="svm_hybridcvo:rhel2_u03_dr"/>

Previous **Next**

7. Provision a log volume and mount it to the target DR server for the Oracle flash recovery area and online logs.

The screenshot shows the ONTAP System Manager interface. On the left, there's a navigation sidebar with sections like DASHBOARD, STORAGE (Overview, Applications, Volumes), LUNs, Shares, Qtrees, Quotas, Storage VMs, Tiers, NETWORK, EVENTS & JOBS, PROTECTION, and HOSTS. The main area is titled 'Volumes' and lists several volumes: 'ora_standby_u01', 'rhel2_u01_dr', 'rhel2_u02_dr', 'rhel2_u02_dr09172116081193_60', 'rhel2_u02_dr09172117035348_63', 'rhel2_u03_dr', and 'rhel2_u03_dr09172118245747_75'. A modal window titled 'Add Volume' is open, showing fields for 'NAME' (set to 'ora_standby_u03') and 'CAPACITY' (set to '20 GB'). There are 'More Options' and 'Save' buttons at the bottom of the modal.

```

[ec2-user@ora-standby:tmp]$ sudo mkdir /u03_cdb2dr
[ec2-user@ora-standby tmp]$ chown oracle:oinstall /u03_cdb2dr
chown: changing ownership of '/u03_cdb2dr': Operation not permitted
[ec2-user@ora-standby tmp]$ sudo chown oracle:oinstall /u03_cdb2dr
[ec2-user@ora-standby tmp]$ sudo mount -t nfs 10.221.1.6:/ora_standby_u03 /u03_cdb2dr
[ec2-user@ora-standby tmp]$ df -h
Filesystem      Size  Used Avail Use% Mounted on
/dev/tmpfs       7.6G  0    7.6G  0% /dev
tmpfs           7.6G  0    7.6G  0% /dev/shm
tmpfs           7.6G  17M  7.6G  1% /run
tmpfs           7.6G  0    7.6G  0% /sys/fs/cgroup
/dev/nvme0nlp2   10G  9.0G  1.1G  90% /
10.221.1.6:/ora_standby_u01   31G  13G  18G  42% /u01
tmpfs           1.6G  0    1.6G  0% /run/user/1000
10.221.1.6:/Sc28182452-3fa8-448c-9e4a-c5a9e465f353 100G  3.1G  97G  4% /u02_cdb2dev
tmpfs           1.6G  0    1.6G  0% /run/user/54321
10.221.1.6:/Sc39c05df8-4b00-4b3a-853c-9d6d338e5df7 100G  3.7G  97G  4% /u02_cdb2test
10.221.1.6:/Scff88ea5c-3273-475e-ad97-472b2a8dccee 100G  3.8G  97G  4% /var/opt/snapcenter/sco/backup_mount/rhel2_cdb2_log_09-17-2021_18.20.04.1177_1/cdb2/1
10.221.1.6:/ora_standby_u03   21G  320K  20G  1% /u03_cdb2dr
[ec2-user@ora-standby tmp]$

```



The Oracle clone procedure does not create a log volume, which needs to be provisioned on the DR server before cloning.

8. Select the target clone host and location to place the data files, control files, and redo logs.

Clone from cdb2

1 Name

Select the host to create a clone

Clone host ora-standby.demo.netapp.com

2 Locations

Datafile locations /u02_cdb2dr

Control files /u02_cdb2dr/cdb2dr/control/control01.ctl
/u03_cdb2dr/cdb2dr/control/control02.ctl

Redo logs

Group	Size	Unit	Number of files
RedoGroup 1	200	MB	1
RedoGroup 2	200	MB	1

Previous Next

The screenshot shows the Oracle Database Clone wizard interface. The left sidebar lists steps 1 through 7. Step 2, 'Locations', is selected and active. The main area is titled 'Select the host to create a clone' and shows the 'Clone host' as 'ora-standby.demo.netapp.com'. Below this, under 'Datafile locations', the path '/u02_cdb2dr' is listed. Under 'Control files', two paths are listed: '/u02_cdb2dr/cdb2dr/control/control01.ctl' and '/u03_cdb2dr/cdb2dr/control/control02.ctl'. Under 'Redo logs', there is a table with three columns: Group, Size, and Unit. It contains two entries: 'RedoGroup 1' with size 200 MB and 1 file, and 'RedoGroup 2' with size 200 MB and 1 file. The 'Redo logs' section also includes a 'Reset' button. At the bottom right are 'Previous' and 'Next' buttons.

9. Select the credentials for the clone. Fill in the details of the Oracle home configuration on the target server.

Clone from cdb2

1 Name

2 Locations

3 Credentials

4 PreOps

5 PostOps

6 Notification

7 Summary

Database Credentials for the clone

Credential name for sys user + ?

Database port

Oracle Home Settings ?

Oracle Home

Oracle OS User

Oracle OS Group

Previous Next

The screenshot shows the Oracle Database Clone wizard interface. The left sidebar lists steps 1 through 7. Step 3, 'Credentials', is currently selected and highlighted in blue. The main panel shows 'Database Credentials for the clone' with a dropdown for 'Credential name for sys user' set to 'None'. Below it, the 'Database port' is set to '1521'. Under 'Oracle Home Settings', the 'Oracle Home' path is '/u01/app/oracle/product/19800/cdb2', and the 'Oracle OS User' and 'Oracle OS Group' are both 'oracle'. At the bottom right are 'Previous' and 'Next' buttons.

10. Specify the scripts to run before cloning. Database parameters can be adjusted if needed.

Clone from cdb2

Specify scripts to run before clone operation ⓘ

Prescript full path	/var/opt/snapcenter/spl/scripts/	Enter Prescript path
Arguments		
Script timeout	60	secs


Database Parameter settings

audit_file_dest	/u01/app/oracle/admin/cdb2dr/adump	X
audit_trail	DB	X
open_cursors	300	X
pga_aggregate_target	1432354816	X

Buttons:

- Previous
- Next

- Select Until Cancel as the recovery option so that the recovery runs through all available archive logs to recoup the last transaction replicated to the secondary cloud location.

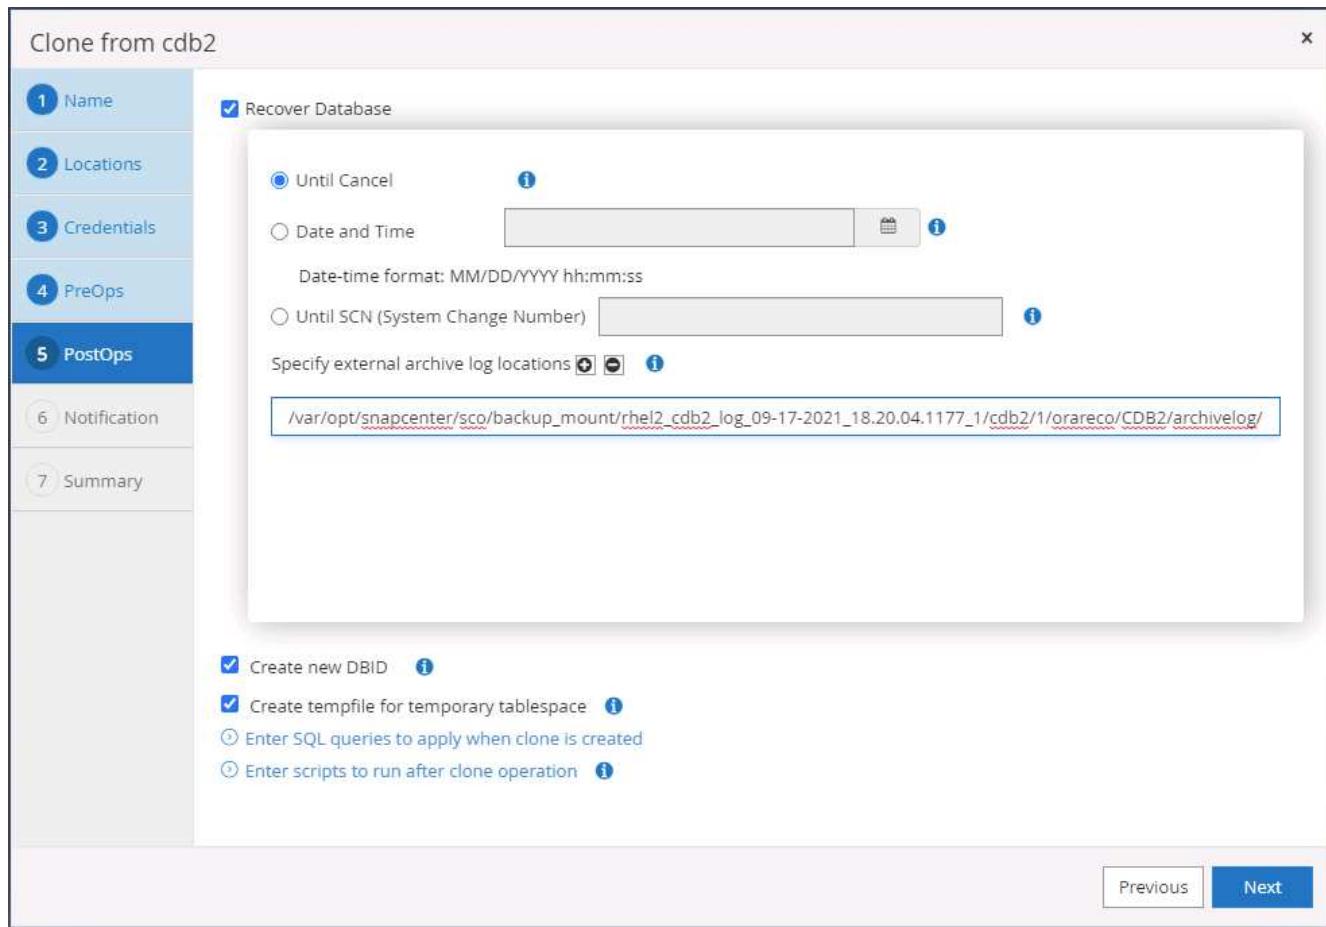

12. Configure the SMTP server for email notification if needed.

Clone from cdb2

Provide email settings i

Email preference	Never
From	From email
To	Email to
Subject	Notification

Attach job report

⚠ If you want to send notifications for Clone jobs, an SMTP server must be configured. Continue to the Summary page to save your information, and then go to Settings>Global Settings>Notification Server Settings to configure the SMTP server.

[Previous](#) [Next](#)

1. Name

2. Locations

3. Credentials

4. PreOps

5. PostOps

6. Notification

7. Summary

13. DR clone summary.

Clone from cdb2

1 Name	Summary
2 Locations	Clone from backup rhel2_cdb2_09-17-2021_14.35.01.4997_0
3 Credentials	Clone SID cdb2dr
4 PreOps	Clone server ora-standby.demo.netapp.com
5 PostOps	Exclude PDBs none
6 Notification	Oracle home /u01/app/oracle/product/19800/cdb2
7 Summary	Oracle OS user oracle
	Oracle OS group oinstall
	Datafile mountpaths /u02_cdb2dr
	Control files /u02_cdb2dr/cdb2dr/control/control01.ctl /u03_cdb2dr/cdb2dr/control/control02.ctl
	Redo groups RedoGroup =1 TotalSize =200 Path =/u03_cdb2dr/cdb2dr/redolog/redo03.log RedoGroup =2 TotalSize =200 Path =/u03_cdb2dr/cdb2dr/redolog/redo02.log RedoGroup =3 TotalSize =200 Path =/u03_cdb2dr/cdb2dr/redolog/redo01.log
	Recovery scope Until Cancel
	Prescript full path none
	Prescript arguments
	Postscript full path none
	Postscript arguments

[Previous](#) [Finish](#)

14. Cloned DBs are registered with SnapCenter immediately after clone completion and are then available for backup protection.

NetApp SnapCenter							
		Oracle Database					
Resources		Name	Oracle Database Type	Host/Cluster	Resource Group	Policies	Last Backup
		cdb2	Single Instance (Multitenant)	rhel2.demo.netapp.com	rhel2_cdb2 rhel2_cdb2_log	Oracle Archive Log Backup Oracle Full Online Backup	09/17/2021 7:00:10 PM
		cdb2dev	Single Instance (Multitenant)	ora-standby.demo.netapp.com			Not protected
		cdb2dr	Single Instance (Multitenant)	ora-standby.demo.netapp.com			Not protected
		cdb2test	Single Instance (Multitenant)	ora-standby.demo.netapp.com			Not protected

Post DR clone validation and configuration for Oracle

1. Validate the last test transaction that has been flushed, replicated, and recovered at the DR location in the cloud.

```

oracle@ora-standby:/u01/app/oracle/product/19000/cdb2/dbs
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.3.0.0.0

SQL> set lin 200
SQL> select instance_name, host_name from v$instance;

INSTANCE_NAME      HOST_NAME
cdb2dr            ora-standby.demo.netapp.com

SQL> alter pluggable database cdb2_pdb1 open;

Pluggable database altered.

SQL> alter session set container=cdb2_pdb1;

Session altered.

SQL> select * from pdbadmin.dr_test;

ID
EVENT
DT
1
testing DB clone for DR and roll forward DB to last available log
17-SEP-21 02.12.13.000000 PM

SQL>

```

2. Configure the flash recovery area.

```

oracle@ora-standby:/u01/app/oracle/product/19000/cdb2/dbs
[oracle@ora-standby dbs]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Fri Sep 17 22:07:11 2021
Version 19.3.0.0.0

Copyright (c) 1982, 2019, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.3.0.0.0

SQL> show parameter db_recovery_file_dest

NAME          TYPE        VALUE
db_recovery_file_dest    string
db_recovery_file_dest_size  big integer 17208M
SQL> alter system set db_recovery_file_dest='/u03_cdb2dr/cdb2dr' scope=both;

System altered.

SQL> show parameter db_recovery_file_dest

NAME          TYPE        VALUE
db_recovery_file_dest    string    /u03_cdb2dr/cdb2dr
db_recovery_file_dest_size  big integer 17208M
SQL>

```

3. Configure the Oracle listener for user access.

4. Split the cloned volume off of the replicated source volume.

5. Reverse replication from the cloud to on-premises and rebuild the failed on-premises database server.



Clone split may incur temporary storage space utilization that is much higher than normal operation. However, after the on-premises DB server is rebuilt, extra space can be released.

Clone an on-premises SQL production DB to cloud for DR

- Similarly, to validate that the SQL clone recovery ran through last available log, we created a small test table and inserted a row. The test data would be recovered after a full recovery to the last available log.

```

Administrator: Command Prompt - sqlcmd - SQLCMD
C:\Users\administrator.DEMO>sqlcmd
1> select host_name()
2> go

-----
SQL1

(1 rows affected)
1> use tpcc
2> go
Changed database context to 'tpcc'.
1> insert into snap_sync values ('test snap mirror DR for SQL', getdate())
2> go

(1 rows affected)
1> select * from snap_sync
2> go
event                                dt
test snap mirror DR for SQL          2021-09-20 14:23:04.533
(1 rows affected)
1> -

```

- Log into SnapCenter with a database management user ID for SQL Server. Navigate to the Resources tab, which shows the SQL Server protection resources group.

The screenshot shows the NetApp SnapCenter interface. The top navigation bar includes links for Microsoft SQL Server, Modify Resource Group, Back up Now, Clone Lifecycle, Maintenance, Edit/View Details, and Delete. The main area displays a table of resources:

Name	Resource Name	Type	Host
sql1_tpcc	tpcc (sql1)	SQL Database	sql1.demo.netapp.com
sql1_tpcc_log			

- Manually run a log backup to flush the last transaction to be replicated to secondary storage in the public cloud.

The screenshot shows the 'Backup' dialog box. It has two main sections: 'Resource Group' and 'Policy'. The 'Resource Group' section contains a dropdown menu with 'sql1_tpcc_log' selected. The 'Policy' section contains a dropdown menu with 'SQL Server Log Backup' selected, accompanied by an information icon. At the bottom right of the dialog are 'Cancel' and 'Backup' buttons, with 'Backup' being the active button.

- Select the last full SQL Server backup for the clone.

The screenshot shows the NetApp SnapCenter interface for managing a Microsoft SQL Server topology named 'tpcc (sql11)'. On the left, a sidebar lists database names: master, model, msdb, tempdb, tpcc, master, model, msdb, tempdb, tpcc_clone, and tpcc_dev. The 'tpcc' entry is selected. The main pane displays 'Manage Copies' with a diagram showing 'Local copies' (7 Backups, 0 Clones) connected to 'Mirror copies' (7 Backups, 2 Clones). Below this is a table for 'Secondary Mirror Backup(s)' with three entries:

Backup Name	Count	Type	End Date	Verified
sql1_tpcc_09-19-2021_18.25.01.4134	1	Full backup	09/19/2021 6:25:05 PM	Unverified
sql1_tpcc_09-18-2021_18.25.01.3963	1	Full backup	09/18/2021 6:25:05 PM	Unverified
sql1_tpcc_09-17-2021_18.25.01.4218	1	Full backup	09/17/2021 6:25:05 PM	Unverified

- Set the clone setting such as the Clone Server, Clone Instance, Clone Name, and mount option. The secondary storage location where cloning is performed is auto-populated.

Clone from backup

1 Clone Options

Clone settings

- Clone server: sql-standby.demo.netapp.com
- Clone instance: sql-standby
- Clone name: tpcc_dr

Choose mount option


- Auto assign mount point
- Auto assign volume mount point under path full file path

Secondary storage location : Snap Vault / Snap Mirror

Source Volume	Destination Volume
svm_onPrem:sql1_data	svm_hybridcvo:sql1_data_dr
svm_onPrem:sql1_log	svm_hybridcvo:sql1_log_dr

Next

- Select all log backups to be applied.

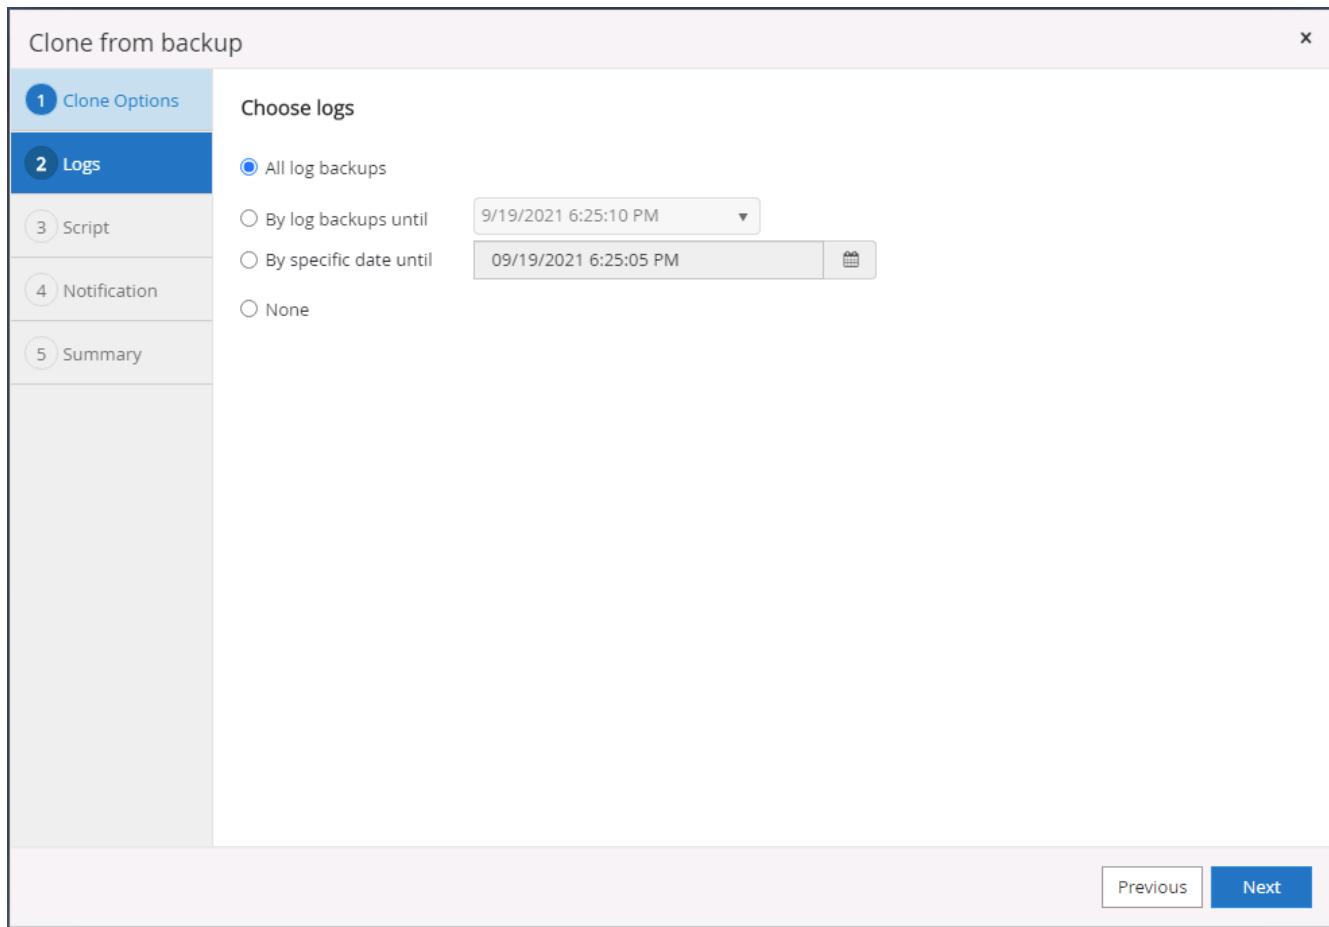

7. Specify any optional scripts to run before or after cloning.

Clone from backup x

1 Clone Options

2 Logs

3 Script

4 Notification

5 Summary

Specify optional scripts to run before and after performing a clone from backup job

Prescript full path

Prescript arguments Choose optional arguments...

Postscript full path

Postscript arguments Choose optional arguments...

Script timeout 60 secs

Previous Next

8. Specify an SMTP server if email notification is desired.

Clone from backup

Provide email settings i

Email preference	Never
From	From email
To	Email to
Subject	Notification

Attach Job Report

⚠ If you want to send notifications for Clone jobs, an SMTP server must be configured. Continue to the Summary page to save your information, and then go to Settings>Global Settings>Notification Server Settings to configure the SMTP server.

Previous Next

1. Clone Options

2. Logs

3. Script

4. Notification

5. Summary

- DR clone summary. Cloned databases are immediately registered with SnapCenter and available for backup protection.

Clone from backup

1 Clone Options

2 Logs

3 Script

4 Notification

5 Summary

Summary	
Clone server	sql-standby.demo.netapp.com
Clone instance	sql-standby
Clone name	tpcc_dr
Mount option	Auto Mount
Prescript full path	None
Prescript arguments	
Postscript full path	None
Postscript arguments	
Send email	No

Previous **Finish**

NetApp SnapCenter®

Microsoft SQL Server

View Database search by name

Dashboard Resources Monitor Reports Hosts Storage Systems Settings Alerts

Refresh Resources New Resource Group

Name	Instance	Host	Last Backup	Overall Status	Type
master	sql1	sql1.demo.netapp.com		Not available for backup	System database
model	sql1	sql1.demo.netapp.com		Not available for backup	System database
msdb	sql1	sql1.demo.netapp.com		Not available for backup	System database
tempdb	sql1	sql1.demo.netapp.com		Not available for backup	System database
tpcc	sql1	sql1.demo.netapp.com	09/22/2021 5:35:08 PM	Backup failed, Schedules on hold	User database
master	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database
model	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database
msdb	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database
tempdb	sql-standby	sql-standby.demo.netapp.com		Not available for backup	System database
tpcc_clone	sql-standby	sql-standby.demo.netapp.com		Not protected	User database
tpcc_clev	sql-standby	sql-standby.demo.netapp.com		Not protected	User database
tpcc_dr	sql-standby	sql-standby.demo.netapp.com		Not protected	User database

Post DR clone validation and configuration for SQL

1. Monitor clone job status.

NetApp SnapCenter®

Jobs Schedules Events Logs

search by name

Dashboard Resources Monitor Reports Hosts Storage Systems Settings

Details Report Download Logs Cancel Job

ID	Status	Name	Start date	End date	Owner
1052	✓	Clone from backup 'sql1_tpcc_09-19-2021_18.25.01.4134'	09/20/2021 2:36:17 PM	09/20/2021 2:37:06 PM	demo\sqldba
1047	✓	Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/20/2021 2:35:01 PM	09/20/2021 2:37:08 PM	demo\sqldba
1045	✓	Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/20/2021 2:26:17 PM	09/20/2021 2:30:25 PM	demo\sqldba
1044	✓	Clone from backup 'sql1_tpcc_09-17-2021_18.25.01.4218'	09/20/2021 1:39:24 PM	09/20/2021 1:40:09 PM	demo\sqldba
1042	✓	Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/20/2021 1:36:01 PM	09/20/2021 1:37:08 PM	demo\sqldba
1040	✓	Backup of Resource Group 'sql1_tpcc_log' with policy 'SQL Server Log Backup'	09/20/2021 1:26:50 PM	09/20/2021 1:27:08 PM	demo\sqldba

2. Validate that last transaction has been replicated and recovered with all log file clones and recovery.

```
C:\Users\administrator.DEMO>sqlcmd  
1> select host_name()  
2> go  
-----  
SQL STANDBY  
(1 rows affected)  
1> use tpcc_dr  
2> go  
Changed database context to 'tpcc_dr'.  
1> select * from snap_sync  
2> go  
event dt  
test snap mirror DR for SQL 2021-09-20 14:23:04.533  
(1 rows affected)  
1> select getdate()  
2> go  
-----  
2021-09-20 14:39:19.937  
(1 rows affected)  
1> -
```

3. Configure a new SnapCenter log directory on the DR server for SQL Server log backup.
4. Split the cloned volume off of the replicated source volume.
5. Reverse replication from the cloud to on-premises and rebuild the failed on-premises database server.

Where to go for help?

If you need help with this solution and use cases, please join the [NetApp Solution Automation community support Slack channel](#) and look for the solution-automation channel to post your questions or inquiries.

Copyright information

Copyright © 2023 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—with prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.