

AOP (Aspect Oriented Programming)

- In simple term, It helps to Intercept the method invocation. And we can perform some task before and after the method.
- AOP allow us to focus on business logic by handling boilerplate and repetitive code like logging, transaction management etc.
- So, Aspect is a module which handle this repetitive or boilerplate code.
- Helps in achieving reusability, maintainability of the code.

Used during:

- Logging
- Transaction Management
- Security etc..

Dependency you need to add in pom.xml:

```
<dependency>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-aop</artifactId>
</dependency>
```


```
@RestController
@RequestMapping(value = "/api/")
public class Employee {

    @GetMapping(path = "/fetchEmployee")
    public String fetchEmployee(){
        return "item fetched";
    }
}
```

```
@Component
@Aspect
public class LoggingAspect {

    @Before("execution(public String com.conceptandcoding.learningspringboot.Employee.fetchEmployee())")
    public void beforeMethod(){
        System.out.println("inside beforeMethod Aspect");
    }
}
```

2024-06-16T23:03:38.117+05:30	INFO 18766 --- [main]	org.hibernate.Version	: HHH000412: Hibernate ORM core version 6.4.4.Final
2024-06-16T23:03:38.137+05:30	INFO 18766 --- [main]	o.h.c.internal.RegionFactoryInitiator	: HHH000026: Second-level cache disabled
2024-06-16T23:03:38.237+05:30	INFO 18766 --- [main]	o.s.o.j.p.SpringPersistenceUnitInfo	: No LoadTimeWeaver setup: ignoring JPA class transformer
2024-06-16T23:03:38.398+05:30	INFO 18766 --- [main]	o.h.e.t.j.p.i.JtaPlatformInitiator	: HHH000489: No JTA platform available (set 'hibernate.transaction.jta.platform'
2024-06-16T23:03:38.400+05:30	INFO 18766 --- [main]	j.LocalContainerEntityManagerFactoryBean	: Initialized JPA EntityManagerFactory for persistence unit 'default'
2024-06-16T23:03:38.440+05:30	WARN 18766 --- [main]	JpaBaseConfiguration\$JpaWebConfiguration	: spring.jpa.open-in-view is enabled by default. Therefore, database queries may
2024-06-16T23:03:38.632+05:30	INFO 18766 --- [main]	o.s.b.w.embedded.tomcat.TomcatWebServer	: Tomcat started on port 8080 (http) with context path ''
2024-06-16T23:03:38.637+05:30	INFO 18766 --- [main]	c.c.l.SpringbootApplication	: Started SpringbootApplication in 1.517 seconds (process running for 1.727)

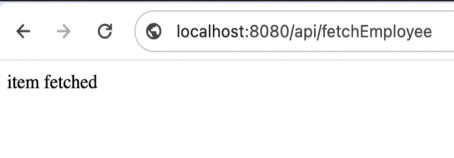

2024-06-16T23:03:38.237+05:30	INFO 18766 --- [main]	o.s.o.j.p.SpringPersistenceUnitInfo	: No LoadTimeWeaver setup: ignoring JPA class transformer
2024-06-16T23:03:38.398+05:30	INFO 18766 --- [main]	o.h.e.t.j.p.i.JtaPlatformInitiator	: HHH000489: No JTA platform available (set 'hibernate.tr
2024-06-16T23:03:38.400+05:30	INFO 18766 --- [main]	j.LocalContainerEntityManagerFactoryBean	: Initialized JPA EntityManagerFactory for persistence uni
2024-06-16T23:03:38.440+05:30	WARN 18766 --- [main]	JpaBaseConfiguration\$JpaWebConfiguration	: spring.jpa.open-in-view is enabled by default. Therefore
2024-06-16T23:03:38.632+05:30	INFO 18766 --- [main]	o.s.b.w.embedded.tomcat.TomcatWebServer	: Tomcat started on port 8080 (http) with context path ''
2024-06-16T23:03:38.637+05:30	INFO 18766 --- [main]	c.c.l.SpringbootApplication	: Started SpringbootApplication in 1.517 seconds (process
2024-06-16T23:05:49.486+05:30	INFO 18766 --- [nio-8080-exec-1]	o.a.c.c.C.[Tomcat].[localhost].[/]	: Initializing Spring DispatcherServlet 'dispatcherServlet
2024-06-16T23:05:49.487+05:30	INFO 18766 --- [nio-8080-exec-1]	o.s.web.servlet.DispatcherServlet	: Initializing Servlet 'dispatcherServlet'
2024-06-16T23:05:49.487+05:30	INFO 18766 --- [nio-8080-exec-1]	o.s.web.servlet.DispatcherServlet	: Completed initialization in 1 ms

inside beforeMethod Aspect

Some important AOP concepts :

```
@Component
@Aspect
public class LoggingAspect {

    @Before("execution(public String com.conceptandcoding.learningspringboot.Employee.fetchEmployee())")
    public void beforeMethod(){
        System.out.println("inside beforeMethod Aspect");
    }
}
```

Access-modifiers: optional and can be omitted

Return type: optional but can not be omitted

This is a pointcut

This @Before and method together is called Advice

Pointcut:

Its an Expression, which tells where an ADVICE should be applied.

Types of Pointcut:

1. **Execution:** matches a particular method in a particular class.

```
@Before("execution(public String com.conceptandcoding.learningspringboot.Employee.fetchEmployee())")
```

→ (*) wildcard : matches any single item

Matches any return type

```
@Before("execution(* com.conceptandcoding.learningspringboot.Employee.fetchEmployee())")
public void beforeMethod(){
    System.out.println("inside beforeMethod Aspect");
}
```

Matches any method with single parameter String

```
@Before("execution(* com.conceptandcoding.learningspringboot.Employee.*(String))")
public void beforeMethod(){
    System.out.println("inside beforeMethod Aspect");
}
```

Matches fetchEmployee method that take any single parameter

```
@Before("execution(String com.conceptandcoding.learningspringboot.Employee.fetchEmployee(*))")
public void beforeMethod(){
    System.out.println("inside beforeMethod Aspect");
}
```

Concept && Coding

→ (..) wildcard : matches 0 or More item

Matches fetchEmployee method that take any 0 or More parameters

```
@Before("execution(String com.conceptandcoding.learningspringboot.Employee.fetchEmployee(..))")
public void beforeMethod(){
    System.out.println("inside beforeMethod Aspect");
}
```

Matches fetchEmployee method in 'com.conceptandcoding' package and subpackage classes


```
@Before("execution(String com.conceptandcoding..fetchEmployee())")
public void beforeMethod(){
    System.out.println("inside beforeMethod Aspect");
}
```

Matches any method in 'com.conceptandcoding' package and subpackage classes

```
@Before("execution(String com.conceptandcoding..*())")
public void beforeMethod(){
    System.out.println("inside beforeMethod Aspect");
}
```

Concept && Coding

2. Within: matches all method within any class or package.

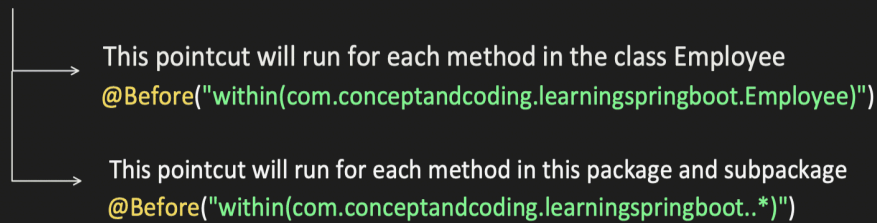

3. @within: matches any method in a class which has this annotation.

```
@RestController
@RequestMapping(value = "/api/")
public class Employee {

    @Autowired
    EmployeeUtil employeeUtil;

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        employeeUtil.employeeHelperMethod();
        return "item fetched";
    }
}
```

```
@Aspect
@Component
public class LoggingAspect {

    @Before("@within(org.springframework.stereotype.Service)")
    public void beforeMethod() {
        System.out.println("inside beforeMethod aspect");
    }
}

@Service
public class EmployeeUtil {

    public void employeeHelperMethod() {
        System.out.println("employee helper method called");
    }
}
```

```
2024-06-22T11:54:02.459+05:30 INFO 66918 --- [main] c.c.l.SpringbootApplication : Started SpringbootApplication in 1.646 s
2024-06-22T11:54:04.070+05:30 INFO 66918 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServlet 'dispatcherServlet'
2024-06-22T11:54:04.070+05:30 INFO 66918 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2024-06-22T11:54:04.070+05:30 INFO 66918 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 0 ms
inside beforeMethod aspect
employee helper method called
```

4. @annotation: matches any method that is annotated with given annotation

```
@RestController
@RequestMapping(value = "/api/")
public class Employee {

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        return "item fetched";
    }
}
```

```
@Component
@Aspect
public class LoggingAspect {

    @Before("@annotation(org.springframework.web.bind.annotation.GetMapping)")
    public void beforeMethod(){
        System.out.println("inside beforeMethod Aspect");
    }
}
```

5. Args: matches any method with particular arguments (or parameters)

@Before("args(String,int)")

```
@RestController
@RequestMapping(value = "/api/")
public class Employee {

    @Autowired
    EmployeeUtil employeeUtil;

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        employeeUtil.employeeHelperMethod( str: "xyz", val: 123);
        return "item fetched";
    }
}
```

```
@Aspect
@Component
public class LoggingAspect {

    @Before("args(String, int)")
    public void beforeMethod() {
        System.out.println("inside beforeMethod aspect");
    }
}
```

```
@Service
public class EmployeeUtil {

    public void employeeHelperMethod(String str, int val) {
        System.out.println("employee helper method called");
    }
}
```

```
2024-06-22T11:13:27.258+05:30 INFO 64094 --- [main] o.hibernate.jpa.internal.util.LogHelper : HH0000204: Processing Persistence
2024-06-22T11:13:27.290+05:30 INFO 64094 --- [main] org.hibernate.Version : HH0000412: Hibernate ORM core
2024-06-22T11:13:27.309+05:30 INFO 64094 --- [main] o.h.c.internal.RegionFactoryInitiator : HH0000026: Second-level cache
2024-06-22T11:13:27.414+05:30 INFO 64094 --- [main] o.s.o.j.p.SpringPersistenceUnitInfo : No LoadTimeWeaver setup: ignore
2024-06-22T11:13:27.583+05:30 INFO 64094 --- [main] o.h.e.t.j.p.i.JtaPlatformInitiator : HH0000489: No JTA platform available
2024-06-22T11:13:27.585+05:30 INFO 64094 --- [main] j.LocalContainerEntityManagerFactoryBean : Initialized JPA EntityManagerFactory for
2024-06-22T11:13:27.636+05:30 WARN 64094 --- [main] JpaBaseConfiguration$JpaWebConfiguration : spring.jpa.open-in-view is enabled by default.
2024-06-22T11:13:27.868+05:30 INFO 64094 --- [main] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat started on port 8080 (http) with
2024-06-22T11:13:27.874+05:30 INFO 64094 --- [main] c.c.l.SpringbootApplication : Started SpringbootApplication
2024-06-22T11:13:30.408+05:30 INFO 64094 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServlet 'dispatcherServlet'
2024-06-22T11:13:30.408+05:30 INFO 64094 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2024-06-22T11:13:30.409+05:30 INFO 64094 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 1 ms
inside beforeMethod aspect
employee helper method called
```

Concept && Coding

If instead of primitive type, we need object, then we can give like this

@Before("args(com.conceptandcoding.learningspringboot.Employee)")

6. @args: matches any method with particular parameters and that parameter class is annotated with particular annotation.

@Before("@args(org.springframework.stereotype.Service)")

```
@Service
public class EmployeeUtil {

    public void employeeHelperMethod(EmployeeDAO employeeDAO) {
        System.out.println("employee helper method called");
    }
}
```

```
@Aspect
@Component
public class LoggingAspect {

    @Before("@args(org.springframework.stereotype.Service)")
    public void beforeMethod() {
        System.out.println("inside beforeMethod aspect");
    }
}
```

```
@Service
public class EmployeeDAO {

}
```

7. target: matches any method on a particular instance of a class.

```
@RestController
@RequestMapping(value = "/api/")
public class Employee {

    @Autowired
    EmployeeUtil employeeUtil;

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        employeeUtil.employeeHelperMethod();
        return "item fetched";
    }
}
```

```
@Aspect
@Component
public class LoggingAspect {

    @Before("target(com.conceptandcoding.learningspringboot.EmployeeUtil)")
    public void beforeMethod() {
        System.out.println("inside beforeMethod aspect");
    }
}
```

```
@Component
public class EmployeeUtil {

    public void employeeHelperMethod() {
        System.out.println("employee helper method called");
    }
}
```

@Before("target(com.conceptandcoding.learningspringboot.IEmployee)")

Interface

```
@RestController
@RequestMapping(value = "/api/")
public class EmployeeController {

    @Autowired
    @Qualifier("tempEmployee")
    IEmployee employeeObj;

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        employeeObj.fetchEmployeeMethod();
        return "item fetched";
    }
}
```

```
@Aspect
@Component
public class LoggingAspect {

    @Before("target(com.conceptandcoding.learningspringboot.IEmployee)")
    public void beforeMethod() {
        System.out.println("inside beforeMethod aspect");
    }
}
```

```
public interface IEmployee {

    public void fetchEmployeeMethod();
}
```

```
@Component
@Qualifier("tempEmployee")
public class TempEmployee implements IEmployee{

    @Override
    public void fetchEmployeeMethod() {
        System.out.println("in temp Employee fetch method");
    }
}
```

```
@Component
@Qualifier("permaEmployee")
public class PermanentEmployee implements IEmployee{

    @Override
    public void fetchEmployeeMethod() {
        System.out.println("inside permanent fetch employee method");
    }
}
```

```
2024-06-22T12:12:42.485+05:30 INFO 67695 --- [main] c.c.l.SpringbootApplication : Started SpringbootApplication
2024-06-22T12:12:48.192+05:30 INFO 67695 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring Dispatcher
2024-06-22T12:12:48.192+05:30 INFO 67695 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatch
2024-06-22T12:12:48.193+05:30 INFO 67695 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 1
inside beforeMethod aspect
in temp Employee fetch method
```

Combining two pointcuts using:

&& (boolean and)
|| (boolean or)

```
@RestController
@RequestMapping(value = "/api/")
public class EmployeeController {

    @Autowired
    EmployeeUtil employeeUtil;

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        return "item fetched";
    }
}
```

```
@Aspect
@Component
public class LoggingAspect {

    @Before("execution(* com.conceptandcoding.learningspringboot.EmployeeController.*())"
        +
        "&& @within(org.springframework.web.bind.annotation.RestController)")
    public void beforeAndMethod() {
        System.out.println("inside beforeAndMethod aspect");
    }

    @Before("execution(* com.conceptandcoding.learningspringboot.EmployeeController.*())"
        +
        "|| @within(org.springframework.stereotype.Component)")
    public void beforeOrMethod() {
        System.out.println("inside beforeOrMethod aspect");
    }
}
```

```
2024-06-22T13:02:39.698+05:30 INFO 70500 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServlet 'dispatcherServlet'
2024-06-22T13:02:39.698+05:30 INFO 70500 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2024-06-22T13:02:39.699+05:30 INFO 70500 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 1 ms
inside beforeAndMethod aspect
inside beforeOrMethod aspect
```

Named Pointcuts

```
@RestController
@RequestMapping(value = "/api/")
public class EmployeeController {

    @Autowired
    EmployeeUtil employeeUtil;

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        return "item fetched";
    }
}
```

```
@Aspect
@Component
public class LoggingAspect {

    @Pointcut("execution(* com.conceptandcoding.learningspringboot.EmployeeController.*())")
    public void customPointcutName() {
        //always stays empty
    }

    @Before("customPointcutName()")
    public void beforeMethod() {
        System.out.println("inside beforeMethod aspect");
    }
}
```

← → ↺
 localhost:8080/api/fetchEmployee

item fetched

```
2024-06-22T13:07:37.055+05:30 WARN 70647 --- [main] JpaBaseConfiguration$JpaWebConfiguration : spring.jpa.open-in-view is enabled by default. This will result in lazy initializations of the persistent entities, but always triggering a synchronization of the persistent data before returning. See https://spring.io/docs/current/data-access for more details.
2024-06-22T13:07:37.254+05:30 INFO 70647 --- [main] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat started on port 8080 (http) with context path = /
2024-06-22T13:07:37.260+05:30 INFO 70647 --- [main] c.c.l.SpringbootApplication : Started SpringbootApplication in 1.526 seconds (process running for 1.526)
2024-06-22T13:07:41.084+05:30 INFO 70647 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServlet 'dispatcherServlet'
2024-06-22T13:07:41.085+05:30 INFO 70647 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2024-06-22T13:07:41.085+05:30 INFO 70647 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 0 ms
inside beforeMethod aspect
```

Advice:

Its an action, which is taken @Before or @After or @Around the method execution.

```
@Component
@Aspect
public class LoggingAspect {

    @Before("execution(public String com.conceptandcoding.learningspringboot.Employee.fetchEmployee())")
    public void beforeMethod(){
        System.out.println("inside beforeMethod Aspect");
    }
}
```

← Advice

@Before or @After: its simple and we have already seen

@Around:

As the name says, it surrounds the method execution (before and after both).

```
@RestController
@RequestMapping(value = "/api/")
public class EmployeeController {

    @Autowired
    EmployeeUtil employeeUtil;

    @GetMapping (path = "/fetchEmployee")
    public String fetchEmployee(){
        return "item fetched";
    }
}
```


```
@Aspect
@Component
public class LoggingAspect {

    @Around("execution(* com.conceptandcoding.learningspringboot.EmployeeUtil.*())")
    public void aroundMethod(ProceedingJoinPoint joinPoint) throws Throwable {
        System.out.println("inside before Method aspect");
        joinPoint.proceed();
        System.out.println("inside after Method aspect");
    }
}
```

```
@Component
public class EmployeeUtil {

    public void employeeHelperMethod() {
        System.out.println("employee helper method called");
    }
}
```

Concept && Coding



```
2024-06-22T16:25:39.014+05:30 INFO 79523 --- [          main] c.c.l.SpringbootApplication : Started SpringbootApplication 3
2024-06-22T16:25:41.031+05:30 INFO 79523 --- [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherS
2024-06-22T16:25:41.031+05:30 INFO 79523 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcher
2024-06-22T16:25:41.032+05:30 INFO 79523 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 1 m
inside before Method aspect
fetching employee details
inside after Method aspect
```

Join Point: Its generally considered a point, where actual method invocation happens.


By now, few questions we all should have:

- 1. How this interception works?
- 2. What if we have 1000s of pointcut, so whenever I invoke a method, does matching happens with 1000s of pointcuts?

Let's understand the AOP flow, to get an answer of above doubts:

Concept && Coding

1. When Application startup happens

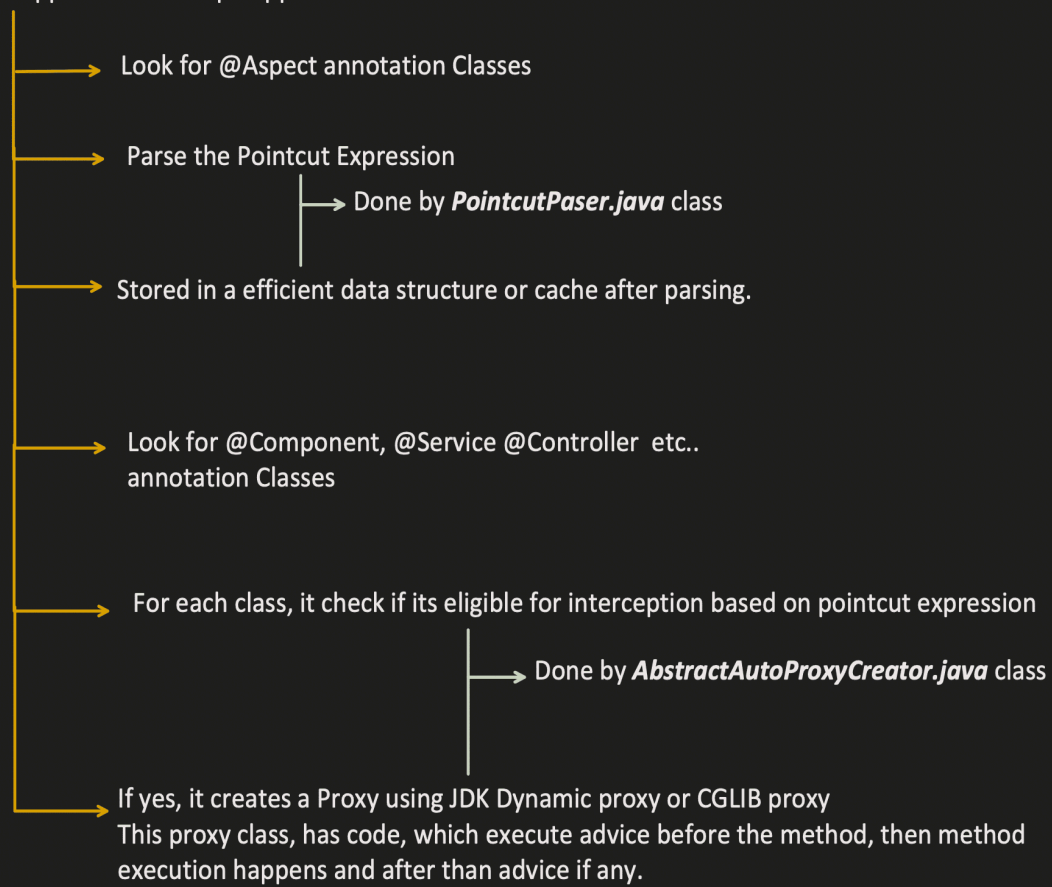

Concept && Coding

Now, when we initiate the Request after application startup, this Proxy class is actually invoked.

1. Parse the Pointcut Expression

```
PointcutParser.class
Decompiled .class file, bytecode version: 52.0 (Java 8)
Download Sources

171
172 public PointcutExpression parsePointcutExpression(String expression, Class<?> inScope, PointcutParameter[] formalParameters)
173     PointcutExpressionImpl pcExpr = null;
174
175     try {
176         Pointcut pc = this.resolvePointcutExpression(expression, inScope, formalParameters);
177         pc = this.concretizePointcutExpression(pc, inScope, formalParameters);
178         this.validateAgainstSupportedPrimitives(pc, expression);
179         pcExpr = new PointcutExpressionImpl(pc, expression, formalParameters, this.getWorld());
180         return pcExpr;
181     } catch (ParserException var6) {
182         throw new IllegalArgumentException(this.buildUserMessageFromParserException(expression, var6));
183     } catch (ReflectionWorld.ReflctionWorldException var7) {
184         throw new IllegalArgumentException(var7.getMessage());
185     }
186 }
```

2. Create Proxy class (either JDK Dynamic proxy or CGLIB proxy) if required for the class


```
AbstractAutoProxyCreator.class
Decompiled .class file, bytecode version: 61.0 (Java 17)
Download Sources Choose Sources...

191
192
193
194 protected Object wrapIfNecessary(Object bean, String beanName, Object cacheKey) { bean: EmployeeUtil@7593 beanName: "employeeUtil"
195     if (StringUtils.hasLength(beanName) && this.targetSourcedBeans.contains(beanName)) { targetSourcedBeans: size = 0
196         return bean;
197     } else if (Boolean.FALSE.equals(this.advisedBeans.get(cacheKey))) {
198         return bean;
199     } else if (!this.isInfrastructureClass(bean.getClass()) && !this.shouldSkip(bean.getClass(), beanName)) {
200         Object[] specificInterceptors = this.getAdvicesAndAdvisorsForBean(bean.getClass(), beanName, (TargetSource) null); specificInterceptors: size = 0
201         if (specificInterceptors != DO_NOT_PROXY) {
202             this.advisedBeans.put(cacheKey, Boolean.TRUE); cacheKey: "employeeUtil" advisedBeans: size = 56
203             Object proxy = this.createProxy(bean.getClass(), beanName, specificInterceptors, new SingletonTargetSource(bean)); specificInterceptors: size = 0
204             this.proxyTypes.put(cacheKey, proxy.getClass());
205             return proxy;
206         } else {
207             this.advisedBeans.put(cacheKey, Boolean.FALSE);
208             return bean;
209         }
210     } else {
211         this.advisedBeans.put(cacheKey, Boolean.FALSE);
212         return bean;
213     }
214 }
215 }
```

Concept && Coding

Application startup success

3. Invoke the request, which need Advice to be run.



4. Now, request actually tries to call Proxy Class, so it invokes either CGLIB proxy class or JDK proxy class

```
1 // Bytecode version: 61.0 (Java 7)
2
3 @Override
4 public Object invoke(Object proxy, Method method, Object[] args) throws Throwable {
5     Object adviceProxy = null;
6     boolean adviceProxy = false;
7     Object target = null;
8     TargetSource targetSource = this.getTargetSource();
9
10    Object var1;
11    try {
12        if (this.isAdviceProxy()) {
13            adviceProxy = AdviceProxyFactory.create(proxy, method, args);
14            adviceProxyContext = true;
15        }
16        target = targetSource.getTarget();
17        Class targetClass = target != null ? target.getClass() : null;
18        MethodSignature methodSignature = new MethodSignature(method.getName(), method.getParameterTypes(), method.getReturnType());
19        Advice[] advice = this.getAdvice(methodSignature, targetClass);
20        if (advice != null) {
21            Advice[] advice = AdviceProxyFactory.create(proxy, method, args);
22            adviceProxyContext = true;
23        }
24        var1 = targetSource.getTarget().invoke(target, method, args);
25    } catch (Throwable t) {
26        return t;
27    }
28    return var1;
29 }
```

This has a list of advice (before, after or around) which need to be run for this method invocation

```
1 // Bytecode version: 61.0 (Java 7)
2
3 @Override
4 public Object invoke(Object proxy, Method method, Object[] args) throws Throwable {
5     if (this.isAdviceProxy()) {
6         return this.invokeAdvice(method, args);
7     }
8     return this.invokeTarget(method, args);
9 }
```

Invokes this, which decide either invoke specific Advice or actual method (joint point)

Calls actual method

If all advice finished, then Method execution happens

Lets say, first is Before Advice in the chain.

```
1 // Bytecode version: 61.0 (Java 7)
2
3 @Override
4 public Object invoke(Object proxy, Method method, Object[] args) throws Throwable {
5     Object adviceProxy = null;
6     boolean adviceProxy = false;
7     Object target = null;
8     TargetSource targetSource = this.getTargetSource();
9
10    Object var1;
11    try {
12        if (this.isAdviceProxy()) {
13            adviceProxy = AdviceProxyFactory.create(proxy, method, args);
14            adviceProxyContext = true;
15        }
16        target = targetSource.getTarget();
17        Class targetClass = target != null ? target.getClass() : null;
18        MethodSignature methodSignature = new MethodSignature(method.getName(), method.getParameterTypes(), method.getReturnType());
19        Advice[] advice = this.getAdvice(methodSignature, targetClass);
20        if (advice != null) {
21            Advice[] advice = AdviceProxyFactory.create(proxy, method, args);
22            adviceProxyContext = true;
23        }
24        var1 = targetSource.getTarget().invoke(target, method, args);
25    } catch (Throwable t) {
26        return t;
27    }
28    return var1;
29 }
```

This will invoke @Before advice

Lets say, second is After Advice in the chain (as counter ++ happens in above method right)

```
1 // Bytecode version: 61.0 (Java 7)
2
3 @Override
4 public Object invoke(Object proxy, Method method, Object[] args) throws Throwable {
5     Object adviceProxy = null;
6     boolean adviceProxy = false;
7     Object target = null;
8     TargetSource targetSource = this.getTargetSource();
9
10    Object var1;
11    try {
12        if (this.isAdviceProxy()) {
13            adviceProxy = AdviceProxyFactory.create(proxy, method, args);
14            adviceProxyContext = true;
15        }
16        target = targetSource.getTarget();
17        Class targetClass = target != null ? target.getClass() : null;
18        MethodSignature methodSignature = new MethodSignature(method.getName(), method.getParameterTypes(), method.getReturnType());
19        Advice[] advice = this.getAdvice(methodSignature, targetClass);
20        if (advice != null) {
21            Advice[] advice = AdviceProxyFactory.create(proxy, method, args);
22            adviceProxyContext = true;
23        }
24        var1 = targetSource.getTarget().invoke(target, method, args);
25    } catch (Throwable t) {
26        return t;
27    }
28    return var1;
29 }
```

First proceed with other calls, either Before advice or Method execution

Then calls After Advice method

Concept && Coding