
Designate Documentation

Release 17.0.1.dev11

Designate Developers

Dec 02, 2023

CONTENTS

1	Contents	3
1.1	Introduction to Designate	3
1.1.1	What is DNS?	3
1.1.2	Introducing Designate	5
1.1.3	Designate Architecture	6
1.1.4	Using Designate	7
1.2	Installing OpenStack DNS as a Service	8
1.2.1	Manual Designate installation	8
	DNS service overview	8
	Install and configure	9
	Verify operation	21
	Create a Zone	22
	Next steps	24
1.2.2	Quickstart with Kolla	24
1.3	Developer documentation	24
1.3.1	Getting Involved	24
	How to install DNS with DevStack	24
	#openstack-dns IRC channel	31
	Contributing	31
	Task Tracking	31
	Reporting a Bug	31
	Development Environment and Developer Workflow	31
	Coding Standards	32
1.3.2	Architecture	35
	High Level Topology	35
	Designate API	35
	Designate Central	35
	Designate MiniDNS	36
	Designate Worker	36
	Designate Producer	36
	Designate Sink	36
	DNS Backend	36
	Message Queue	37
	Database/Storage	37
1.3.3	Guru Meditation Reports	37
	Structure of a GMR	37
	Generate a GMR	37
	Reference	38
	GMR Example	38

1.3.4	Source Code Documentation	47
	API	47
	Backend	48
	Central	58
	MDNS	66
	Objects	66
	Quota	117
	Sink	118
	Storage	118
1.3.5	Development Environment on Ubuntu	134
	Development Environment	134
1.3.6	OpenStack Integrations	140
	Reverse - FloatingIP	140
	Neutron Designate direct integration	141
	Designate Sink	141
1.3.7	Other modules	141
1.4	User guide	141
1.4.1	Managing Zones	142
	Managing Zones	142
	Zone Import and Export	145
	Zone Ownership Transfers	152
	Secondary Zones	157
	Shared Zones	160
1.4.2	Working with Recordsets	162
	Managing Records	162
	How To Manage PTR Records	166
	Using DNS with Neutron & Nova	181
1.5	Administration guide	186
1.5.1	Managing Top Level Domain Names	186
1.5.2	DNS Server Plugin Documentation	187
	Agent Backend	187
	Akamai v2 Backend	188
	Bind9 Backend	189
	Djbdns Agent backend	190
	gdnssd Agent backend	192
	Infoblox Backend	194
	Knot DNS 2 Agent backend	195
	MSDNS Agent Backend	199
	NS1 Backend	200
	PDNS4 Backend	202
1.5.3	High Availability Guide	203
	designate-api	203
	designate-central	204
	designate-mdns	205
	designate-worker	206
	designate-producer	206
	designate-sink	207
1.5.4	DNS Server Pools	208
	Overview	208
	Target vs. Nameserver	209
	Managing Pools	209

1.5.5	Pool Scheduler	211
	Default Provided Filters	212
1.5.6	How To Configure Multiple Pools	215
	Pools Configuration	215
	Pool Scheduler	218
1.5.7	Blacklisting Domain Names	219
	Managing Blacklists	219
	Using the REST API	220
	Regular Expressions	221
1.5.8	View and Manage Quotas	221
	Viewing Quotas	221
	Modifying Quotas	222
	Resetting Quotas	223
	Available Quotas	223
	Default Quotas	224
	Project ID Verification	224
1.5.9	Designate Policies	225
	Enabling Keystone Default Roles and Scoped Tokens	225
	Oslo Tools For Policy Management	227
	Designate Default Policy Overview	227
1.5.10	Config Documentation	246
	DEFAULT	246
	backend:agent:bind9	261
	backend:agent:denominator	263
	backend:agent:djbdns	264
	backend:agent:gdnisd	265
	backend:agent:knot2	266
	backend:agent:msdns	267
	backend:dynect	267
	backend:infoblox	268
	coordination	271
	cors	271
	database	273
	handler:neutron_floatingip	277
	handler:nova_fixed	279
	healthcheck	280
	heartbeat_emitter	281
	keystone	281
	keystone_authtoken	285
	network_api:neutron	291
	oslo_concurrency	294
	oslo_messaging_amqp	294
	oslo_messaging_kafka	303
	oslo_messaging_notifications	307
	oslo_messaging_rabbit	308
	oslo_middleware	315
	oslo_policy	316
	oslo_reports	318
	oslo_versionedobjects	319
	producer_task:delayed_notify	319
	producer_task:periodic_exists	320

	producer_task:periodic_secondary_refresh	320
	producer_task:worker_periodic_recovery	321
	producer_task:zone_purge	321
	proxy	322
	service:agent	322
	service:api	325
	service:central	330
	service:mdns	332
	service:producer	334
	service:sink	335
	service:worker	336
	ssl	338
	storage:sqlalchemy	340
1.5.11	Notifications	344
	Emitters	345
	Receivers	346
	Format	346
1.5.12	Production Guidelines	347
	DNS Zone Squatting	347
	DNS Cache Poisoning	348
1.5.13	Upgrades	348
	Upgrading to Kilo from Juno	349
	Upgrading to Mitaka from Liberty	349
	Upgrading to Newton from Mitaka	351
	Upgrading to Ocata from Newton	353
1.5.14	Troubleshooting	354
	I have a broken zone	354
	I have a broken pool	354
	I deleted a zone but its still in the database	354
	What ports should be open?	354
	What network protocol are used?	355
	What needs access to the Database?	355
	What needs access to RabbitMQ?	355
	What needs access to ZooKeeper?	355
	What needs access to Memcached?	355
	How do I monitor Designate?	355
	What are useful metrics to monitor?	355
	What are useful metrics to review first during an incident?	356
1.5.15	Sample configuration files	356
	policy.yaml	356
	designate.conf	376
1.5.16	DNS Server Driver Support Matrix	376
1.6	Designate Configuration Guide	381
1.7	Command-Line Interface Reference	381
1.7.1	Designate Manage CLI	381
	designate-manage	382
	designate-manage pool	383
	designate-manage database	384
1.7.2	Designate Status CLI	385
	designate-status	385
	designate-status upgrade	385

1.8	Designate Reference	386
1.8.1	Designate Glossary	386
Index		387

Designate is a multi-tenant DNSaaS service for OpenStack. It provides a REST API with integrated Keystone authentication. It can be configured to auto-generate records based on Nova and Neutron actions. Designate supports a variety of DNS servers including Bind9 and PowerDNS 4.

CONTENTS


1.1 Introduction to Designate

Designate is an Open Source DNS-as-a-Service implementation and a part of the OpenStack ecosystem of services for running clouds. In order to understand what Designate can do and how it works, its necessary to understand some of the basics of DNS.

1.1.1 What is DNS?


The Domain Name System (DNS) is a system for naming resources connected to a network, and works by storing various types of *record*, such as an IP address associated with a domain name. In practice, this is implemented by *authoritative name servers* which contain these records and *resolvers* which query name servers for records. Names are divided up into a hierarchy of zones, allowing different name servers to be responsible for separate groups of zones by delegating responsibility using records.

The root zone, which is simply `.`, is comprised entirely of records delegating various top level domains (TLDs) to other nameservers. The TLD name servers will contain records for domains within their TLD, such as the `.com` nameserver having an `example.com` record, as well as records that delegate zones to other nameservers, for example `openstack.org` might have their own nameserver so that they can then create `cloud.openstack.org`.

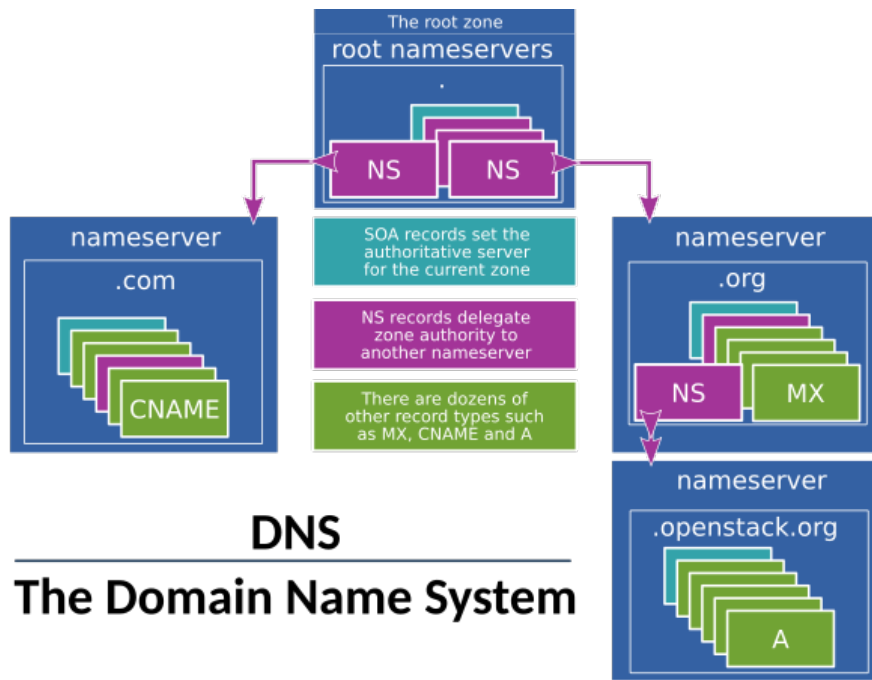

Resolvers are often formed in two parts: a *stub* resolver which is often merely a library on a users computer, and a *recursive resolver* that will perform queries against nameservers before returning the result to the user. When searching for a domain, the resolver will start at the end of the domain and work its way back to the beginning.

For example in the diagram below, when searching for `cloud.openstack.org`, it will start with the root nameserver `.`, which will reply with the location of the `.org` nameserver. The resolver can then contact the `.org` nameserver to get the `openstack.org` nameserver and from there finally get the `cloud.openstack.org` record and return it to the user.

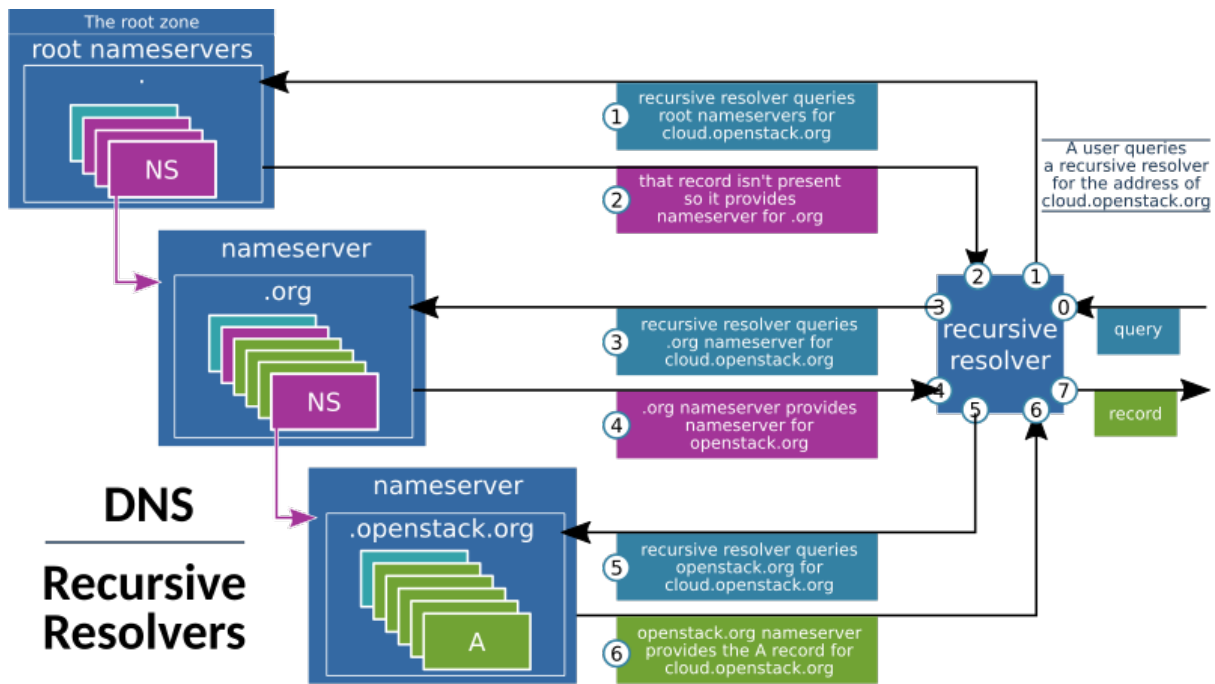

In order to make this more efficient, the results are cached on the resolver, so after the first user has requested `cloud.openstack.org`, the resolver can return the cached result for subsequent requests.

Further reading on DNS and how it works is available here:

- https://en.wikipedia.org/wiki/Domain_Name_System

While the system itself is defined via RFCs such as this:


- <https://tools.ietf.org/html/rfc1034>

1.1.2 Introducing Designate

Designate is an OpenStack service that allows users and operators to manage DNS records, names and zones via a REST API and can configure existing DNS name servers to contain those records. Designate can also be configured by an operator to integrate with both the OpenStack Network Service (Neutron) and the Compute Service (Nova) so that records are automatically created when floating IPs and compute instances are created respectively, and uses the OpenStack Identity Service (Keystone) for user management. Since there are a multitude of software implementations of the DNS name server, Designate has a pluggable backend that can be configured to manage many of them, most notably BIND9 and PowerDNS.

1.1.3 Designate Architecture

Designate is comprised of several different services: the API, Producer, Central, Worker and Mini DNS. It uses an oslo.db compatible database to store state and data, and an oslo.messaging compatible message queue to facilitate communication between services. Multiple copies of all Designate services can be run in tandem to facilitate high availability deployments, with the API process often sitting behind load balancers.

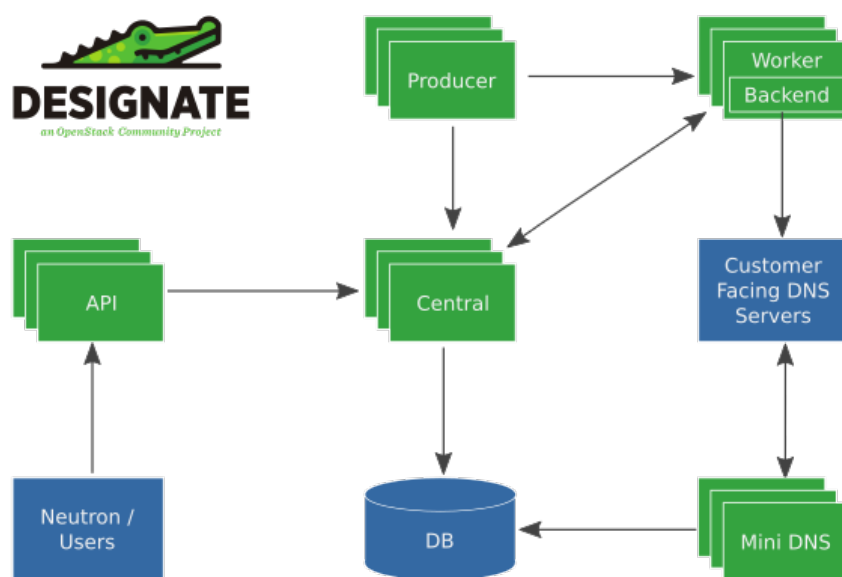


Neutron and other users of Designate only need to be able to access the API server, while administrators should ensure the DNS Nameservers to be configured are able to access Mini DNS from which to request updates.

Below we can see a common deployment scenario:

A user has created two zones in Designate: *zone1.cloud.openstack.org* and *zone2.cloud.openstack.org*. This will result in two new zones being created on the Designate-managed nameserver with SOA records.

The user then created two networks in Neutron: one private network with *zone1.cloud.openstack.org* assigned to it, and one public network with *zone2.cloud.openstack.org*.

They have then created virtual machine *vm1* in Nova, connected to the private network in Neutron and attached to a floating IP, and the virtual machine *vm2* attached directly to the public network. Each of these actions triggers a chain of events that will cause Neutron to request Designate create records on behalf of the user, with the end result being that records are created in the authoritative nameserver mapping the vm names to domains along with PTR records to allow reverse lookups.

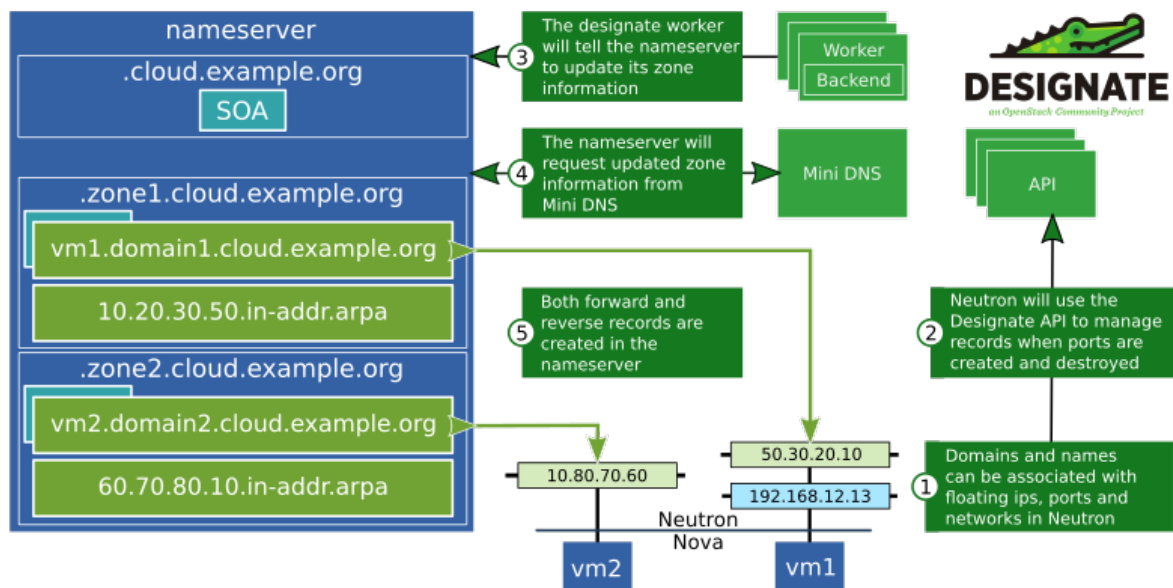

More information about configuring Neutron to work with Designate can be found in the Neutron documentation at <https://docs.openstack.org/neutron/latest/admin/config-dns-int-ext-serv.html>

1.1.4 Using Designate

Designate provides a REST API and that is commonly used by one of three methods. The most common is to use the OpenStack client, a python command-line tool with commands for interacting with OpenStack services. The documentation for the OpenStack client is available at <https://docs.openstack.org/python-openstackclient/>. The *designate plugin* <https://docs.openstack.org/python-designateclient/latest/> for the OpenStack client needs to be installed as well:

```
pip install python-openstackclient
pip install python-designateclient
```

Another popular way to use Designate is via the OpenStack Dashboard, Horizon. Administrators will need to add the *Designate Horizon plugin* <https://opendev.org/openstack/designate-dashboard> to the dashboard in order to enable Designate features.

Finally, for python developers the aforementioned Designate plugin for the OpenStack client which can be used as a python library. Other languages may have bindings available from one of the third party *SDKs* <https://wiki.openstack.org/wiki/SDKs> for OpenStack.

1.2 Installing OpenStack DNS as a Service

1.2.1 Manual Designate installation

This chapter assumes a working setup of OpenStack following the [OpenStack Installation Tutorial](#).

DNS service overview

The DNS service provides DNS Zone and RecordSet management for OpenStack clouds. The DNS Service includes a REST API, a command-line client, and a Horizon Dashboard plugin.

The DNS service consists of the following components:

openstack command-line client plugin

A plugin for the OpenStack Client CLI that communicates with the REST API

designate-api component

An OpenStack-native REST API that processes API requests by sending them to the `designate-central` over Remote Procedure Call (RPC).

designate-central component

Orchestrates the creation, deletion and update of Zones and RecordSets.

designate-producer component

Orchestrates periodic tasks that are run by designate.

designate-worker component

Is a generic task runner, that runs both zone create / update and deletes, and periodic tasks, from `designate-producer`

designate-mdns component

A small DNS Server that is responsible for pushing DNS Zone information to the customer facing DNS Servers. Can also pull in DNS information about DNS Zones hosted outside of the Designate infrastructure

designate-agent component

A small python daemon that can be used for a limited sub set of DNS Servers Some DNS Servers require commands be run locally, and to do this we use this component.

Note: The majority of the DNS service installs will not need this component.

Customer Facing DNS Servers

Serves DNS requests to end users. They are orchestrated by the `designate-worker`, and the supported list is maintained [here](#).

Install and configure

This section describes how to install and configure the DNS service, code-named designate, on the controller node.

This section assumes that you already have a working OpenStack environment with at least the Identity service installed.

Note that installation and configuration vary by distribution.

Install and configure for openSUSE and SUSE Linux Enterprise

This section describes how to install and configure the DNS service for openSUSE Leap 42.2 and SUSE Linux Enterprise Server 12 SP2.

Prerequisites

Before you install and configure the DNS service, you must create service credentials and API endpoints.

1. Source the admin credentials to gain access to admin-only CLI commands:

```
$ source admin-openrc
```

2. To create the service credentials, complete these steps:

- Create the designate user:

```
$ openstack user create --domain default --password-prompt designate
```

- Add the admin role to the designate user:

```
$ openstack role add --project service --user designate admin
```

- Create the designate service entities:

```
$ openstack service create --name designate --description "DNS" dns
```

3. Create the DNS service API endpoint:

```
$ openstack endpoint create --region RegionOne \
  dns public http://controller:9001/
```

Install and configure components

Note: Default configuration files vary by distribution. You might need to add these sections and options rather than modifying existing sections and options. Also, an ellipsis (...) in the configuration snippets indicates potential default configuration options that you should retain.

1. Install the packages:

```
# zypper install openstack-designate\*
```

2. Create a designate database that is accessible by the designate user. Replace DESIGNATE_DBPASS with a suitable password:

```
# mysql
MariaDB [(none)]> CREATE DATABASE designate CHARACTER SET utf8 COLLATE_
↪utf8_general_ci;
MariaDB [(none)]> GRANT ALL PRIVILEGES ON designate.* TO 'designate'@
↪'localhost' \
IDENTIFIED BY 'DESIGNATE_DBPASS';
MariaDB [(none)]> GRANT ALL PRIVILEGES ON designate.* TO 'designate'@'%' \
IDENTIFIED BY 'DESIGNATE_DBPASS';
```

3. Install the BIND packages:

```
# zypper install bind bind-utils
```

4. Create an RNDK Key:

```
# rndc-confgen -a -k designate -c /etc/designate/rndc.key -r /dev/urandom
```

5. Add the following options in the /etc/named.conf file:

```
...
include "/etc/designate/rndc.key";

options {
    ...
    allow-new-zones yes;
    request-ixfr no;
    listen-on port 53 { 127.0.0.1; };
    recursion no;
    allow-query { 127.0.0.1; };
};

controls {
    inet 127.0.0.1 port 953
        allow { 127.0.0.1; } keys { "designate"; };
};
```

6. Start the DNS service and configure it to start when the system boots:

```
# systemctl enable named

# systemctl start named
```

7. Edit the /etc/designate/designate.conf file and complete the following actions:

- In the [service:api] section, configure auth_strategy:

```
[service:api]
listen = 0.0.0.0:9001
auth_strategy = keystone
enable_api_v2 = True
enable_api_admin = True
enable_host_header = True
enabled_extensions_admin = quotas, reports
```

- In the [keystone_authtoken] section, configure the following options:

```
[keystone_authtoken]
auth_type = password
username = designate
password = DESIGNATE_PASS
project_name = service
project_domain_name = Default
user_domain_name = Default
www_authenticate_uri = http://controller:5000/
auth_url = http://controller:5000/
memcached_servers = controller:11211
```

Replace DESIGNATE_PASS with the password you chose for the designate user in the Identity service.

- In the [DEFAULT] section, configure RabbitMQ message queue access:

```
[DEFAULT]
# ...
transport_url = rabbit://openstack:RABBIT_PASS@controller:5672/
```

Replace RABBIT_PASS with the password you chose for the openstack account in RabbitMQ.

- In the [storage:sqlalchemy] section, configure database access:

```
[storage:sqlalchemy]
connection = mysql+pymysql://designate:DESIGNATE_DBPASS@controller/
↳ designate
```

Replace DESIGNATE_DBPASS with the password you chose for the designate database.

- Populate the designate database

```
# su -s /bin/sh -c "designate-manage database sync" designate
```

8. Start the designate central and API services and configure them to start when the system boots:

```
# systemctl start openstack-designate-central openstack-designate-api
# systemctl enable openstack-designate-central openstack-designate-api
```

9. Create a pools.yaml file in /etc/designate/pools.yaml with the following contents:

```
- name: default
  # The name is immutable. There will be no option to change the name.
  ↪after
  # creation and the only way will to change it will be to delete it
  # (and all zones associated with it) and recreate it.
  description: Default Pool

  attributes: {}

  # List out the NS records for zones hosted within this pool
  # This should be a record that is created outside of designate, that
  # points to the public IP of the controller node.
  ns_records:
    - hostname: ns1-1.example.org.
      priority: 1

  # List out the nameservers for this pool. These are the actual BIND.
  ↪servers.
  # We use these to verify changes have propagated to all nameservers.
  nameservers:
    - host: 127.0.0.1
      port: 53

  # List out the targets for this pool. For BIND there will be one
  # entry for each BIND server, as we have to run rndc command on each.
  ↪server
  targets:
    - type: bind9
      description: BIND9 Server 1

  # List out the designate-mdns servers from which BIND servers.
  ↪should
  # request zone transfers (AXFRs) from.
  # This should be the IP of the controller node.
  # If you have multiple controllers you can add multiple masters
  # by running designate-mdns on them, and adding them here.
  masters:
    - host: 127.0.0.1
      port: 5354

  # BIND Configuration options
  options:
    host: 127.0.0.1
    port: 53
    rndc_host: 127.0.0.1
    rndc_port: 953
    rndc_key_file: /etc/designate/rndc.key
```

10. Update the pools:

```
# su -s /bin/sh -c "designate-manage pool update" designate
```

11. Start the designate and mDNS services and configure them to start when the system boots:

```
# systemctl start openstack-designate-worker openstack-designate-producer
↪ openstack-designate-mdns

# systemctl enable openstack-designate-worker openstack-designate-
↪ producer openstack-designate-mdns
```

Install and configure for Red Hat Enterprise Linux and CentOS

This section describes how to install and configure the DNS service for Red Hat Enterprise Linux 7 and CentOS 7.

Prerequisites

Before you install and configure the DNS service, you must create service credentials and API endpoints.

1. Source the admin credentials to gain access to admin-only CLI commands:

```
$ source admin-openrc
```

2. To create the service credentials, complete these steps:

- Create the designate user:

```
$ openstack user create --domain default --password-prompt designate
```

- Add the admin role to the designate user:

```
$ openstack role add --project service --user designate admin
```

- Create the designate service entities:

```
$ openstack service create --name designate --description "DNS" dns
```

3. Create the DNS service API endpoint:

```
$ openstack endpoint create --region RegionOne \
  dns public http://controller:9001/
```

Install and configure components

Note: Default configuration files vary by distribution. You might need to add these sections and options rather than modifying existing sections and options. Also, an ellipsis (. . .) in the configuration snippets indicates potential default configuration options that you should retain.

1. Install the packages:

```
# yum install openstack-designate\*
```

2. Create a designate database that is accessible by the designate user. Replace DESIGNATE_DBPASS with a suitable password:

```
# mysql
MariaDB [(none)]> CREATE DATABASE designate CHARACTER SET utf8 COLLATE_
↪utf8_general_ci;
MariaDB [(none)]> GRANT ALL PRIVILEGES ON designate.* TO 'designate'@
↪'localhost' \
IDENTIFIED BY 'DESIGNATE_DBPASS';
MariaDB [(none)]> GRANT ALL PRIVILEGES ON designate.* TO 'designate'@'%' \
IDENTIFIED BY 'DESIGNATE_DBPASS';
```

3. Install the BIND packages:

```
# yum install bind bind-utils
```

4. Create an RNDC Key:

```
# rndc-confgen -a -k designate -c /etc/designate/rndc.key -r /dev/urandom
```

5. Add the following options in the /etc/named.conf file:

```
...
include "/etc/designate/rndc.key";

options {
    ...
    allow-new-zones yes;
    request-ixfr no;
    listen-on port 53 { 127.0.0.1; };
    recursion no;
    allow-query { 127.0.0.1; };
};

controls {
    inet 127.0.0.1 port 953
        allow { 127.0.0.1; } keys { "designate"; };
};
```

6. Start the DNS service and configure it to start when the system boots:

```
# systemctl enable named
# systemctl start named
```

7. Edit the `/etc/designate/designate.conf` file and complete the following actions:

- In the `[service:api]` section, configure `auth_strategy`:

```
[service:api]
listen = 0.0.0.0:9001
auth_strategy = keystone
enable_api_v2 = True
enable_api_admin = True
enable_host_header = True
enabled_extensions_admin = quotas, reports
```

- In the `[keystone_authtoken]` section, configure the following options:

```
[keystone_authtoken]
auth_type = password
username = designate
password = DESIGNATE_PASS
project_name = service
project_domain_name = Default
user_domain_name = Default
www_authenticate_uri = http://controller:5000/
auth_url = http://controller:5000/
memcached_servers = controller:11211
```

Replace `DESIGNATE_PASS` with the password you chose for the `designate` user in the Identity service.

- In the `[DEFAULT]` section, configure RabbitMQ message queue access:

```
[DEFAULT]
# ...
transport_url = rabbit://openstack:RABBIT_PASS@controller:5672/
```

Replace `RABBIT_PASS` with the password you chose for the `openstack` account in RabbitMQ.

- In the `[storage:sqlalchemy]` section, configure database access:

```
[storage:sqlalchemy]
connection = mysql+pymysql://designate:DESIGNATE_DBPASS@controller/
↳ designate
```

Replace `DESIGNATE_DBPASS` with the password you chose for the `designate` database.

- Populate the `designate` database

```
# su -s /bin/sh -c "designate-manage database sync" designate
```

8. Start the `designate` central and API services and configure them to start when the system boots:

```
# systemctl start designate-central designate-api

# systemctl enable designate-central designate-api
```

9. Create a pools.yaml file in /etc/designate/pools.yaml with the following contents:

```
- name: default
  # The name is immutable. There will be no option to change the name.
  ↪after
  # creation and the only way will to change it will be to delete it
  # (and all zones associated with it) and recreate it.
  description: Default Pool

  attributes: {}

  # List out the NS records for zones hosted within this pool
  # This should be a record that is created outside of designate, that
  # points to the public IP of the controller node.
  ns_records:
    - hostname: ns1-1.example.org.
      priority: 1

  # List out the nameservers for this pool. These are the actual BIND.
  ↪servers.
  # We use these to verify changes have propagated to all nameservers.
  nameservers:
    - host: 127.0.0.1
      port: 53

  # List out the targets for this pool. For BIND there will be one
  # entry for each BIND server, as we have to run rndc command on each.
  ↪server
  targets:
    - type: bind9
      description: BIND9 Server 1

  # List out the designate-mdns servers from which BIND servers.
  ↪should
  # request zone transfers (AXFRs) from.
  # This should be the IP of the controller node.
  # If you have multiple controllers you can add multiple masters
  # by running designate-mdns on them, and adding them here.
  masters:
    - host: 127.0.0.1
      port: 5354

  # BIND Configuration options
  options:
    host: 127.0.0.1
    port: 53
```

(continues on next page)

(continued from previous page)

```

rndc_host: 127.0.0.1
rndc_port: 953
rndc_key_file: /etc/designate/rndc.key

```

10. Update the pools:

```
# su -s /bin/sh -c "designate-manage pool update" designate
```

11. Start the designate and mDNS services and configure them to start when the system boots:

```

# systemctl start designate-worker designate-producer designate-mdns
# systemctl enable designate-worker designate-producer designate-mdns

```

Install and configure for Ubuntu

This section describes how to install and configure the DNS service for Ubuntu 16.04 (LTS).

Prerequisites

Before you install and configure the DNS service, you must create service credentials and API endpoints.

1. Source the admin credentials to gain access to admin-only CLI commands:

```
$ source admin-openrc
```

2. To create the service credentials, complete these steps:

- Create the designate user:

```
$ openstack user create --domain default --password-prompt designate
```

- Add the admin role to the designate user:

```
$ openstack role add --project service --user designate admin
```

- Create the designate service entities:

```
$ openstack service create --name designate --description "DNS" dns
```

3. Create the DNS service API endpoint:

```
$ openstack endpoint create --region RegionOne \
  dns public http://controller:9001/
```

Install and configure components

Note: Default configuration files vary by distribution. You might need to add these sections and options rather than modifying existing sections and options. Also, an ellipsis (. . .) in the configuration snippets indicates potential default configuration options that you should retain.

1. Install the packages:

```
# apt-get install designate
```

2. Create a designate database that is accessible by the designate user. Replace DESIGNATE_DBPASS with a suitable password:

```
# mysql
mysql> CREATE DATABASE designate CHARACTER SET utf8 COLLATE utf8_general_
↪ci;
mysql> GRANT ALL PRIVILEGES ON designate.* TO 'designate'@'localhost' \
IDENTIFIED BY 'DESIGNATE_DBPASS';
mysql> GRANT ALL PRIVILEGES ON designate.* TO 'designate'@'%' \
IDENTIFIED BY 'DESIGNATE_DBPASS';
```

3. Install the BIND9 packages:

```
# apt-get install bind9 bind9utils bind9-doc
```

4. Create an RNDK Key:

```
# rndc-confgen -a -k designate -c /etc/designate/rndc.key -r /dev/urandom
```

5. Add the following options in the /etc/bind/named.conf.options file:

```
...
include "/etc/designate/rndc.key";

options {
    ...
    allow-new-zones yes;
    request-ixfr no;
    listen-on port 53 { 127.0.0.1; };
    recursion no;
    allow-query { 127.0.0.1; };
};

controls {
    inet 127.0.0.1 port 953
        allow { 127.0.0.1; } keys { "designate"; };
};
```

6. Restart the DNS service:

```
# systemctl restart bind9.service
```

7. Edit the `/etc/designate/designate.conf` file and complete the following actions:

- In the `[service:api]` section, configure `auth_strategy`:

```
[service:api]
listen = 0.0.0.0:9001
auth_strategy = keystone
enable_api_v2 = True
enable_api_admin = True
enable_host_header = True
enabled_extensions_admin = quotas, reports
```

- In the `[keystone_authtoken]` section, configure the following options:

```
[keystone_authtoken]
auth_type = password
username = designate
password = DESIGNATE_PASS
project_name = service
project_domain_name = Default
user_domain_name = Default
www_authenticate_uri = http://controller:5000/
auth_url = http://controller:5000/
memcached_servers = controller:11211
```

Replace `DESIGNATE_PASS` with the password you chose for the `designate` user in the Identity service.

- In the `[DEFAULT]` section, configure RabbitMQ message queue access:

```
[DEFAULT]
# ...
transport_url = rabbit://openstack:RABBIT_PASS@controller:5672/
```

Replace `RABBIT_PASS` with the password you chose for the `openstack` account in RabbitMQ.

- In the `[storage:sqlalchemy]` section, configure database access:

```
[storage:sqlalchemy]
connection = mysql+pymysql://designate:DESIGNATE_DBPASS@controller/
↪designate
```

Replace `DESIGNATE_DBPASS` with the password you chose for the `designate` database.

- Populate the `designate` database

```
# su -s /bin/sh -c "designate-manage database sync" designate
```

8. Start the `designate` central and API services and configure them to start when the system boots:

```
# systemctl start designate-central designate-api

# systemctl enable designate-central designate-api
```

9. Create a pools.yaml file in /etc/designate/pools.yaml with the following contents:

```
- name: default
  # The name is immutable. There will be no option to change the name.
  ↪after
  # creation and the only way will to change it will be to delete it
  # (and all zones associated with it) and recreate it.
  description: Default Pool

  attributes: {}

  # List out the NS records for zones hosted within this pool
  # This should be a record that is created outside of designate, that
  # points to the public IP of the controller node.
  ns_records:
    - hostname: ns1-1.example.org.
      priority: 1

  # List out the nameservers for this pool. These are the actual BIND.
  ↪servers.
  # We use these to verify changes have propagated to all nameservers.
  nameservers:
    - host: 127.0.0.1
      port: 53

  # List out the targets for this pool. For BIND there will be one
  # entry for each BIND server, as we have to run rndc command on each.
  ↪server
  targets:
    - type: bind9
      description: BIND9 Server 1

  # List out the designate-mdns servers from which BIND servers.
  ↪should
  # request zone transfers (AXFRs) from.
  # This should be the IP of the controller node.
  # If you have multiple controllers you can add multiple masters
  # by running designate-mdns on them, and adding them here.
  masters:
    - host: 127.0.0.1
      port: 5354

  # BIND Configuration options
  options:
    host: 127.0.0.1
    port: 53
```

(continues on next page)

(continued from previous page)

```

rndc_host: 127.0.0.1
rndc_port: 953
rndc_key_file: /etc/designate/rndc.key

```

10. Update the pools:

```
# su -s /bin/sh -c "designate-manage pool update" designate
```

11. Install Designate Worker, producer and mini-dns

```
# apt install designate-worker designate-producer designate-mdns
```

12. Start the designate and mDNS services and configure them to start when the system boots:

```

# systemctl start designate-worker designate-producer designate-mdns

# systemctl enable designate-worker designate-producer designate-mdns

```

Verify operation

Verify operation of the DNS service.

Note: Perform these commands on the controller node.

1. Source the admin tenant credentials:

```
$ . admin-openrc
```

2. List service components to verify successful launch and registration of each process:

```

$ ps -aux | grep designate

../usr/bin/python /usr/bin/designate-mdns --config-file /etc/designate/
↪ designate.conf
../usr/bin/python /usr/bin/designate-central --config-file /etc/designate/
↪ designate.conf
../usr/bin/python /usr/bin/designate-agent --config-file /etc/designate/
↪ designate.conf
../usr/bin/python /usr/bin/designate-api --config-file /etc/designate/
↪ designate.conf
../usr/bin/python /usr/bin/designate-worker --config-file /etc/designate/
↪ designate.conf
../usr/bin/python /usr/bin/designate-producer --config-file /etc/
↪ designate/designate.conf

$ openstack dns service list
+-----+-----+-----+-----+-----+
↪

```

(continues on next page)

(continued from previous page)

id	hostname	
↪service_name	status	stats capabilities
+-----+-----+-----+-----+-----+-----+		
↪918a8f6e-9e7e-453e-8583-cbefa7ae7f8f	vagrant-ubuntu-trusty-64	↪
↪central	UP	- -
↪982f78d5-525a-4c36-af26-a09aa39de5d7	vagrant-ubuntu-trusty-64	↪api ↪
↪	UP	- -
↪eda2dc16-ad27-4ee1-b091-bb75b6ceaffe	vagrant-ubuntu-trusty-64	↪mdns ↪
↪	UP	- -
↪00c5c372-e630-49b1-a6b6-17e3fa4544ea	vagrant-ubuntu-trusty-64	↪
↪worker	UP	- -
↪8cdaf2e9-accd-4665-8e9e-be26f1ccfe4a	vagrant-ubuntu-trusty-64	↪
↪producer	UP	- -
+-----+-----+-----+-----+-----+-----+		
↪		

Note: This output should indicate at least one of each of the central, api, producer, mdns and worker components on the controller node.

This output may differ slightly depending on the distribution.

Create a Zone

In environments that include the DNS service, you can create a DNS Zone.

1. Source the demo credentials to perform the following steps as a non-administrative project:

```
$ . demo-openrc
```

2. Create a DNS Zone called `example.com.`:

```
$ openstack zone create --email dnsmaster@example.com example.com.
+-----+-----+-----+-----+-----+-----+
| Field      | Value                                     |
+-----+-----+-----+-----+-----+
| action     | CREATE                                  |
| attributes | {}                                       |
| created_at | 2016-07-13T14:54:16.000000             |
| description | None                                    |
| email      | dnsmaster@example.com                  |
| id         | 14093115-0f0f-497a-ac69-42235e46c26f |
| masters    |                                         |
| name       | example.com.                           |
| pool_id    | 794ccc2c-d751-44fe-b57f-8894c9f5c842 |
| project_id | 656bc359067844fba6005d400f19df76     |
| serial     | 1468421656                             |
| status     | PENDING                                |
```

(continues on next page)

(continued from previous page)

```

| transferred_at | None |
| ttl            | 3600 |
| type           | PRIMARY |
| updated_at     | None |
| version        | 1 |
+-----+-----+

```

3. After a short time, verify successful creation of the DNS Zone:

```

$ openstack zone list
+-----+-----+-----+-----+
| id | name | type |  |
+-----+-----+-----+-----+
| 14093115-0f0f-497a-ac69-42235e46c26f | example.com. | PRIMARY |  |
| 1468421656 | ACTIVE | NONE |  |
+-----+-----+-----+-----+

```

4. You can now create RecordSets in this DNS Zone:

```

$ openstack recordset create --record '10.0.0.1' --type A example.com. www
+-----+-----+-----+-----+
| Field | Value |
+-----+-----+-----+-----+
| action | CREATE |
| created_at | 2016-07-13T14:59:32.000000 |
| description | None |
| id | 07e6f5af-783e-481f-b8df-5972a6174c94 |
| name | www.example.com. |
| project_id | 656bc359067844fba6005d400f19df76 |
| records | 10.0.0.1 |
| status | PENDING |
| ttl | None |
| type | A |
| updated_at | None |
| version | 1 |
| zone_id | 14093115-0f0f-497a-ac69-42235e46c26f |
| zone_name | example.com. |
+-----+-----+-----+-----+

```

5. Delete the DNS Zone:

```

$ openstack zone delete example.com.
+-----+-----+-----+-----+
| Field | Value |
+-----+-----+-----+-----+
| action | DELETE |
+-----+-----+-----+-----+

```

(continues on next page)

(continued from previous page)

attributes		
created_at	2017-07-12T03:26:25.000000	
description	None	
email	dnsmaster@example.com	
id	4a21a893-2c58-4797-82ed-19fcef7c418d	
masters		
name	example.com.	
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842	
project_id	d53f80b5a22b4962a176935eea23f9c4	
serial	1499830029	
status	PENDING	
transferred_at	None	
ttl	3600	
type	PRIMARY	
updated_at	2017-07-12T03:27:25.000000	
version	4	
+-----+-----+		

Next steps

Your OpenStack environment now includes the designate service.

To add additional services, see the [OpenStack install guide](#).

To learn more about the designate service, read the *Designate developer documentation*.

1.2.2 Quickstart with Kolla

Following the [Designate in Kolla](#) to quickly install and setup Designate.

1.3 Developer documentation

In this section, you will find documentation relevant to developing Designate.

Contents:

1.3.1 Getting Involved

How to install DNS with DevStack

The Designate source code contains a DevStack plugin that allows to deploy an OpenStack installation with the DNS service enabled.

Instructions

Note: If you want to use local sources for development then you should consider using the contrib/vagrant folder in the [repository](#).

1. Get a clean Ubuntu 20.04 VM (see the [DevStack installation instructions](#) for more details). DevStack takes over. Dont use your desktop!
2. Clone DevStack inside the VM

```
$ git clone https://opendev.org/openstack/devstack.git
```

3. Move to devstack directory

```
$ cd devstack
```

4. Create a *local.conf* config file

```
[[local|localrc]]
# General DevStack Config
# =====
ADMIN_PASSWORD=password
MYSQL_PASSWORD=password
RABBIT_PASSWORD=password
SERVICE_PASSWORD=password
SERVICE_TOKEN=password

# IP Address for services to bind to (Should match IP from Vagrantfile)
SERVICE_HOST=192.168.27.100
HOST_IP=$SERVICE_HOST

# Logging
#LOGFILE=/opt/stack/logs/stack.sh.log
VERBOSE=True
LOG_COLOR=True

# Test a Gerrit Review
# DESIGNATE_REPO=https://review.opendev.org/openstack/designate
# DESIGNATE_BRANCH=refs/changes/41/765541/1

# Test a particular branch
# DESIGNATE_REPO=https://opendev.org/openstack/designate.git
# DESIGNATE_BRANCH=stable/stein

# Disable all services except core ones
disable_all_services
enable_service rabbit mysql key

# Enable designate
enable_plugin designate https://opendev.org/openstack/designate
```

(continues on next page)

(continued from previous page)

```

# Designate Devstack Config
# =====
# Enable core Designate services
enable_service designate,designate-central,designate-api,designate-worker,
↪ designate-producer,designate-mdns

# Optional Designate services
#enable_service designate-agent
#enable_service designate-sink

# Backend Driver (e.g. powerdns, bind9. See designate.backend section of
#             setup.cfg)
#DESIGNATE_BACKEND_DRIVER=bind9

# Agent Backend Driver (Used only when DESIGNATE_BACKEND_DRIVER=agent)
#DESIGNATE_AGENT_BACKEND_DRIVER=fake

# Pool Manager Cache Driver (e.g. noop, memcache, sqlalchemy. See
#             designate.backend section of setup.cfg)
#DESIGNATE_POOL_MANAGER_CACHE_DRIVER=memcache

# mDNS Service DNS Port Number
#DESIGNATE_SERVICE_PORT_MDNS=5354

# Designate Backend Config
# =====
# DynECT Backend
# NOTES:
# - DynECT requires DESIGNATE_SERVICE_PORT_MDNS is set to "53"
# - DESIGNATE_DYNECT_MASTERS must be a Publicly reachable IP, pointed to ↪
↪ mDNS
#DESIGNATE_DYNECT_CUSTOMER=
#DESIGNATE_DYNECT_USERNAME=
#DESIGNATE_DYNECT_PASSWORD=
#DESIGNATE_DYNECT_NAMESERVERS=ns1.p13.dynect.net,ns2.p13.dynect.net,ns3.
↪ p13.dynect.net,ns4.p13.dynect.net
#DESIGNATE_DYNECT_MASTERS=

# Akamai Backend
#DESIGNATE_AKAMAI_USERNAME=
#DESIGNATE_AKAMAI_PASSWORD=
#DESIGNATE_AKAMAI_NAMESERVERS=a5-64.akam.net,a11-65.akam.net,a13-66.akam.
↪ net,a14-64.akam.net,a20-65.akam.net,a22-66.akam.net
#DESIGNATE_AKAMAI_MASTERS=

# Designate D2D Backend
# NOTES:
# - DESIGNATE_D2D_ALSO_NOTIFIES needs to be set to the source mdns ↪

```

(continues on next page)

(continued from previous page)

```

↪ip:port in
#   order for designate to receive the proper NOTIFY
# - DESIGNATE_D2D_* credentials should be setup either to the source_
↪keystone
#   or the destination
#DESIGNATE_D2D_MASTERS=
#DESIGNATE_D2D_ALSO_NOTIFIES=
#DESIGNATE_D2D_NAMESERVERS=

# Authentication options
#DESIGNATE_D2D_KS_VERSION=3

#DESIGNATE_D2D_AUTH_URL=
#DESIGNATE_D2D_USERNAME=
#DESIGNATE_D2D_PASSWORD=

# Keystone V2
#DESIGNATE_D2D_TENANT_NAME=${DESIGNATE_D2D_TENANT_NAME:-}
#DESIGNATE_D2D_TENANT_NAME=${DESIGNATE_D2D_TENANT_ID:-}

# Keystone V3
#DESIGNATE_D2D_PROJECT_NAME=
#DESIGNATE_D2D_PROJECT_DOMAIN_NAME=
#DESIGNATE_D2D_USER_DOMAIN_NAME=

# Designate Misc Config
# =====

# Enable a Notification Driver (e.g. for Ceilometer)
#DESIGNATE_NOTIFICATION_DRIVER=messaging

# Set Notification topics
#DESIGNATE_NOTIFICATION_TOPICS=notifications

# Set coordination service URL (e.g. kazoo://localhost/)
#DESIGNATE_COORDINATION_URL=

# Other Devstack Config
# =====
# Optional TLS Proxy
#enable_service tls-proxy

# Optional Tempest (Recommended)
enable_service tempest

# Optional Rally
#enable_plugin rally https://opendev.org/openstack/rally.git master

```

(continues on next page)

(continued from previous page)

```
# Optional Horizon
#enable_service horizon

# Optional Glance
#enable_service g-api,g-reg

# Optional Nova
#enable_service n-api n-cpu n-net n-cond n-sch n-novnc

# Optional Neutron
#disable_service n-net
#enable_service q-svc q-agt q-dhcp q-l3 q-meta
```

5. Run DevStack

```
$ ./stack.sh
```

6. See the status of all Designate processes

```
$ sudo systemctl status devstack@designate-*.service
```

See the [Using Systemd in DevStack](#) home page for more options.

7. Querying Logs

```
$ sudo journalctl -f --unit devstack@designate-*.service
```

See the [Querying Logs](#) home page for more options.

8. Load credentials into the shell

```
$ export OS_CLOUD=devstack-admin    # For the admin user, admin project
$ export OS_CLOUD=devstack          # For the demo user, demo project
```

9. Try out the openstack client

```
$ openstack zone create --email admin@example.net example.net.
```

Field	Value
action	CREATE
attributes	
created_at	2017-11-15T04:48:40.000000
description	None
email	admin@example.net
id	f34f835b-9acc-4930-b6dd-d045c15da78a
masters	
name	example.net.
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842
project_id	9d0beaef253a4e14bd7025dc30c24f98
serial	1510721320

(continues on next page)

(continued from previous page)

```

| status          | PENDING          |
| transferred_at  | None             |
| ttl             | 3600             |
| type            | PRIMARY          |
| updated_at      | None             |
| version         | 1                |
+-----+-----+

$ openstack recordset create --record '127.0.0.1' --type A example.net.
↪www
+-----+-----+
| Field          | Value            |
+-----+-----+
| action         | CREATE           |
| created_at     | 2017-11-15T04:51:27.000000 |
| description    | None             |
| id             | 7861e600-8d9e-4e13-9ea2-9038a2719b41 |
| name           | www.example.net. |
| project_id     | 9d0beaef253a4e14bd7025dc30c24f98 |
| records        | 127.0.0.1        |
| status         | PENDING          |
| ttl            | None             |
| type           | A                |
| updated_at     | None             |
| version        | 1                |
| zone_id        | f34f835b-9acc-4930-b6dd-d045c15da78a |
| zone_name      | example.net.     |
+-----+-----+

$ openstack recordset list f34f835b-9acc-4930-b6dd-d045c15da78a
↪
↪
↪-----+
| id                                     | name                | type |
↪records                                     |                     |      |
↪status | action |
+-----+-----+
↪
↪-----+
| d0630d94-94d8-43fc-93e8-973fbec7531e | example.net.        | SOA   | ns1.
↪devstack.org. admin.example.net. 1510721487 3510 600 86400 3600 |
↪ACTIVE | NONE   |
| 31a313dc-c322-4dc0-ba53-79c039d7f09f | example.net.        | NS    | ns1.
↪devstack.org.                                     |
↪ACTIVE | NONE   |
| 7861e600-8d9e-4e13-9ea2-9038a2719b41 | www.example.net.    | A     | 127.0.
↪0.1                                     | ACTIVE
↪| NONE   |
+-----+-----+

```

(continues on next page)

(continued from previous page)

```

$ openstack recordset show f34f835b-9acc-4930-b6dd-d045c15da78a 7861e600-
8d9e-4e13-9ea2-9038a2719b41
+-----+-----+
| Field      | Value                                     |
+-----+-----+
| action      | NONE                                     |
| created_at   | 2017-11-15T04:51:27.000000              |
| description  | None                                     |
| id           | 7861e600-8d9e-4e13-9ea2-9038a2719b41   |
| name         | www.example.net.                        |
| project_id   | 9d0beaef253a4e14bd7025dc30c24f98       |
| records      | 127.0.0.1                               |
| status       | ACTIVE                                  |
| ttl          | None                                     |
| type         | A                                        |
| updated_at   | None                                     |
| version      | 1                                        |
| zone_id      | f34f835b-9acc-4930-b6dd-d045c15da78a   |
| zone_name    | example.net.                            |
+-----+-----+

```

10. Verify that the recordset is in DNS

```

$ dig www.example.net @${SERVICE_HOST}

; <<>> DiG 9.16.1-Ubuntu <<>> www.example.net @192.168.27.100
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 34315
;; flags: qr aa rd; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1
;; WARNING: recursion requested but not available

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
; COOKIE: f10292dba9100bbf0100000005f749e3586096307a693d0fe (good)
;; QUESTION SECTION:
;www.example.net.                IN      A

;; ANSWER SECTION:
www.example.net.                 3600    IN      A      127.0.0.1

;; Query time: 0 msec
;; SERVER: 192.168.27.100#53(192.168.27.100)
;; WHEN: Wed Sep 30 15:03:17 UTC 2020
;; MSG SIZE rcvd: 88

```

where `SERVICE_HOST` is the IP address used in `local.conf`.

#openstack-dns IRC channel

There is an active IRC channel at <irc://oftc.net/#openstack-dns>, where many of the designate contributors can be found, as well as users from various organisations.

Contributing

For general information on contributing to OpenStack please see the [contributor guide](#) to get started. It covers all the basics that are common to all OpenStack projects: the accounts you need, the basics of interacting with our Gerrit review system, how we communicate as a community, etc.

We welcome fixes, extensions, documentation, pretty much anything that helps improve Designate, contributing is easy & follows the standard OpenStack [Gerrit workflow](#), if youre looking for something to do, you could always checkout the [blueprint](#) & [bug](#) lists.

The designate git repo is available at <https://opendev.org/openstack/designate>, though all contributions should be done via the Gerrit review system.

Task Tracking

We track our tasks in Launchpad

<https://bugs.launchpad.net/designate>

If youre looking for some smaller, easier work item to pick up and get started on, search for the low-hanging-fruit tag.

Reporting a Bug

You found an issue and want to make sure we are aware of it? You can do so on [Launchpad](#).

Development Environment and Developer Workflow

Assuming youve already got a working *Development Environment*, heres a quick summary:

Install the git-review package to make life easier, some distros have it as native package, otherwise use pip

```
pip install git-review
```

Branch, work, & submit:

```
# cut a new branch, tracking master
git checkout --track -b bug/id origin/master
# work work work
git add stuff
git commit
# rebase/squash to a single commit before submitting
git rebase -i
# submit
git-review
```

Coding Standards

Designate uses the OpenStack flake8 coding standards guidelines. These are stricter than pep8, and are run by gerrit on every commit.

You can use tox to check your code locally by running

```
# For just flake8 tests
tox -e flake8
# For tests + flake8
tox
```

Example DNS Names and IP Space

The IANA has allocated several special purpose domains and IP blocks for use as examples in code and documentation. Where possible, these domains and IP blocks should be preferred. There are some cases where it will not be possible to follow this guidance, for example, there is currently no reserved IDN domain name.

We prefer to use these names and IP blocks to avoid causing any unexpected collateral damage to the rightful owners of the non-reserved names and IP space. For example, publishing an email address in our codebase will more than likely be picked up by spammers, while published URLs etc using non-reserved names or IP space will likely trigger search indexers etc to begin crawling.

Reserved Domains

Reserved DNS domains are documented here: [IANA Special Use Domain Names](#).

Several common reserved domains:

- example.com.
- example.net.
- example.org.

Reserved IP Space

Reserved IP space is documented here: [IANA IPv4 Special Registry](#), and [IANA IPv6 Special Registry](#).

Several common reserved IP blocks:

- 192.0.2.0/24
- 198.51.100.0/24
- 203.0.113.0/24
- 2001:db8::/32

Style Guide

Follow [OpenStack Style Guidelines](#)

File header

Start new files with the following. Replace where needed:

```
# Copyright <year> <company>
#
# Author: <name> <email addr>
#
# Licensed under the Apache License, Version 2.0 (the "License"); you may
# not use this file except in compliance with the License. You may obtain
# a copy of the License at
#
#     http://www.apache.org/licenses/LICENSE-2.0
#
# Unless required by applicable law or agreed to in writing, software
# distributed under the License is distributed on an "AS IS" BASIS, WITHOUT
# WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the
# License for the specific language governing permissions and limitations
# under the License.

"""
<package.module>
~~~~~
<Describe what the module should do, especially interactions with
other components and caveats>

<Optional links>
`Specs: Refer to a spec document if relevant`_

`User documentation <FILL_THIS.html>`_ <Refer to files under doc/>
<This is useful to remind developers to keep the docs up to date>
"""
```

Example:

```
backend.impl_akamai
~~~~~
Akamai backend. Create and delete zones on Akamai. Blah Blah...

`Specs: Keystone Session <https://opendev.org/openstack/designate-specs/src/
↳branch/master/specs/kilo/switch-to-keystone-session.rst>`_

`User documentation <backend.html>`_
```

When updating a module, please ensure that the related user documentation is updated as well.

Docstrings

Use the Sphinx markup. Here is an example:

```
class MyClass(object):
    """<description>
    mention a function :func:`foo` or a class :class:`Bar`
    """

    def function(self, foo):
        """<describe what the function does>
        :param foo: <description>
        :type foo: <type>
        :returns: <describe the returned value>
        :rtype: <returned type>
        :raises: <list raised exceptions>

        :Example:

        >>> a = b - c
        >>> <more Python code>

        .. note:: <add a note here>
        .. seealso:: <blah>
        .. warning:: <use sparingly>
        """
```

Logging


See <https://docs.openstack.org/oslo.i18n/latest/user/guidelines.html>

```
# Do not use "%" string formatting
# No localization for log messages
LOG.debug("... %s", variable)
# Use named interpolation when more than one replacement is done
LOG.info("... %(key)s ...", {'key': 'value', ...})
LOG.warning("... %(key)s", {'key': 'value'})
LOG.error("... %(key)s", {'key': 'value'})
LOG.critical("... %(key)s", {'key': 'value'})
```

1.3.2 Architecture

Designate provides multi-tenant DNS as a Service. Designate provides a REST API, applies business logic, persists DNS data to a database, and orchestrates the propagation of the DNS data to configured pools of DNS servers. For a more detailed breakdown of responsibilities and components, see the components below.

High Level Topology

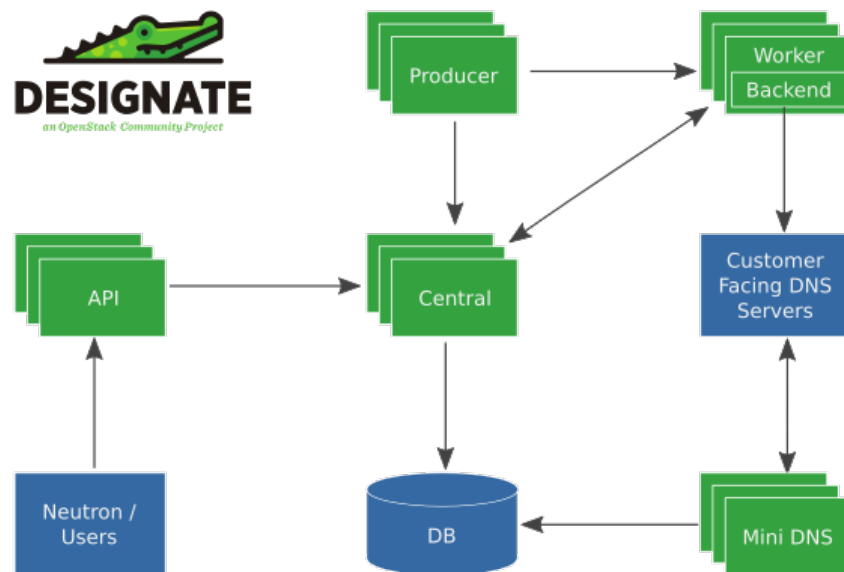

Designate API

designate-api provides the standard OpenStack style REST API service, accepting HTTP requests, validating authentication tokens with Keystone and passing them to the *Designate Central* service over AMQP. Multiple versions of the API can be hosted, as well as API extensions, allowing for pluggable extensions to the core API.

Although designate-api is capable of handling HTTPS traffic, its typical to terminate HTTPS elsewhere, for example by placing nginx in front of designate-api or by letting the external facing load balancers terminate HTTPS.

Designate Central

designate-central is the service that handles RPC requests via the MQ, it coordinates the persistent storage of data and applies business logic to data from the API. Storage is provided via plugins, typically SQLAlchemy, although MongoDB or other storage drivers should be possible.

Designate MiniDNS

designate-mdns is the service that sends DNS NOTIFY and answers zone transfer (AXFR) requests. This allows Designate to integrate with any DNS server that supports these very standard methods of communicating. designate-mdns also encapsulates all other forms of DNS protocol that Designate performs. For example, sending SOA queries to check that a change is live.

Designate Worker

designate-worker is a service that manages state of the DNS servers Designate manages, and any other long-running or otherwise complicated piece of work. The worker reads configuration for DNS servers from the Designate database, which is populated via the pools.yaml file. These DNS server backends are loaded into the worker so it understands how to create, update, and delete zones and recordsets on each DNS server. The Worker is fully aware of DNS Server Pools, so a single worker process can manage many pools of DNS servers.

Designate Producer

designate-producer is a service that handles the invocation of long-running and potentially large jobs. Producer processes start work for an automatically assigned shard of the zones Designate manages. Shards are allocated based on the first three characters of the zone ID (a UUID field). The number of shards under management of a single producer process is equal to the total number of shards divided by the number of producer processes. This means the more producer processes are started, the less work is created at any one time.

The current implemented tasks in producer include emitting dns.zone.exists events for Ceilometer, purging deleted zones from database, polling secondary zones at their refresh intervals, generating delayed NOTIFY transactions, and invoking a periodic recovery of zones in an error state.

Designate Sink

designate-sink is an optional service which listens for event *Notifications*, such as compute.instance.create.end, handlers are available for Nova and Neutron. Notification events can then be used to trigger record creation & deletion.

The current sink implementations generate simple forward lookup A records, using a format specified in handler-nova configuration. Any field in the event notification can be used to generate a record.

DNS Backend

Backends are drivers for a particular DNS server. Designate supports multiple backend implementations, PowerDNS, BIND, NSD, DynECT, you are also free to implement your own backend to fit your needs, as well as extensions to provide extra functionality to complement existing backends.

Message Queue

Designate uses oslo.rpc for messaging between components, therefore it inherits a requirement for a supported messaging bus (such as RabbitMQ, Qpid or ZeroMQ). Typically this means a RabbitMQ setup is dedicated to Designate, but as only a single virtualhost is required for a normal installation, you're free to use other RabbitMQ instances as you see fit.

Database/Storage

Storage drivers are drivers for a particular SQL/NoSQL server. Designate needs a SQLAlchemy-supported storage engine for the persistent storage of data. The recommended driver is MySQL.

1.3.3 Guru Meditation Reports

A Guru Meditation Report (GMR) is generated by the Designate services when service processes receiving SIGUSR2 signal. The report is a general-purpose debug report for developers and system admins which contains the current state of a running Designate service process.

Structure of a GMR

Package

Shows information about the package to which this process belongs, including version information

Threads

Shows stack traces and thread ids for each of the threads within this process

Green Threads

Shows stack traces for each of the green threads within this process (green threads don't have thread ids)

Processes

Shows information about this process, including pid, ppid, uid and process state

Configuration

Lists all the configuration options currently accessible via the CONF object for the current process

Generate a GMR

A GMR can be generated by sending the USR2 signal to any Designate processes.

For example, suppose `designate-central` has pid 15097, `kill -USR2 15097` will trigger a GMR.

If option `logdir` has been set in `designate.conf`, the GMR will be saved in the folder which `logdir` specified. Otherwise, the GMR will be printed to the stderr.

Reference

For more information about GMR, see [GMR wiki](#).

GMR Example

```
=====
====                                Guru Meditation                                ====
=====
|||||
|||||

=====
====                                Package                                ====
=====
product = OpenStack Designate
vendor = OpenStack Foundation
version = 2015.1
=====
====                                Threads                                ====
=====
-----                                Thread #140098874533632                                -----

/usr/local/lib/python2.7/dist-packages/eventlet/hubs/hub.py:346 in run
`self.wait(sleep_time)`

/usr/local/lib/python2.7/dist-packages/eventlet/hubs/poll.py:85 in wait
`presult = self.do_poll(seconds)`

/usr/local/lib/python2.7/dist-packages/eventlet/hubs/epolls.py:62 in do_poll
`return self.poll.poll(seconds)`

=====
====                                Green Threads                                ====
=====
-----                                Green Thread                                -----

/usr/local/lib/python2.7/dist-packages/eventlet/greenthread.py:214 in main
`result = function(*args, **kwargs)`

/opt/stack/designate/designate/openstack/common/service.py:492 in run_service
`done.wait()`

/usr/local/lib/python2.7/dist-packages/eventlet/event.py:121 in wait
`return hubs.get_hub().switch()`

/usr/local/lib/python2.7/dist-packages/eventlet/hubs/hub.py:294 in switch
`return self.greenlet.switch()`

-----                                Green Thread                                -----
```

(continues on next page)

(continued from previous page)

```

/usr/local/lib/python2.7/dist-packages/eventlet/greenthread.py:214 in main
    `result = function(*args, **kwargs)`

/usr/local/lib/python2.7/dist-packages/oslo_utils/excutils.py:95 in inner_func
    `return infunc(*args, **kwargs)`

/usr/local/lib/python2.7/dist-packages/oslo_messaging/_executors/impl_
↳eventlet.py:96 in _executor_thread
    `incoming = self.listener.poll()`

/usr/local/lib/python2.7/dist-packages/oslo_messaging/_drivers/amqpdriver.
↳py:121 in poll
    `self.conn.consume(limit=1, timeout=timeout)`

/usr/local/lib/python2.7/dist-packages/oslo_messaging/_drivers/impl_rabbit.
↳py:867 in consume
    `six.next(it)`

/usr/local/lib/python2.7/dist-packages/oslo_messaging/_drivers/impl_rabbit.
↳py:782 in iterconsume
    `yield self.ensure(_error_callback, _consume)`

/usr/local/lib/python2.7/dist-packages/oslo_messaging/_drivers/impl_rabbit.
↳py:688 in ensure
    `ret, channel = autoretry_method()`

/usr/local/lib/python2.7/dist-packages/kombu/connection.py:436 in _ensured
    `return fun(*args, **kwargs)`

/usr/local/lib/python2.7/dist-packages/kombu/connection.py:508 in __call__
    `return fun(*args, channel=channels[0], **kwargs), channels[0]`

/usr/local/lib/python2.7/dist-packages/oslo_messaging/_drivers/impl_rabbit.
↳py:675 in execute_method
    `method()`

/usr/local/lib/python2.7/dist-packages/oslo_messaging/_drivers/impl_rabbit.
↳py:774 in _consume
    `return self.connection.drain_events(timeout=poll_timeout)`

/usr/local/lib/python2.7/dist-packages/kombu/connection.py:275 in drain_events
    `return self.transport.drain_events(self.connection, **kwargs)`

/usr/local/lib/python2.7/dist-packages/kombu/transport/pyamqp.py:91 in drain_
↳events
    `return connection.drain_events(**kwargs)`

/usr/local/lib/python2.7/dist-packages/amqp/connection.py:302 in drain_events

```

(continues on next page)

(continued from previous page)

```

`chanmap, None, timeout=timeout,`

/usr/local/lib/python2.7/dist-packages/amqp/connection.py:365 in _wait_
↳multiple
`channel, method_sig, args, content = read_timeout(timeout)`

/usr/local/lib/python2.7/dist-packages/amqp/connection.py:336 in read_timeout
`return self.method_reader.read_method()`

/usr/local/lib/python2.7/dist-packages/amqp/method_framing.py:186 in read_
↳method
`self._next_method()`

/usr/local/lib/python2.7/dist-packages/amqp/method_framing.py:107 in _next_
↳method
`frame_type, channel, payload = read_frame()`

/usr/local/lib/python2.7/dist-packages/amqp/transport.py:154 in read_frame
`frame_header = read(7, True)`

/usr/local/lib/python2.7/dist-packages/amqp/transport.py:277 in _read
`s = recv(n - len(rbuf))`

/usr/local/lib/python2.7/dist-packages/eventlet/greenio/base.py:326 in recv
`timeout_exc=socket.timeout("timed out"))`

/usr/local/lib/python2.7/dist-packages/eventlet/greenio/base.py:201 in _
↳trampoline
`mark_as_closed=self._mark_as_closed)`

/usr/local/lib/python2.7/dist-packages/eventlet/hubs/__init__.py:162 in _
↳trampoline
`return hub.switch()`

/usr/local/lib/python2.7/dist-packages/eventlet/hubs/hub.py:294 in switch
`return self.greenlet.switch()`

-----                                Green Thread                                -----

/usr/local/bin/designate-central:10 in <module>
`sys.exit(main())`

/opt/stack/designate/designate/cmd/central.py:37 in main
`service.wait()`

/opt/stack/designate/designate/service.py:356 in wait
`_launcher.wait()`

/opt/stack/designate/designate/openstack/common/service.py:187 in wait

```

(continues on next page)

(continued from previous page)

```

`status, signo = self._wait_for_exit_or_signal(ready_callback)`

/opt/stack/designate/designate/openstack/common/service.py:170 in _wait_for_
↪exit_or_signal
`super(ServiceLauncher, self).wait()`

/opt/stack/designate/designate/openstack/common/service.py:133 in wait
`self.services.wait()`

/opt/stack/designate/designate/openstack/common/service.py:473 in wait
`self.tg.wait()`

/opt/stack/designate/designate/openstack/common/threadgroup.py:145 in wait
`x.wait()`

/opt/stack/designate/designate/openstack/common/threadgroup.py:47 in wait
`return self.thread.wait()`

/usr/local/lib/python2.7/dist-packages/eventlet/greenthread.py:175 in wait
`return self._exit_event.wait()`

/usr/local/lib/python2.7/dist-packages/eventlet/event.py:121 in wait
`return hubs.get_hub().switch()`

/usr/local/lib/python2.7/dist-packages/eventlet/hubs/hub.py:294 in switch
`return self.greenlet.switch()`

-----                                Green Thread                                -----

No Traceback!

=====
====                                Processes                                =====
=====
Process 15097 (under 7312) [ run by: stanzgy (1000), state: running ]

=====
====                                Configuration                                =====
=====

backend:agent:bind9:
  query-destination = 127.0.0.1
  rndc-config-file = None
  rndc-host = 127.0.0.1
  rndc-key-file = None
  rndc-port = 953
  zone-file-path = /opt/stack/data/designate/zones

backend:bind9:

```

(continues on next page)

(continued from previous page)

```
masters =
    127.0.0.1:5354
rndc-config-file = None
rndc-host = 127.0.0.1
rndc-key-file = None
rndc-port = 953
server_ids =

backend:fake:
    masters =
        127.0.0.1:5354
    server_ids =

backend:powerdns:
    backend = sqlalchemy
    connection = ***
    connection_debug = 0
    connection_trace = False
    db_inc_retry_interval = True
    db_max_retries = 20
    db_max_retry_interval = 10
    db_retry_interval = 1
    idle_timeout = 3600
    masters =
        10.180.64.117:5354
    max_overflow = None
    max_pool_size = None
    max_retries = 10
    min_pool_size = 1
    mysql_sql_mode = TRADITIONAL
    pool_timeout = None
    retry_interval = 10
    server_ids =
        f26e0b32-736f-4f0a-831b-039a415c481e
    slave_connection = ***
    sqlite_db = oslo.sqlite
    sqlite_synchronous = True
    use_db_reconnect = False

backend:powerdns:f26e0b32-736f-4f0a-831b-039a415c481e:
    backend = None
    connection = ***
    connection_debug = None
    connection_trace = None
    db_inc_retry_interval = None
    db_max_retries = None
    db_max_retry_interval = None
    db_retry_interval = None
    host = 10.180.64.117
```

(continues on next page)

(continued from previous page)

```

idle_timeout = None
masters = None
max_overflow = None
max_pool_size = None
max_retries = None
min_pool_size = None
mysql_sql_mode = None
pool_timeout = None
port = 53
retry_interval = None
slave_connection = ***
sqlite_db = None
sqlite_synchronous = None
tsig-key = None
use_db_reconnect = None

default:
    allowed_remote_exmods =
    backdoor_port = None
    backlog = 4096
    central-topic = central
    config-dir = None
    config-file =
        /etc/designate/designate.conf
    control_exchange = designate
    debug = True
    default-soa-expire = 86400
    default-soa-minimum = 3600
    default-soa-refresh-min = 3500
    default-soa-refresh-max = 3600
    default-soa-retry = 600
    default-ttl = 3600
    default_log_levels =
        amqp=WARN
        amqpplib=WARN
        boto=WARN
        eventlet.wsgi.server=WARN
        keystone=INFO
        keystone.middleware.auth_token=INFO
        oslo.messaging=WARN
        sqlalchemy=WARN
        stevedore=WARN
        suds=INFO
    fatal_deprecations = False
    host = cns-dev2
    instance_format = [instance: %(uuid)s]
    instance_uuid_format = [instance: %(uuid)s]
    log-config-append = None
    log-date-format = %Y-%m-%d %H:%M:%S

```

(continues on next page)

(continued from previous page)

```

log-dir = /opt/stack/logs/designate
log-file = None
log-format = None
logging_context_format_string = %(asctime)s.%(msecs)03d %(color)s
↪ %(levelname)s %(name)s [[01;36m%(request_id)s [00;36m%(user)s %(tenant)s
↪ %(color)s] [01;35m%(instance)s%(color)s%(message)s[00m
logging_debug_format_suffix = [00;33mfrom (pid=%(process)d) %(funcName)s
↪ %(pathname)s:%(lineno)d[00m
logging_default_format_string = %(asctime)s.%(msecs)03d %(color)s
↪ %(levelname)s %(name)s [[00;36m-%(color)s] [01;35m%(instance)s%(color)s
↪ %(message)s[00m
logging_exception_prefix = %(color)s%(asctime)s.%(msecs)03d TRACE %(name)s.
↪ [01;35m%(instance)s[00m
mdns-topic = mdns
network_api = neutron
notification_driver =
notification_topics =
    notifications
policy_default_rule = default
policy_dirs =
    policy.d
policy_file = /etc/designate/policy.yaml
pool-manager-topic = pool_manager
publish_errors = False
pybasedir = /opt/stack/designate
quota-domain-records = 500
quota-domain-recordsets = 500
quota-domains = 10
quota-driver = storage
quota-recordset-records = 20
root-helper = sudo designate-rootwrap /etc/designate/rootwrap.conf
rpc_backend = rabbit
rpc_thread_pool_size = 64
state-path = /opt/stack/data/designate
syslog-log-facility = LOG_USER
tcp_keepidle = 600
transport_url = None
use-syslog = False
use-syslog-rfc-format = False
use_stderr = True
verbose = True

network_api:neutron:
    admin_password = ***
    admin_tenant_name = None
    admin_username = None
    auth_strategy = keystone
    auth_url = None
    ca_certificates_file = None

```

(continues on next page)

(continued from previous page)

```

endpoint_type = publicURL
endpoints = None
insecure = False
timeout = 30

oslo_concurrency:
    disable_process_locking = False
    lock_path = None

oslo_messaging_rabbit:
    amqp_auto_delete = False
    amqp_durable_queues = False
    fake_rabbit = False
    kombu_reconnect_delay = 1.0
    kombu_ssl_ca_certs =
    kombu_ssl_certfile =
    kombu_ssl_keyfile =
    kombu_ssl_version =
    rabbit_ha_queues = False
    rabbit_host = localhost
    rabbit_hosts =
        127.0.0.1
    rabbit_login_method = AMQPLAIN
    rabbit_max_retries = 0
    rabbit_password = ***
    rabbit_port = 5672
    rabbit_retry_backoff = 2
    rabbit_retry_interval = 1
    rabbit_use_ssl = False
    rabbit_userid = stackrabbit
    rabbit_virtual_host = /
    rpc_conn_pool_size = 30

proxy:
    http_proxy = None
    https_proxy = None
    no_proxy =

service:central:
    default_pool_id = 794ccc2c-d751-44fe-b57f-8894c9f5c842
    enabled-notification-handlers =
    managed_resource_email = hostmaster@example.com
    managed_resource_tenant_id = None
    max_domain_name_len = 255
    max_recordset_name_len = 255
    min_ttl = None
    storage-driver = sqlalchemy
    workers = None

```

(continues on next page)

(continued from previous page)

```
service:pool_manager:
    backends =
        powerdns
    cache-driver = sqlalchemy
    enable-recovery-timer = True
    enable-sync-timer = True
    periodic-recovery-interval = 120
    periodic-sync-interval = 300
    periodic-sync-seconds = None
    poll-delay = 1
    poll-max-retries = 3
    poll-retry-interval = 2
    poll-timeout = 30
    pool-id = 794ccc2c-d751-44fe-b57f-8894c9f5c842
    threshold-percentage = 100
    workers = None

ssl:
    ca_file = None
    cert_file = None
    key_file = None

storage:sqlalchemy:
    backend = sqlalchemy
    connection = ***
    connection_debug = 0
    connection_trace = False
    db_inc_retry_interval = True
    db_max_retries = 20
    db_max_retry_interval = 10
    db_retry_interval = 1
    idle_timeout = 3600
    max_overflow = None
    max_pool_size = None
    max_retries = 10
    min_pool_size = 1
    mysql_sql_mode = TRADITIONAL
    pool_timeout = None
    retry_interval = 10
    slave_connection = ***
    sqlite_db = oslo.sqlite
    sqlite_synchronous = True
    use_db_reconnect = False
```

1.3.4 Source Code Documentation

API

API Middleware

```
class designate.api.middleware.APIv2ValidationErrorMiddleware(application)
```

Bases: `Middleware`

```
class designate.api.middleware.ContextMiddleware(application, conf=None)
```

Bases: `Middleware`

```
make_context(request, *args, **kwargs)
```

```
class designate.api.middleware.FaultWrapperMiddleware(application)
```

Bases: `Middleware`

```
class designate.api.middleware.KeystoneContextMiddleware(application)
```

Bases: `ContextMiddleware`

```
process_request(request)
```

Called on each request.

If this returns `None`, the next application down the stack will be executed. If it returns a response then that response will be returned and execution will stop here.

```
class designate.api.middleware.MaintenanceMiddleware(application)
```

Bases: `Middleware`

```
process_request(request)
```

Called on each request.

If this returns `None`, the next application down the stack will be executed. If it returns a response then that response will be returned and execution will stop here.

```
class designate.api.middleware.NoAuthContextMiddleware(application)
```

Bases: `ContextMiddleware`

```
process_request(request)
```

Called on each request.

If this returns `None`, the next application down the stack will be executed. If it returns a response then that response will be returned and execution will stop here.

```
class designate.api.middleware.NormalizeURIMiddleware(application, conf=None)
```

Bases: `Middleware`

```
class designate.api.middleware.TestContextMiddleware(application, tenant_id=None,  
                                                    user_id=None)
```

Bases: `ContextMiddleware`

```
process_request(request)
```

Called on each request.

If this returns `None`, the next application down the stack will be executed. If it returns a response then that response will be returned and execution will stop here.

`designate.api.middleware.auth_pipeline_factory(loader, global_conf, **local_conf)`

A paste pipeline replica that keys off of `auth_strategy`.

Code nabbed from cinder.

API Service

class `designate.api.service.Service`

Bases: `WSGIService`

property `service_name`

start()

Start a service.

stop(*graceful=True*)

Stop a service.

Parameters

graceful indicates whether to wait for all threads to finish or terminate them instantly

property `wsgi_application`

Backend

Backend Base

class `designate.backend.base.Backend`(*target*)

Bases: `DriverPlugin`

Base class for backend implementations

abstract `create_zone(context, zone)`

Create a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

abstract `delete_zone(context, zone, zone_params)`

Delete a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

update_zone(*context, zone*)

Update a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

Backend Bind9

Bind 9 backend. Create and delete zones by executing rndc

class designate.backend.impl_bind9.**Bind9Backend**(*target*)

Bases: *Backend*

create_zone(*context*, *zone*)

Create a new Zone by executin rndc, then notify mDNS Do not raise exceptions if the zone already exists.

delete_zone(*context*, *zone*, *zone_params=None*)

Delete a new Zone by executin rndc Do not raise exceptions if the zone does not exist.

get_zone(*context*, *zone*)

Returns True if zone exists and False if not

update_zone(*context*, *zone*)

Update a DNS zone.

This will execute a rndc modzone if the zone already exists but masters might need to be refreshed. Or, will create the zone if it does not exist.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

Backend Designate

class designate.backend.impl_designate.**DesignateBackend**(*target*)

Bases: *Backend*

Support for Designate to Designate using Secondary zones.

property client

create_zone(*context*, *zone*)

Create a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

delete_zone(*context*, *zone*, *zone_params=None*)

Delete a DNS zone.

Parameters

- **context** Security context information.

- **zone** the DNS zone.

Backend Dynect

```
class designate.backend.impl_dynect.DynClient(customer_name, user_name, password,  
                                              endpoint='https://api.dynect.net:443',  
                                              api_version='3.5.6', headers=None,  
                                              verify=True, retries=1, timeout=10,  
                                              timings=False, pool_maxsize=10,  
                                              pool_connections=10)
```

Bases: `object`

DynECT service client.

<https://help.dynect.net/rest/>

delete(*args, **kwargs)

get(*args, **kwargs)

get_timings()

login()

logout()

patch(*args, **kwargs)

poll_response(response)

The API might return a job nr in the response in case of a async response: <https://github.com/fog/fog/issues/575>

post(*args, **kwargs)

put(*args, **kwargs)

request(method, url, retries=2, **kwargs)

reset_timings()

```
exception designate.backend.impl_dynect.DynClientAuthError(data=None,  
                                                            job_id=None,  
                                                            msgs=None,  
                                                            http_status=None,  
                                                            url=None, method=None,  
                                                            details=None)
```

Bases: `DynClientError`

```
exception designate.backend.impl_dynect.DynClientError(data=None, job_id=None,  
                                                         msgs=None,  
                                                         http_status=None, url=None,  
                                                         method=None, details=None)
```

Bases: `Backend`

The base exception class for all HTTP exceptions.

```
static from_response(response, details=None)
```

```
exception designate.backend.impl_dynect.DynClientOperationBlocked(*args,  
                                                                    **kwargs)
```

Bases: `BadRequest`, `DynClientError`

```
error_type = 'operation_blocked'
```

```
class designate.backend.impl_dynect.DynECTBackend(target)
```

Bases: `Backend`

Support for DynECT as a secondary DNS.

```
create_zone(context, zone)
```

Create a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

```
delete_zone(context, zone, zone_params=None)
```

Delete a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

```
get_client()
```

```
exception designate.backend.impl_dynect.DynTimeoutError
```

Bases: `Backend`

A job timedout.

```
error_code = 408
```

```
error_type = 'dyn_timeout'
```

Backend Infoblox

```
class designate.backend.impl_infoblox.InfobloxBackend(*args, **kwargs)
```

Bases: `Backend`

Provides a Designate Backend for Infoblox

```
create_zone(context, zone)
```

Create a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

delete_zone(*context*, *zone*)

Delete a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

Backend Nsd4

class designate.backend.impl_nsd4.**NSD4Backend**(*target*)

Bases: [Backend](#)

NSDCT_VERSION = 'NSDCT1'

create_zone(*context*, *zone*)

Create a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

delete_zone(*context*, *zone*, *zone_params=None*)

Delete a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

Backend Fake

class designate.backend.impl_fake.**FakeBackend**(*target*)

Bases: [Backend](#)

create_zone(*context*, *zone*)

Create a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

delete_zone(*context*, *zone*, *zone_params=None*)

Delete a DNS zone.

Parameters

- **context** Security context information.
- **zone** the DNS zone.

Backend PowerDNS 4

```
class designate.backend.impl_pdns4.PDNS4Backend(target)
```

Bases: [Backend](#)

```
create_zone(context, zone)
```

Create a DNS zone

```
delete_zone(context, zone, zone_params=None)
```

Delete a DNS zone

Agent Backend KnotDNS

backend.agent_backend.impl_knot2

Knot DNS agent backend

Create, update, delete zones locally on a Knot DNS resolver using the knotc utility.

Supported Knot versions: ≥ 2.1 , < 3

[Knot DNS 2 User documentation](#)

Warning: Untested, do not use in production.

Note: If the backend is killed during a configuration transaction it might be required to manually abort the transaction with *sudo knotc conf-abort*

Configured in [\[service:agent:knot2\]](#)

```
class designate.backend.agent_backend.impl_knot2.Knot2Backend(*a, **kw)
```

Bases: AgentBackend

```
__abstractmethods__ = frozenset({})
```

```
__annotations__ = {}
```

```
__backend_status__ = 'untested'
```

```
__init__(*a, **kw)
```

Configure the backend

```
__module__ = 'designate.backend.agent_backend.impl_knot2'
```

```
__plugin_name__ = 'knot2'
```

```
_abc_impl = <_abc._abc_data object>
```

```
_execute_knotc(*knotc_args, **kw)
```

Run the Knot client and check the output

Parameters

- **expected_output** (*str*) expected output (default: OK)
- **expected_error** (*str*) expected alternative output, will be logged as info(). Default: not set.

_lock_name = 'knot2.lock'

_modify_zone(**knotc_args*, ***kw*)

Create or delete a zone while locking, and within a Knot transaction. Knot supports only one config transaction at a time.

Raises

exceptions.Backend

_start_minidns_to_knot_axfr(*zone_name*)

Instruct Knot to request an AXFR from MiniDNS. No need to lock or enter a configuration transaction.

create_zone(*zone*)

Create a new Zone by executing knotc Do not raise exceptions if the zone already exists.

Parameters

zone (*raw pythondns Zone*) zone to be created

delete_zone(*zone_name*)

Delete a new Zone by executing knotc Do not raise exceptions if the zone does not exist.

Parameters

zone_name (*str*) zone name

find_zone_serial(*zone_name*)

Get serial from a zone by running knotc

Returns

serial (int or None)

Raises

exceptions.Backend

start()

Start the backend

update_zone(*zone*)

Instruct Knot DNS to perform AXFR from MiniDNS

Parameters

zone (*raw pythondns Zone*) zone to be created

Agent Backend gdnssd

backend.agent_backend.impl_gdnssd

gdnssd agent backend

Create, update, delete zones locally on a gdnssd resolver using the gdnssd utility.

Supported Knot versions: ≥ 2.1 , < 3

[User documentation](#)

Warning: Untested, do not use in production.

Note: If the backend is killed during a configuration transaction it might be required to manually abort the transaction with *sudo gdnssd conf-abort*

Configured in [\[service:agent:gdnssd\]](#)

```
class designate.backend.agent_backend.impl_gdnssd.GdnssdBackend(*a, **kw)
    Bases: AgentBackend
    __abstractmethods__ = frozenset({})
    __annotations__ = {}
    __backend_status__ = 'experimental'
    __init__(*a, **kw)
        Configure the backend
    __module__ = 'designate.backend.agent_backend.impl_gdnssd'
    __plugin_name__ = 'gdnssd'
    _abc_impl = <_abc._abc_data object>
    _check_conf()
        Run gdnssd to check its configuration
    _check_dirs(*dirname)
        Check if directories are writable
    _generate_zone_filename(zone_name)
        Generate a filename for a zone file / is traslated into @ Non-valid characters are translated
        into NNN where NNN is a decimal integer in the range 0 - 255 The filename is lowercase
    Returns
        valid filename (string)
    _write_zone_file(zone)
        Create or update a zone file atomically. The zone file is written to a unique temp file and then
        renamed
```

create_zone(**kw)

Create a DNS zone

delete_zone(**kw)

Delete a DNS zone

find_zone_serial(zone_name)

Query the local resolver for a zone Times out after SOA_QUERY_TIMEOUT

start()

Start the backend, check gdnsd configuration

Raises

exception.Backend on invalid configuration

update_zone(**kw)

Update a DNS zone

designate.backend.agent_backend.impl_gdnsd.**filter_exceptions**(fn)

Agent Backend Djbdns

backend.agent_backend.impl_djbdns

Djbdns DNS agent backend

Create, update, delete zones locally on a Djbdns DNS resolver using the axfr-get utility.

[Djbdns User documentation](#)

Warning: Untested, do not use in production.

Configured in [[service:agent:djbdns](#)]

Requires rootwrap (or equivalent sudo privileges) to execute:

- tcpclient
- axfr-get
- tinydns-data

class designate.backend.agent_backend.impl_djbdns.**DjbdnsBackend**(*a, **kw)

Bases: AgentBackend

__abstractmethods__ = frozenset({})

__annotations__ = {}

__backend_status__ = 'experimental'

__init__(*a, **kw)

Configure the backend

__module__ = 'designate.backend.agent_backend.impl_djbdns'


```
__plugin_name__ = 'djbdns'

_abc_impl = <_abc._abc_data object>

static _check_dirs(*dirnames)
    Check if directories are writable

static _concatenate_zone_datafiles(data_fn, path_glob)
    Concatenate all zone datafiles into data

_perform_axfr_from_minidns(zone_name)
    Instruct axfr-get to request an AXFR from MiniDNS.

    Raises
        exceptions.Backend on error

_rebuild_data_cdb()
    Rebuild data.cdb file from zone datafiles Requires global lock

    On zone creation, axfr-get creates datafiles atomically by doing rename. On zone deletion,
    os.remove deletes the file atomically Globbing and reading the datafiles can be done without
    locking on them. The data and data.cdb files are written into a unique temp directory

create_zone(**kw)
    Create a DNS zone

delete_zone(**kw)
    Delete a DNS zone

find_zone_serial(zone_name)
    Query the local resolver for a zone Times out after SOA_QUERY_TIMEOUT

start()
    Start the backend

update_zone(**kw)
    Update a DNS zone

designate.backend.agent_backend.impl_djbdns.filter_exceptions(fn)
```

Agent Backend MSDNS

```
class designate.backend.agent_backend.impl_msdns.MSDNSBackend(agent_service)
    Bases: AgentBackend

    __abstractmethods__ = frozenset({})

    __annotations__ = {}

    __backend_status__ = 'experimental'

    __init__(agent_service)
        Configure the backend

    __module__ = 'designate.backend.agent_backend.impl_msdns'
```

__plugin_name__ = 'msdns'

_abc_impl = <_abc._abc_data object>

create_zone(*zone*)

Create a new DNS Zone

delete_zone(*zone_name*)

Delete a DNS Zone Do not raise exception if the zone does not exist.

find_zone_serial(*zone_name*)

Return the zones serial

start()

Start the backend

update_zone(*zone*)

Instruct MSDNS to request an AXFR from MiniDNS.

Central

Central RPC API

class designate.central.rpcapi.**CentralAPI**(*topic=None*)

Bases: object

Client side of the central RPC API.

API version history:

1.0 - Initial version 1.1 - Add new finder methods 1.2 - Add get_tenant and get_tenants
1.3 - Add get_absolute_limits 2.0 - Renamed most get_resources to find_resources 2.1
- Add quota methods 3.0 - RecordSet Changes 3.1 - Add floating ip ptr methods 3.2
- TLD Api changes 3.3 - Add methods for blacklisted domains 4.0 - Create methods
now accept designate objects 4.1 - Add methods for server pools 4.2 - Add methods
for pool manager integration 4.3 - Added Zone Transfer Methods 5.0 - Remove dead
server code 5.1 - Add xfr_zone 5.2 - Add Zone Import methods 5.3 - Add Zone Export
method 5.4 - Add asynchronous Zone Export methods 5.5 - Add deleted zone purging
task 5.6 - Changed purge_zones function args 6.0 - Renamed domains to zones 6.1 -
Add ServiceStatus methods 6.2 - Changed find_recordsets method args 6.3 - Changed
update_status method args 6.4 - Removed unused record and diagnostic methods 6.5
- Removed additional unused methods 6.6 - Add methods for shared zones 6.7 - Add
increment_zone_serial 6.8 - Add managed recordset methods

LOGGING_BLACKLIST = ['update_service_status']

RPC_API_VERSION = '6.8'

count_report(*context, criterion=None*)

create_blacklist(*context, blacklist*)

create_managed_records(*context, zone_id, records_values, recordset_values*)

create_pool(*context, pool*)

create_recordset(*context, zone_id, recordset*)

create_tld(*context, tld*)

create_tsigkey(*context, tsigkey*)

create_zone(*context, zone*)

create_zone_export(*context, zone_id*)

create_zone_import(*context, request_body*)

create_zone_transfer_accept(*context, zone_transfer_accept*)

create_zone_transfer_request(*context, zone_transfer_request*)

delete_blacklist(*context, blacklist_id*)

delete_managed_records(*context, zone_id=None, criterion=None*)

delete_pool(*context, pool_id*)

delete_recordset(*context, zone_id, recordset_id, increment_serial=True*)

delete_tld(*context, tld_id*)

delete_tsigkey(*context, tsigkey_id*)

delete_zone(*context, zone_id*)

delete_zone_export(*context, zone_export_id*)

delete_zone_import(*context, zone_import_id*)

delete_zone_transfer_request(*context, zone_transfer_request_id*)

export_zone(*context, zone_id*)

find_blacklists(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_pool(*context, criterion=None*)

find_pools(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_records(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_recordset(*context, criterion=None*)

find_recordsets(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None, force_index=False*)

find_service_status(*context, criterion=None*)

find_service_statuses(*context*, *criterion=None*, *marker=None*, *limit=None*,
sort_key=None, *sort_dir=None*)

find_shared_zones(*context*, *criterion=None*, *marker=None*, *limit=None*, *sort_key=None*,
sort_dir=None)

find_tenants(*context*)

find_tlds(*context*, *criterion=None*, *marker=None*, *limit=None*, *sort_key=None*,
sort_dir=None)

find_tsigkeys(*context*, *criterion=None*, *marker=None*, *limit=None*, *sort_key=None*,
sort_dir=None)

find_zone_exports(*context*, *criterion=None*, *marker=None*, *limit=None*, *sort_key=None*,
sort_dir=None)

find_zone_imports(*context*, *criterion=None*, *marker=None*, *limit=None*, *sort_key=None*,
sort_dir=None)

find_zone_transfer_accepts(*context*, *criterion=None*, *marker=None*, *limit=None*,
sort_key=None, *sort_dir=None*)

find_zone_transfer_requests(*context*, *criterion=None*, *marker=None*, *limit=None*,
sort_key=None, *sort_dir=None*)

find_zones(*context*, *criterion=None*, *marker=None*, *limit=None*, *sort_key=None*,
sort_dir=None)

get_absolute_limits(*context*)

get_blacklist(*context*, *blacklist_id*)

get_floatingip(*context*, *region*, *floatingip_id*)

classmethod get_instance()

The `rpc.get_client()` which is called upon the API object initialization will cause a assertion error if the `designate.rpc.TRANSPORT` isnt setup by `rpc.init()` before.

This fixes that by creating the `rpcapi` when demanded.

get_pool(*context*, *pool_id*)

get_quotas(*context*, *tenant_id*)

get_recordset(*context*, *zone_id*, *recordset_id*)

get_shared_zone(*context*, *zone_id*, *zone_share_id*)

get_tenant(*context*, *tenant_id*)

get_tld(*context*, *tld_id*)

get_tsigkey(*context*, *tsigkey_id*)

get_zone(*context*, *zone_id*)

get_zone_export(*context*, *zone_export_id*)

get_zone_import(*context*, *zone_import_id*)

get_zone_ns_records(*context*, *zone_id*)

get_zone_transfer_accept(*context*, *zone_transfer_accept_id*)

get_zone_transfer_request(*context*, *zone_transfer_request_id*)

increment_zone_serial(*context*, *zone*)

list_floatingips(*context*)

purge_zones(*context*, *criterion*, *limit=None*)

reset_quotas(*context*, *tenant_id*)

set_quota(*context*, *tenant_id*, *resource*, *hard_limit*)

share_zone(*context*, *zone_id*, *shared_zone*)

unshare_zone(*context*, *zone_id*, *zone_share_id*)

update_blacklist(*context*, *blacklist*)

update_floatingip(*context*, *region*, *floatingip_id*, *values*)

update_pool(*context*, *pool*)

update_recordset(*context*, *recordset*, *increment_serial=True*)

update_service_status(*context*, *service_status*)

update_status(*context*, *zone_id*, *status*, *serial*, *action=None*)

update_tld(*context*, *tld*)

update_tsigkey(*context*, *tsigkey*)

update_zone(*context*, *zone*, *increment_serial=True*)

update_zone_export(*context*, *zone_export*)

update_zone_import(*context*, *zone_import*)

update_zone_transfer_request(*context*, *zone_transfer_request*)

xfr_zone(*context*, *zone_id*)

designate.central.rpcapi.reset()

Central Service

```
class designate.central.service.Service
```

```
    Bases: RPCService
```

```
    RPC_API_VERSION = '6.8'
```

```
    count_records(context, criterion=None)
```

```
    count_recordsets(context, criterion=None)
```

```
    count_report(context, criterion=None)
```

```
    count_tenants(context)
```

```
    count_zones(context, criterion=None)
```

```
    create_blacklist(context, blacklist)
```

```
    create_managed_records(context, zone_id, records_values, recordset_values)
```

```
    create_pool(context, pool)
```

```
    create_recordset(context, zone_id, recordset, increment_serial=True)
```

```
    create_tld(context, tld)
```

```
    create_tsigkey(context, tsigkey)
```

```
    create_zone(context, zone)
```

```
        Create zone: perform checks and then call _create_zone()
```

```
    create_zone_export(context, zone_id)
```

```
    create_zone_import(context, request_body)
```

```
    create_zone_transfer_accept(context, zone_transfer_accept)
```

```
    create_zone_transfer_request(context, zone_transfer_request)
```

```
    delete_blacklist(context, blacklist_id)
```

```
    delete_managed_records(context, zone_id, criterion)
```

```
    delete_pool(context, pool_id)
```

```
    delete_recordset(context, zone_id, recordset_id, increment_serial=True)
```

```
    delete_tld(context, tld_id)
```

```
    delete_tsigkey(context, tsigkey_id)
```

```
    delete_zone(context, zone_id)
```

```
        Delete or abandon a zone On abandon, delete the zone from the DB immediately. Otherwise,
        set action to DELETE and status to PENDING and poke Pool Managers delete_zone to update
        the resolvers. PM will then poke back to set action to NONE and status to DELETED
```

delete_zone_export(context, zone_export_id)

delete_zone_import(context, zone_import_id)

delete_zone_transfer_request(context, zone_transfer_request_id)

export_zone(context, zone_id)

find_blacklists(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_pool(context, criterion=None)

find_pools(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_records(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_recordset(context, criterion=None)

find_recordsets(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None, force_index=False)

find_service_status(context, criterion=None)

find_service_statuses(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

List service statuses.

find_shared_zones(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_tenants(context)

find_tlds(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_tsigkeys(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_zone_exports(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_zone_imports(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_zone_transfer_accepts(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_zone_transfer_requests(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

find_zones(context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None)

List existing zones including the ones flagged for deletion.

get_absolute_limits(*context*)

get_blacklist(*context*, *blacklist_id*)

get_floatingip(*context*, *region*, *floatingip_id*)
Get Floating IP PTR

get_pool(*context*, *pool_id*)

get_quotas(*context*, *tenant_id*)

get_recordset(*context*, *zone_id*, *recordset_id*)

get_shared_zone(*context*, *zone_id*, *zone_share_id*)

get_tenant(*context*, *tenant_id*)

get_tld(*context*, *tld_id*)

get_tsigkey(*context*, *tsigkey_id*)

get_zone(*context*, *zone_id*, *apply_tenant_criteria=True*)
Get a zone, even if flagged for deletion

get_zone_export(*context*, *zone_export_id*)

get_zone_import(*context*, *zone_import_id*)

get_zone_ns_records(*context*, *zone_id=None*, *criterion=None*)

get_zone_transfer_accept(*context*, *zone_transfer_accept_id*)

get_zone_transfer_request(*context*, *zone_transfer_request_id*)

increment_zone_serial(*context*, *zone*)

list_floatingips(*context*)
List Floating IPs PTR

- A) We have **service_catalog** in the context and do a lookup using the token pr Neutron in the SC
- B) We lookup FIPs using the configured values for this deployment.

purge_zones(*context*, *criterion*, *limit=None*)
Purge deleted zones. :returns: number of purged zones

property quota

reset_quotas(*context*, *tenant_id*)

property scheduler

property service_name

set_quota(*context*, *tenant_id*, *resource*, *hard_limit*)

share_zone(*context*, *zone_id*, *shared_zone*)

start()

Start a service.

stop(*graceful=True*)

Stop a service.

Parameters

graceful indicates whether to wait for all threads to finish or terminate them instantly

property storage

target = <Target version=6.8>

unshare_zone(*context, zone_id, zone_share_id*)

update_blacklist(*context, blacklist*)

update_floatingip(*context, region, floatingip_id, values*)

We strictly see if values[ptrdname] is str or None and set / unset the requested FloatingIPs PTR record based on that.

update_pool(*context, pool*)

update_recordset(*context, recordset, increment_serial=True*)

update_service_status(*context, service_status*)

update_status(*context, zone_id, status, serial, action=None*)

Parameters

- **context** Security context information.
- **zone_id** The ID of the designate zone.
- **status** The status, SUCCESS or ERROR.
- **serial** The consensus serial number for the zone.
- **action** The action, CREATE, UPDATE, DELETE or NONE.

Returns

updated zone

update_tld(*context, tld*)

update_tsigkey(*context, tsigkey*)

update_zone(*context, zone, increment_serial=True*)

Update zone. Perform checks and then call `_update_zone()`

Returns

updated zone

update_zone_export(*context, zone_export*)

update_zone_import(*context, zone_import*)

update_zone_transfer_request(*context, zone_transfer_request*)

```
property worker_api
xfr_zone(context, zone_id)
```

MDNS

MDNS Handler

```
class designate.mdns.handler.RequestHandler(storage, tg)
    Bases: object
    property worker_api
```

MDNS Service

```
class designate.mdns.service.Service
    Bases: Service
    property dns_application
    property service_name
    start()
        Start a service.
    stop(graceful=True)
        Stop a service.
        Parameters
            graceful indicates whether to wait for all threads to finish or terminate them
            instantly
    property storage
```

Objects

Objects Base

```
class designate.objects.base.AttributeListObjectMixin(*args, **kwargs)
    Bases: ListObjectMixin
    Mixin class for Attribute objects.
    Attribute objects are ListObjects, whos memebbers have a key and value property, which should be
    exposed on the list itself as list.<key>.
    classmethod from_dict(_dict)
    get(key, default=None)
    to_dict()
```

```
class designate.objects.base.DesignateObject(*args, **kwargs)
    Bases: VersionedObject

    OBJ_PROJECT_NAMESPACE = 'designate'

    OBJ_SERIAL_NAMESPACE = 'designate_object'

    STRING_KEYS = []

    classmethod from_dict(_dict)

    classmethod from_list(_list)

    classmethod from_primitive(primitive, context=None)

    property is_valid
        Returns True if the Object is valid.

    nested_sort(key, value)
        This function ensure that change fields list is sorted. :param key: :param value: :return:

    obj_attr_is_set(name)
        Return True or False depending of if a particular attribute has had an attributes value explicitly
        set.

    classmethod obj_cls_from_name(name)

    property obj_context

    property obj_fields

    obj_get_original_value(field)
        Returns the original value of a field.

    classmethod obj_get_schema()

    obj_reset_changes(fields=None, recursive=False)
        Reset the list of fields that have been changed.

        Parameters
        • fields List of fields to reset, or all if None.
        • recursive Call obj_reset_changes(recursive=True) on any sub-objects
            within the list of fields being reset.

        This is NOT revert to previous values.

        Specifying fields on recursive resets will only be honored at the top level. Everything below
        the top will reset all.

    save(context)
        Save the changed fields back to the store.

        This is optional for subclasses, but is presented here in the base class for consistency among
        those that do.

    to_dict()
        Convert the object to a simple dictionary.
```

to_primitive()

update(values)

Update a objects fields with the supplied key/value pairs

validate()

class designate.objects.base.**DesignateRegistry**(*args, **kwargs)

Bases: VersionedObjectRegistry

registration_hook(cls, index)

class designate.objects.base.**ListObjectMixin**(*args, **kwargs)

Bases: ObjectListBase

LIST_ITEM_TYPE

alias of *DesignateObject*

append(value)

Append a value to the list

count(value)

List count of value occurrences

extend(values)

Extend the list by appending all the items in the given list

classmethod from_list(_list)

index(value)

List index of value

insert(index, value)

Insert a value into the list at the given index

pop(index)

Pop a value from the list

remove(value)

Remove a value from the list

to_list()

class designate.objects.base.**PagedListObjectMixin**

Bases: object

Mixin class for List objects.

This adds fields that would populate API metadata for collections.

```
fields = {'total_count': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

class designate.objects.base.**PersistentObjectMixin**

Bases: object

Mixin class for Persistent objects.

This adds the fields that we use in common for all persistent objects.

```
fields = {'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

class designate.objects.base.SoftDeleteObjectMixin

Bases: object

Mixin class for Soft-Deleted objects.

This adds the fields that we use in common for all soft-deleted objects.

```
fields = {'deleted': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'deleted_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

designate.objects.base.get_dict_attr(*klass*, *attr*)

Objects Backlist

class designate.objects.blacklist.Blacklist(**args*, ***kwargs*)

Bases: VersionedObjectDictCompat, *PersistentObjectMixin*, *DesignateObject*

STRING_KEYS = ['id', 'pattern']

property created_at

property description

```
fields = {'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'pattern': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

property id

property pattern

property updated_at

property version

class designate.objects.blacklist.**BlacklistList**(*args, **kwargs)

Bases: *ListObjectMixin*, *DesignateObject*

LIST_ITEM_TYPE

alias of *Blacklist*

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects Zone

class designate.objects.zone.**Zone**(*args, **kwargs)

Bases: *DesignateObject*, *VersionedObjectDictCompat*, *PersistentObjectMixin*,
SoftDeleteObjectMixin

STRING_KEYS = ['id', 'type', 'name', 'pool_id', 'serial', 'action',
'status']

property action

property attributes

property created_at

property delayed_notify

property deleted

property deleted_at

property description

property email

property expire

```

fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'attributes': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'delayed_notify': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'deleted': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'deleted_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'email': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'expire': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'increment_serial': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'masters': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'minimum': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'name':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'parent_zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'pool_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordsets': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'refresh': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'retry': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shared': Boolean(default=False, nullable=True), 'status':
Enum(default=<class 'oslo_versionedobjects.fields.UnspecifiedDefault'>,
nullable=True, valid_values=['ACTIVE', 'PENDING', 'ERROR', 'DELETED',
'SUCCESS', 'NO_ZONE']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'transferred_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'ttl':
Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'type':
Enum(default=<class 'oslo_versionedobjects.fields.UnspecifiedDefault'>,
nullable=True, valid_values=['SECONDARY', 'PRIMARY']), 'updated_at':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

```

`get_master_by_ip(host)`

Utility to get the master by its ip for this zone.

`property id`

`property increment_serial`

`property masters`

`property minimum`

`property name`

`property parent_zone_id`

`property pool_id`

`property recordsets`

`property refresh`

`property retry`

`property serial`

`property shard`

`property shared`

`property status`

`property tenant_id`

`property transferred_at`

`property ttl`

`property type`

`property updated_at`

`validate()`

`property version`

class `designate.objects.zone.ZoneList(*args, **kwargs)`

Bases: *ListObjectMixin*, *DesignateObject*, *PagedListObjectMixin*

LIST_ITEM_TYPE

alias of *Zone*

```
fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'total_count': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```


property objects

property total_count

Objects Pool

```
class designate.objects.pool.Pool(*args, **kwargs)
    Bases: VersionedObjectDictCompat, PersistentObjectMixin, DesignateObject
    STRING_KEYS = ['id', 'name']

    property also_notifies

    property attributes

    property created_at

    property description

    fields = {'also_notifies': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'attributes': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'name':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'nameservers': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'ns_records': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'provisioner': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'targets': Object(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

    property id

    property name

    property nameservers
```

property ns_records
property provisioner
property targets
property tenant_id
property updated_at
property version

```
class designate.objects.pool.PoolList(*args, **kwargs)
    Bases: ListObjectMixin, DesignateObject
    LIST_ITEM_TYPE
        alias of Pool
    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}
    property objects
```

Objects Quota

```
class designate.objects.quota.Quota(*args, **kwargs)
    Bases: VersionedObjectDictCompat, PersistentObjectMixin, DesignateObject
    STRING_KEYS = ['resource', 'tenant_id', 'hard_limit']
    property created_at
    fields = {'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'hard_limit': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'resource': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['api_export_size',
'recordset_records', 'zone_records', 'zone_recordsets', 'zones']),
'tenant_id': Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
    property hard_limit
    property id
    property resource
```

property tenant_id

property updated_at

property version

class designate.objects.quota.QuotaList(*args, **kwargs)

Bases: *ListObjectMixin*, *DesignateObject*

LIST_ITEM_TYPE

alias of *Quota*

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

classmethod from_dict(_dict)

property objects

to_dict()

Convert the object to a simple dictionary.

Objects Record

class designate.objects.record.Record(*args, **kwargs)

Bases: *DesignateObject*, *PersistentObjectMixin*, VersionedObjectDictCompat

STRING_KEYS = ['id', 'recordset_id', 'data']

property action

property created_at

property data

property description

```
fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

classmethod get_recordset_schema_changes()

property hash

property id

property managed
```

property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

```
class designate.objects.record.RecordList(*args, **kwargs)
    Bases: ListObjectMixin, DesignateObject
    LIST_ITEM_TYPE
        alias of Record
    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}
    property objects
```

Objects Recordset

```
class designate.objects.recordset.RecordSet(*args, **kwargs)
    Bases: DesignateObject, VersionedObjectDictCompat, PersistentObjectMixin
    STRING_KEYS = ['id', 'type', 'name', 'zone_id']
    property action
    property created_at
    property description
```

```
fields = {'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True), 'name':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'records': PolymorphicObject(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True), 'ttl':
Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True), 'type':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True),
'zone_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>,nullable=True)}
```

property id

property managed

property name

property records

property shard

property status

property tenant_id

property ttl

property type

property updated_at

validate()

property version

property zone_id

property zone_name

```
class designate.objects.recordset.RecordSetList(*args, **kwargs)
    Bases: ListObjectMixin, DesignateObject, PagedListObjectMixin

    LIST_ITEM_TYPE
        alias of RecordSet

    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'total_count': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

    property objects

    property total_count
```

Objects Server

```
class designate.objects.server.Server(*args, **kwargs)
    Bases: VersionedObjectDictCompat, PersistentObjectMixin, DesignateObject

    STRING_KEYS = ['id', 'name']

    property created_at

    fields = {'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'name':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

    property id

    property name

    property updated_at

    property version

class designate.objects.server.ServerList(*args, **kwargs)
    Bases: ListObjectMixin, DesignateObject

    LIST_ITEM_TYPE
        alias of Server

    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

    property objects
```

Objects Tenant

```
class designate.objects.tenant.Tenant(*args, **kwargs)
    Bases: DesignateObject, VersionedObjectDictCompat

    STRING_KEYS = ['id']

    fields = {'id': Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_count': Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zones': Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

    property id

    property zone_count

    property zones
```

```
class designate.objects.tenant.TenantList(*args, **kwargs)
    Bases: ListObjectMixin, DesignateObject

    LIST_ITEM_TYPE
        alias of Tenant

    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

    property objects
```

Objects TLD

```
class designate.objects.tld.Tld(*args, **kwargs)
    Bases: VersionedObjectDictCompat, PersistentObjectMixin, DesignateObject

    STRING_KEYS = ['id', 'name']

    property created_at

    property description

    fields = {'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'name':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```


property id

property name

property updated_at

property version

```
class designate.objects.tld.TldList(*args, **kwargs)
```

Bases: *ListObjectMixin*, *DesignateObject*

LIST_ITEM_TYPE

alias of *Tld*

```
fields = {'objects': List(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}
```

property objects

Objects TSigKey

```
class designate.objects.tsigkey.TsigKey(*args, **kwargs)
```

Bases: *VersionedObjectDictCompat*, *PersistentObjectMixin*, *DesignateObject*

STRING_KEYS = ['id', 'name', 'algorithm', 'scope', 'resource_id']

property algorithm

property created_at

```
fields = {'algorithm': Enum(default=<class 'oslo_versionedobjects.fields.  
UnspecifiedDefault'>, nullable=False, valid_values=['hmac-md5', 'hmac-sha1',  
'hmac-sha224', 'hmac-sha256', 'hmac-sha384', 'hmac-sha512']),  
'created_at': DateTime(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':  
UUID(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'name':  
String(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),  
'resource_id': UUID(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),  
'scope': Enum(default=<class 'oslo_versionedobjects.fields.  
UnspecifiedDefault'>, nullable=False, valid_values=['POOL', 'ZONE']),  
'secret': String(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),  
'updated_at': DateTime(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),  
'version': Integer(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

property id

property name
property resource_id
property scope
property secret
property updated_at
property version

class designate.objects.tsigkey.**TsigKeyList**(*args, **kwargs)

Bases: *ListObjectMixin*, *DesignateObject*

LIST_ITEM_TYPE

alias of *TsigKey*

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects A Record

class designate.objects.rrdata_a.**A**(*args, **kwargs)

Bases: *Record*

A Resource Record Type Defined in: RFC1035

RECORD_TYPE = 1

property action

property address

property created_at

property data

property description

```

fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'address': IPV4Address(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

```

`from_string(value)`

property hash

property id

property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

class designate.objects.rrdata_a.**AList**(*args, **kwargs)

Bases: [RecordList](#)

LIST_ITEM_TYPE

alias of [A](#)

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects AAAA Record

class designate.objects.rrdata_aaaa.**AAAA**(*args, **kwargs)

Bases: [Record](#)

AAAA Resource Record Type Defined in: RFC3596

RECORD_TYPE = 28

property action

property address

property created_at

property data

property description

```
fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'address': IPV6Address(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

```

from_string(value)
property hash
property id
property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

```

```

class designate.objects.rrdata_aaaa.AAAAList(*args, **kwargs)
    Bases: RecordList
    LIST_ITEM_TYPE
        alias of AAAA

    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

    property objects

```

Objects CNAME Record

```
class designate.objects.rrdata_cname.CNAME(*args, **kwargs)
```

Bases: *Record*

CNAME Resource Record Type Defined in: RFC1035

RECORD_TYPE = 5

property action

property cname

property created_at

property data

property description

```
fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'cname': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

`from_string(value)`

property hash

property id

property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

```
class designate.objects.rrdata_cname.CNAMEList(*args, **kwargs)
    Bases: RecordList
    LIST_ITEM_TYPE
        alias of CNAME
    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}
    property objects
```

Objects MX Record

```
class designate.objects.rrdata_mx.MX(*args, **kwargs)
    Bases: Record
    MX Resource Record Type Defined in: RFC1035
    RECORD_TYPE = 15
    property action
    property created_at
```

property data

property description

property exchange

```

fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'exchange': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'hash': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'priority': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

```

`from_string(value)`

property hash

property id
property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property priority
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

class designate.objects.rrdata_mx.**MXList**(*args, **kwargs)

Bases: [RecordList](#)

LIST_ITEM_TYPE

alias of [MX](#)

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects NS Record

class designate.objects.rrdata_ns.**NS**(*args, **kwargs)

Bases: [Record](#)

NS Resource Record Type Defined in: RFC1035

RECORD_TYPE = 2

property action
property created_at
property data
property description

```
fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'nsdname': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

from_string(value)

classmethod get_recordset_schema_changes()

property hash
```

property id
property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property nsdname
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

class designate.objects.rrdata_ns.NSList(*args, **kwargs)

Bases: [RecordList](#)

LIST_ITEM_TYPE

alias of [NS](#)

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects PTR Record

class designate.objects.rrdata_ptr.PTR(*args, **kwargs)

Bases: [Record](#)

PTR Resource Record Type Defined in: RFC1035

RECORD_TYPE = 12

property action

property created_at

property data

property description


```

fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'ptrdname': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

```

`from_string(value)`

property hash

property id

property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property ptrdname
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

class designate.objects.rrdata_ptr.PTRLIST(*args, **kwargs)

Bases: [RecordList](#)

LIST_ITEM_TYPE

alias of [PTR](#)

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects SOA Record

class designate.objects.rrdata_soa.SOA(*args, **kwargs)

Bases: [Record](#)

SOA Resource Record Type Defined in: RFC1035

RECORD_TYPE = 6

property action

property created_at
property data
property description
property expire

```
fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'expire': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'hash': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'minimum': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'mname': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'refresh': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'retry': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'rname': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

`from_string(value)`

`property hash`

`property id`

`property managed`

`property managed_extra`

`property managed_plugin_name`

`property managed_plugin_type`

`property managed_resource_id`

`property managed_resource_region`

`property managed_resource_type`

`property managed_tenant_id`

`property minimum`

`property mname`

`property recordset_id`

`property refresh`

`property retry`

`property rname`

`property serial`

`property shard`

`property status`

`property tenant_id`

`property updated_at`

`property version`

`property zone_id`

```
class designate.objects.rrdata_soa.SOAList(*args, **kwargs)
```

Bases: [RecordList](#)

`LIST_ITEM_TYPE`

alias of [SOA](#)

```
fields = {'objects': List(default=<class  
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}
```

`property objects`

Objects SPF Record

```
class designate.objects.rrdata_spf.SPF(*args, **kwargs)
```

Bases: *Record*

SPF Resource Record Type Defined in: RFC4408

RECORD_TYPE = 99

property action

property created_at

property data

property description

```

fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'txt_data': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

```

`from_string(value)`

property hash

property id

property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property recordset_id
property serial
property shard
property status
property tenant_id
property txt_data
property updated_at
property version
property zone_id

class designate.objects.rrdata_spf.**SPFList**(*args, **kwargs)

Bases: [RecordList](#)

LIST_ITEM_TYPE

alias of [SPF](#)

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects SRV Record

class designate.objects.rrdata_srv.**SRV**(*args, **kwargs)

Bases: [Record](#)

SRV Resource Record Type Defined in: RFC2782

RECORD_TYPE = 33

property action

property created_at

property data

property description

```
fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'port':
Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'priority': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'target': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'weight': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```

```
from_string(value)

classmethod get_recordset_schema_changes()

property hash
property id
property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property port
property priority
property recordset_id
property serial
property shard
property status
property target
property tenant_id
property updated_at
property version
property weight
property zone_id

class designate.objects.rrdns_srv.SRVList(*args, **kwargs)
    Bases: RecordList
    LIST_ITEM_TYPE
        alias of SRV

    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

    property objects
```

Objects TXT Record

```
class designate.objects.rrdata_txt.TXT(*args, **kwargs)
```

Bases: *Record*

TXT Resource Record Type Defined in: RFC1035

RECORD_TYPE = 16

property action

property created_at

property data

property description

```

fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'hash':
String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'txt_data': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

```

`from_string(value)`

property hash

property id

property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property recordset_id
property serial
property shard
property status
property tenant_id
property txt_data
property updated_at
property version
property zone_id

class designate.objects.rrdata_txt.TXTList(*args, **kwargs)

Bases: [RecordList](#)

LIST_ITEM_TYPE

alias of [TXT](#)

fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}

property objects

Objects SSHFP Record

class designate.objects.rrdata_sshfp.SSHFP(*args, **kwargs)

Bases: [Record](#)

SSHFP Resource Record Type Defined in: RFC4255

RECORD_TYPE = 44

property action

property algorithm
property created_at
property data
property description

```
fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'algorithm': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'fingerprint': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'fp_type': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'hash': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}
```


property fingerprint
property fp_type
from_string(*value*)
property hash
property id
property managed
property managed_extra
property managed_plugin_name
property managed_plugin_type
property managed_resource_id
property managed_resource_region
property managed_resource_type
property managed_tenant_id
property recordset_id
property serial
property shard
property status
property tenant_id
property updated_at
property version
property zone_id

```
class designate.objects.rdata_sshfp.SSHFPList(*args, **kwargs)
    Bases: RecordList
    LIST_ITEM_TYPE
        alias of SSHFP
    fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}
    property objects
```

Objects NAPTR Record

```
class designate.objects.rrdata_naptr.NAPTR(*args, **kwargs)
```

Bases: [Record](#)

NAPTR Resource Record Type Defined in: RFC2915

RECORD_TYPE = 35

property action

property created_at

property data

property description

```

fields = {'action': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['CREATE', 'DELETE',
'UPDATE', 'NONE']), 'created_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'data':
Any(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'description': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'flags': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'hash': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True), 'id':
UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed': Boolean(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_extra': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_name': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_plugin_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_region': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_resource_type': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'managed_tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'order': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'preference': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'recordset_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'regexp': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'replacement': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'serial': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'service': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False),
'shard': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'status': Enum(default=<class 'oslo_versionedobjects.fields.
UnspecifiedDefault'>, nullable=True, valid_values=['ACTIVE', 'PENDING',
'ERROR', 'DELETED']), 'tenant_id': String(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'updated_at': DateTime(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'version': Integer(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True),
'zone_id': UUID(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=True)}

```

property flags
 from_string(*value*)
 property hash
 property id
 property managed
 property managed_extra
 property managed_plugin_name
 property managed_plugin_type
 property managed_resource_id
 property managed_resource_region
 property managed_resource_type
 property managed_tenant_id
 property order
 property preference
 property recordset_id
 property regexp
 property replacement
 property serial
 property service
 property shard
 property status
 property tenant_id
 property updated_at
 property version
 property zone_id

class designate.objects.rdata_naptr.**NAPTRList**(*args, **kwargs)

Bases: [RecordList](#)

LIST_ITEM_TYPE

alias of [NAPTR](#)

```
fields = {'objects': List(default=<class
'oslo_versionedobjects.fields.UnspecifiedDefault'>, nullable=False)}
```

property objects

Objects CAA Record

members
undoc-members
show-inheritance

Objects CERT Record

members
undoc-members
show-inheritance

Quota

Quota Base

```
class designate.quota.base.Quota
    Bases: DriverPlugin
    Base class for quota plugins
    get_default_quotas(context)
    get_quota(context, tenant_id, resource)
    get_quotas(context, tenant_id)
    limit_check(context, tenant_id, **values)
    reset_quotas(context, tenant_id)
    set_quota(context, tenant_id, resource, hard_limit)
```

Quota Storage

```
class designate.quota.impl_storage.StorageQuota
    Bases: Quota
    get_quota(context, tenant_id, resource)
    reset_quotas(context, tenant_id)
    set_quota(context, tenant_id, resource, hard_limit)
```

Sink

Sink Service

class designate.sink.service.**Service**

Bases: Service

info(*context, publisher_id, event_type, payload, metadata*)

Processes an incoming notification, offering each extension the opportunity to handle it.

property service_name

start()

Start a service.

stop(*graceful=True*)

Stop a service.

Parameters

graceful indicates whether to wait for all threads to finish or terminate them instantly

Storage

Storage Base

class designate.storage.sqlalchemy.**SQLAlchemyStorage**

Bases: SQLAlchemy

SQLAlchemy connection

count_records(*context, criterion=None*)

Count records

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

count_recordsets(*context, criterion=None*)

Count recordsets

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

count_tenants(*context*)

Count tenants

Parameters

context RPC Context.

count_zone_tasks(*context, criterion=None*)

count_zone_transfer_accept(*context*, *criterion=None*)

count_zones(*context*, *criterion=None*)

Count zones

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

create_blacklist(*context*, *blacklist*)

Create a Blacklist.

Parameters

- **context** RPC Context.
- **blacklist** Blacklist object with the values to be created.

create_pool(*context*, *pool*)

Create a Pool.

Parameters

- **context** RPC Context.
- **pool** Pool object with the values to be created.

create_pool_also_notify(*context*, *pool_id*, *pool_also_notify*)

create_pool_attribute(*context*, *pool_id*, *pool_attribute*)

Create a PoolAttribute.

Parameters

- **context** RPC Context.
- **pool_id** The ID of the pool to which the attribute belongs.
- **pool_attribute** PoolAttribute object with the values created.

create_pool_nameserver(*context*, *pool_id*, *pool_nameserver*)

create_pool_ns_record(*context*, *pool_id*, *pool_ns_record*)

create_pool_target(*context*, *pool_id*, *pool_target*)

create_pool_target_master(*context*, *pool_target_id*, *pool_target_master*)

create_pool_target_option(*context*, *pool_target_id*, *pool_target_option*)

create_quota(*context*, *quota*)

Create a Quota.

Parameters

- **context** RPC Context.
- **quota** Quota object with the values to be created.

create_record(*context, zone_id, recordset_id, record*)

Create a record on a given Zone ID

Parameters

- **context** RPC Context.
- **zone_id** Zone ID to create the record in.
- **recordset_id** RecordSet ID to create the record in.
- **record** Record object with the values to be created.

create_recordset(*context, zone_id, recordset*)

Create a recordset on a given Zone ID

Parameters

- **context** RPC Context.
- **zone_id** Zone ID to create the recordset in.
- **recordset** RecordSet object with the values to be created.

create_service_status(*context, service_status*)

Create a Service status for a service.

Parameters

- **context** RPC Context.
- **service_status** The status of a service.

create_tld(*context, tld*)

Create a TLD.

Parameters

- **context** RPC Context.
- **tld** Tld object with the values to be created.

create_tsigkey(*context, tsigkey*)

Create a TSIG Key.

Parameters

- **context** RPC Context.
- **tsigkey** TsigKey object with the values to be created.

create_zone(*context, zone*)

Create a new Zone.

Parameters

- **context** RPC Context.
- **zone** Zone object with the values to be created.

create_zone_attribute(*context, zone_id, zone_attribute*)

create_zone_export(*context, zone_export*)

Create a Zone Export.

Parameters

- **context** RPC Context.
- **zone_export** Zone Export object with the values to be created.

create_zone_import(*context, zone_import*)

Create a Zone Import.

Parameters

- **context** RPC Context.
- **zone_import** Zone Import object with the values to be created.

create_zone_master(*context, zone_id, zone_master*)

create_zone_transfer_accept(*context, zone_transfer_accept*)

create_zone_transfer_request(*context, zone_transfer_request*)

delete_blacklist(*context, blacklist_id*)

Delete a Blacklist via ID.

Parameters

- **context** RPC Context.
- **blacklist_id** Delete a Blacklist via ID

delete_pool(*context, pool_id*)

Delete the pool with the matching id

Parameters

- **context** RPC Context.
- **pool_id** The ID of the pool to be deleted

delete_pool_also_notify(*context, pool_also_notify_id*)

delete_pool_attribute(*context, pool_attribute_id*)

Delete the pool with the matching id

Parameters

- **context** RPC Context.
- **pool_attribute_id** The ID of the PoolAttribute to be deleted

delete_pool_nameserver(*context, pool_nameserver_id*)

delete_pool_ns_record(*context, pool_ns_record_id*)

delete_pool_target(*context, pool_target_id*)

delete_pool_target_master(*context, pool_target_master_id*)

delete_pool_target_option(*context, pool_target_option_id*)

delete_quota(*context, quota_id*)

Delete a Quota via ID.

Parameters

- **context** RPC Context.
- **quota_id** Delete a Quota via ID

delete_record(*context, record_id*)

Delete a record

Parameters

- **context** RPC Context.
- **record_id** Record ID to delete

delete_recordset(*context, recordset_id*)

Delete a recordset

Parameters

- **context** RPC Context.
- **recordset_id** RecordSet ID to delete

delete_tld(*context, tld_id*)

Delete a TLD via ID.

Parameters

- **context** RPC Context.
- **tld_id** Delete a TLD via ID

delete_tsigkey(*context, tsigkey_id*)

Delete a TSIG Key via ID.

Parameters

- **context** RPC Context.
- **tsigkey_id** Delete a TSIG Key via ID

delete_zone(*context, zone_id*)

Delete a Zone

Parameters

- **context** RPC Context.
- **zone_id** Zone ID to delete.

delete_zone_attribute(*context, zone_attribute_id*)

delete_zone_export(*context, zone_export_id*)

Delete a Zone Export via ID.

Parameters

- **context** RPC Context.
- **zone_export_id** Delete a Zone Export via ID

delete_zone_import(*context, zone_import_id*)

Delete a Zone Import via ID.

Parameters

- **context** RPC Context.
- **zone_import_id** Delete a Zone Import via ID

delete_zone_master(*context, zone_master_id*)

delete_zone_shares(*zone_id*)

Delete all of the zone shares for a specific zone.

Parameters

zone_id The zone ID to check.

delete_zone_transfer_accept(*context, zone_transfer_accept_id*)

delete_zone_transfer_request(*context, zone_transfer_request_id*)

find_blacklist(*context, criterion*)

Find a single Blacklist.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_blacklists(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find Blacklists

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_pool(*context, criterion*)

Find a single Pool.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_pool_also_notifies(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_pool_also_notify(*context, criterion*)

find_pool_attribute(*context, criterion*)

Find a single PoolAttribute

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_pool_attributes(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find all PoolAttributes

Parameters

- **context** RPC Context
- **criterion** Criteria by which to filter
- **marker** Resource ID used by paging. The next page will start at the next resource after the marker
- **limit** Integer limit of objects on the page
- **sort_key** Key used to sort the returned list
- **sort_dir** Directions to sort after using sort_key

find_pool_nameserver(*context, criterion*)

find_pool_nameservers(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_pool_target(*context, criterion*)

find_pool_targets(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_pools(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find all Pools

Parameters

- **context** RPC Context.
- **criterion** Criteria by which to filter
- **marker** Resource ID used by paging. The next page will start at the next resource after the marker
- **limit** Integer limit of objects on the page
- **sort_key** Key used to sort the returned list
- **sort_dir** Directions to sort after using sort_key

find_quota(*context, criterion*)

Find a single Quota.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_quotas(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find Quotas

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_record(*context, criterion*)

Find a single Record.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_records(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find Records.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_recordset(*context, criterion, apply_tenant_criteria=True*)

Find a single RecordSet.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **apply_tenant_criteria** Whether to filter results by project_id.

find_recordsets(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None, force_index=False, apply_tenant_criteria=True*)

Find RecordSets.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.
- **apply_tenant_criteria** Whether to filter results by project_id.

find_recordsets_axfr(*context, criterion=None*)

Find RecordSets.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_recordsets_export(*context, criterion=None*)

find_service_status(*context, criterion*)

Find a single Service Status.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_service_statuses(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Retrieve status for services

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_shared_zones(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find shared zones

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after

- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_tenants(*context*)

Find all Tenants.

Parameters

context RPC Context.

find_tld(*context, criterion*)

Find a single TLD.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_tlds(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find TLDs

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_tsigkey(*context, criterion*)

Find TSIG Key.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_tsigkeys(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find TSIG Keys.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.

- **sort_dir** Direction to sort after using sort_key.

find_zone(*context, criterion*)

Find a single Zone.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_zone_attributes(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_zone_export(*context, criterion*)

Find a single Zone Export.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_zone_exports(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find Zone Exports

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_zone_import(*context, criterion*)

Find a single Zone Import.

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.

find_zone_imports(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find Zone Imports

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker

- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

find_zone_transfer_accept(*context, criterion*)

find_zone_transfer_accepts(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_zone_transfer_request(*context, criterion*)

find_zone_transfer_requests(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

find_zones(*context, criterion=None, marker=None, limit=None, sort_key=None, sort_dir=None*)

Find zones

Parameters

- **context** RPC Context.
- **criterion** Criteria to filter by.
- **marker** Resource ID from which after the requested page will start after
- **limit** Integer limit of objects of the page size after the marker
- **sort_key** Key from which to sort after.
- **sort_dir** Direction to sort after using sort_key.

get_blacklist(*context, blacklist_id*)

Get a Blacklist via ID.

Parameters

- **context** RPC Context.
- **blacklist_id** Blacklist ID to get.

get_inspector()

get_pool(*context, pool_id*)

Get a Pool via the id

Parameters

- **context** RPC Context.
- **pool_id** The ID of the pool to get

get_pool_also_notify(*context, pool_also_notify_id*)

get_pool_attribute(*context, pool_attribute_id*)

Get a PoolAttribute via the ID

Parameters

- **context** RPC Context.
- **pool_attribute_id** The ID of the PoolAttribute to get

get_pool_nameserver(*context, pool_nameserver_id*)

get_pool_target(*context, pool_target_id*)

get_quota(*context, quota_id*)

Get a Quota via ID.

Parameters

- **context** RPC Context.
- **quota_id** Quota ID to get.

get_record(*context, record_id*)

Get a record via ID

Parameters

- **context** RPC Context.
- **record_id** Record ID to get

get_shared_zone(*context, zone_id, shared_zone_id*)

Get a shared zone via ID

Parameters

- **context** RPC Context.
- **shared_zone_id** Shared Zone Id

get_tenant(*context, tenant_id*)

Get Tenant.

Parameters

- **context** RPC Context.
- **tenant_id** ID of the Tenant.

get_tld(*context, tld_id*)

Get a TLD via ID.

Parameters

- **context** RPC Context.
- **tld_id** TLD ID to get.

get_tsigkey(*context, tsigkey_id*)

Get a TSIG Key via ID.

Parameters

- **context** RPC Context.
- **tsigkey_id** Server ID to get.

get_zone(*context, zone_id, apply_tenant_criteria=True*)

Get a Zone via its ID.

Parameters

- **context** RPC Context.
- **zone_id** ID of the Zone.
- **apply_tenant_criteria** Whether to filter results by project_id.

get_zone_attributes(*context, zone_attribute_id*)

get_zone_export(*context, zone_export_id*)

Get a Zone Export via ID.

Parameters

- **context** RPC Context.
- **zone_export_id** Zone Export ID to get.

get_zone_import(*context, zone_import_id*)

Get a Zone Import via ID.

Parameters

- **context** RPC Context.
- **zone_import_id** Zone Import ID to get.

get_zone_transfer_accept(*context, zone_transfer_accept_id*)

get_zone_transfer_request(*context, zone_transfer_request_id*)

increment_serial(*context, zone_id*)

Increment the zones serial number.

is_zone_shared_with_project(*zone_id, project_id*)

Checks if a zone is shared with a project.

Parameters

- **zone_id** The zone ID to check.
- **project_id** The project ID to check.

Returns

Boolean True/False if the zone is shared with the project.

purge_zone(*context, zone*)

Purge a Zone, effectively removing the zone database record.

Parameters

- **context** RPC Context.
- **zone** Zone to delete.

purge_zones(*context, criterion, limit*)

Purge Zones, effectively removing the zones database records.

Reparent orphan childrens, if any. Transactions/locks are not needed.

Parameters

- **context** RPC Context.

- **criterion** Criteria to filter by.
- **limit** Integer limit of objects of the page size after the marker

share_zone(*context, shared_zone*)

Share zone

Parameters

- **context** RPC Context.
- **shared_zone** Shared Zone dict

unshare_zone(*context, zone_id, shared_zone_id*)

Unshare zone

Parameters

- **context** RPC Context.
- **shared_zone_id** Shared Zone Id

update_blacklist(*context, blacklist*)

Update a Blacklist

Parameters

- **context** RPC Context.
- **blacklist** Blacklist to update.

update_pool(*context, pool*)

Update the specified pool

Parameters

- **context** RPC Context.
- **pool** Pool to update.

update_pool_also_notify(*context, pool_also_notify*)

update_pool_attribute(*context, pool_attribute*)

Update the specified pool

Parameters

- **context** RPC Context.
- **pool_attribute** PoolAttribute to update

update_pool_nameserver(*context, pool_nameserver*)

update_pool_ns_record(*context, pool_ns_record*)

update_pool_target(*context, pool_target*)

update_pool_target_master(*context, pool_target_master*)

update_pool_target_option(*context, pool_target_option*)

update_quota(*context, quota*)

Update a Quota

Parameters

- **context** RPC Context.
- **quota** Quota to update.

update_record(*context, record*)

Update a record

Parameters

- **context** RPC Context.
- **record** Record to update

update_recordset(*context, recordset*)

Update a recordset

Parameters

- **context** RPC Context.
- **recordset** RecordSet to update

update_service_status(*context, service_status*)

Update the Service status for a service.

Parameters

- **context** RPC Context.
- **service_status** Set the status for a service.

update_tld(*context, tld*)

Update a TLD

Parameters

- **context** RPC Context.
- **tld** TLD to update.

update_tsigkey(*context, tsigkey*)

Update a TSIG Key

Parameters

- **context** RPC Context.
- **tsigkey** TSIG Keyto update.

update_zone(*context, zone*)

Update a Zone

Parameters

- **context** RPC Context.
- **zone** Zone object.

update_zone_attribute(*context*, *zone_attribute*)

update_zone_export(*context*, *zone_export*)

Update a Zone Export

Parameters

- **context** RPC Context.
- **zone_export** Zone Export to update.

update_zone_import(*context*, *zone_import*)

Update a Zone Import

Parameters

- **context** RPC Context.
- **zone_import** Zone Import to update.

update_zone_master(*context*, *zone_master*)

update_zone_transfer_accept(*context*, *zone_transfer_accept*)

update_zone_transfer_request(*context*, *zone_transfer_request*)

1.3.5 Development Environment on Ubuntu

Designate is comprised of four main components *Designate API*, *Designate Central*, *designate-mdns*, and *designate-pool-manager*, supported by a few standard open source components. For more information see [Architecture](#).

There are many different options for customizing Designate, and two of these options have a major impact on the installation process:

- The storage backend used (SQLite or MySQL)
- The DNS backend used (PowerDNS or BIND9)

This guide will walk you through setting up a typical development environment for Designate, using BIND9 as the DNS backend and MySQL as the storage backend. For a more complete discussion on installation & configuration options, please see [Architecture](#).

For this guide you will need access to an Ubuntu Server (16.04).

Development Environment

Installing Designate

1. Install system package dependencies (Ubuntu)

```
$ sudo apt update
$ sudo apt install python-pip python-virtualenv libssl-dev libffi-dev git
$ sudo apt build-dep python-lxml
```

2. Clone the Designate repo

```
$ mkdir openstack
$ cd openstack
$ git clone https://opendev.org/openstack/designate.git
$ cd designate
```

3. Setup a virtualenv

Note: This step is necessary to allow the installation of an up-to-date pip, independent of the version packaged for Ubuntu. it is also useful in isolating the remainder of Designates dependencies from the rest of the system.

```
$ virtualenv .venv
$ . .venv/bin/activate
```

4. Install an up-to-date pip

```
$ pip install -U pip
```

5. Install Designate and its dependencies

```
$ pip install -e .
```

6. Change directories to the etc/designate folder.

Note: Everything from here on out should take place in or below your etc/designate folder

```
$ cd etc/designate
```

7. Create Designates config files by copying the sample config files

```
$ cp -a rootwrap.conf.sample rootwrap.conf
```

8. Make the directory for Designates state files

```
$ mkdir -p ../../state
```

Configuring Designate

Refer to *Designate Configuration Guide* for a sample configuration options.

Installing RabbitMQ

Install the RabbitMQ package

```
$ sudo apt install rabbitmq-server
```

Create a user:

```
$ sudo rabbitmqctl add_user designate designate
```

Give the user access to the / vhost:

```
$ sudo rabbitmqctl set_permissions -p "/" designate ".*" ".*" ".*"
```

Installing MySQL

Install the MySQL server package

```
$ sudo apt install mysql-server
```

If you do not have MySQL previously installed, you will be prompted to change the root password. By default, the MySQL root password for Designate is password. You can:

- Change the root password to password
- If you want your own password, edit the `designate.conf` file and change any instance of `mysql+pymysql://root:password@127.0.0.1/designate?charset=utf8` to `mysql+pymysql://root:YOUR_PASSWORD@127.0.0.1/designate?charset=utf8`

You can change your MySQL password anytime with the following command:

```
$ mysqladmin -u root -p password NEW_PASSWORD
Enter password <enter your old password>
```

Create the Designate tables

```
$ mysql -u root -p
Enter password: <enter your password here>

mysql> CREATE DATABASE `designate` CHARACTER SET utf8 COLLATE utf8_general_ci;
mysql> exit;
```

Install additional packages

```
$ sudo apt install libmysqlclient-dev
$ pip install pymysql
```


Installing BIND9

Install the DNS server, BIND9

```
$ sudo apt install bind9
```

Update the BIND9 Configuration

```
$ sudo editor /etc/bind/named.conf.options
```

Change the corresponding lines in the config file:

```
options {
    directory "/var/cache/bind";
    dnssec-validation auto;
    auth-nxdomain no; # conform to RFC1035
    listen-on-v6 { any; };
    allow-new-zones yes;
    request-ixfr no;
    recursion no;
};
```

Disable AppArmor for BIND9

```
$ sudo touch /etc/apparmor.d/disable/usr.sbin.named
$ sudo systemctl reload apparmor
```

Restart BIND9:

```
$ sudo systemctl restart bind9
```

Create and Import pools.yaml File

Create the pools.yaml file

```
$ editor pools.yaml
```

Copy or mirror the configuration from this sample file here:

```
- name: default
  # The name is immutable. There will be no option to change the name after
  # creation and the only way will to change it will be to delete it
  # (and all zones associated with it) and recreate it.
  description: Default BIND9 Pool

  attributes: {}

  # List out the NS records for zones hosted within this pool
  ns_records:
    - hostname: ns1-1.example.org.
```

(continues on next page)

(continued from previous page)

```
priority: 1

# List out the nameservers for this pool. These are the actual BIND servers.
# We use these to verify changes have propagated to all nameservers.
nameservers:
  - host: 127.0.0.1
    port: 53

# List out the targets for this pool. For BIND, most often, there will be
↪ one
# entry for each BIND server.
targets:
  - type: bind9
    description: BIND9 Server 1

# List out the designate-mdns servers from which BIND servers should
# request zone transfers (AXFRs) from.
masters:
  - host: 127.0.0.1
    port: 5354

# BIND Configuration options
options:
  host: 127.0.0.1
  port: 53
  rndc_host: 127.0.0.1
  rndc_port: 953
  rndc_key_file: /etc/bind/rndc.key

# Optional list of additional IP/Port's for which designate-mdns will send
# DNS NOTIFY packets to
# also_notifies:
# - host: 192.0.2.4
#   port: 53
```

Initialize the Database

Sync the Designate database.

```
$ designate-manage database sync
```

Start the Central Service

Start the central service.

```
$ designate-central
```

You'll now be seeing the log from the central service.

Initialize Pools Information

Import the pools.yaml file into Designate. It is important that `designate-central` is started before invoking this command

```
$ designate-manage pool update --file pools.yaml
```

Start the other Services

Open up some new ssh windows and log in to your server (or open some new screen/tmux sessions).

```
$ cd openstack/designate  
$ . .venv/bin/activate
```

Start the other services

```
$ designate-api  
$ designate-mdns  
$ designate-worker  
$ designate-producer
```

You'll now be seeing the logs from the other services.

Exercising the API

Note: If you have a firewall enabled, make sure to open port 53, as well as Designate's default port (9001).

Using a web browser, curl statement, or a REST client, calls can be made to the Designate API. You can find the various API calls on the [api-ref](#) document.

For example:

```
$ curl 127.0.0.1:9001/v2/zones -H 'Content-Type: application/json' --data '{  
  {  
    "name": "example.com.",  
    "email": "example@example.com"  
  }  
'
```

(continues on next page)

(continued from previous page)

```
{"status": "PENDING",.....  
$ curl 127.0.0.1:9001/v2/zones  
{"zones": [{"status": "ACTIVE",.....
```

The ACTIVE status shows that the zone propagated. So you should be able to perform a DNS query and see it:

```
$ dig @127.0.0.1 example.com SOA +short  
ns1-1.example.org. example.example.com. 1487884120 3531 600 86400 3600
```

You can find the IP Address of your server by running

```
ip addr show eth0 | grep "inet\b" | awk '{print $2}' | cut -d/ -f1
```

If you have Keystone set up, you can use it by configuring the [keystone_authtoken] section and changing the auth_strategy = keystone in the service:api section. This will make it easier to use clients like the openstack CLI that expect Keystone.

1.3.6 OpenStack Integrations

This page overviews integrations with other services like Neutron and others to make use of Designate more convenient.

Reverse - FloatingIP

The FloatingIP PTR feature of Designate relies on information of the FloatingIP which is in a different service than Designate itself. It can be in any service as long as there is a plugin for it that can be loaded via the configuration setting called network_api.

- Controller, views and schemas in the V2 API
- RPC Client towards Central used by the API and Sink
- Logic in Central to make it convenient for setting, unsetting, listing and getting FloatingIP PTR records compared to the Records themselves which would be more work. (This is outlined in code docstrings for the specific methods.)
- Sink handlers for the various backend to help us be more consistent.

Record invalidation

Happens mainly happens via comparing a Tenants FloatingIPs towards the list we have of Records which are of a certain plugin type and with the use of a Sink handler that listens for incoming events from the various services.

Configuring Neutron

Configuring the FloatingIP feature is really simple:

```
[network_api:neutron]
endpoints = RegionOne|http://localhost:9696
endpoint_type = publicURL
timeout = 30
# This is optional - if these credentials are not provided designate will
# use the users context and auth token to query neutron
#admin_username = designate
#admin_password = designate
#admin_tenant_name = designate
auth_url = http://localhost:35357/v2.0
insecure = False
auth_strategy = keystone
ca_certificates_file = /etc/path/to/ca.pem
```

Note that using `admin_user`, `admin_password` and `admin_tenant_name` is optional, if not present well piggyback on the `context.auth_token` passed in by the API.

Note: If endpoints is not configured and theres no service catalog is present in the context passed by the API to Central the request will fail in a `NoEndpoint` exception.

Neutron Designate direct integration

Neutron supports creating DNS Recordsets as neutron ports are created, and pushing that information into designate.

The configuration for this is in the [Networking Guide](#)

Designate Sink

Designate Sink is a component of designate that can listen to the event stream of other openstack services and perform actions based on them.

1.3.7 Other modules

1.4 User guide

In this section, you will find documentation relevant for using Designate.

Contents:

1.4.1 Managing Zones

Managing Zones

In the Domain Name System, *zones* are used to break up the namespace into more easily managed pieces. For example, within the root zone `.` there are zones for each of the top level domains such as `.org.` and `.com.` and responsibility for each of those zones could lie with a different organisation. Within those zones, there are then delegations to other zones, such as `example.org.` or `example.com.` which might again be managed by a different organisation and/or set of nameservers. This forms a hierarchy of responsibility, with the higher levels being mainly composed of delegations to lower levels.

Zones in Designate

Zones in Designate model the ownership concept from DNS itself, where any given zone can only be owned by a single tenant. However, while DNS is able to support a hierarchy of zones, there is no support for delegating subzones to another tenant, and one tenant cannot create zones that lie within the zone of another tenant.

The creation of a zone in Designate also creates two recordsets automatically: an SOA record and an NS record. By default these records cannot be modified without the admin role.

Zones vs Top Level Domains

While top level domains are considered zones from a DNS perspective, in Designate they are often not managed as a zone, and instead have their own TLD type that allows any tenant to create zones within that TLD and restricts tenants from creating zones that aren't within a managed TLD. If no TLDs are being managed within Designate, tenants can create any zone aside from the root zone and top level domains.

Creating a zone

Creating a zone requires only the name of the zone and an email address of the party responsible for the zone.

```
$ openstack zone create --email dnsmaster@example.com example.com.
```

Field	Value
action	CREATE
attributes	{}
created_at	2016-07-13T14:54:16.000000
description	None
email	dnsmaster@example.com
id	14093115-0f0f-497a-ac69-42235e46c26f
masters	
name	example.com.
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842
project_id	656bc359067844fba6005d400f19df76
serial	1468421656

(continues on next page)

(continued from previous page)

status	PENDING	
transferred_at	None	
ttl	3600	
type	PRIMARY	
updated_at	None	
version	1	
+-----+	+-----+	+-----+

Note that the state is PENDING. Designate has received the request to create the zone, but may not have completed it yet. After a short time, verify successful creation of the DNS Zone:

```
$ openstack zone list
```

id	name	type	serial
status	action		
14093115-0f0f-497a-ac69-42235e46c26f	example.com.	PRIMARY	1468421656
ACTIVE	NONE		

There will now be two recordsets visible in the zone:

```
$ openstack recordset list example.com.
```

id	name	type	records
status	action		
269cf8d2-c498-49a8-aef9-01e81d078313	example.com.	SOA	ns1.devstack.org. admin.example.com. 1618291836 3509 600 86400 3600
31b50023-88b2-4011-b31b-474fa25a8e39	example.com.	NS	ns1.devstack.org.
		ACTIVE	NONE

The values for refresh, retry, minimum and expire on the SOA record are set by the Designate operator. The TTL, however, can be modified by users via the zone:

```
$ openstack zone set example.com. --ttl 3000
```

Field	Value	
action	UPDATE	
attributes		
created_at	2021-04-13T05:30:36.000000	
description	None	

(continues on next page)

(continued from previous page)

email	admin@example.com	
id	b9861a55-0e50-4896-8ab9-25d8c4494f64	
masters		
name	example.com.	
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842	
project_id	9d69e3a004aa40c581f00d7bb7763e0a	
serial	1618545015	
status	PENDING	
transferred_at	None	
ttl	3000	
type	PRIMARY	
updated_at	2021-04-16T03:50:15.000000	
version	11	
+-----+	+-----+	+-----+

The `dig` tool can be used to query one of the backend nameservers to confirm the result. In this example, there is a DNS server at `192.168.122.186` managed by designate as part of the default pool.

```
$ dig @192.168.122.186 example.com.

; <<>> DiG 9.11.20-RedHat-9.11.20-5.el8_3.1 <<>> @192.168.122.186 example.com.
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 63663
;; flags: qr aa rd; QUERY: 1, ANSWER: 0, AUTHORITY: 1, ADDITIONAL: 1
;; WARNING: recursion requested but not available

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
; COOKIE: 970f584e4cb93505eaf46f526079097ac959da76062f1d0a (good)
;; QUESTION SECTION:
;example.com.                IN      A

;; AUTHORITY SECTION:
example.com.                 3000    IN      SOA     ns1.devstack.org. admin.example.
->com. 1618545015 3509 600 86400 3600

;; Query time: 0 msec
;; SERVER: 192.168.122.186#53(192.168.122.186)
;; WHEN: Fri Apr 16 03:50:18 UTC 2021
;; MSG SIZE rcvd: 126
```

In the **AUTHORITY** section, the numeric value between the name and *IN* is the TTL, which has updated to the new value of 3000.

Deleting a zone

A zone can be deleted using either its name or ID:

```
$ openstack zone delete example.com.
```

Field	Value
action	DELETE
attributes	
created_at	2021-04-13T05:30:36.000000
description	None
email	admin@example.com
id	b9861a55-0e50-4896-8ab9-25d8c4494f64
masters	
name	example.com.
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842
project_id	9d69e3a004aa40c581f00d7bb7763e0a
serial	1618545024
status	PENDING
transferred_at	None
ttl	3000
type	PRIMARY
updated_at	2021-04-16T10:18:05.000000
version	15

Any records present in the zone are also deleted and will no longer resolve.

Note: Zones that have shares cannot be deleted without removing the shares or using the *delete-shares* modifier.

Zone Import and Export

Overview

Zones can be imported into and serialised out of Designate using the zone import and export APIs. Using the [zone file format](#) along with these APIs you can both create zones and recordsets in batches and export zone data from Designate easily.

Exporting Zones

You can export a zone file from Designate using the `zone export create` subcommand on an existing zone, and subsequently access the exported zone file using `zone export showfile`.

For example, use `openstack recordset list` to view the records for a zone youd like to export:

```
$ openstack recordset list example.org.
```

id	name	type	records	status	action
b4dfcb36-c4ae-4399-9493-6e6997099356	example.org.	NS	ns1.	ACTIVE	
e9e3b31f-8aef-465f-9380-e3380191f8bd	example.org. admin.example.org.	SOA	ns1. 1624414033 3583 600 86400 3600	ACTIVE	
09407eaa-1fac-4257-b9e1-11d693bc1eae	www.example.org.	A	192.0.2.2	ACTIVE	NONE
			192.0.2.1		

Using the `openstack zone export create` command, export `example.org.`:

```
$ openstack zone export create example.org.
```

Field	Value
created_at	2021-06-23T02:01:30.000000
id	e75aef2c-b562-4cd9-a426-4a73f6cb82be
location	None
message	None
project_id	cf5a8f5cc5834d2dacd1d54cd0a354b7
status	PENDING
updated_at	None
version	1
zone_id	d8f81db6-937b-4388-bfb3-ba620e6c09fb

You can access the contents of the zone file using `zone export showfile`. Using the `-f value` parameter will print the contents of the zone file without any tabulation, which can be useful if you want to modify the exported zone file locally and then import it back into Designate to update the zone.

```
$ openstack zone export showfile e75aef2c-b562-4cd9-a426-4a73f6cb82be -f value
$ORIGIN example.org.
$TTL 3600
```

(continues on next page)

(continued from previous page)

```
example.org.  IN NS ns1.example.org.
example.org.  IN SOA ns1.example.org. admin.example.org. 1624414033 3583 600
↪86400 3600

www.example.org.  IN A 192.0.2.2
www.example.org.  IN A 192.0.2.1
```

By default, the zone export file will be created on demand as it is accessed and as a result the contents of the zone export file will be updated as you add new recordsets to the zone:

```
$ openstack recordset create example.org. test --type A --record 192.0.2.100
+-----+-----+
| Field      | Value                                |
+-----+-----+
| action     | CREATE                              |
| created_at | 2021-06-23T02:35:06.000000          |
| description | None                                |
| id         | aa27ccd8-77b1-41df-a3ed-2129259b334a |
| name       | test.example.org.                  |
| project_id | cf5a8f5cc5834d2dacd1d54cd0a354b7   |
| records    | 192.0.2.100                        |
| status     | PENDING                             |
| ttl        | None                                |
| type       | A                                    |
| updated_at | None                                |
| version    | 1                                    |
| zone_id    | d8f81db6-937b-4388-bfb3-ba620e6c09fb |
| zone_name  | example.org.                        |
+-----+-----+
$ openstack zone export showfile e75aef2c-b562-4cd9-a426-4a73f6cb82be -f value
$ORIGIN example.org.
$TTL 3600

example.org.  IN NS ns1.example.org.
example.org.  IN SOA ns1.example.org. admin.example.org. 1624415706 3583 600
↪86400 3600

www.example.org.  IN A 192.0.2.2
www.example.org.  IN A 192.0.2.1
test.example.org. IN A 192.0.2.100
```

Zone Export Internals

The zone export resource created does not contain the zone file data, instead it holds the location of that data as Designate can be configured by the operator to store zone exports in external services. By default, the location of the zone export file is internal to Designate and uses the Designate protocol *designate://*. In this case, zone file data will be generated on demand when *zone export showfile* is used. You can view the location URI of the zone file data using *zone export show*:

```
$ openstack zone export show e75aef2c-b562-4cd9-a426-4a73f6cb82be
```

Field	Value
created_at	2021-06-23T02:01:30.000000
id	e75aef2c-b562-4cd9-a426-4a73f6cb82be
location	designate://v2/zones/tasks/exports/e75aef2c-b562-4cd9-a426-4a73f6cb82be/export
message	None
project_id	cf5a8f5cc5834d2dacd1d54cd0a354b7
status	COMPLETE
updated_at	2021-06-23T02:01:30.000000
version	2
zone_id	d8f81db6-937b-4388-bfb3-ba620e6c09fb

Zone Import

You can import a zone and all of its recordsets by putting them all into a file that uses the *zone file format* and calling *openstack zone import create*:

```
$ cat zone_file
$ORIGIN example.org.
$TTL 3600

example.org. IN NS ns1.example.org.
example.org. IN SOA ns1.example.org. admin.example.org. 1624415706 3583 600 86400 3600
www.example.org. IN A 192.0.2.2
```

(continues on next page)

(continued from previous page)

```

www.example.org.  IN A 192.0.2.1
test.example.org. IN A 192.0.2.100

$ openstack zone import create zone_file
+-----+-----+
| Field      | Value                                     |
+-----+-----+
| created_at | 2021-06-24T03:39:58.000000              |
| id         | 6140580d-c72a-4f07-82ab-908da979a9a3    |
| message    | None                                     |
| project_id | cf5a8f5cc5834d2dacd1d54cd0a354b7       |
| status     | PENDING                                 |
| updated_at | None                                     |
| version    | 1                                       |
| zone_id    | None                                     |
+-----+-----+

```

You can now view the zone in Designate:

```

$ openstack recordset list example.org.
+-----+-----+-----+-----+-----+-----+
↪+-----+-----+-----+-----+-----+-----+
↪+
| id                  | name                  | type | records |
↪                  | status | action |
↪+-----+-----+-----+-----+-----+-----+
↪+
| 3d9e96c2-da27-4c5b-9b2b-c1b44a58c1e5 | www.example.org. | A    | 192.0.2.2 |
↪                  | ACTIVE | NONE |
↪+-----+-----+-----+-----+-----+-----+
|                  |                  |      | 192.0.2.1 |
↪                  |      |      |
↪+-----+-----+-----+-----+-----+-----+
| 541bac15-18da-411f-a8e5-8ccecb65ae1f | example.org.     | SOA  | ns1.      |
↪example.org. admin.example.org. 1624415706 3541 600 86400 3600 | ACTIVE |
↪NONE |
| a643b088-6052-49c0-81f7-6ade6682d9a3 | example.org.     | NS   | ns1.      |
↪example.org.                  | ACTIVE |
↪NONE |
| f97274f1-e062-4f59-8ec0-11bccd830547 | test.example.org. | A    | 192.0.2. |
↪100                  | ACTIVE | NONE |
↪+-----+-----+-----+-----+-----+-----+
↪+

```

You cannot use zone imports to update a zone or create records in a zone that already exists. Importing a zone that already exists will result in an error and no records will be created or modified.

```
$ echo "new.example.org. IN A 192.0.2.101" >> zone_file
$ openstack zone import create zone_file
```

Field	Value
created_at	2021-06-24T03:40:28.000000
id	50516762-23ec-4bf3-a065-530171c5d0fb
message	None
project_id	cf5a8f5cc5834d2dacd1d54cd0a354b7
status	PENDING
updated_at	None
version	1
zone_id	None

```
$ openstack zone import show 50516762-23ec-4bf3-a065-530171c5d0fb
```

Field	Value
created_at	2021-06-24T03:40:28.000000
id	50516762-23ec-4bf3-a065-530171c5d0fb
message	An undefined error occurred.
project_id	cf5a8f5cc5834d2dacd1d54cd0a354b7
status	ERROR
updated_at	2021-06-24T03:40:28.000000
version	2
zone_id	None

```
$ openstack recordset list example.org.
```

id	name	type	records	status	action
3d9e96c2-da27-4c5b-9b2b-c1b44a58c1e5	www.example.org.	A	192.0.2.2	ACTIVE	NONE
			192.0.2.1		
541bac15-18da-411f-a8e5-8ccecb65ae1f	example.org.	SOA	ns1.	ACTIVE	NONE
a643b088-6052-49c0-81f7-6ade6682d9a3	example.org.	NS	ns1.	ACTIVE	NONE
f97274f1-e062-4f59-8ec0-11bccd830547	test.example.org.	A	192.0.2.		

(continues on next page)

(continued from previous page)

```

↪ 100 | ACTIVE | NONE ↪
↪ |
+-----+-----+-----+-----+
↪ -----+-----+-----+-----+
↪ +

```

You must set the zone TTL using a TTL statement in the zone file. The SOA record created for the zone will not always match the values in the zone file as some values are dependent on Designate configuration options:

- The *MNAME* is set using the zones assigned pool information.
- The refresh value is set randomly between the `default_soa_refresh_min` and `default_soa_refresh_max` configuration values.
- The minimum value is set to the `soa_default_minimum` configuration value.

The NS record for the zone is generated based on the pool the zone has been assigned. Other NS records are imported without modification.

For example, the following zone file uses *test.example.org.* as its nameserver, and provides its own values for the zone TTL, refresh, minimum and expire. The refresh and minimum values will be discarded on import and the nameserver changed to the pools nameserver at *ns1.example.org.:*

```

$ cat zone_file
$ORIGIN example.org.
$TTL 3000

example.org. IN NS test.example.org.
example.org. IN SOA test.example.org. admin.example.org. 1624415706 9000 500 ↪
↪ 86000 5000
www.example.org. IN A 192.0.2.2
test.example.org. IN NS test.example.org.
$ openstack zone import create zone_file
+-----+-----+-----+-----+
| Field      | Value                                     |
+-----+-----+-----+-----+
| created_at | 2021-06-25T07:07:41.000000              |
| id         | ccd0af00-aa5f-43e0-a57d-67cfa2f3738e    |
| message    | None                                     |
| project_id | cf5a8f5cc5834d2dacd1d54cd0a354b7       |
| status     | PENDING                                 |
| updated_at | None                                     |
| version    | 1                                       |
| zone_id    | None                                     |
+-----+-----+-----+-----+
$ openstack recordset list example.org.
+-----+-----+-----+-----+
↪ -----+-----+-----+-----+
↪ +
| id                                     | name                                     | type | records ↪
↪                                     | status | action ↪

```

(continues on next page)

(continued from previous page)

```

↪ |
+-----+-----+-----+-----+
↪ -----+-----+-----+
↪ +
| 35143297-5268-4bc9-80bb-9d2d12c609e0 | example.org.      | SOA   | ns1.
↪ example.org. admin.example.org. 1624415706 3582 500 86000 3600 | ACTIVE | ↵
↪ NONE |
| 3532dee3-effc-4aac-b5c4-90b6e2ad20e0 | test.example.org. | NS    | test.
↪ example.org.                                     | ACTIVE | ↵
↪ NONE |
| bef04729-f49e-4920-83b6-2ef9b620fa9d | example.org.      | NS    | ns1.
↪ example.org.                                     | ACTIVE | ↵
↪ NONE |
| c290d79a-6583-4666-a6f7-d4b967f67d79 | www.example.org.  | A     | 192.0.2.2 ↵
↪                                     | ACTIVE | NONE  | ↵
↪ |
+-----+-----+-----+-----+
↪ -----+-----+-----+
↪ +

```

Zone Ownership Transfers

Designate allows you to transfer ownership of zones between projects. For example, the engineering team project may want to transfer the ownership of the `wow.example.com.` zone from the engineering project to the marketing teams project.

This can be accomplished without cloud administrator intervention using the zone transfer features in Designate. Both the sending and receiving project must agree to the transfer by using the zone transfer process.

Zone Transfer Requests

Creating a Zone Transfer Request

To create a zone transfer offer we create a zone transfer request in Designate. You can optionally provide a target project ID in the request to lock the transfer to a specific project. When using a target project ID, no other project will be allowed to accept the zone transfer. If you do not provide a target project ID, any project that has the transfer request ID and key can receive the zone transfer.

Note: The target project ID must be provided as the ID and not the project name.

To transfer the zone `wow.example.com.` to project `1d12e87fad0d437286c2873b36a12316` you would run:

```

$ openstack zone transfer request create --target-project-id ↵
↪ 1d12e87fad0d437286c2873b36a12316 wow.example.com.

```

(continues on next page)

(continued from previous page)

Field	Value
created_at	2022-05-26T22:06:39.000000
description	None
id	63cab5e5-65fa-4480-b26c-c16c267c44b2
key	BIFJIQWH
links	{'self': 'http://127.0.0.1:60053/v2/zones/tasks/transfer_requests/63cab5e5-65fa-4480-b26c-c16c267c44b2'}
project_id	6265985fc493465db6a978b318a01996
status	ACTIVE
target_project_id	1d12e87fad0d437286c2873b36a12316
updated_at	None
zone_id	962f08b4-b671-4096-bf24-8908c9d4af0c
zone_name	wow.example.com.

You will then provide the ID and key to a member of the receiving project.

Displaying a Zone Transfer Request

To display the zone transfer request we created in the previous section you would run:

```
$ openstack zone transfer request show 63cab5e5-65fa-4480-b26c-c16c267c44b2
```

Field	Value
created_at	2022-05-26T22:06:39.000000
description	None
id	63cab5e5-65fa-4480-b26c-c16c267c44b2
key	BIFJIQWH
links	{'self': 'http://127.0.0.1:60053/v2/zones/tasks/transfer_requests/63cab5e5-65fa-4480-b26c-c16c267c44b2'}
project_id	6265985fc493465db6a978b318a01996
status	ACTIVE
target_project_id	1d12e87fad0d437286c2873b36a12316
updated_at	None
zone_id	962f08b4-b671-4096-bf24-8908c9d4af0c
zone_name	wow.example.com.

Listing Zone Transfer Requests

You can list all of the existing zone transfer requests by using the *openstack zone transfer request list* command:

```
$ openstack zone transfer request list
```

id	zone_id	zone_name	project_id	target_project_id	status
63cab5e5-962f08b4- BIFJIIQWH	wow.examp	6265985fc4	1d12e87fad0d43728	ACTIVE	
-65fa-44	-b671-40	le.com.	93465db6a9	6c2873b36a12316	
80-b26c-	96-bf24-		78b318a019		
c16c267c	8908c9d4		96		
44b2	af0c				

Updating a Zone Transfer Request

Designate allows you to update a limited set of fields on zone transfer requests, such as the description and target project ID.

To add a description the zone transfer request we created above, you would run the following command:

```
$ openstack zone transfer request set --description "wow zone transfer" 63cab5e5-65fa-4480-b26c-c16c267c44b2
```

Field	Value
created_at	2022-05-26T22:06:39.000000
description	wow zone transfer
id	63cab5e5-65fa-4480-b26c-c16c267c44b2
key	BIFJIIQWH
links	{'self': 'http://127.0.0.1:60053/v2/zones/tasks/transfer_requests/63cab5e5-65fa-4480-b26c-c16c267c44b2'}
project_id	6265985fc493465db6a978b318a01996
status	ACTIVE
target_project_id	1d12e87fad0d437286c2873b36a12316
updated_at	2022-05-27T20:52:08.000000

(continues on next page)

(continued from previous page)

zone_id	962f08b4-b671-4096-bf24-8908c9d4af0c	
zone_name	wow.example.com.	
+-----+	+-----+	+-----+

Deleting a Zone Transfer Request

If you would like to cancel a zone transfer you can delete the zone transfer request using the *openstack zone transfer request delete* command:

```
$ openstack zone transfer request delete 63cab5e5-65fa-4480-b26c-c16c267c44b2
```

There is no output from the zone transfer request delete command.

Zone Transfer Accepts

Accepting a Zone Transfer Request

Once you have the zone transfer request ID and key, you can create a *zone transfer accept* to finish the zone transfer.

An example of accepting the zone transfer we created in the *Zone Transfer Requests* section:

```
$ openstack zone transfer accept request --transfer-id 63cab5e5-65fa-4480-
→b26c-c16c267c44b2 --key BIFJQWH
```

+-----+	+-----+	+-----+
Field	Value	
+-----+	+-----+	+-----+
created_at	2022-05-27T21:37:43.000000	
id	a4c4f872-c98c-411b-a787-58ed0e2dce11	
key	BIFJQWH	
links	{'self': 'http://127.0.0.1:60053/v2/zones/ta	
	sks/transfer_accepts/a4c4f872-c98c-411b-a787	
	-58ed0e2dce11', 'zone': 'http://127.0.0.1:60	
	053/v2/zones/962f08b4-b671-4096-bf24-8908c9d	
	4af0c'}	
project_id	1d12e87fad0d437286c2873b36a12316	
status	COMPLETE	
updated_at	2022-05-27T21:37:43.000000	
zone_id	962f08b4-b671-4096-bf24-8908c9d4af0c	
zone_transfer_request_id	63cab5e5-65fa-4480-b26c-c16c267c44b2	
+-----+	+-----+	+-----+

Displaying a Zone Transfer Accept

To check the status of your zone transfer accept, you can use the *openstack zone transfer accept* command:

```
$ openstack zone transfer accept show a4c4f872-c98c-411b-a787-58ed0e2dce11
```

Field	Value
created_at	2022-05-27T21:37:43.000000
id	a4c4f872-c98c-411b-a787-58ed0e2dce11
key	None
links	{'self': 'http://127.0.0.1:60053/v2/zones/ta sks/transfer_accepts/a4c4f872-c98c-411b-a787 -58ed0e2dce11', 'zone': 'http://127.0.0.1:60 053/v2/zones/962f08b4-b671-4096-bf24-8908c9d 4af0c'}
project_id	1d12e87fad0d437286c2873b36a12316
status	COMPLETE
updated_at	2022-05-27T21:37:43.000000
zone_id	962f08b4-b671-4096-bf24-8908c9d4af0c
zone_transfer_request_id	63cab5e5-65fa-4480-b26c-c16c267c44b2

Listing Zone Transfer Accepts

Designate can provide a list of existing zone transfer accept records using the *openstack zone transfer accept list* command:

Note: By default, only users with the admin role can list zone transfer accept records.

```
$ openstack zone transfer accept list
```

id	zone_id	project_id	zone_transfer_request_id	status
key				
a4c4f872-c9	962f08b4-b6	1d12e87fad0	63cab5e5-65fa-4480-b26c-	COMPLETE
8c-411b-a78	71-4096-bf2	d437286c287	c16c267c44b2	
7-58ed0e2dc	4-8908c9d4a	3b36a12316		
e11	f0c			

(continues on next page)

(continued from previous page)



Secondary Zones

The Designate v2 API introduced functionality that allows Designate to act as a DNS slave, rather than a master for a zone. This is accomplished by completing a zone transfer (AXFR) from a DNS server managed outside of Designate.

RecordSets / Records

Changes to secondary zones are managed outside of Designate. Users must make the changes they wish, and prompt a fresh zone transfer (AXFR) into Designate to make those changes live on any DNS servers Designate manages.

Setup

To add a secondary zone to Designate, there must be a DNS master for the zone, to which Designate can act as a slave. For this guide, we assume that you have already set this up.

The remaining Designate set up will be similar to a non-secondary zone setup. You'll need a primary DNS server for Designate to manage and transfer secondary zones to.

In our examples we'll use the following values:

Name - example.com.

Masters - 192.168.27.100

Setup - example NSD4

Skip this section if you have a master already to use.

Note: For this it is assumed that you are running on Ubuntu.

Install

For some reason there's a bug with the nsd package so it doesn't create the user that it needs for the installation. So we'll create that before installing the package.

```
$ sudo apt-get install nsd
```

Configure

```
$ sudo zcat /usr/share/doc/nsd/examples/nsd.conf.sample.gz >/tmp/nsd.conf
$ sudo mv /tmp/nsd.conf /etc/nsd/nsd.conf
```

Add the following to /etc/nsd/nsd.conf

Note: If you're wondering why we set notify to *192.168.27.100:5354* it's because MDNS runs on 5354 by default.

```
$ sudo vi /etc/nsd/nsd.conf
```

Add the contents:

```
pattern:
  name: "mdns"
  zonefile: "%s.zone"
  notify: 192.168.27.100@5354 NOKEY
  provide-xfr: 192.168.27.100 NOKEY
  allow-axfr-fallback: yes
```

Add a zone file

Create a new *Zone* in NSD called *example.com*.

/etc/nsd/example.com.zone

```
$ sudo vi /etc/nsd/example.com.zone
```

And add the contents:

```
$TTL 1800 ;minimum ttl
example.com.      IN      SOA      ns1.example.com. admin.example.net. (
                    2014111301      ;serial
                    3600             ;refresh
                    600              ;retry
                    180000           ;expire
                    600              ;negative ttl
                    )

                    TXT              "v=spf1 +a +mx ~all"
                    SPF              "v=spf1 +a +mx ~all"

                    NS               ns1.example.com.
                    NS               ns2.example.com.
                    NS               ns3.example.com.

                    MX               0      mail1.example.com.
```

(continues on next page)

(continued from previous page)

	MX	5	mail2.example.com.
	MX	10	mail3.example.com.
	A		10.0.0.1
	A		10.0.0.2
	A		10.0.0.3
ns1	A		172.16.28.100
ns2	A		172.16.28.101
ns3	A		172.16.28.103
mail1	A		10.0.10.1
mail2	A		10.0.10.2
mail3	A		10.0.10.3
google	CNAME		google.com.

Restart NSD

```
$ sudo service nsd restart
```

Check that its working

```
$ sudo nsd-control status
```

Activate the zone in NSD

```
$ sudo nsd-control addzone example.com mdns
```

Creating the Zone

When you create a domain in Designate there are two possible initial actions:

- Domain is created but transfer fails if its not available yet in master, then typically the initial transfer will be done once the master sends first NOTIFY.
- Domain is created and transfers straight away.

In both cases the interaction between your master and Designate is handled by the MDNS instance at the Designate side.

Definition of values:

- *email* set to the value of the *managed_resource_email* option in the *central* section of the Designate configuration.
- *transferred_at* is **null** and *version* is **1** since the zone has not transferred yet.

```
$ openstack zone create --type secondary --masters 192.168.27.100 example.com.
```

Shared Zones

Shared zones allow sharing a particular zone across tenants. This is useful in cases when records for one zone should be managed by multiple projects. For example when a Designate zone is assigned to a shared network in Neutron.

Zone shares have the following properties:

- Quotas will be enforced against the zone owner.
- Projects that a zone is shared with can only manage recordsets created or owned by the project.
- Zone owners can see, modify, and remove recordsets created by another project.
- Projects that a zone is shared with cannot see or modify the attributes of the zone.
- Zones that have shares cannot be deleted without removing the shares or using the *delete-shares* modifier.
- Projects that a zone is shared with cannot create sub-zones.

How to Share a Zone With Another Project

Create a zone to share:

```
$ openstack zone create example.com. --email admin@example.com
```

Field	Value
action	CREATE
email	admin@example.com
id	92b2214f-8a57-4ed3-95f0-a64099f3b516
name	example.com.
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842
project_id	804806ad94364aecb0f9ae86ad653055
serial	1596186919
status	PENDING
ttl	3600
type	PRIMARY

Share the zone using the *openstack zone share create* command (in this example, the ID of the project we want to share with is *356df8e6c7564b5bb107f5de26cdb8ea*):

```
$ openstack zone share create example.com. 356df8e6c7564b5bb107f5de26cdb8ea
```

Field	Value
created_at	2023-01-30T23:17:44.000000
id	77e4d5b9-2057-4be7-8cf0-9f84ef0efec1
project_id	804806ad94364aecb0f9ae86ad653055
target_project_id	356df8e6c7564b5bb107f5de26cdb8ea
updated_at	None

(continues on next page)

(continued from previous page)

```
| zone_id | 92b2214f-8a57-4ed3-95f0-a64099f3b516 |
+-----+
```

Project `356df8e6c7564b5bb107f5de26cdb8ea` now has access to zone `92b2214f-8a57-4ed3-95f0-a64099f3b516` and can manage recordsets in the zone.

Using credentials for project `356df8e6c7564b5bb107f5de26cdb8ea`, we can create a recordset for `www.example.com.`:

```
$ openstack recordset create --type A --record 192.0.2.1 example.com. www
+-----+
| Field | Value |
+-----+
| action | CREATE |
| created_at | 2023-01-30T23:28:05.000000 |
| description | None |
| id | aff3e00a-9e5c-4cfa-9650-65196f73418b |
| name | www.example.com. |
| project_id | 356df8e6c7564b5bb107f5de26cdb8ea |
| records | 192.0.2.1 |
| status | PENDING |
| ttl | None |
| type | A |
| updated_at | None |
| version | 1 |
| zone_id | 92b2214f-8a57-4ed3-95f0-a64099f3b516 |
| zone_name | example.com. |
+-----+
```

How to List All of the Projects Sharing a Zone

You can list all of the zone shares for a zone with the `openstack zone share list` command:

```
$ openstack zone share list example.com.
+-----+
| id | zone_id | target_project_id |
+-----+
| 77e4d5b9-2057-4be7- | 92b2214f-8a57-4ed3- | 356df8e6c7564b5bb107f5d |
| 8cf0-9f84ef0efec1 | 95f0-a64099f3b516 | e26cdb8ea |
+-----+
```

How To Remove a Zone Share

To stop sharing a zone with a project, you can use the *openstack zone share delete* command:

```
$ openstack zone share delete example.com. 77e4d5b9-2057-4be7-8cf0-  
↪9f84ef0efec1
```

A zone cannot be unshared in the following cases:

- Zone has recordsets in other projects.

1.4.2 Working with Recordsets

Managing Records

While zones are used to break up the DNS namespace into a hierarchy, resource records, or simply records, are used to store data within the namespace. Each record has a

- **Name:** the string that indicates its location in the DNS namespace.
- **Type:** the set of **letter codes** that identify the records usage. For example **A** for an address record or **CNAME** for a canonical name record.
- **Class:** the set of letter codes that specify the namespace for the record. Typically, this is **IN** for internet, though other namespaces do exist.
- **TTL:** the duration in seconds that the record remains valid.
- **Rdata:** the data for the record, such as an IP address for an **A** type record or another record name for a **CNAME** type record.

Recordsets in Designate

DNS records in Designate are managed using **Recordsets**, which represent one or more DNS records with the same *Name* and *Type*, but potentially different data. For example, a recordset named **www.example.com**, with a type of **A**, that contains the data **192.0.2.1** and **192.0.2.2** might reflect two web servers hosting **www.example.com** located at those two IP addresses.

You must create Recordsets within a zone. If you delete a zone that contains recordsets, those recordsets within the zone are also deleted.

Creating a recordset

By default, any user can create Recordsets in zones that their project owns. In this example, a user has created a zone named **example.org**.

Recordsets are created using the `openstack recordset create` command and require a zone, a name, a type, and data for the record. To recreate the earlier example using the OpenStack client with the Designate plugin, the user would run:

```
$ openstack recordset create --type A --record 192.0.2.1 example.org. www
```

Field	Value
action	CREATE
created_at	2021-05-03T03:13:46.000000
description	None
id	549c3e83-443f-474b-b467-6bcd7cb9f37d
name	www.example.org.
project_id	c85fdb96041438fa0cad2dc7909d3f5
records	192.0.2.1
status	PENDING
ttl	None
type	A
updated_at	None
version	1
zone_id	077460ef-34db-486a-8d59-c9564dc3a3a9
zone_name	example.org.

As the final argument `www` is not a fully qualified domain name (FQDN) it is prepended to the zone name. You can achieve the same result using the FQDN, `www.example.org.`. Note that the trailing `.` is required when using the FQDN. Omitting it results in the name, `"www.example.org.example.org."`.

You can supply the `--record` argument multiple times to create multiple records within the recordset. A typical use for this is [Round-robin DNS](#).

```
$ openstack recordset create --type A --record 192.0.2.1 --record 192.0.2.2
↪example.org. web
```

Field	Value
action	CREATE
created_at	2021-05-03T03:26:43.000000
description	None
id	9e0fba43-ca67-44ed-b9d9-fc1242920319
name	web.example.org.
project_id	c85fdb96041438fa0cad2dc7909d3f5
records	192.0.2.1
	192.0.2.2
status	PENDING
ttl	None
type	A
updated_at	None
version	1
zone_id	077460ef-34db-486a-8d59-c9564dc3a3a9
zone_name	example.org.

You can view the recordsets for a zone using the `openstack recordset list` command:

```
$ openstack recordset list example.org.
```

id	name	type	records	status	action
3bebbd03-07d7-4274-a784-39c32a2be8c6	example.org.	SOA	ns1. example.net. admin.example.org. 16200 12616 3599 600 86400 3600	ACTIVE	
7d34e4d3-a2f1-4af0-831c-ba52a8312c6a	example.org.	NS	ns1. example.net.	ACTIVE	
9e0fba43-ca67-44ed-b9d9-fc1242920319	web.example.org.	A	192.0.2.1 192.0.2.2	ACTIVE	NONE
549c3e83-443f-474b-b467-6bcd7cb9f37d	www.example.org.	A	192.0.2.1	ACTIVE	NONE

The SOA and NS records for the zone are also visible here, but cannot be modified.

The authoritative nameserver for the zone is listed as the record data for the NS type record of the zone, which in this example is ns1.example.net.. To verify this you can query the nameserver using dig for the NS type:

```
$ dig @ns1.example.net example.org. -t NS +short
ns1.devstack.org.
```

You can also verify the A recordsets. You dont need the -t option because it is the default:

```
$ dig @ns1.example.net web.example.org. +short
192.0.2.2
192.0.2.1
$ dig @ns1.example.net www.example.org. +short
192.0.2.1
```

If you want to construct a TXT record that exceeds the 255-octet maximum length of a character-string, it has to be split into multiple strings as defined in RFC7208 section 3.3. For example, "v=DKIM1; firstsecond string..." can become "v=DKIM1; first" "second string...". If you provide a record data with less than 255 characters, it will be treated as a single character-string and validated for empty spaces outside quotes and unescaped double quotation marks as in RFC1035 section 5.1.

For example, to create a TXT record made of one string of 410 characters you can split it into 2 to like this:

```
$ openstack recordset create --type TXT --record '"210 characters string"
↪"200 characters string"' example.org. _domainkey
```

Updating a recordset

You can modify a recordset by using the `openstack recordset set` command. When updating a recordset by name, you must use the FQDN. As with most OpenStack commands, you can also use recordset ID. For example, to update the recordset `www.example.org.` to contain two records, you could use the following:

```
$ openstack recordset set example.org. www.example.org. --record 192.0.2.1 --
→record 192.0.2.2
```

Field	Value
action	UPDATE
created_at	2021-05-03T03:30:16.000000
description	None
id	549c3e83-443f-474b-b467-6bcd7cb9f37d
name	www.example.org.
project_id	c85fdb96041438fa0cad2dc7909d3f5
records	192.0.2.2
	192.0.2.1
status	PENDING
ttl	None
type	A
updated_at	2021-05-03T03:44:16.000000
version	5
zone_id	077460ef-34db-486a-8d59-c9564dc3a3a9
zone_name	example.org.

Deleting a recordset

You can use the `openstack recordset delete` command to remove recordsets using the zone and either the FQDN or the recordset ID.

```
$ openstack recordset delete example.org. web.example.org.
```

Field	Value
action	DELETE
created_at	2021-05-03T03:47:00.000000
description	None
id	5ab3418f-5377-47eb-b967-9e9ff7f3c26b
name	web.example.org.
project_id	c85fdb96041438fa0cad2dc7909d3f5
records	192.0.2.1
	192.0.2.2
status	PENDING
ttl	None
type	A

(continues on next page)

(continued from previous page)

```
| updated_at | 2021-05-03T03:47:13.000000 |
| version   | 2                             |
| zone_id   | 077460ef-34db-486a-8d59-c9564dc3a3a9 |
| zone_name | example.org.                  |
+-----+-----+
```

How To Manage PTR Records

PTR Record Basics

PTR records provide a reverse mapping from a single IP or set of IP addresses to a fully qualified domain name (FQDN). For example,

```
$ dig -x 192.0.2.12 +short
example.org.
```

The way this works in the DNS system is through the *in-addr.arpa.* zone. For example

```
$ dig example.org +short
192.0.2.12
$ dig -x 192.0.2.12
; <<>> DiG 9.9.5-3ubuntu0.1-Ubuntu <<>> -x 192.0.2.12
;; global options: +cmd
;; Got answer:
;; ->HEADER<- opcode: QUERY, status: NXDOMAIN, id: 3431
;; flags: qr rd ra; QUERY: 1, ANSWER: 0, AUTHORITY: 1, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4000
;; QUESTION SECTION:
;12.2.0.192.in-addr.arpa.    IN      PTR      example.org.

;; AUTHORITY SECTION:
12.2.0.192.in-addr.arpa. 3600 IN      NS      ns1.example.org.

;; Query time: 40 msec
;; SERVER: 127.0.0.1#53(127.0.0.1)
;; WHEN: Fri Feb 20 19:05:44 UTC 2015
;; MSG SIZE rcvd: 119
```

In the question section we see the address being requested from the DNS system as *12.2.0.192.in-addr.arpa.*. As you can see, the IP address has been reversed in order to function similarly to a domain name where the more specific elements come first. The reversed IP address is then added to the *in-addr.arpa.* domain, at which point the DNS system can perform a simple look up to find any *PTR* records that describe what domain name, if any, maps to that IP.

Create a PTR Record in Designate

To create a *PTR* record in Designate we need a *in-addr.arpa.* zone that will receive the actual *PTR* record

Using the V2 API and the OpenStack CLI

To begin lets create a zone that we want to return when we do our reverse lookup.

```
POST /v2/zones HTTP/1.1
Accept: application/json
Content-Type: application/json

{
  "name": "example.org.",
  "email": "admin@example.org",
  "ttl": 3600,
  "description": "A great example zone"
}
```

Here is the JSON response describing the new zone.

```
HTTP/1.1 202 Accepted
Location: http://127.0.0.1:9001/v2/zones/251fbde4-6eb8-44e6-bc48-e095f1763a1f
Content-Length: 476
Content-Type: application/json; charset=UTF-8
X-Openstack-Request-Id: req-bfcd0723-624c-4ec2-bbd5-99e985efe8db
Date: Tue, 02 Jun 2020 17:24:10 GMT
Connection: keep-alive

{
  "id": "251fbde4-6eb8-44e6-bc48-e095f1763a1f",
  "pool_id": "794ccc2c-d751-44fe-b57f-8894c9f5c842",
  "project_id": "123d51544df443e790b8e95cce52c285",
  "name": "example.org.",
  "email": "admin@example.org",
  "description": "A great example zone",
  "ttl": 3600,
  "serial": 1591118650,
  "status": "PENDING",
  "action": "CREATE",
  "version": 1,
  "attributes": {},
  "type": "PRIMARY",
  "masters": [],
  "created_at": "2020-06-02T17:24:10.000000",
  "updated_at": null,
  "transferred_at": null,
  "links": {
    "self": "http://127.0.0.1:9001/v2/zones/251fbde4-6eb8-44e6-bc48-e095f1763a1f"
  }
}
```

(continues on next page)

(continued from previous page)

```
}
}
```

Using the CLI:

```
$ openstack zone create --email admin@example.org \
  --description "A great example zone" --ttl 3600 example.org.
```

Field	Value
action	CREATE
attributes	
created_at	2020-06-02T17:24:10.000000
description	A great example zone
email	admin@example.org
id	251fbde4-6eb8-44e6-bc48-e095f1763a1f
masters	
name	example.org.
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842
project_id	123d51544df443e790b8e95cce52c285
serial	1591118650
status	PENDING
transferred_at	None
ttl	3600
type	PRIMARY
updated_at	None
version	1

Note: The *status* is *PENDING*. If we make a *GET* request to the *self* field in the zone, it will most likely have been processed and updated to *ACTIVE*.

Now that we have a zone we would like to use for our reverse DNS lookup, we need to add an *in-addr.arpa*. zone that includes the IP address we want to look up.

Lets configure *192.0.2.11* to return our *example.org*. domain name when we do a reverse look up.

```
POST /v2/zones HTTP/1.1
Accept: application/json
Content-Type: application/json

{
  "name": "11.2.0.192.in-addr.arpa.",
  "email": "admin@example.org",
  "ttl": 3600,
  "description": "A in-addr.arpa. zone for reverse lookups"
}
```

As you can see, in the *name* field we reversed our IP address and used that as a subdomain in the *in-addr.arpa*. zone.

Here is the response.

```
HTTP/1.1 202 Accepted
Location: http://127.0.0.1:9001/v2/zones/f5546034-b27e-4326-bf9d-c53ed879f7fa
Content-Length: 512
Content-Type: application/json; charset=UTF-8
X-Openstack-Request-Id: req-4e691123-045e-4f8e-ae50-b5eabb5af3fa
Date: Tue, 02 Jun 2020 17:32:46
Connection: keep-alive

{
  "id": "f5546034-b27e-4326-bf9d-c53ed879f7fa",
  "pool_id": "794ccc2c-d751-44fe-b57f-8894c9f5c842",
  "project_id": "123d51544df443e790b8e95cce52c285",
  "name": "11.2.0.192.in-addr.arpa.",
  "email": "admin@example.org",
  "description": "A in-addr.arpa. zone for reverse lookups",
  "ttl": 3600,
  "serial": 1591119166,
  "status": "PENDING",
  "action": "CREATE",
  "version": 1,
  "attributes": {},
  "type": "PRIMARY",
  "masters": [],
  "created_at": "2020-06-02T17:32:47.000000",
  "updated_at": null,
  "transferred_at": null,
  "links": {
    "self": "http://127.0.0.1:9001/v2/zones/f5546034-b27e-4326-bf9d-
    ↪c53ed879f7fa"
  }
}
```

Using the CLI:

```
$ openstack zone create --email admin@example.org \
  --ttl 3600 --description "A in-addr.arpa. zone for reverse lookups" \
  11.2.0.192.in-addr.arpa.
```

Field	Value
action	CREATE
attributes	
created_at	2020-06-02T17:32:47.000000
description	A in-addr.arpa. zone for reverse lookups
email	admin@example.org
id	f5546034-b27e-4326-bf9d-c53ed879f7fa
masters	
name	11.2.0.192.in-addr.arpa.
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842

(continues on next page)

(continued from previous page)

project_id	123d51544df443e790b8e95cce52c285	
serial	1591119166	
status	PENDING	
transferred_at	None	
ttl	3600	
type	PRIMARY	
updated_at	None	
version	1	
+-----+-----+-----+		

Now that we have our *in-addr.arpa.* zone, we add a new *PTR* record to the zone.

```
POST /v2/zones/f5546034-b27e-4326-bf9d-c53ed879f7fa/recordsets HTTP/1.1
Content-Type: application/json
Accept: application/json

{
  "name": "11.2.0.192.in-addr.arpa.",
  "type": "PTR",
  "records": [
    "example.org."
  ],
  "ttl": 3600,
  "description": "A PTR recordset"
}
```

Here is the response.

```
HTTP/1.1 202 Accepted
Location: http://127.0.0.1:9001/v2/zones/f5546034-b27e-4326-bf9d-c53ed879f7fa/
↪recordsets/ca604f72-83e6-421f-bf1c-bb4dc1df994a
Content-Length: 573
Content-Type: application/json; charset=UTF-8
X-Openstack-Request-Id: req-5b7044d0-591a-445a-839f-1403b1455824
Date: Tue, 02 Jun 2020 19:55:50 GMT
Connection: keep-alive

{
  "id": "ca604f72-83e6-421f-bf1c-bb4dc1df994a",
  "zone_id": "f5546034-b27e-4326-bf9d-c53ed879f7fa",
  "project_id": "123d51544df443e790b8e95cce52c285",
  "name": "11.2.0.192.in-addr.arpa.",
  "zone_name": "11.2.0.192.in-addr.arpa.",
  "type": "PTR",
  "records": [
    "example.org."
  ],
  "description": "A PTR recordset",
  "ttl": 3600,
  "status": "PENDING",
}
```

(continues on next page)

(continued from previous page)

```

"action": "CREATE",
"version": 1,
"created_at": "2020-06-02T19:55:50.000000",
"updated_at": null,
"links": {
  "self": "http://127.0.0.1:9001/v2/zones/f5546034-b27e-4326-bf9d-
→c53ed879f7fa/recordsets/ca604f72-83e6-421f-bf1c-bb4dc1df994a"
}
}

```

With the CLI:

```

$ openstack recordset create --record example.org. --type PTR \
  --ttl 3600 --description "A PTR recordset" \
  11.2.0.192.in-addr.arpa. 11.2.0.192.in-addr.arpa.

```

Field	Value
action	CREATE
created_at	2020-06-02T19:55:50.000000
description	A PTR recordset
id	ca604f72-83e6-421f-bf1c-bb4dc1df994a
name	11.2.0.192.in-addr.arpa.
project_id	123d51544df443e790b8e95cce52c285
records	example.org.
status	PENDING
ttl	3600
type	PTR
updated_at	None
version	1
zone_id	f5546034-b27e-4326-bf9d-c53ed879f7fa
zone_name	11.2.0.192.in-addr.arpa.

We should now have a correct *PTR* record assigned in our nameserver that we can test.

Lets test it out!

```

$ dig @localhost -x 192.0.2.11

; <<>> DiG 9.9.5-3ubuntu0.1-Ubuntu <<>> @localhost -x 192.0.2.11
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 32832
;; flags: qr aa rd; QUERY: 1, ANSWER: 1, AUTHORITY: 1, ADDITIONAL: 1
;; WARNING: recursion requested but not available

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096

```

(continues on next page)

(continued from previous page)

As you can see from the answer section everything worked as expected.

IPv6

Following the previous example we will configure `fd00::2:11` to return our `example.org.` domain name. As reverse DNS lookups for `IPv6` addresses use the special domain `ip6.arpa`, we need to create

```
$ openstack zone create --email admin@example.org \
    --ttl 3600 --description "A ip6.arpa zone for IPv6 reverse lookups" \
    1.1.0.0.2.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.d.f.ip6.arpa.
```

(continues on next page)

```
$ openstack recordset create --record example.org. --type PTR \
--ttl 3600 --description "A PTR recordset" \
1.1.0.0.2.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.d.f.ip6.arpa.
↩\
1.1.0.0.2.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.d.f.ip6.arpa.
```

Field	Value
action	CREATE
created_at	2020-06-04T13:10:30.000000
description	A PTR recordset
id	246c5cbb-315d-437d-a52f-bf0a0cfa91a0
name	1.1.0.0.2.0.d.f.ip6.arpa.
project_id	123d51544df443e790b8e95cce52c285
records	example.org.
status	PENDING
ttl	3600
type	PTR

(continued from previous page)

```

↪ | updated_at | None
↪ | version | 1
↪ | zone_id | 9c8f30a1-6d9d-4f40-9fac-ab8abfb24fba
↪ | zone_name | 1.1.0.0.2.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.d.
↪ f.ip6.arpa. |
+-----+-----+
↪ -----+

```

Now we can do a reverse lookup with

```

$ dig @localhost -x fd00::2:11

; <<>> DiG 9.11.3-1ubuntu1.12-Ubuntu <<>> @10.5.0.32 -x fd00::2:11
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 50892
;; flags: qr aa rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 1, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
; COOKIE: 812dd247d36b98504b6d12485ed8f44bd7ae0a902343c348 (good)
;; QUESTION SECTION:
;1.1.0.0.2.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.d.f.ip6.arpa. IN
↪PTR

;; ANSWER SECTION:
1.1.0.0.2.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.d.f.ip6.arpa.
↪3600 IN PTR example.org.

;; AUTHORITY SECTION:
1.1.0.0.2.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.d.f.ip6.arpa.
↪3600 IN NS ns1.example.org.

;; Query time: 1 msec
;; SERVER: 127.0.0.1#53(127.0.0.1)
;; WHEN: Thu Jun 04 13:16:59 UTC 2020
;; MSG SIZE rcvd: 197

```

Advanced Usage

You can add many *PTR* records to a larger subnet by using a more broadly defined *in-addr.arpa.* zone. For example, if we wanted to ensure *any* IP in a subnet resolves to a specific domain we would add a wildcard DNS record to this zone.

```
POST /v2/zones HTTP/1.1
Accept: application/json
Content-Type: application/json

{
  "name": "2.0.192.in-addr.arpa.",
  "type": "PRIMARY",
  "email": "admin@example.org",
  "ttl": 3600,
  "description": "A more broadly defined in-addr.arpa. zone for reverse_
↳lookups"
}
```

With the CLI:

```
$ openstack zone create --email admin@example.org --ttl 3600 \
  --description "A more broadly defined in-addr.arpa. zone for reverse_
↳lookups" \
  2.0.192.in-addr.arpa.
```

```
+-----+-----+
↳---+
| Field          | Value                                     |
↳ |
+-----+-----+
↳---+
| action         | CREATE                                  |
↳ |
| attributes     |                                         |
↳ |
| created_at     | 2020-06-02T20:07:11.000000             |
↳ |
| description    | A more broadly defined in-addr.arpa. zone for reverse_
↳lookups |
| email         | admin@example.org                       |
↳ |
| id            | e9fd0ced-1d3e-43fa-b9aa-6d4b7a73988d   |
↳ |
| masters       |                                         |
↳ |
| name          | 2.0.192.in-addr.arpa.                  |
↳ |
| pool_id       | 794ccc2c-d751-44fe-b57f-8894c9f5c842   |
↳ |
| project_id    | 123d51544df443e790b8e95cce52c285      |
↳ |
```

(continues on next page)

(continued from previous page)

We then could use the corresponding domain to create a *PTR* record for a specific IP.

```
POST /v2/zones/e9fd0ced-1d3e-43fa-b9aa-6d4b7a73988d/recordsets HTTP/1.1
Accept: application/json
Content-Type: application/json

{
  "name": "3.2.0.192.in-addr.arpa.",
  "type": "PTR"
  "ttl": 3600,
  "records": [
    "cats.example.com."
  ]
}
```

With the CLI:

```
$ openstack recordset create --record cats.example.org. --type PTR \
    --ttl 3600 2.0.192.in-addr.arpa. 3.2.0.192.in-addr.arpa.
```

(continues on next page)

(continued from previous page)

version	1
zone_id	e9fd0ced-1d3e-43fa-b9aa-6d4b7a73988d
zone_name	2.0.192.in-addr.arpa.

Or with a wildcard DNS record:

```
$ openstack recordset create --record example.org. --type PTR \
  --ttl 3600 2.0.192.in-addr.arpa. *.2.0.192.in-addr.arpa.
```

Field	Value
action	CREATE
created_at	2020-06-04T12:22:45.000000
description	None
id	4fa96619-a1f8-4409-ba5f-fa904db4c97c
name	*.2.0.192.in-addr.arpa.
project_id	123d51544df443e790b8e95cce52c285
records	example.org.
status	PENDING
ttl	3600
type	PTR
updated_at	None
version	1
zone_id	e9fd0ced-1d3e-43fa-b9aa-6d4b7a73988d
zone_name	2.0.192.in-addr.arpa.

When we do our reverse look, we should see *cats.example.com*.

```
$ dig @localhost -x 192.0.2.3 +short
cats.example.com.
```

When we query any other IP address in *192.0.2.0/24* we get

```
$ dig @10.5.0.32 -x 192.0.2.10 +short
example.org.
```

Success!

Note: In BIND9, when creating a new *PTR* we could skip the zone name. For example, if the zone is *2.0.192.in-addr.arpa.*, using *12* for the record name ends up as *12.2.0.192.in-addr.arpa.*. In Designate, the name of a record **MUST** be a complete host name.

Classless IN-Addr.ARPA Delegation

You may want to delegate blocks of IP addresses to projects that do not align to subnet boundaries. For example, if you wanted to give project A three IP addresses. To allow project A to manage DNS records for those three addresses, without delegating a whole subnet zone to project A, you can use classless IN-ADDR.ARPA delegation as described in [RFC 2317](#).

Note: As discussed in section 4 of [RFC 2317](#), the examples in the RFC use / in the delegated zones but - is recommended. Designate will not allow you to use / in zone names. You will need to use the recommended - instead.

In this example, we will delegate a PTR zone for three IP addresses, from the 192.0.2.0/24 subnet, to the *Demo* project 9284a20339184a9bb299386c380211c7.

Note: Unless noted in the examples, the commands are using a credential with an admin role. This is not necessary, but is a typical use case.

First, the full subnet in-addr.arpa zone will need to be created:

```
$ openstack zone create --email me@example.com 2.0.192.in-addr.arpa.
```

Field	Value
action	CREATE
attributes	
created_at	2022-09-09T20:05:41.000000
description	None
email	me@example.com
id	bdbf0e8f-8d73-4659-ae62-f59e95a31cd7
masters	
name	2.0.192.in-addr.arpa.
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842
project_id	cc5ab848dbe7462e9c7603d54a9af90f
serial	1662753940
status	PENDING
transferred_at	None
ttl	3600
type	PRIMARY
updated_at	None
version	1

Next we will create the delegated zone:

```
$ openstack zone create --email me@example.com 1-3.2.0.192.in-addr.arpa.
```

Field	Value
action	CREATE

(continues on next page)

(continued from previous page)

attributes		
created_at	2022-09-09T20:06:59.000000	
description	None	
email	me@example.com	
id	2d353ed7-cb7f-4ff7-9c1e-54481304f4cb	
masters		
name	1-3.2.0.192.in-addr.arpa.	
pool_id	794ccc2c-d751-44fe-b57f-8894c9f5c842	
project_id	cc5ab848dbe7462e9c7603d54a9af90f	
serial	1662754018	
status	PENDING	
transferred_at	None	
ttl	3600	
type	PRIMARY	
updated_at	None	
version	1	
+-----+	+-----+	+-----+

Now we can share the delegated zone with the *Demo* project:

```
$ openstack zone share create 1-3.2.0.192.in-addr.arpa.
↪9284a20339184a9bb299386c380211c7
```

Field	Value	
+-----+	+-----+	+-----+
created_at	2022-09-09T20:07:20.000000	
id	7859ca43-bcee-4fd1-aa2d-efda17b75198	
project_id	cc5ab848dbe7462e9c7603d54a9af90f	
target_project_id	9284a20339184a9bb299386c380211c7	
updated_at	None	
zone_id	2d353ed7-cb7f-4ff7-9c1e-54481304f4cb	
+-----+	+-----+	+-----+

Once we have the zones created and shared, we can now add the CNAME records to the full subnet zone that point to the delegated zone records. This will need to be repeated for each IP address being delegated. This example creates the first CNAME record for the 192.0.2.1 IP address.

```
$ openstack recordset create --record 1.1-3.2.0.192.in-addr.arpa. --type
↪CNAME 2.0.192.in-addr.arpa. 1.2.0.192.in-addr.arpa.
```

Field	Value	
+-----+	+-----+	+-----+
action	CREATE	
created_at	2022-09-09T20:09:16.000000	
description	None	
id	482bd367-9815-4d86-a93d-734bbc92499a	
name	1.2.0.192.in-addr.arpa.	
project_id	cc5ab848dbe7462e9c7603d54a9af90f	
records	1.1-3.2.0.192.in-addr.arpa.	
status	PENDING	

(continues on next page)

(continued from previous page)

ttl	None	
type	CNAME	
updated_at	None	
version	1	
zone_id	bddf0e8f-8d73-4659-ae62-f59e95a31cd7	
zone_name	2.0.192.in-addr.arpa.	
+-----+		

Finally, members of the *Demo* project can now create the PTR records for the delegates IP addresses. In this example the administrator will create the first record on behalf of the *Demo* project.

```
$ openstack recordset create --sudo-project-id 9284a20339184a9bb299386c380211c7 --record www.example.com. --type PTR 1-3.2.0.192.in-addr.arpa. 1.1-3.2.0.192.in-addr.arpa.
```

Field	Value	
+-----+		
action	CREATE	
created_at	2022-09-09T20:08:17.000000	
description	None	
id	cea3f3ce-687b-422c-a378-bdcfe382a159	
name	1.1-3.2.0.192.in-addr.arpa.	
project_id	9284a20339184a9bb299386c380211c7	
records	www.example.com.	
status	PENDING	
ttl	None	
type	PTR	
updated_at	None	
version	1	
zone_id	2d353ed7-cb7f-4ff7-9c1e-54481304f4cb	
zone_name	1-3.2.0.192.in-addr.arpa.	
+-----+		

We can now use dig to query a recursive resolver to verify the delegation:

```
$ dig -x 192.0.2.1 @198.51.100.5

; <<> DiG 9.16.32-RH <<> -x 192.0.2.1 @198.51.100.5
;; global options: +cmd
;; Got answer:
;; ->HEADER<- opcode: QUERY, status: NOERROR, id: 16209
;; flags: qr aa rd ra; QUERY: 1, ANSWER: 2, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
; COOKIE: a415d9b43dcef11c01000000631ba068973cbfbf5b765032 (good)
;; QUESTION SECTION:
;1.2.0.192.in-addr.arpa.      IN      PTR

;; ANSWER SECTION:
```

(continues on next page)

(continued from previous page)

```

1.2.0.192.in-addr.arpa.      3600    IN      CNAME    1.1-3.2.0.192.in-addr.
↪arpa.
1.1-3.2.0.192.in-addr.arpa. 3600    IN      PTR      www.example.com.

;; Query time: 0 msec
;; SERVER: 198.51.100.5#53(198.51.100.5)
;; WHEN: Fri Sep 09 13:22:00 PDT 2022
;; MSG SIZE rcvd: 149

```

Note: Your resolver or DNS server settings (such as allow recursion and/or minimal responses) may cause dig to only display the CNAME and not resolve the PTR record in the same request.

Using DNS with Neutron & Nova

Neutron can be integrated with Designate to provide automatic *recordset* creation for ports and, by proxy, Nova server instances. This section will describe how you can use this integration to have Designate DNS *recordsets* created for Neutron ports and Nova instances at creation time.

Neutron DNS Extensions

DNS integration in Neutron is optional and an extension must be enabled in the Neutron configuration file, by a cloud administrator, for DNS names to be assigned automatically to Neutron and Nova resources. You can check if a DNS integration extension is enabled by querying the [Neutron extensions API](#):

```
$ openstack extension list --network -f value -c Alias | grep dns-integration
dns-integration
```

One of these extensions must be enabled to allow Neutron and, via Neutron, Nova to automatically create DNS *recordsets* in Designate:

- dns-integration
- dns-domain-ports (includes dns-integration)
- subnet-dns-publish-fixed-ip (includes dns-integration and dns-domain-ports)
- dns-integration-domain-keywords (includes all others)

dns-integration

When the *dns-integration* extension is enabled the following DNS attributes will be available via Neutron:

Resource	dns_name	dns_domain
Ports	Yes	No
Networks	No	Yes
Floating IPs	Yes	Yes

dns-domain-ports

In addition, if the *dns-domain-ports* extension is enabled in Neutron, ports can be created with a *dns_domain* specified. This *dns_domain* will take precedence over the *dns_domain* setting for the network. You can check if the *dns-domain-ports* extension is enabled by querying the [Neutron extensions API](#):

```
$ openstack extension list --network -f value -c Alias | grep dns-domain-ports
dns-domain-ports
```

With the *dns-domain-ports* extension is enabled the following DNS settings will be available via Neutron:

Resource	dns_name	dns_domain
Ports	Yes	Yes
Networks	No	Yes
Floating IPs	Yes	Yes

Both of these extensions impose a set of criteria for when DNS *recordsets* will be created in Designate.

- A *dns_domain* must be specified either on the network, port, or floating IP. If both the network and the port or floating IP specify a *dns_domain*, the *dns_domain* specified on the port or floating IP will take precedent over the *dns_domain* provided on the network.
- The network must not have the *router:external* field set to True.
- The network type must be one of: FLAT, VLAN, GRE, VXLAN, or GENEVE.
- For VLAN, GRE, VXLAN, or GENEVE networks, the segmentation ID must be outside the ranges configured in the Neutron *ml2_conf* file. For example, with VXLAN networks, the range setting is *[ml2_type_vxlan] vni_ranges*.
- The *zone* for the *dns_domain* must already exist in Designate and the project ID creating the Nova instance, port, or floating IP must have permission to create *recordsets* in the *zone*.

These restrictions typically mean that a special network will need to be created by an administrator that will allow *recordsets* to be created in Designate.

If these criteria are not all met, Neutron will create a DNS assignment in the Neutron internal resolvers using the default *dns_domain* specified in the Neutron configuration file. The current default domain is *openstacklocal..*

Warning: If the user creating the Nova instance, port, or floating IP does not have permission to create *recordsets* in the *zone* or the *zone* does not exist in Designate, Neutron will create the port with the *dns_assignment* field populated using the *dns_domain* provided, but no *recordset* will be created in Designate. Neutron will log the error Error publishing port data in external DNS service..

subnet-dns-publish-fixed-ip

A third Neutron extension is available called *subnet-dns-publish-fixed-ip*. This extension includes the capabilities of the *dns-domain-ports* extension, but removes the restrictions if the subnet *dns_publish_fixed_ip* property is set to True.

dns-integration-domain-keywords

The fourth Neutron extension, including the capabilities of the *subnet-dns-publish-fixed-ip* extension, is called *dns-integration-domain-keywords*. It allows the use of keywords in the *dns_domain* that will be replaced when a port is created. Valid keywords are: <project_id>, <project_name>, <user_id>, and <user_name>.

Note: For more information on enabling DNS integration in Neutron, see the [Neutron Networking Guide](#).

DNS for Nova Server Instances

DNS integration with Neutron allows you to automatically create a DNS *recordset* for Nova instances. When Nova requests the Neutron port to be created for the new instance, Neutron will attempt to create a DNS *recordset* for the port in Designate.

As an example, we will create a new Nova instance with the DNS name of server.example.org registered in Designate.

Note: This example is for user created networks. DNS records can be automatically created for Nova server instances on networks created by a cloud administrator if they meet the [Neutron criteria](#).

Steps:

1. Check that the *subnet-dns-publish-fixed-ip* Neutron extension is enabled.
2. Create the *zone* example.org. in Designate.
3. Create a network, providing the *dns_domain* of example.org., that we will use for the Nova instance.
4. Create a subnet on the network with *dns_publish_fixed_ip* set to True.
5. Create the Nova instance, with name server and a NIC on the network.
6. Verify the DNS *recordset* was created in the Designate *zone*.

Note: The DNS domain must always be a *Fully Qualified Domain Name* (FQDN), meaning it will always end with a period.

CLI Commands:

```
$ openstack extension list --network -f value -c Alias | grep subnet-dns-
↪publish-fixed-ip
$ openstack zone create --email example@example.org example.org.
$ openstack network create --dns-domain example.org. example-net
$ openstack subnet create --allocation-pool start=192.0.2.10,end=192.0.2.200 -
↪-network example-net --subnet-range 192.0.2.0/24 --dns-publish-fixed-ip↪
↪example-subnet
$ openstack server create --image cirros-0.5.2-x86_64-disk --flavor 1 --nic↪
↪net-id=example-net server
$ openstack recordset list --type A example.org.
```

id	name	type	records	status	action
7b8d1be6-1b23	server.example.org.	A	192.0.2.44	ACTIVE	NONE
-478a-94d5-60					
b876dca2c8					

DNS for Neutron Ports

DNS integration with Neutron allows you to automatically create a DNS *recordset* for Neutron ports.

As an example, we will create a new Neutron port with the DNS name of example-port.example.org registered in Designate.

Note: This example is for user created networks. DNS records can be automatically created for Neutron ports on networks created by a cloud administrator if they meet the [Neutron criteria](#).

Steps:

1. Check that the *subnet-dns-publish-fixed-ip* Neutron extension is enabled.
2. Create the *zone* example.org. in Designate.
3. Create a network, providing the *dns_domain* of example.org., that we will use for the Neutron port.
4. Create a subnet on the network with *dns_publish_fixed_ip* set to True.
5. Create the Neutron port specifying the *dns_name* of example-port for the port.
6. Verify the DNS *recordset* was created in the Designate *zone*.

Note: The DNS domain must always be a *Fully Qualified Domain Name* (FQDN), meaning it will always end with a period.

CLI Commands:

```
$ openstack extension list --network -f value -c Alias | grep subnet-dns-
↪publish-fixed-ip
```

(continues on next page)

(continued from previous page)

```
$ openstack zone create --email example@example.org example.org.
$ openstack network create --dns-domain example.org. example-net
$ openstack subnet create --allocation-pool start=192.0.2.10,end=192.0.2.200 --
↪-network example-net --subnet-range 192.0.2.0/24 --dns-publish-fixed-ip↪
↪example-subnet
$ openstack port create --network example-net --dns-name example-port my-
↪example-port
$ openstack recordset list --type A example.org.
```

id	name	type	records	status	↪
↪action					
↪-----+					
9ebbe94f-2442	example-port.example.org.	A	192.0.2.149	ACTIVE	↪
↪NONE					
-4bb8-9cfa-6d					↪
↪					
ca1daba73f					↪
↪					
↪-----+					

DNS for Floating IPs

DNS integration with Neutron allows you to automatically create a DNS *recordset* for Neutron floating IP addresses.

As an example, we will create a new Neutron floating IP with the DNS name of example-fip.example.org registered in Designate.

Steps:

1. Create the Neutron floating IP specifying the *dns_name* of example-fip and the *dns_domain* as example.org..
2. Verify the DNS *recordset* was created in the Designate *zone*.

Note: The DNS domain must always be a *Fully Qualified Domain Name* (FQDN), meaning it will always end with a period.

CLI Commands:

```
$ openstack floating ip create --dns-name example-fip --dns-domain example.
↪org. example-net
$ openstack recordset list --type A example.org.
```

(continues on next page)

(continued from previous page)

```

↪-----+
| id          | name          | type | records      | status | ↪
↪action |
+-----+-----+-----+-----+-----+-----+
↪-----+
| e1eca823-169d | example-fip.example.org. | A    | 192.0.2.106 | ACTIVE | ↪
↪NONE |
| -4d0a-975e-91 |          |      |              |        | ↪
↪ |
| a9907ec0c1    |          |      |              |        | ↪
↪ |
+-----+-----+-----+-----+-----+-----+
↪-----+

```

1.5 Administration guide

In this section, you will find documentation relevant for administering and operating Designate.

Contents:

1.5.1 Managing Top Level Domain Names

[System Administrators](#) can use top level domains (TLDs) to restrict the domains under which users can create zones. While in the Domain Name System the term TLD refers specifically to the set of domains that lie directly below the root, such as `.org`, in Designate a TLD can be any domain.

For example, if you want to require that users create zones ending in `.org.`, this can be achieved by creating a single `.org` TLD:

```

$ openstack tld create --name org
+-----+-----+-----+-----+
| Field          | Value                                     |
+-----+-----+-----+-----+
| created_at     | 2021-06-10T05:20:16.000000             |
| description    | None                                    |
| id             | 9fd0a12d-511e-4024-bf76-6ec2e3e71edd   |
| name           | org                                     |
| updated_at     | None                                    |
+-----+-----+-----+-----+

```

Note: When using the `openstack tld` command, ensure that the FQDN that you enter has no trailing dot (*example.net.*).

If you now attempt to create a zone that does not lie within the `.org` TLD, it will fail:

```

$ openstack zone create --email admin@test.net test.net.
Invalid TLD

```

TLDs are much like an allowlist: if there are many TLDs then the zone must exist within one of the TLDs. If no TLDs have been created in Designate, then users can create any zone. Unlike the blacklists feature, TLDs do not have a policy that allows privileged users to create zones outside the allowed TLDs.

You can modify the values for a TLD using the *set* command. You can use either the name or the ID to specify which TLD to set:

```
$ openstack tld set org --name example.net
```

Field	Value
created_at	2021-06-10T05:20:16.000000
description	
id	9fd0a12d-511e-4024-bf76-6ec2e3e71edd
name	example.net
updated_at	2021-06-10T07:09:45.000000

You can delete a TLD by providing either the ID or the current name:

```
$ openstack tld delete org
```

This command has no output when completed successfully.

1.5.2 DNS Server Plugin Documentation

Contents:

Agent Backend

This page documents using the various Agent backends, and its accompanying service, *designate-agent*. This backend uses an extension of the DNS protocol itself to send management requests to the remote agent processes, where the requests will be actioned.

The *rpc* traffic between designate and the *agent* is both unauthenticated and unencrypted. Do not run this traffic over unsecured networks.

Designate Configuration

For each designate-agent running, add a target to the pools.yaml configuration file, using the following template:

```
targets:
  - type: agent
    description: Agent Server 1

    # List out the designate-mdns servers from which Agent servers
    ↪ should
    # request zone transfers (AXFRs) from.
    masters:
```

(continues on next page)

(continued from previous page)

```
- host: 192.0.2.1
  port: 5354

# Agent Configuration options, this should be this targets
# designate-agent service's host and port.
options:
  host: 192.0.2.2
  port: 5358
```

Then update the designate pools database using the `designate-manage pool` command - see *designate-manage pool* for further details on the `designate-manage pool` command:

```
$ designate-manage pool update
```

Akamai v2 Backend

This page documents using the Akamai v2 backend. The backend uses the FastDNS V2 API to create and delete zones remotely.

Designate Configuration

Example configuration required: One section for each pool target

```
- name: default-akamai-v2
  # The name is immutable. There will be no option to change the
  ↪name after
  # creation and the only way will to change it will be to delete it
  # (and all zones associated with it) and recreate it.
  description: Akamai v2

  attributes: {}

  # List out the NS records for zones hosted within this pool
  ns_records:
    - hostname: ns1-1.example.org.
      priority: 1

  # List out the nameservers for this pool. These are the actual
  ↪Akamai servers.
  # We use these to verify changes have propagated to all
  ↪nameservers.
  nameservers:
    - host: 192.0.2.2
      port: 53

  # List out the targets for this pool. For Akamai, most often,
  ↪there will be
  # one entry for each Akamai server.
```

(continues on next page)

(continued from previous page)

```

targets:
  - type: akamai_v2
    description: Akamai v2 server

    # List out the designate-mdns servers from which Akamai_
↪ servers should
    # request zone transfers (AXFRs) from.
    masters:
      - host: 192.0.2.1
        port: 5354

    options:
      host: 192.0.2.2
      port: 53
      akamai_host: 192.0.2.2
      akamai_client_token: client_token_string
      akamai_access_token: access_token_string
      akamai_client_secret: client_secret_string
      akamai_contract_id: contract_id
      akamai_gid: group_id

```

Then update the pools in designate - see *designate-manage pool* for further details on the designate-manage pool command

```
$ designate-manage pool update
```

Bind9 Backend

This page documents using the Bind 9 backend. The backend uses the rndc utility to create and delete zones remotely.

The traffic between rndc and Bind is authenticated with a key.

Designate Configuration

Example configuration required for Bind9 operation. One section for each pool target

```

targets:
  - type: bind9
    description: BIND9 Server 1

    # List out the designate-mdns servers from which BIND servers_
↪ should
    # request zone transfers (AXFRs) from.
    masters:
      - host: 192.0.2.1
        port: 5354

```

(continues on next page)

(continued from previous page)

```
# BIND Configuration options
options:
  host: 192.0.2.2
  port: 53
  rndc_host: 192.0.2.2
  rndc_port: 953
  rndc_key_file: /etc/designate/rndc.key
```

The key and config files are relative to the host running Designate (and can be different from the hosts running Bind)

Then update the pools in designate - see [designate-manage pool](#) for further details on the designate-manage pool command

```
$ designate-manage pool update
```

Bind9 Configuration

Ensure Bind can access the /etc/bind/rndc.conf and /etc/bind/rndc.key files and receive rndc traffic from Designate.

Enable rndc addzone/delzone functionality by editing named.conf.options or named.conf and add this line under options

```
allow-new-zones yes;
```

Example configuration of /etc/bind/rndc.key

```
key "rndc-key" {
  algorithm hmac-md5;
  secret "<b64-encoded string>";
};
```

Djbdns Agent backend

Djbdns User documentation

This page documents the Agent backend for djbdns.

The agent runs on the same host as the [tinydns](#) resolver. It receives DNS messages from Mini DNS using private DNS OPCODEs and classes and creates or deletes zones in the data.cdb file using [axfr-get](#) and [tinydns-data](#)

Setting up Djbdns on Ubuntu Trusty

Assuming no DNS resolver is already installed, run as root:

```
set -u
datadir=/var/lib/djbdns
ug_name=djbdns
tinydns_ipaddr=127.0.0.1

[[ -d $datadir ]] && echo "$datadir already exists" && exit 1
set -e
apt-get update
apt-get install dbdns daemontools
if ! getent passwd $ug_name >/dev/null; then
    adduser --quiet --system --group --no-create-home --home /nonexistent $ug_
    ↪name
fi
tinydns-conf $ug_name $ug_name $datadir $tinydns_ipaddr
cd $datadir/root
tinydns-data data
chown -Rv $ug_name:$ug_name $datadir
```

Setup the a Systemd service or, alternatively, an initfile to start TinyDNS.

In the contrib/djbdns directory there are example files for both.

```
systemctl daemon-reload
service tinydns start
service tinydns status
```

If needed, create the rootwrap filters, as root:

```
cat > /etc/designate/rootwrap.d/djbdns.filters <<EOF
# cmd-name: filter-name, raw-command, user, args
[Filters]
tcpclient: CommandFilter, /usr/bin/tcpclient, root
axfr-get: CommandFilter, /usr/bin/axfr-get, root
EOF

# Check the filter:
sudo /usr/local/bin/designate-rootwrap /etc/designate/rootwrap.conf tcpclient_
↪-h
sudo /usr/local/bin/designate-rootwrap /etc/designate/rootwrap.conf axfr-get -
↪h
```

Configure the service.agent and backend.agent.djbdns sections in /etc/designate/designate.conf

Look in designate.conf.example for examples.

Create an agent pool:

```
# Fetch the existing pool(s) if needed or start from scratch
designate-manage pool generate_file --file /tmp/pool.yaml
```

(continues on next page)

(continued from previous page)

```
# Edit the file (see below) and reload it as:
designate-manage pool update --file /tmp/pool.yaml
```

The targets section in pool.yaml should look like:

```
targets:
- description: gdnssd agent
  masters:
  - host: <MiniDNS IP addr>
    port: 5354
  options: {}
  options:
  - host: <Agent IP addr>
    port: 5358
  type: agent
```

Testing

Create new zones and records. Monitor the agent logfile and the contents of the TinyDNS datadir. The data.cdb file should be receiving updates.

```
openstack zone create --email example@example.org example.org.
openstack recordset create example.org. --type A foo --records 1.2.3.4
dig example.org @<tinydns_ipaddr> SOA
dig foo.example.org @<tinydns_ipaddr> A
```

Developer documentation

Devstack testbed

Follow Setting up Djbdns on Ubuntu Trusty

Configure Tinydns to do AXFR from MiniDNS on 192.168.121.131

gdnssd Agent backend

User documentation

This page documents the Agent backend for [gdnssd](#).

The agent runs on the same host as the resolver. It receives DNS messages from Mini DNS using private DNS OPCODEs and classes and creates/updates/deletes zones on gdnssd using zone files under the gdnssd configuration directory.

The backend supports gdnssd from version 2.0

[gdnssd documentation](#)

Setting up gdnssd on Ubuntu Vivid

Run as root:

```
apt-get update
apt-get install gdnssd
```

Configuring gdnssd

Assuming gdnssd has been freshly installed on the system, run as root:

```
# Monitor syslog during the next steps
tail -f /var/log/syslog

# config check should be successful
/usr/sbin/gdnssd checkconf

# Start the daemon if needed
service gdnssd status
service gdnssd start

# gdnssd should be listening on TCP and UDP ports
netstat -lnptu | grep '/gdnssd'

# Test the daemon: it should respond with "gdnssd"
dig @127.0.0.1 CH TXT +short
```

Configure the service.agent and backend.agent.gdnssd sections in /etc/designate/designate.conf

Look in designate.conf.example for more complete examples

```
[service:agent]
backend_driver = gdnssd
# Place here the MiniDNS ipaddr and port (not the agent itself)
masters = 192.168.27.100:5354

[backend:agent:gdnssd]
#gdnssd_cmd_name = gdnssd
#confdir_path = /etc/gdnssd
#query_destination = 127.0.0.1
```

Ensure that the zones directory under confdir_path (default /etc/gdnssd) is readable and writable by the system user running the Designate Agent

Create an agent pool:

```
# Fetch the existing pool(s) if needed
designate-manage pool generate_file --file /tmp/pool.yaml
# Edit the file (see below) and reload it as:
designate-manage pool update --file /tmp/pool.yaml
```

The targets section in pool.yaml should look like:

```
targets:
- description: gdnssd agent
  masters:
  - host: <MiniDNS IP addr>
    port: 5354
  options: {}
  options:
  - host: <Agent IP addr>
    port: 5358
  type: agent
```

Start the Designate Agent. You should see log messages similar to:

```
2016-05-03 15:13:38.193 INFO designate.backend.agent_backend.impl_gdnssd [-]
↳gdnssd command: 'gdnssd'
2016-05-03 15:13:38.193 INFO designate.backend.agent_backend.impl_gdnssd [-]
↳gdnssd conf directory: '/etc/gdnssd'
2016-05-03 15:13:38.194 INFO designate.backend.agent_backend.impl_gdnssd [-]
↳Resolvers: ['127.0.0.1']
```

Infoblox Backend

Provides an integration between Designate and Infoblox grids.

Features

The Infoblox Designate backend allows an Infoblox grid to be used for serving zones controlled by Open-Stack Designate.

The Infoblox backend may be setup to map a specific Designate pool to a single DNS view, or it may be setup to map individual tenants to per-tenant DNS views.

Infoblox Configuration

- Create a user for use by Designate.
- Set up one or more nameserver groups to be used to serve Designate zones.
 - Set the Designate mDNS servers as external primaries
 - Add a grid member as a grid secondary; select the Lead Secondary option for this member
 - Add additional grid secondaries as desired

Designate Backend Configuration

- Designate may be configured to talk to any number of grid API service points (GM or Cloud appliance).
 - Setup a pool for each combination of DNS view and nameserver group you wish to manage.
 - Setup a pool target for each API service point that Designate should talk to.
 - * A single Designate pool should point to only one API service point in any single grid. That is, do not point a pool at more than one API service point in the same grid.
 - * It is OK to point a pool at multiple grids, just not to multiple service points on the same grid.
 - * You may specify the DNS view and nameserver group on a per-target basis.
- The `[infoblox:backend]` stanza in the designate configuration file can be used to set default values for the grid connectivity and other information.
- These values can be overridden on a per-target basis with the options element of the target configuration.
- Set the mDNS port to 53 in the `[service:mdns]` stanza.
- Designate always puts any servers associated with the pool as NS records for the domain. So, if you wish for any Infoblox nameservers to be listed in NS records, they must be added via Designate.

Multi-tenant Configuration

When configured with `multi_tenant = True` in the `designate.conf` file, the DNS view will be chosen as follows:

- A search will be made for a network view with the EA TenantID, with the value of the OpenStack `tenant_id`.
- If found, then DNS view used will be `<dns_view>.<network_view>`, where `<dns_view>` is the value specified in `designate.conf`, and `<network_view>` is the name of the view found in the search.
- If no such network view is found, then a network view will be created with the name `<network_view>.<tenant_id>`, where `<network_view>` is the value specified in `designate.conf`. This network view will be tagged with the TenantID EA.
- If the DNS view does not exist (in either case above), then it will be created.

Knot DNS 2 Agent backend

Knot DNS 2 User documentation

This page documents the Agent backend for [Knot DNS](#).

The agent runs on the same host as the resolver. It receives DNS messages from Mini DNS using private DNS OPCODEs and classes and creates or deletes zones on Knot using the `knotc` tool. It also instructs Knot to request AXFR from MiniDNS when a zone is created or updated.

Support matrix:

- 2.0 and older: not supported
- 2.2.0: affected by a bug

Knot DNS documentation

Configuring Knot DNS

Assuming Knot has been freshly installed on the system, run as root:

```
# Monitor syslog during the next steps
tail -f /var/log/syslog

# Start the daemon, ensure it's running
service knot start
netstat -npltu | grep knotd

# Create the config database
knotc conf-init

# Edit /etc/default/knot
# Set the variable:
# KNOTD_ARGS="-C /var/lib/knot/confdb"

# Restart
service knot restart

# Check if the deamon is still running from the conf file in /etc/knot/
ps auxw | grep knotd

# if so, apply this workaround for bug
# https://gitlab.labs.nic.cz/labs/knot/issues/455
( cd /etc/default/ && ln -s knot knotd )
service knot restart
ps auxw | grep knotd

# Ensure the confdb is present
test -f /var/lib/knot/confdb/data.mdb && echo OK

# Create the configuration
# Populate the variable with the MiniDNS ipaddr:
MINIDNS_IPADDR=

knotc conf-begin
knotc conf-set server.listen 0.0.0.0@53
# To listen on IPv6 as well, also run this:
# knotc conf-set server.listen '::@53'
knotc conf-set remote[minidns]
knotc conf-set remote[minidns].address $MINIDNS_IPADDR@5354
knotc conf-set template[default]
knotc conf-set template[default].master minidns
```

(continues on next page)

(continued from previous page)

```

knotc conf-set template[default].acl acl_minidns
knotc conf-set template[default].semantic-checks on
knotc conf-set zone[example.com]
knotc conf-set log.any info
knotc conf-set log.target syslog
knotc conf-set acl[acl_minidns]
knotc conf-set acl[acl_minidns].address $MINIDNS_IPADDR
knotc conf-set acl[acl_minidns].action notify
# Review the changes and commit
knotc conf-diff
knotc conf-commit

# Optionally check and back up the conf
knotc conf-check
knotc conf-export knot.conf.bak && cat knot.conf.bak

# Ensure the zone survives a restart
service knot restart
knotc zone-status example.com

# Test Knot: this should return the version
dig @127.0.0.1 version.server CH TXT

```

If needed, create a rootwrap filter, as root:

```

cat > /etc/designate/rootwrap.d/knot2.filters <<EOF
# cmd-name: filter-name, raw-command, user, args
[Filters]
knotc: CommandFilter, /usr/sbin/knotc, root
EOF

# Check the filter:
sudo /usr/local/bin/designate-rootwrap /etc/designate/rootwrap.conf knotc_
↪status

```

Configure the service.agent and backend.agent.knot2 sections in /etc/designate/designate.conf

Look in designate.conf.example for examples

Create an agent pool:

```

# Fetch the existing pool(s) if needed or start from scratch
designate-manage pool generate_file --file /tmp/pool.yaml
# Edit the file (see below) and reload it as:
designate-manage pool update --file /tmp/pool.yaml

```

The targets section in pool.yaml should look like:

```

targets:
- description: knot2 agent
  masters:

```

(continues on next page)

(continued from previous page)

```
- host: <MiniDNS IP addr>
  port: 5354
options: {}
options:
- host: <Agent IP addr>
  port: 5358
type: agent
```

Developer documentation

Devstack testbed

Follow Setting up Knot DNS on Ubuntu Trusty

Configure Knot to slave from MiniDNS on 192.168.121.131

Knotd configuration example (sudo knotc conf-export <filename>):

```
# Configuration export (Knot DNS 2.1.1)

server:
  listen: "0.0.0.0@53"

log:
- target: "syslog"
  any: "debug"

acl:
- id: "acl_minidns"
  address: [ "192.168.121.131" ]
  action: [ "notify" ]

remote:
- id: "minidns"
  address: "192.168.121.131@5354"

template:
- id: "default"
  master: "minidns"
  acl: "acl_minidns"
  semantic-checks: "on"
```

MSDNS Agent Backend

MSDNS User Documentation

This page documents using the MSDNS Agent backend.

The agent runs on the Windows host where the Microsoft DNS Server feature is installed. It receives DNS messages from Mini DNS using private DNS OPCODEs and classes and creates or deletes zones using WMI calls.

It also instructs MSDNS to request AXFR from MiniDNS when a zone is created or updated.

[Microsoft DNS documentation for managing DNS zones](#)

Setting up the Microsoft DNS server on Windows Server

The DNS Server role can be installed on the system by following the documentation available here: [How to install the DNS Server role](#)

Configuring MSDNS

Assuming the DNS Server role has been installed on the system, follow the next steps to complete the configuration.

These steps are for the Windows host which will run the designate agent. Make sure that Python 2.7 or Python 3.4 is installed on the system already.

To install Designate, clone the repository from <https://github.com/openstack/designate> and do a pip install. Example:

```
git clone https://github.com/openstack/designate
pip install .\\designate
```

After that, we need to configure the Designate Agent. Inside the github repository, there is a folder named etc/designate which can be used as default configuration.

Copy the folder somewhere else, for this example we will copy it to C:\etc\designate Inside the configuration folder, make a copy of designate.conf.sample and rename the copy to designate.conf Example:

```
copy C:\\etc\\designate\\designate.conf.sample C:\\etc\\designate\\designate.
↪conf
```

Configure the service.agent and backend.agent.msdns sections in C:\etc\designate\designate.conf

Look in C:\etc\designate\designate.conf.example for more complete examples.

```
[service:agent]
backend_driver = msdns
# Place here the MiniDNS ipaddr and port (no the agent itself)
masters = <MiniDNS IP addr>:53
```

Ensure that policy_file under the [default] section is set:

```
policy_file = C:\\etc\\designate\\policy.yaml
```

Start the designate agent using (Python 2.7 was installed in the default location C:\Python27):

```
C:\\Python27\\Scripts\\designate-agent.exe --config-file 'C:\\etc\\designate\\  
↪designate.conf'
```

You should see log messages similar to:

```
2016-06-22 02:00:47.177 3436 INFO designate.backend.agent_backend.impl_msdns_  
↪[-] Started msdns backend  
2016-06-22 02:00:47.177 3436 INFO designate.service [-] _handle_tcp thread_  
↪started  
2016-06-22 02:00:47.177 3436 INFO designate.service [-] _handle_udp thread_  
↪started
```

The following steps are for the system running the Designate controller.

Make sure to set the mDNS port to 53 in the [service:mdns] section. MS DNS does not support Masters that are on any port other than 53.

Create an agent pool:

```
# Fetch the existing pool(s) if needed or start from scratch  
designate-manage pool generate_file --file /tmp/pool.yaml  
# Edit the file (see below) and reload it as:  
designate-manage pool update --file /tmp/pool.yaml
```

The targets section in pool.yaml should look like:

```
targets:  
- description: Microsoft DNS agent  
  masters:  
    - host: <MiniDNS IP addr>  
      port: 53  
    options: {}  
  options:  
    - host: <Agent IP addr>  
      port: 5358  
    type: agent
```

NS1 Backend

NS1 Configuration

1. Configure the NS1 Backend using this sample target snippet

```
targets:  
- type: ns1  
  description: NS1 DNS Server
```

(continues on next page)

(continued from previous page)

```

# List out the designate-mdns servers from which NS1 servers should
# request zone transfers (AXFRs) from.
masters:
  - host: 192.0.2.1
    port: 5354

# NS1 Configuration options
options:
  #NS1 XFR container ip and port
  host: 192.0.2.2
  port: 5302
  #NS1 API endpoint IP address or name (Core container). Enter only base_
↪address or name.
  #Plugin will generate full api address, e.g. https://192.0.2.2/v1/
↪zones/<zone name>
  api_endpoint: 192.0.2.2
  #NS1 API key
  api_token: changeme
  # If a tsigkey is needed, uncomment the line below and insert the key_
↪name, algorithm and value
  # NOTE: TSIG key has to be set manually
  #tsigkey_name: testkey
  #tsigkey_hash: hmac-sha512
  #tsigkey_value: 4EJz00m4ZWe005HjLiXRedJbSnCUx5Dt+4wVYsBweG5HKAV6cqSVJ/
↪oem/6mLgDNFALLP3Jg0npbg1SkP7RMDg==

```

2. Then update the pools in designate

```
$ designate-manage pool update
```

See [designate-manage pool](#) for further details on the designate-manage pool command, and [DNS Server Pools](#) for information about the yaml file syntax

TSIG Key Configuration

In some cases a deployer may need to use tsig keys to sign AXFR (zone transfer) requests. As NS1 does not support a per host key setup, this needs to be set on a per zone basis, on creation.

To do this, generate a tsigkey using any of available utilities (e.g. tsig-keygen):

```

$ tsig-keygen -a hmac-sha512 testkey
key "testkey" {
  algorithm hmac-sha512;
  secret
↪"vQbMI3u5QGUYRu6FWRm16eL0F0df00mVJjWKCTg4mIMNnba0g2PLrV+0G92WcTfJrgqZ20a4hv3RWDICKCcJhw==
↪";
};

```

Then insert it into Designate. Make sure the pool id is correct (the --resource-id below.)

```
openstack tsigkey create --name testkey --algorithm hmac-sha512 --secret_
↪4EJz00m4ZW005HjLiXRedJbSnCUx5Dt+4wVYsBweG5HKAV6cqSVJ/oem/
↪6mLgDNFA1LP3Jg0npbg1SkP7RMDg== --scope POOL --resource-id 794ccc2c-d751-
↪44fe-b57f-8894c9f5c842
```

Then add it to the `pools.yaml` file as shown in the example.

PDNS4 Backend

PDNS4 Configuration

The version PowerDNS in Ubuntu Xenial is `pdns4`. This has a different DB schema, and is incompatible with the legacy PowerDNS driver. In PDNS 4 the API was marked stable, and this is what we will use.

You will need to configure PowerDNS, and its database before performing these steps.

You will need to use a database backend for PowerDNSs API to function.

See [PowerDNS Docs](#) for details.

1. Enable the API in the `pdns.conf` file.

```
webserver=yes
api=yes
api-key=changeme
```

2. Configure the PowerDNS Backend using this sample target snippet

```
targets:
- type: pdns4
  description: PowerDNS4 DNS Server

  # List out the designate-mdns servers from which PowerDNS servers should
  # request zone transfers (AXFRs) from.
  masters:
  - host: 192.0.2.1
    port: 5354

  # PowerDNS Configuration options
  options:
    host: 192.0.2.1
    port: 53
    api_endpoint: http://127.0.0.1:8081
    api_token: changeme
    api_ca_cert: /etc/ssl/certs/ca-certificates.crt
    # If a tsigkey is needed, uncomment the line below and insert the name
    # tsigkey_name: <keyname>
```

3. Then update the pools in designate

```
$ designate-manage pool update
```

See *designate-manage pool* for further details on the `designate-manage pool` command, and *DNS Server Pools* for information about the yaml file syntax

TSIG Key Configuration

Note: This is only available in PowerDNS 4.2 or newer

In some cases a deployer may need to use tsig keys to sign AXFR (zone transfer) requests. As `pdns` does not support a per host key setup, this needs to be set on a per zone basis, on creation.

To do this, generate a tsigkey on the PowerDNS Server:

```
$ pdnsutil generate-tsig-key <keyname> hmac-sha512
Create new TSIG key keyname hmac-sha512
↪ 4EJz00m4ZWe005HjLiXRedJbSnCUx5Dt+4wVYsBweG5HKAV6cqSVJ/oem/
↪ 6mLgDNFA1LP3Jg0npbg1SkP7RMDg==
```

Then insert it into Designate. Make sure the pool id is correct (the `--resource-id` below.)

```
openstack tsigkey create --name <keyname> --algorithm hmac-sha512 --secret
↪ 4EJz00m4ZWe005HjLiXRedJbSnCUx5Dt+4wVYsBweG5HKAV6cqSVJ/oem/
↪ 6mLgDNFA1LP3Jg0npbg1SkP7RMDg== --scope POOL --resource-id 794ccc2c-d751-
↪ 44fe-b57f-8894c9f5c842
```

Then add it to the `pools.yaml` file as shown in the example. The ID used is the name of the key in the PowerDNS server.

For a list of drivers and the status of each drivers testing please go to *DNS Server Driver Support Matrix*

1.5.3 High Availability Guide


Designate supports running all of its components services in active-active HA modes.

Some services require some extra setup to ensure that they can work in active-active, and the services are listed below.

designate-api

Needs Access to:

- AMQP

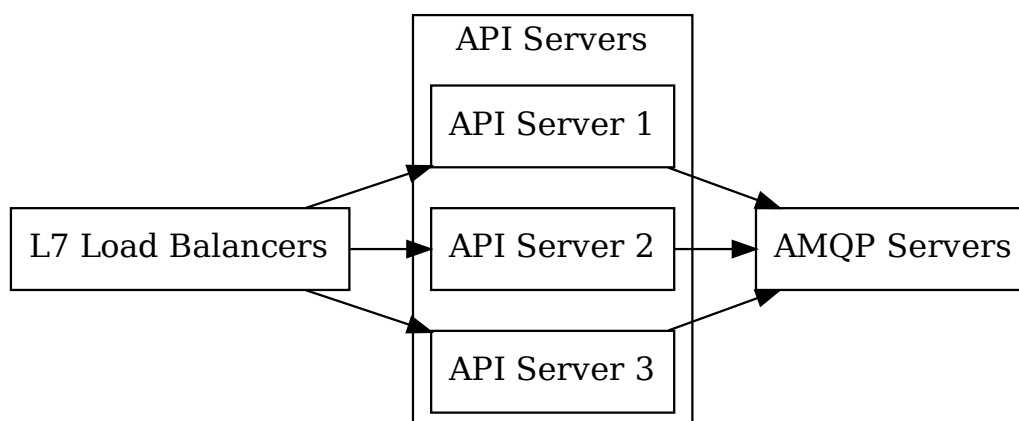

Notes

To run multiple *designate-api* services, you should run the services behind a load balancer.

When behind the load balancer, you may need to set the following:

```
[service:api]
api_base_uri = http://<load balancer URI>/
enable_host_header = True
```

Or the following:


```
[oslo_middleware]
enable_proxy_headers_parsing = true
```

And then the load balancer to set appropriate headers (e.g. enable *mod_proxy* in apache.)

designate-central

Needs Access to:

- AMQP
- Database

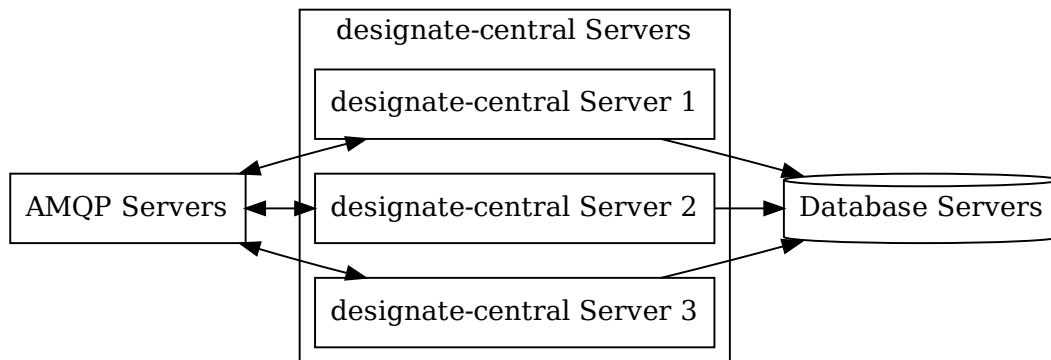


Notes

You can run as many *designate-central* services as needed, as long as they all have access to the AMQP server(s), work will be distributed across all of them.

designate-mdns

Needs Access to:

- AMQP
- Database
- DNS Servers

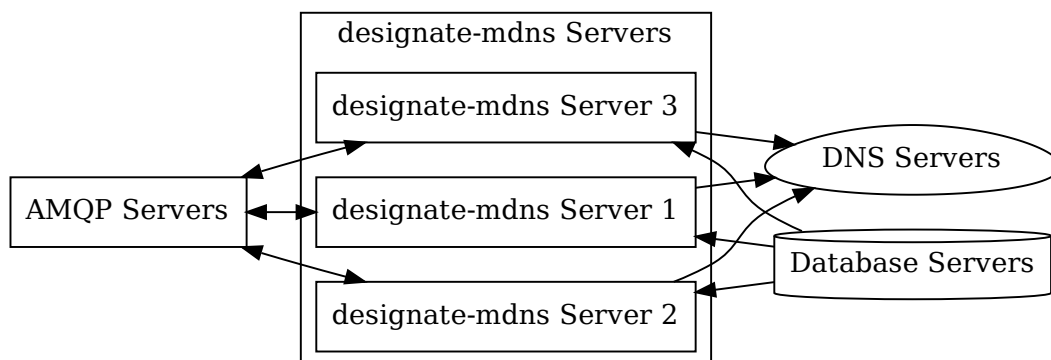


Notes

You can run as many *designate-mdns* services as needed, as long as they all have access to the AMQP server(s), work will be distributed across all of them.

designate-worker

Needs Access to:

- AMQP
- DNS Servers

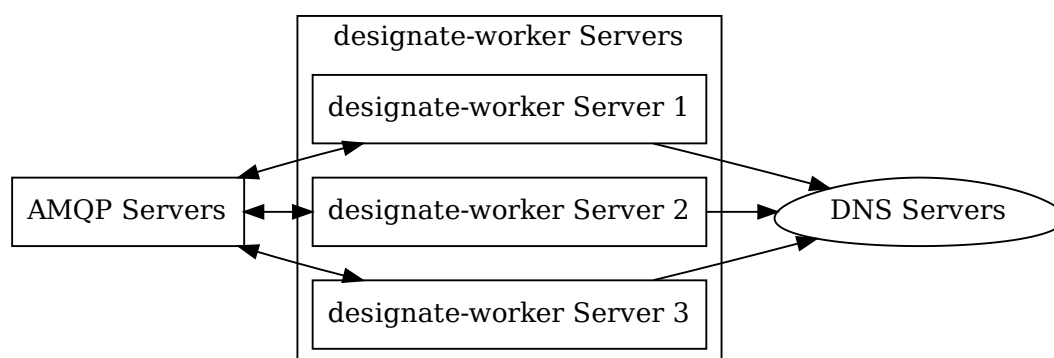


Notes

You can run as many *designate-worker* services as needed, as long as they all have access to the AMQP server(s), work will be distributed across all of them.

designate-producer

Needs Access to:

- AMQP
- DLM

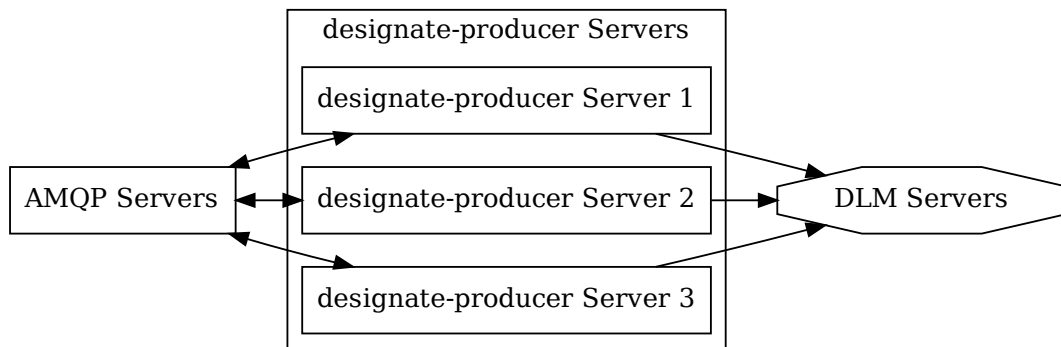

Notes

You can run as many *designate-producer* services as needed, as long as they all have access to the AMQP server(s), and a distributed lock manager, work will be sharded across all the services.

You will need to set a coordination *backend_url*. This needs to be a DLM that is supported by tooz, that supports group membership. See [tooz driver list](#) for available drivers


Warning: Failure to set a *backend_url* can cause unexpected consequences, and may result in some periodic tasks being ran more than once.

[coordination]
`backend_url = kazoo://<zookeeper url>:<zookeeper port>`

designate-sink

Needs Access to:

- AMQP

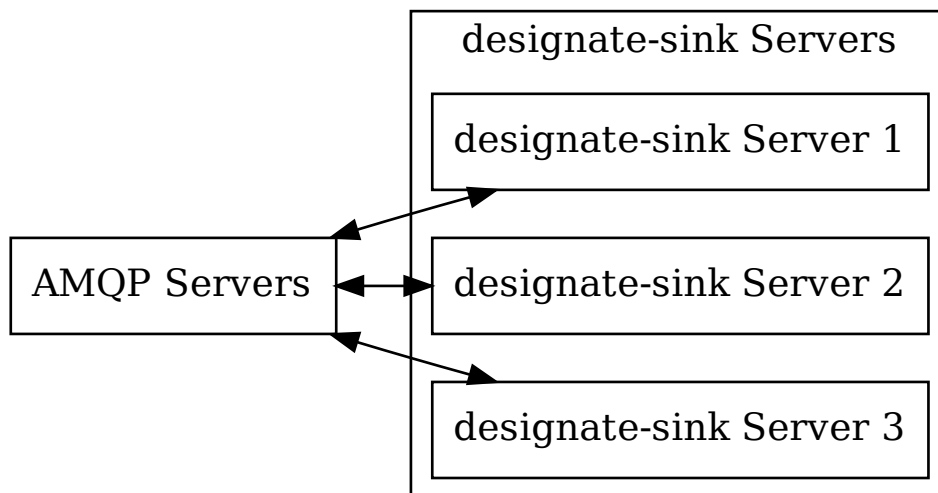

Notes

You can run as many *designate-sink* services as needed, as long as they all have access to the AMQP server(s), work will be distributed across all of them.

1.5.4 DNS Server Pools

Overview

In designate we support the concept of multiple pools of DNS Servers.

This allows operators to scale out their DNS Service by adding more pools, avoiding the scaling problems that some DNS servers have for number of zones, and the total number of records hosted by a single server.

This also allows providers to have tiers of service (i.e. the difference between GOLD vs SILVER tiers may be the number of DNS Servers, and how they are distributed around the world.)

In a private cloud situation, it allows operators to separate internal and external facing zones.

To help users create zones on the correct pool we have a scheduler that is responsible for examining the zone being created and the pools that are available for use, and matching the zone to a pool.

The filters are pluggable (i.e. operator replaceable) and all follow a simple interface.

The zones are matched using zone attributes and pool attributes. These are key: value pairs that are attached to the zone when it is being created, and the pool. The pool attributes can be updated by the operator in the future, but it will **not** trigger zones to be moved from one pool to another.

Note: Currently the only zone attribute that is accepted is the *pool_id* attribute. As more filters are

merged there will be support for dynamic filters.

Target vs. Nameserver

One thing that can be confusing about pools is the differentiation between a target and a nameserver. The target is where Designate will try to write the change, while a nameserver is where Designate checks that the change exists.

A great example of this is [binds stealth master system](#). In this configuration, there could be a stealth master that you configure as your target and a set of slaves pointed to that master as your nameservers. Designate will write to the master and then look for the changes on the slaves before considering the change active.

Another example would be where Designate uses an API backend such as DynDNS or even another Designate instance. In this situation, you will typically have a single target with a set of nameservers to test that meet your requirements.

Yet another example is when using a Designate agent. In this scenario your agent instances are the targets and the nameservers the agent updates would be checked for the correct information.

Managing Pools

In mitaka we moved the method of updating pools to a CLI in *designate-manage*

There is a YAML file that defines the pool, and is used to load this information into the database.

```
---
- name: default
  # The name is immutable. There will be no option to change the name after
  # creation and the only way will to change it will be to delete it
  # (and all zones associated with it) and recreate it.
  description: Default PowerDNS Pool

  # Attributes are Key:Value pairs that describe the pool. for example the
  # level
  # of service (i.e. service_tier:GOLD), capabilities (i.e. anycast: true) or
  # other metadata. Users can use this information to point their zones to the
  # correct pool
  attributes: {}

  # List out the NS records for zones hosted within this pool
  ns_records:
    - hostname: ns1-1.example.org.
      priority: 1
    - hostname: ns1-2.example.org.
      priority: 2

  # List out the nameservers for this pool. These are the actual PowerDNS
```

(continues on next page)

(continued from previous page)

```
# servers. We use these to verify changes have propagated to all_
↪nameservers.
nameservers:
  - host: 192.0.2.2
    port: 53

# List out the targets for this pool. For PowerDNS, this is the database
# (or databases, if you deploy a separate DB for each PowerDNS server)
targets:
  - type: powerdns
    description: PowerDNS Database Cluster

# List out the designate-mdns servers from which PowerDNS servers should
# request zone transfers (AXFRs) from.
masters:
  - host: 192.0.2.1
    port: 5354

# PowerDNS Configuration options
options:
  host: 192.0.2.2
  port: 53
  connection: 'mysql+pymysql://designate:password@127.0.0.1/designate_
↪pdns?charset=utf8'

# Optional list of additional IP/Port's for which designate-mdns will send
# DNS NOTIFY packets to
also_notifies:
  - host: 192.0.2.4
    port: 53
```

Designate Manage Pools Command Reference

Update Pools Information

```
designate-manage pool update [options]
```

Options:

--file	Input file (Default: /etc/designate/pools.yaml)
--dry-run	This will simulate what will happen when you run this command
--delete	Any Pools not listed in the config file will be deleted

Warning:

Running with `--delete` can be **extremely** dangerous.
 It will delete any pools that are not in the supplied YAML file, and any zones that are in that Pool.
 Before running with `--delete` we recommend operators run with `--delete --dry-run` to view the outcome.

Generate YAML File

```
designate-manage pool generate_file [options]
```

Options:

--file YAML file output too (Default: `/etc/designate/pools.yaml`)

Generate YAML File from Liberty Config

```
designate-manage pool export_from_config [options]
```

Options:

--file YAML file output too (Default: `/etc/designate/pools.yaml`)

1.5.5 Pool Scheduler

In designate we have a pluggable scheduler filter interface.

You can set an ordered list of filters to run on each zone create api request.

We provide a few basic filters below, and creating custom filters follows a similar pattern to schedulers.

You can create your own by extending `designate.scheduler.filters.base.Filter` and registering a new entry point in the `designate.scheduler.filters` namespace like so in your `setup.cfg` file:

```
[entry_points]
designate.scheduler.filters =
my_custom_filter = my_extension.filters.my_custom_filter:MyCustomFilter
```

The new filter can be added to the `scheduler_filters` list in the `[service:central]` section like so:

```
[service:central]
```

```
scheduler_filters = attribute, pool_id_attribute, fallback, random, my_custom_
↪filter
```

The filters list is ran from left to right, so if the list is set to:

```
[service:central]
```

```
scheduler_filters = attribute, random
```

There will be two filters ran, the `designate.scheduler.filters.attribute_filter.AttributeFilter` followed by `designate.scheduler.filters.random_filter.RandomFilter`

Default Provided Filters

Base Class - Filter

```
class designate.scheduler.filters.base.Filter(storage)
```

This is the base class used for filtering Pools.

This class should implement a single public function `filter()` which accepts a `designate.objects.pool.PoolList` and returns a `designate.objects.pool.PoolList`

```
abstract filter(context, pools, zone)
```

Filter list of supplied pools based on attributes in the request

Parameters

- **context** `designate.context.DesignateContext` - Context Object from request
- **pools** `designate.objects.pool.PoolList` - List of pools to choose from
- **zone** `designate.objects.zone.Zone` - Zone to be created

Returns

`designate.objects.pool.PoolList` - Filtered list of Pools

Attribute Filter

```
class designate.scheduler.filters.attribute_filter.AttributeFilter(storage)
```

Bases: `Filter`

This allows users to choose the pool by supplying hints to this filter. These are provided as attributes as part of the zone object provided at zone create time.

```
{
    "attributes": {
        "pool_level": "gold",
        "fast_ttl": "true",
```

(continues on next page)

(continued from previous page)

```

    "pops": "global",
  },
  "email": "user@example.com",
  "name": "example.com."
}

```

The zone attributes are matched against the potential pool candidates, and any pools that do not match **all** hints are removed.

Warning: This should be used in conjunction with the `designate.scheduler.impl_filter.filters.random_filter.RandomFilter` in case of multiple Pools matching the filters, as without it, we will raise an error to the user.

name = 'attribute'

Name to enable in the `[designate:central:scheduler].filters` option list

Pool ID Attribute Filter

class `designate.scheduler.filters.pool_id_attribute_filter.PoolIDAttributeFilter`(*storage*)

Bases: `Filter`

This allows users with the correct role to specify the exact `pool_id` to schedule the supplied zone to.

This is supplied as an attribute on the zone

```

{
  "attributes": {
    "pool_id": "794ccc2c-d751-44fe-b57f-8894c9f5c842"
  },
  "email": "user@example.com",
  "name": "example.com."
}

```

The pool is loaded to ensure it exists, and then a policy check is performed to ensure the user has the correct role.

Warning: This should only be enabled if required, as it will raise a 403 Forbidden if a user without the correct role uses it.

filter(*context, pools, zone*)

Attempt to load and set the pool to the one provided in the Zone attributes.

Parameters

- **context** `designate.context.DesignateContext` - Context Object from request

- **pools** *designate.objects.pool.PoolList* - List of pools to choose from
- **zone** *designate.objects.zone.Zone* - Zone to be created

Returns

designate.objects.pool.PoolList A PoolList with containing a single pool.

Raises

Forbidden, PoolNotFound

name = 'pool_id_attribute'

Name to enable in the [designate:central:scheduler].filters option list

Random Filter

class *designate.scheduler.filters.random_filter.RandomFilter*(storage)

Bases: *Filter*

Randomly chooses one of the input pools if there are multiple ones supplied.

Note: This should be used as one of the last filters, as it reduces the supplied pool list to one.

name = 'random'

Name to enable in the [designate:central:scheduler].filters option list

Fallback Filter

class *designate.scheduler.filters.fallback_filter.FallbackFilter*(storage)

Bases: *Filter*

If there is no zones available to schedule to, this filter will insert the default_pool_id.

Note: This should be used as one of the last filters, if you want to preserve behavior from before the scheduler existed.

name = 'fallback'

Name to enable in the [designate:central:scheduler].filters option list

Default Pool Filter

class designate.scheduler.filters.default_pool_filter.DefaultPoolFilter(*storage*)

Bases: *Filter*

This filter will always return the default pool specified in the designate config file

Warning: This should be used as the only filter, as it will always return the same thing - a *designate.objects.pool.PoolList* with a single *designate.objects.pool.Pool*

name = 'default_pool'

Name to enable in the [designate:central:scheduler].filters option list

In Doubt Default Pool Filter

class designate.scheduler.filters.in_doubt_default_pool_filter.InDoubtDefaultPoolFilter(*storage*)

Bases: *Filter*

If the previous filter(s) didnt make a clear selection of one pool and if the default pool is in the set of multiple pools, this filter will select the default pool.

This filter will pass through the pool list, if there are one or less pools available to schedule to, or if the default pool is not in the set of multiple pools.

Note: This should be used as one of the last filters.

name = 'in_doubt_default_pool'

Name to enable in the [designate:central:scheduler].filters option list

1.5.6 How To Configure Multiple Pools

Designate supports pools of nameservers. A pool is a collection of nameservers and targets that Designate will write to and read from to confirm changes are successful. In some cases you might have multiple pools that you need to manage differently. For example, you might use separate pools to distribute tenants across some subset of your DNS infrastructure.

Read the section on *DNS Server Pools* to learn more about what pools are and what they can do.

Pools Configuration

Pools are configured by a *pools.yml* file. This file describes the pools and can be used to update Designate via *designate-manage* commands.

Here is an example *pools.yml* that configures two different pools. The idea is that well configure our pools to support different usage levels. Well define a *gold* and *standard* level and put zones in each based on the tenant.

Our *gold* level will provide 6 nameservers that users have access to where our *standard* will only provide 2. Both pools will have one master target we write to.

```
---  
  
- name: golden_pool  
  description: The golden pool!  
  
  attributes:  
    service_tier: gold  
  
  ns_records:  
    - hostname: ns1-gold.example.org  
      priority: 1  
  
    - hostname: ns2-gold.example.org  
      priority: 2  
  
    - hostname: ns3-gold.example.net  
      priority: 3  
  
    - hostname: ns4-gold.example.net  
      priority: 4  
  
    - hostname: ns5-gold.example.net  
      priority: 5  
  
    - hostname: ns6-gold.example.net  
      priority: 6  
  
  nameservers:  
    - host: ns1-gold.example.net  
      port: 53  
  
    - host: ns2-gold.example.net  
      port: 53  
  
    - host: ns3-gold.example.net  
      port: 53  
  
    - host: ns4-gold.example.net  
      port: 53  
  
    - host: ns5-gold.example.net  
      port: 53  
  
    - host: ns6-gold.example.net  
      port: 53  
  
  targets:  
    - type: bind9  
      description: bind9 golden master
```

(continues on next page)

(continued from previous page)

```
masters:
  - host: mdns.designate.example.com
    port: 5354

options:
  host: ns-master-gold.example.org
  port: 53
  rndc_host: ns-master-gold.example.org
  rndc_port: 953
  rndc_key_file: /etc/designate.rndc.key

- name: standard_pool
  description: The standard pool

  attributes:
    service_tier: standard

  ns_records:
    - hostname: ns1-std.example.org
      priority: 1

    - hostname: ns2-std.example.org
      priority: 2

  nameservers:
    - host: ns1-std.example.net
      port: 53

    - host: ns2-std.example.net
      port: 53

  targets:
    - type: bind9
      description: bind9 golden master

    masters:
      - host: mdns.designate.example.com
        port: 5354

    options:
      host: ns-master-std.example.org
      port: 53
      rndc_host: ns-master-std.example.org
      rndc_port: 953
      rndc_key_file: /etc/designate.rndc.key
```

With our configuration in place, we can then update Designate to use the pool configuration.

```
# Do a dry run
$ designate-manage pool update --file pools.yml --dry-run
$ designate-manage pool update --file pools.yml
```

Designate now has two pools to work with. The next step will be to configure the scheduler to use the attributes when choosing what pool to store the zone on.

Pool Scheduler

The pool scheduler allows selecting a pool when a zone is created. Each scheduler acts as a filter, selecting or negating each pool based on some attributes. Designate comes with some simple schedulers to support common patterns:

- `default_pool`
- `fallback`
- `random`
- `pool_id_attribute`
- `attribute`

These are configured in the *service:central* section of the config.

Schedule by Pool ID Example

For example, if we wanted to allow a user to select a specific pool by id or fallback to using a default, we could use the following configuration.

```
[service:central]
default_pool_id = 794ccc2c-d751-44fe-b57f-8894c9f5c842
scheduler_filters = pool_id_attribute, fallback
```

The filters are applied from left to right. If the zone body doesn't contain an *attributes* object with a *pool_id* set to a valid pool id, the fallback filter is then called, returning the default pool as the scheduled pool for that zone.

Schedule by Tier Example

In our tiered example, we'll use the *attribute* filter to select the correct pool.

```
[service:central]
default_pool_id = 794ccc2c-d751-44fe-b57f-8894c9f5c842 # the std pool
scheduler_filters = attribute, fallback
```

When a user needs the zone to go to the *gold* pool, the user needs to provide the appropriate attribute in the zone.

```
POST /v2/zones HTTP/1.1
Accept: application/json
Content-Type: application/json

{
  "attributes": {
    "service_tier": "gold"
  },
  "email": "user@example.com",
  "name": "example.net."
}
```

This ensures the zone ends up on the correct pool.

In this example, we've allowed the user to define what pool should be scheduled. If we wanted to schedule the zone based on the tenant, we could write a custom filter that looked up the appropriate group and adds the appropriate pool.

1.5.7 Blacklisting Domain Names

Note: The blacklist feature will be renamed and moved to denylist in the near future.

You can prevent users from creating zones with names that match a particular regular expression using blacklists. For example, you might use a blacklist to prevent users from:

- creating a specific zone.
- creating zones that contain a certain string,
- creating subzones of a certain zone.

Managing Blacklists

You can create blacklists using the `zone blacklist create` command with [System Administrator](#) privileges. For example, to blacklist `example.com.` and all of its subdomains:

```
$ openstack zone blacklist create --pattern ".*example.com."
+-----+-----+
| Field      | Value                                     |
+-----+-----+
| created_at | 2021-05-27T04:06:42.000000              |
| description | None                                     |
| id         | 7622e241-8c3d-4c03-a692-8747e3cf2658   |
| pattern    | .*example.com.                          |
| updated_at | None                                     |
+-----+-----+
```

If a [Domain or Project Persona](#) attempts to create `foo.example.com.`, or `example.com.`, they encounter an error:

```
$ openstack zone create --email admin@example.com example.com.  
Blacklisted zone name  
$ openstack zone create --email admin@example.com foo.example.com.  
Blacklisted zone name
```

Note: Users who satisfy the `use_blacklisted_zone` policy can create zones with names that are on a blacklist. By default, the only users who have this override are [System Administrators](#).

You can update a blacklist using `zone blacklist set` to modify its pattern or description;

```
$ openstack zone blacklist set 81fbfe02-6bf9-4812-a40e-1522ab6862ca --pattern  
↪ ".*web.example.com"  
+-----+-----+  
| Field      | Value                                |  
+-----+-----+  
| created_at | 2021-05-27T04:14:14.000000         |  
| description| None                               |  
| id         | 81fbfe02-6bf9-4812-a40e-1522ab6862ca |  
| pattern    | .*web.example.com                  |  
| updated_at | 2021-05-27T04:14:48.000000         |  
+-----+-----+
```

You can delete a blacklist using `zone blacklist delete`:

```
$ openstack zone blacklist delete 7622e241-8c3d-4c03-a692-8747e3cf2658
```

There is no output when this command is successful.

Using the REST API

The regular expressions used for blacklists are similar to Python regular expressions, but you must escape certain characters when making HTTP calls.

For examples, this regex restricts using `example.com.` and its ASCII subdomains:

```
^([A-Za-z0-9_\-]+\.)*example\.com\.$
```

However, you must insert the escape character (backslash, `\`) before the instances of dot (`.`) and `.com`:

```
^([A-Za-z0-9_\-]+\.\.)*example\\.com\\.\\.$
```

Here is the API call and the regex with the HTTP characters escaped:

```
POST /v2/blacklists/ HTTP/1.1  
Accept: application/json  
Content-Type: application/json  
  
{  
  "pattern" : "^([A-Za-z0-9_\\-]+\\.\\.)*example\\.\\.com\\.\\.\\.$",  
  "description" : "This blacklists *.example.com."  
}
```

Regular Expressions

Regular Expressions can be difficult to work with. The [Python Regex Documentation](#) may serve as a useful introduction, and online regular expression tools can assist when building and testing regexes for use with the blacklist API.

1.5.8 View and Manage Quotas

Quotas exist in Designate for various resources. You can configure quotas globally or on a per-project basis.

Viewing Quotas

The [Designate plugin](#) for the [OpenStack Client](#) allows users to query their current quota using the `dns quota list` command.

```
$ openstack dns quota list
+-----+-----+
| Field          | Value |
+-----+-----+
| api_export_size | 1000  |
| recordset_records | 20    |
| zone_records    | 500   |
| zone_recordsets | 500   |
| zones          | 10    |
+-----+-----+
```

Users can also view their quotas with a simple [View Current Projects Quotas Designate API](#) call:

```
GET /v2/quotas/ HTTP/1.1
Accept: application/json
Content-Type: application/json
```

Response:

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
X-Openstack-Request-Id: req-bfcd0723-624c-4ec2-bbd5-99e985efe8db

{
  "api_export_size": 1000,
  "recordset_records": 20,
  "zone_records": 500,
  "zone_recordsets": 500,
  "zones": 10
}
```

Administrators with a cross-project read role can query the quotas for other projects using the `--project-id` option to the `dns quota list` command or by specifying a `project_id` when making the [View Quotas Designate API](#) call.

```
$ openstack dns quota list --project-id ecd4341280d645e5959d32a4b7659da1
```

```
+-----+-----+
| Field           | Value |
+-----+-----+
| api_export_size | 1000  |
| recordset_records | 20    |
| zone_records    | 500   |
| zone_recordsets | 500   |
| zones           | 20    |
+-----+-----+
```

```
GET /v2/quotas/ecd4341280d645e5959d32a4b7659da1 HTTP/1.1
```

```
Accept: application/json
```

```
Content-Type: application/json
```

Modifying Quotas

You can edit Designate quotas on a per-project basis. An administrator can edit quotas for any project, but they must have an *all_tenants* role or use a system scoped admin token.

Administrators can set a custom quota for a project using the [OpenStack Client](#) `dns quota set` command.

```
$ openstack dns quota set --project-id ecd4341280d645e5959d32a4b7659da1 --
↪zones 30
```

```
+-----+-----+
| Field           | Value |
+-----+-----+
| api_export_size | 1000  |
| recordset_records | 20    |
| zone_records    | 500   |
| zone_recordsets | 500   |
| zones           | 30    |
+-----+-----+
```

Below is an example of setting a quota using the [Set Quotas Designate API](#).

```
PATCH /v2/quotas/ecd4341280d645e5959d32a4b7659da1 HTTP/1.1
```

```
Accept: application/json
```

```
Content-Type: application/json
```

```
X-Auth-All-Projects: True
```

```
{
  "zones": 30
}
```

The response would be:

```
HTTP/1.1 200 OK
```

```
Content-Type: application/json; charset=UTF-8
```

(continues on next page)

(continued from previous page)

```
X-Openstack-Request-Id: req-ee264c7d-d9f3-4de8-92ec-7de4dc93a255

{
  "api_export_size": 1000,
  "recordset_records": 20,
  "zone_records": 500,
  "zone_recordsets": 500,
  "zones": 30
}
```

Resetting Quotas

You can reset custom quotas for a project to their default values by using the `dns quota reset` command. Administrators can reset quotas for any project, but they must have an *all_tenants* role or use a system scoped admin token.

```
$ openstack dns quota reset --project-id ecd4341280d645e5959d32a4b7659da1
```

Note: There is no output from a successful `dns quota reset` command.

Below is an example of resetting a projects quota via the [Reset Quota Designate API](#).

```
DELETE /v2/quotas/ecd4341280d645e5959d32a4b7659da1 HTTP/1.1
Accept: application/json
Content-Type: application/json
X-Auth-All-Projects: True
```

The response would be:

```
HTTP/1.1 204 No Content
X-Openstack-Request-Id: req-82b85853-145d-4253-be86-b9aa3116b975
```

Available Quotas

The quotas available in Designate are listed below with a short description and the default values.

Zones

Quota	Description	Default
zones	The number of zone allowed per project	10

Recordsets/Records

Quota	Description	Default
zone_recordsets	Number of recordsets allowed per zone	500
zone_records	Number of records allowed per zone	500
recordset_records	Number of records allowed per recordset	20

Zone Exports

Quota	Description	Default
api_export_size	Number of recordsets allowed in a zone export	1000

Default Quotas

You can set a default value for each quota that applies to all users by editing the [DEFAULT] configuration section of the `designate.conf` file, for example:

```
[DEFAULT]
#####
## General Configuration
#####
quota_zones = 10
quota_zone_recordsets = 500
quota_zone_records = 500
quota_recordset_records = 20
quota_api_export_size = 1000
```

Project ID Verification

Although Designate API can accept arbitrary strings as the Project ID to set the quota for, actual enforcement of quota will be performed only when the project ID of the quota matches the `project-id` in the request that attempts to create a resource.

To prevent mistakes when specifying the `project-id` for a quota, you can turn on project ID verification in the Designate configuration file:

```
[service:api]
quotas_verify_project_id = True
```

You must also specify how Designate connects to Keystone and locates the appropriate Keystone endpoint with which to perform requests. In the [keystone] section, ensure that the Session- and Adapter-related options are set.

Here is an example:


```
[keystone]
cafile = /path/to/ca/bundle
valid_interfaces = internal,public
region_name = RegionWest
```

See [keystoneauth documentation](#) for more details.

With project ID verification enabled, Designate will use the credentials provided with the request to attempt to verify that the project ID is valid in Keystone.

As a result of this verification, the request might return additional errors in these cases:

- when the Keystone V3 endpoint could not be found in the service catalog (as specified in [keystone] section) - 504 error is returned
- when the authentication with incoming token was successful but the project id was not actually found - 400 is returned

For project ID validation to be successful, the user setting quotas should have permission to list projects in Keystone. If the user does not have permission to list projects in Keystone, the validation will be skipped.

1.5.9 Designate Policies

Warning: JSON formatted policy file is deprecated since Designate 12.0.0 (Wallaby). This [oslopolicy-convert-json-to-yaml](#) tool will migrate your existing JSON-formatted policy file to YAML in a backward-compatible way.

Designate, like most OpenStack services, supports Role Based Access Control (RBAC) using [oslo policy](#) to define default RBAC policies in the Designate code. These default policies can be overridden by operators using a yaml policy file. For a sample policy file, refer to [policy.yaml](#).

Currently Designate defaults to the OpenStack legacy admin or owner scheme, but Designate also supports a newer RBAC model using [Keystone Default Roles](#) and [Keystone Scoped Tokens](#) via configuration settings.

Enabling Keystone Default Roles and Scoped Tokens

Starting with the Xena release of Designate, Keystone token scopes and default roles can be enforced. By default, in the Xena release, [oslo policy](#) will not be enforcing these new roles and scopes. However, at some point in the future they may become the default. You may want to enable them now to be ready for the later transition. This section will describe those settings.

The Oslo Policy project defines two configuration settings, among others, that can be set in the Designate configuration file to influence how policies are handled by Designate. Those two settings are [enforce_scope](#) and [enforce_new_defaults](#).

When you enable [Keystone Default Roles](#) and [Keystone Scoped Tokens](#) the Designate policy honors the following roles:

- System scoped - Admin
- System scoped - Reader

- Project scoped - Reader
- Project scoped - Member

[oslo_policy] enforce_scope

Keystone has introduced the concept of [token scopes](#). To ensure backward compatibility, Oslo Policy does not enforce scope validation of tokens by default.

In the Xena release, Designate supports enforcing Keystone token scopes. To enable Keystone token scoping, add the following to your Designate configuration file:

```
[oslo_policy]
enforce_scope = True
```

The primary effect of this setting is to allow a system scoped admin token when performing administrative API calls to the Designate API. The Designate API already enforces the project scoping in Keystone tokens.

[oslo_policy] enforce_new_defaults

The Designate Xena release added support for [Keystone Default Roles](#) in the default policies. To be backward compatible, Oslo Policy currently uses deprecated policies that do not require the new [Keystone Default Roles](#) by default.

Designate supports requiring these new [Keystone Default Roles](#) as of the Xena release. To start requiring these roles in Designate, enable the new policies by adding the following setting to your Designate configuration file:

```
[oslo_policy]
enforce_new_defaults = True
```

Example OpenStack Client Command

After you have enabled `enforce_new_defaults` and `enforce_scope`, administrative commands require a system scoped admin token. An example [OpenStack Client](#) command to create a [Top Level Domain \(TLD\)](#) would look like:

```
openstack --os-system-scope all --os-auth-url <identity endpoint URL> --os-
↪password <admin password> --os-username admin --os-user-domain-name default_
↪create tld --name example.org
```

Oslo Tools For Policy Management

This section describes how to use Oslo Policy tools to managing Designate policies.

Sample File Generation

To generate a sample policy.yaml file from the Designate defaults, run the oslo policy generation script:

```
oslopolicy-sample-generator
--config-file etc/designate/designate-policy-generator.conf
--output-file policy.yaml.sample
```

Merged File Generation

To generate a policy file which shows the effective policy in use by the project, including all registered policy defaults and the policy overrides included in a policy.yaml file, run this command:

```
oslopolicy-policy-generator
--config-file etc/designate/designate-policy-generator.conf
```

This tool uses the output_file path from the config-file.

List Redundant Configurations

To generate a list of matches for policy rules that are defined in a configuration file where the rule does not differ from a registered default rule, run this command:

```
oslopolicy-list-redundant
--config-file etc/designate/designate-policy-generator.conf
```

These are rules that can be removed from the policy file with no change in effective policy.

Designate Default Policy Overview

The following is an overview of all available policies in Designate. For a sample configuration file, refer to *policy.yaml*.

designate

admin

Default

role:admin or is_admin:True

(no description provided)

owner

Default

project_id:%(tenant_id)s

(no description provided)

admin_or_owner

Default

rule:admin or rule:owner

(no description provided)

default

Default

(role:admin) or (role:member and project_id:%(project_id)s)

(no description provided)

create_blacklist

Default

role:admin

Operations

- **POST** /v2/blacklists

Scope Types

- **project**

Create blacklist.

find_blacklists

Default

role:admin

Operations

- **GET** /v2/blacklists

Scope Types

- **project**

Find blacklists.

get_blacklist

Default

role:admin

Operations

- **GET** /v2/blacklists/{blacklist_id}

Scope Types

- **project**

Get blacklist.

update_blacklist

Default

role:admin

Operations

- **PATCH** /v2/blacklists/{blacklist_id}

Scope Types

- **project**

Update blacklist.

delete_blacklist**Default**

role:admin

Operations

- **DELETE** /v2/blacklists/{blacklist_id}

Scope Types

- **project**

Delete blacklist.

use_blacklisted_zone**Default**

role:admin

Operations

- **POST** /v2/zones

Scope Types

- **project**

Allowed bypass the blacklist.

all_tenants**Default**

role:admin

Scope Types

- **project**

Action on all tenants.

edit_managed_records**Default**

role:admin

Scope Types

- **project**

Edit managed records.

use_low_ttl

Default

role:admin

Scope Types

- **project**

Use low TTL.

use_sudo

Default

role:admin

Scope Types

- **project**

Accept sudo from user to tenant.

hard_delete

Default

role:admin

Scope Types

- **project**

Clean backend resources associated with zone

create_pool

Default

role:admin

Scope Types

- **project**

Create pool.

find_pools

Default

role:admin

Operations

- **GET /v2/pools**

Scope Types

- **project**

Find pool.

find_pool

Default

role:admin

Operations

- **GET /v2/pools**

Scope Types

- **project**

Find pools.

get_pool**Default**

role:admin

Operations

- **GET** /v2/pools/{pool_id}

Scope Types

- **project**

Get pool.

update_pool**Default**

role:admin

Scope Types

- **project**

Update pool.

delete_pool**Default**

role:admin

Scope Types

- **project**

Delete pool.

zone_create_forced_pool**Default**

role:admin

Operations

- **POST** /v2/zones

Scope Types

- **project**

load and set the pool to the one provided in the Zone attributes.

get_quotas**Default**

(role:admin) or (role:reader and project_id:%(project_id)s) or
(True:%(all_tenants)s and role:reader)

Operations

- GET /v2/quotas

Scope Types

- project

View Current Projects Quotas.

set_quota

Default

role:admin

Operations

- PATCH /v2/quotas/{project_id}

Scope Types

- project

Set Quotas.

reset_quotas

Default

role:admin

Operations

- DELETE /v2/quotas/{project_id}

Scope Types

- project

Reset Quotas.

find_records

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- GET /v2/reverse/floatingips/{region}:{floatingip_id}
- GET /v2/reverse/floatingips

Scope Types

- project

Find records.

count_records

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- project

(no description provided)

create_recordset

Default

(role:member and project_id:%(project_id)s) and
('PRIMARY':%(zone_type)s) or (role:admin) and
('PRIMARY':%(zone_type)s) or (role:admin) and
('SECONDARY':%(zone_type)s) or ("True":%(zone_shared)s) and
('PRIMARY':%(zone_type)s)

Operations

- **POST** /v2/zones/{zone_id}/recordsets

Scope Types

- **project**

Create Recordset

get_recordsets**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

(no description provided)

get_recordset**Default**

(role:admin) or (role:reader and project_id:%(project_id)s) or
("True":%(zone_shared)s)

Operations

- **GET** /v2/zones/{zone_id}/recordsets/{recordset_id}

Scope Types

- **project**

Get recordset

find_recordset**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

List a Recordset in a Zone

find_recordsets**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/{zone_id}/recordsets

Scope Types

- **project**

List Recordsets in a Zone

update_recordset

Default

(role:member and project_id:%(project_id)s)
and ('PRIMARY':%(zone_type)s) or (role:admin)
and ('PRIMARY':%(zone_type)s) or (role:admin)
and ('SECONDARY':%(zone_type)s) or role:member
and (project_id:%(recordset_project_id)s) and
('PRIMARY':%(zone_type)s)

Operations

- **PUT** /v2/zones/{zone_id}/recordsets/{recordset_id}

Scope Types

- **project**

Update recordset

delete_recordset

Default

(role:member and project_id:%(project_id)s)
and ('PRIMARY':%(zone_type)s) or (role:admin)
and ('PRIMARY':%(zone_type)s) or (role:admin)
and ('SECONDARY':%(zone_type)s) or role:member
and (project_id:%(recordset_project_id)s) and
('PRIMARY':%(zone_type)s)

Operations

- **DELETE** /v2/zones/{zone_id}/recordsets/{recordset_id}

Scope Types

- **project**

Delete RecordSet

count_recordset

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

Count recordsets

find_service_status

Default

role:admin

Operations

- **GET** /v2/service_status/{service_id}

Scope Types

- **project**

Find a single Service Status

find_service_statuses**Default**

role:admin

Operations

- **GET** /v2/service_status

Scope Types

- **project**

List service statuses.

update_service_status**Default**

role:admin

Scope Types

- **project**

(no description provided)

get_zone_share**Default**

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/{zone_id}/shares/{zone_share_id}

Scope Types

- **project**

Get a Zone Share

share_zone**Default**

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones/{zone_id}/shares

Scope Types

- **project**

Share a Zone

find_zone_shares**Default**

@

Operations

- **GET** /v2/zones/{zone_id}/shares

List Shared Zones

find_project_zone_share

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Scope Types

- **project**

Check the can query for a specific projects shares.

unshare_zone

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **DELETE** /v2/zones/{zone_id}/shares/{shared_zone_id}

Scope Types

- **project**

Unshare Zone

find_tenants

Default

role:admin

Scope Types

- **project**

Find all Tenants.

get_tenant

Default

role:admin

Scope Types

- **project**

Get all Tenants.

count_tenants

Default

role:admin

Scope Types

- **project**

Count tenants

create_tld

Default

role:admin

Operations

- **POST** /v2/tlds

Scope Types

- **project**

Create Tld

find_tlds**Default**

role:admin

Operations

- **GET** /v2/tlds

Scope Types

- **project**

List Tlds

get_tld**Default**

role:admin

Operations

- **GET** /v2/tlds/{tld_id}

Scope Types

- **project**

Show Tld

update_tld**Default**

role:admin

Operations

- **PATCH** /v2/tlds/{tld_id}

Scope Types

- **project**

Update Tld

delete_tld**Default**

role:admin

Operations

- **DELETE** /v2/tlds/{tld_id}

Scope Types

- **project**

Delete Tld

create_tsigkey

Default

role:admin

Operations

- **POST** /v2/tsigkeys

Scope Types

- **project**

Create Tsigkey

find_tsigkeys

Default

role:admin

Operations

- **GET** /v2/tsigkeys

Scope Types

- **project**

List Tsigkeys

get_tsigkey

Default

role:admin

Operations

- **GET** /v2/tsigkeys/{tsigkey_id}

Scope Types

- **project**

Show a Tsigkey

update_tsigkey

Default

role:admin

Operations

- **PATCH** /v2/tsigkeys/{tsigkey_id}

Scope Types

- **project**

Update Tsigkey

delete_tsigkey

Default

role:admin

Operations

- **DELETE** /v2/tsigkeys/{tsigkey_id}

Scope Types

- **project**

Delete a Tsigkey

create_zone**Default**

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones

Scope Types

- **project**

Create Zone

get_zones**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

(no description provided)

get_zone**Default**

(role:admin) or (role:reader and project_id:%(project_id)s) or
("True":%(zone_shared)s)

Operations

- **GET** /v2/zones/{zone_id}

Scope Types

- **project**

Get Zone

get_zone_servers**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

(no description provided)

get_zone_ns_records

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/{zone_id}/nameservers

Scope Types

- **project**

Get the Name Servers for a Zone

find_zones

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones

Scope Types

- **project**

List existing zones

update_zone

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **PATCH** /v2/zones/{zone_id}

Scope Types

- **project**

Update Zone

delete_zone

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **DELETE** /v2/zones/{zone_id}

Scope Types

- **project**

Delete Zone

xfr_zone

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones/{zone_id}/tasks/xfr

Scope Types

- **project**

Manually Trigger an Update of a Secondary Zone

abandon_zone**Default**

role:admin

Operations

- **POST** /v2/zones/{zone_id}/tasks/abandon

Scope Types

- **project**

Abandon Zone

count_zones**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

(no description provided)

count_zones_pending_notify**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

(no description provided)

purge_zones**Default**

role:admin

Scope Types

- **project**

(no description provided)

zone_export**Default**

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/tasks/exports/{zone_export_id}/export

Scope Types

- **project**

Retrive a Zone Export from the Designate Datastore

create_zone_export

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones/{zone_id}/tasks/export

Scope Types

- **project**

Create Zone Export

find_zone_exports

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/tasks/exports

Scope Types

- **project**

List Zone Exports

get_zone_export

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/tasks/exports/{zone_export_id}

Scope Types

- **project**

Get Zone Exports

update_zone_export

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones/{zone_id}/tasks/export

Scope Types

- **project**

Update Zone Exports

delete_zone_export

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **DELETE** /v2/zones/tasks/exports/{zone_export_id}

Scope Types

- **project**

Delete a zone export

create_zone_import**Default**

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones/tasks/imports

Scope Types

- **project**

Create Zone Import

find_zone_imports**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/tasks/imports

Scope Types

- **project**

List all Zone Imports

get_zone_import**Default**

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/tasks/imports/{zone_import_id}

Scope Types

- **project**

Get Zone Imports

update_zone_import**Default**

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones/tasks/imports

Scope Types

- **project**

Update Zone Imports

delete_zone_import

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **DELETE** /v2/zones/tasks/imports/{zone_import_id}

Scope Types

- **project**

Delete a Zone Import

create_zone_transfer_accept

Default

((role:admin) or (role:member and project_id:%(project_id)s))
or project_id:%(target_project_id)s or
None:%(target_project_id)s

Operations

- **POST** /v2/zones/tasks/transfer_accepts

Scope Types

- **project**

Create Zone Transfer Accept

get_zone_transfer_accept

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Operations

- **GET** /v2/zones/tasks/transfer_requests/
{zone_transfer_accept_id}

Scope Types

- **project**

Get Zone Transfer Accept

find_zone_transfer_accepts

Default

role:admin

Operations

- **GET** /v2/zones/tasks/transfer_accepts

Scope Types

- **project**

List Zone Transfer Accepts

create_zone_transfer_request

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **POST** /v2/zones/{zone_id}/tasks/transfer_requests

Scope Types

- **project**

Create Zone Transfer Accept

get_zone_transfer_request

Default

((role:admin) or (role:member and project_id:%(project_id)s))
or project_id:%(target_project_id)s or
None:%(target_project_id)s

Operations

- **GET** /v2/zones/tasks/transfer_requests/
{zone_transfer_request_id}

Scope Types

- **project**

Show a Zone Transfer Request

get_zone_transfer_request_detailed

Default

(role:admin) or (role:reader and project_id:%(project_id)s)

Scope Types

- **project**

(no description provided)

find_zone_transfer_requests

Default

@

Operations

- **GET** /v2/zones/tasks/transfer_requests

List Zone Transfer Requests

update_zone_transfer_request

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **PATCH** `/v2/zones/tasks/transfer_requests/{zone_transfer_request_id}`

Scope Types

- **project**

Update a Zone Transfer Request

delete_zone_transfer_request

Default

(role:admin) or (role:member and project_id:%(project_id)s)

Operations

- **DELETE** `/v2/zones/tasks/transfer_requests/{zone_transfer_request_id}`

Scope Types

- **project**

Delete a Zone Transfer Request

1.5.10 Config Documentation

The following is an overview of all available configuration in Designate. For a sample configuration file, refer to *designate.conf*.

DEFAULT

rpc_conn_pool_size

Type
integer

Default
30

Minimum Value
1

Size of RPC connection pool.

Table 1: Deprecatcd Variations

Group	Name
DEFAULT	rpc_conn_pool_size

conn_pool_min_size

Type
integer

Default
2

The pool size limit for connections expiration policy

conn_pool_ttl**Type**

integer

Default

1200

The time-to-live in sec of idle connections in the pool

executor_thread_pool_size**Type**

integer

Default

64

Size of executor thread pool when executor is threading or eventlet.

Table 2: Deprecated Variations

Group	Name
DEFAULT	rpc_thread_pool_size

rpc_response_timeout**Type**

integer

Default

60

Seconds to wait for a response from a call.

transport_url**Type**

string

Default

rabbit://

The network address and optional user credentials for connecting to the messaging backend, in URL format. The expected format is:

driver://[user:pass@]host:port[, [userN:passN@]hostN:portN]/virtual_host?query

Example: rabbit://rabbitmq:password@127.0.0.1:5672//

For full details on the fields in the URL see the documentation of `oslo_messaging.TransportURL` at <https://docs.openstack.org/oslo.messaging/latest/reference/transport.html>

control_exchange**Type**

string

Default

designate

The default exchange under which topics are scoped. May be overridden by an exchange name specified in the `transport_url` option.

rpc_ping_enabled

Type

boolean

Default

False

Add an endpoint to answer to ping calls. Endpoint is named `oslo_rpc_server_ping`

host

Type

string

Default

current_hostname

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Name of this node

pybasedir

Type

string

Default

<Path>

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Directory where the designate python module is installed

state_path

Type

string

Default

/var/lib/designate

Top-level directory for maintaining designates state

allowed_remote_exmods

Type

list

Default

[]

Additional modules that contains allowed RPC exceptions.

Table 3: Deprecatcd Variations

Group	Name
DEFAULT	allowed_rpc_exception_modules

default_ttl

Type

integer

Default

3600

TTL Value

default_soa_refresh_min

Type

integer

Default

3500

SOA refresh-min value

Table 4: Deprecatcd Variations

Group	Name
DEFAULT	default_soa_refresh

default_soa_refresh_max

Type

integer

Default

3600

SOA max value

default_soa_retry

Type

integer

Default

600

SOA retry

default_soa_expire

Type

integer

Default

86400

SOA expire

default_soa_minimum

Type

integer

Default

3600

SOA minimum value

supported_record_type

Type

list

Default

['A', 'AAAA', 'CNAME', 'MX', 'SRV', 'TXT', 'SPF', 'NS', 'PTR',
'SSHFP', 'SOA', 'NAPTR', 'CAA', 'CERT']

Supported record types

backlog

Type

integer

Default

4096

Number of backlog requests to configure the socket with

tcp_keepidle

Type

integer

Default

600

Sets the value of TCP_KEEPIDLE in seconds for each server socket. Not supported on OS X.

root_helper

Type

string

Default

sudo designate-rootwrap /etc/designate/rootwrap.conf

designate-rootwrap configuration

network_api

Type

string

Default

neutron

Which API to use.

notify_api_faults**Type**

boolean

Default

False

Send notifications if theres a failure in the API.

notification_plugin**Type**

string

Default

default

The notification plugin to use

quota_driver**Type**

string

Default

storage

Quota driver to use

quota_zones**Type**

integer

Default

10

Number of zones allowed per tenant

quota_zone_recordsets**Type**

integer

Default

500

Number of recordsets allowed per zone

quota_zone_records**Type**

integer

Default

500

Number of records allowed per zone

quota_recordset_records**Type**

integer

Default

20

Number of records allowed per recordset

quota_api_export_size**Type**

integer

Default

1000

Number of recordsets allowed in a zone export

debug**Type**

boolean

Default

False

Mutable

This option can be changed without restarting.

If set to true, the logging level will be set to DEBUG instead of the default INFO level.

log_config_append**Type**

string

Default

<None>

Mutable

This option can be changed without restarting.

The name of a logging configuration file. This file is appended to any existing logging configuration files. For details about logging configuration files, see the Python logging module documentation. Note that when logging configuration files are used then all logging configuration is set in the configuration file and other logging configuration options are ignored (for example, log-date-format).

Table 5: Deprecated Variations

Group	Name
DEFAULT	log-config
DEFAULT	log_config

log_date_format**Type**

string

Default

%Y-%m-%d %H:%M:%S

Defines the format string for `%(asctime)s` in log records. Default: the value above. This option is ignored if `log_config_append` is set.

log_file**Type**

string

Default

<None>

(Optional) Name of log file to send logging output to. If no default is set, logging will go to `stderr` as defined by `use_stderr`. This option is ignored if `log_config_append` is set.

Table 6: Deprecated Variations

Group	Name
DEFAULT	logfile

log_dir**Type**

string

Default

<None>

(Optional) The base directory used for relative `log_file` paths. This option is ignored if `log_config_append` is set.

Table 7: Deprecated Variations

Group	Name
DEFAULT	logdir

watch_log_file**Type**

boolean

Default

False

Uses logging handler designed to watch file system. When log file is moved or removed this handler will open a new log file with specified path instantaneously. It makes sense only if `log_file` option is specified and Linux platform is used. This option is ignored if `log_config_append` is set.

use_syslog

Type

boolean

Default

False

Use syslog for logging. Existing syslog format is DEPRECATED and will be changed later to honor RFC5424. This option is ignored if log_config_append is set.

use_journal

Type

boolean

Default

False

Enable journald for logging. If running in a systemd environment you may wish to enable journal support. Doing so will use the journal native protocol which includes structured metadata in addition to log messages. This option is ignored if log_config_append is set.

syslog_log_facility

Type

string

Default

LOG_USER

Syslog facility to receive log lines. This option is ignored if log_config_append is set.

use_json

Type

boolean

Default

False

Use JSON formatting for logging. This option is ignored if log_config_append is set.

use_stderr

Type

boolean

Default

False

Log output to standard error. This option is ignored if log_config_append is set.

use_eventlog

Type

boolean

Default

False

Log output to Windows Event Log.

log_rotate_interval**Type**

integer

Default

1

The amount of time before the log files are rotated. This option is ignored unless `log_rotation_type` is set to `interval`.

log_rotate_interval_type**Type**

string

Default

days

Valid Values

Seconds, Minutes, Hours, Days, Weekday, Midnight

Rotation interval type. The time of the last file change (or the time when the service was started) is used when scheduling the next rotation.

max_logfile_count**Type**

integer

Default

30

Maximum number of rotated log files.

max_logfile_size_mb**Type**

integer

Default

200

Log file maximum size in MB. This option is ignored if `log_rotation_type` is not set to `size`.

log_rotation_type**Type**

string

Default

none

Valid Values

interval, size, none

Log rotation type.

Possible values

interval

Rotate logs at predefined time intervals.

size

Rotate logs once they reach a predefined size.

none

Do not rotate log files.

logging_context_format_string

Type

string

Default

```
%(asctime)s.%(msecs)03d %(process)d %(levelname)s %(name)s  
[% (global_request_id)s %(request_id)s %(user_identity)s]  
%(instance)s%(message)s
```

Format string to use for log messages with context. Used by `oslo_log.formatters.ContextFormatter`

logging_default_format_string

Type

string

Default

```
%(asctime)s.%(msecs)03d %(process)d %(levelname)s %(name)s [-]  
%(instance)s%(message)s
```

Format string to use for log messages when context is undefined. Used by `oslo_log.formatters.ContextFormatter`

logging_debug_format_suffix

Type

string

Default

```
%(funcName)s %(pathname)s:%(lineno)d
```

Additional data to append to log message when logging level for the message is DEBUG. Used by `oslo_log.formatters.ContextFormatter`

logging_exception_prefix

Type

string

Default

```
%(asctime)s.%(msecs)03d %(process)d ERROR %(name)s  
%(instance)s
```

Prefix each line of exception output with this format. Used by `oslo_log.formatters.ContextFormatter`

logging_user_identity_format**Type**

string

Default

```
%(user)s %(project)s %(domain)s %(system_scope)s  
%(user_domain)s %(project_domain)s
```

Defines the format string for %(user_identity)s that is used in logging_context_format_string.
Used by oslo_log.formatters.ContextFormatter

default_log_levels**Type**

list

Default

```
['amqp=WARN', 'amqpplib=WARN', 'boto=WARN', 'qpid=WARN',  
'sqlalchemy=WARN', 'suds=INFO', 'oslo.messaging=INFO',  
'oslo_messaging=INFO', 'iso8601=WARN', 'requests.packages.  
urllib3.connectionpool=WARN', 'urllib3.connectionpool=WARN',  
'websocket=WARN', 'requests.packages.urllib3.util.retry=WARN',  
'urllib3.util.retry=WARN', 'keystonemiddleware=WARN',  
'routes.middleware=WARN', 'stevedore=WARN', 'taskflow=WARN',  
'keystoneauth=WARN', 'oslo.cache=INFO', 'oslo_policy=INFO',  
'dogpile.core.dogpile=INFO', 'kazoo.client=WARN',  
'keystone=INFO', 'oslo_service.loopingcall=WARN']
```

List of package logging levels in logger=LEVEL pairs. This option is ignored if log_config_append is set.

publish_errors**Type**

boolean

Default

False

Enables or disables publication of error events.

instance_format**Type**

string

Default

```
"[instance: %(uuid)s] "
```

The format for an instance that is passed with the log message.

instance_uuid_format**Type**

string

Default

```
"[instance: %(uuid)s] "
```

The format for an instance UUID that is passed with the log message.

rate_limit_interval

Type

integer

Default

0

Interval, number of seconds, of log rate limiting.

rate_limit_burst

Type

integer

Default

0

Maximum number of logged messages per rate_limit_interval.

rate_limit_except_level

Type

string

Default

CRITICAL

Log level name used by rate limiting: CRITICAL, ERROR, INFO, WARNING, DEBUG or empty string. Logs with level greater or equal to rate_limit_except_level are not filtered. An empty string means that all levels are filtered.

fatal_deprecations

Type

boolean

Default

False

Enables or disables fatal status of deprecations.

run_external_periodic_tasks

Type

boolean

Default

True

Some periodic tasks can be run in a separate process. Should we run them here?

backdoor_port

Type

string

Default

<None>

Enable eventlet backdoor. Acceptable values are 0, <port>, and <start>:<end>, where 0 results in listening on a random tcp port number; <port> results in listening on the specified port number (and not enabling backdoor if that port is in use); and <start>:<end> results in listening on the smallest unused port number within the specified range of port numbers. The chosen port is displayed in the services log file.

backdoor_socket

Type

string

Default

<None>

Enable eventlet backdoor, using the provided path as a unix socket that can receive connections. This option is mutually exclusive with backdoor_port in that only one should be provided. If both are provided then the existence of this option overrides the usage of that option. Inside the path {pid} will be replaced with the PID of the current process.

log_options

Type

boolean

Default

True

Enables or disables logging values of all registered options when starting a service (at DEBUG level).

graceful_shutdown_timeout

Type

integer

Default

60

Specify a timeout after which a gracefully shutdown server will exit. Zero value means endless wait.

api_paste_config

Type

string

Default

api-paste.ini

File name for the paste.deploy config for api service

wsgi_log_format

Type

string

Default

```
%(client_ip)s "%(request_line)s" status: %(status_code)s len:
%(body_length)s time: %(wall_seconds).7f
```

A python format string that is used as the template to generate log lines. The following values can beformatted into it: `client_ip`, `date_time`, `request_line`, `status_code`, `body_length`, `wall_seconds`.

tcp_keepidle

Type
integer

Default
600

Sets the value of TCP_KEEPIDLE in seconds for each server socket. Not supported on OS X.

wsgi_default_pool_size

Type
integer

Default
100

Size of the pool of greenthreads used by wsgi

max_header_line

Type
integer

Default
16384

Maximum line size of message headers to be accepted. `max_header_line` may need to be increased when using large tokens (typically those generated when keystone is configured to use PKI tokens with big service catalogs).

wsgi_keep_alive

Type
boolean

Default
True

If False, closes the client socket connection explicitly.

client_socket_timeout

Type
integer

Default
900

Timeout for client connections socket operations. If an incoming connection is idle for this number of seconds it will be closed. A value of 0 means wait forever.

wsgi_server_debug

Type
boolean

Default

False

True if the server should send exception tracebacks to the clients on 500 errors. If False, the server will respond with empty bodies.

backend:agent:bind9**rndc_host****Type**

string

Default

127.0.0.1

RNDC Host

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

rndc_port**Type**

integer

Default

953

RNDC Port

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

rndc_config_file**Type**

string

Default

<None>

RNDC Config File

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

rndc_key_file

Type
string

Default
<None>

RNDC Key File

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

rndc_timeout

Type
integer

Default
0

Minimum Value
0

RNDC command timeout

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

zone_file_path

Type
string

Default
\$state_path/zones

Path where zone files are stored

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

query_destination**Type**

string

Default

127.0.0.1

Host to query when finding zones

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

backend:agent:denominator**name****Type**

string

Default

fake

Name of the affected provider

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

config_file**Type**

string

Default

/etc/denominator.conf

Path to Denominator configuration file

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

backend:agent:djb dns

tcpclient_cmd_name

Type

string

Default

tcpclient

tcpclient executable path or rootwrap command name

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

axfr_get_cmd_name

Type

string

Default

axfr-get

axfr-get executable path or rootwrap command name

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

tinydns_data_cmd_name

Type

string

Default

tinydns-data

tinydns-data executable path or rootwrap command name

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

tinydns_datadir**Type**

string

Default

/var/lib/djbdns

TinyDNS data directory

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

query_destination**Type**

string

Default

127.0.0.1

Host to query when finding zones

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

backend:agent:gdnsd**gdnsd_cmd_name****Type**

string

Default

gdnsd

gdnsd executable path or rootwrap command name

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

confdir_path

Type

string

Default

/etc/gdnsd

gdnsd configuration directory path

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

query_destination

Type

string

Default

127.0.0.1

Host to query when finding zones

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

backend:agent:knot2

knotc_cmd_name

Type

string

Default

knotc

knotc executable path or rootwrap command name

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

query_destination**Type**

string

Default

127.0.0.1

Host to query when finding zones

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

backend:agent:msdns**backend:dynect****job_timeout****Type**

integer

Default

30

Timeout in seconds for pulling a job in DynECT.

timeout**Type**

integer

Default

10

Timeout in seconds for API Requests.

timings**Type**

boolean

Default

False

Measure requests timings.

backend:infoblox

wapi_url

Type

string

Default

<None>

DEPRECATED: wapi_url

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

username

Type

string

Default

<None>

DEPRECATED: username

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

password

Type

string

Default

<None>

DEPRECATED: password

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

sslverify

Type

boolean

Default

True

DEPRECATED: sslverify

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

multi_tenant**Type**

boolean

Default

False

DEPRECATED: multi_tenant

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

http_pool_connections**Type**

integer

Default

100

DEPRECATED: http_pool_connections

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

http_pool_maxsize**Type**

integer

Default

100

DEPRECATED: http_pool_maxsize

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

dns_view

Type

string

Default

default

DEPRECATED: dns_view

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

network_view

Type

string

Default

default

DEPRECATED: network_view

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

ns_group

Type

string

Default

<None>

DEPRECATED: ns_group

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

All backend options have been migrated to options in the pools.yaml file

coordination

backend_url

Type

string

Default

<None>

The backend URL to use for distributed coordination. If unset services that need coordination will function as a standalone service. This is a *tooz* url - see <https://docs.openstack.org/tooz/latest/user/compatibility.html>

heartbeat_interval

Type

floating point

Default

5.0

Number of seconds between heartbeats for distributed coordination.

run_watchers_interval

Type

floating point

Default

10.0

Number of seconds between checks to see if group membership has changed

cors

allowed_origin

Type

list

Default

<None>

Indicate whether this resource may be shared with the domain received in the requests origin header. Format: <protocol>://<host>[:<port>], no trailing slash. Example: <https://horizon.example.com>

allow_credentials

Type

boolean

Default

True

Indicate that the actual request can include user credentials

expose_headers

Type

list

Default

['X-OpenStack-Request-ID', 'Host']

Indicate which headers are safe to expose to the API. Defaults to HTTP Simple Headers.

max_age

Type

integer

Default

3600

Maximum cache age of CORS preflight requests.

allow_methods

Type

list

Default

['GET', 'PUT', 'POST', 'DELETE', 'PATCH', 'HEAD']

Indicate which methods can be used during the actual request.

allow_headers

Type

list

Default

['X-Auth-Token', 'X-Auth-Sudo-Tenant-ID',
'X-Auth-Sudo-Project-ID', 'X-Auth-All-Projects',
'X-Designate-Edit-Managed-Records', 'X-Designate-Hard-Delete',
'OpenStack-DNS-Hide-Counts']

Indicate which header field names may be used during the actual request.

database**sqlite_synchronous**

Type
boolean

Default
True

If True, SQLite uses synchronous mode.

Table 8: Deprecated Variations

Group	Name
DEFAULT	sqlite_synchronous

backend

Type
string

Default
sqlalchemy

The back end to use for the database.

Table 9: Deprecated Variations

Group	Name
DEFAULT	db_backend

connection

Type
string

Default
<None>

The SQLAlchemy connection string to use to connect to the database.

Table 10: Deprecated Variations

Group	Name
DEFAULT	sql_connection
DATABASE	sql_connection
sql	connection

slave_connection

Type
string

Default

<None>

The SQLAlchemy connection string to use to connect to the slave database.

mysql_sql_mode

Type

string

Default

TRADITIONAL

The SQL mode to be used for MySQL sessions. This option, including the default, overrides any server-set SQL mode. To use whatever SQL mode is set by the server configuration, set this to no value. Example: `mysql_sql_mode=`

mysql_wsrep_sync_wait

Type

integer

Default

<None>

For Galera only, configure `wsrep_sync_wait` causality checks on new connections. Default is None, meaning don't configure any setting.

connection_recycle_time

Type

integer

Default

3600

Connections which have been present in the connection pool longer than this number of seconds will be replaced with a new one the next time they are checked out from the pool.

max_pool_size

Type

integer

Default

5

Maximum number of SQL connections to keep open in a pool. Setting a value of 0 indicates no limit.

max_retries

Type

integer

Default

10

Maximum number of database connection retries during startup. Set to -1 to specify an infinite retry count.

Table 11: Deprecated Variations

Group	Name
DEFAULT	sql_max_retries
DATABASE	sql_max_retries

retry_interval

Type
integer

Default
10

Interval between retries of opening a SQL connection.

Table 12: Deprecated Variations

Group	Name
DEFAULT	sql_retry_interval
DATABASE	reconnect_interval

max_overflow

Type
integer

Default
50

If set, use this value for max_overflow with SQLAlchemy.

Table 13: Deprecated Variations

Group	Name
DEFAULT	sql_max_overflow
DATABASE	sqlalchemy_max_overflow

connection_debug

Type
integer

Default
0

Minimum Value
0

Maximum Value
100

Verbosity of SQL debugging information: 0=None, 100=Everything.

Table 14: Deprecated Variations

Group	Name
DEFAULT	sql_connection_debug

connection_trace**Type**

boolean

Default

False

Add Python stack traces to SQL as comment strings.

Table 15: Deprecated Variations

Group	Name
DEFAULT	sql_connection_trace

pool_timeout**Type**

integer

Default

<None>

If set, use this value for pool_timeout with SQLAlchemy.

Table 16: Deprecated Variations

Group	Name
DATABASE	sqlalchemy_pool_timeout

use_db_reconnect**Type**

boolean

Default

False

Enable the experimental use of database reconnect on connection lost.

db_retry_interval**Type**

integer

Default

1

Seconds between retries of a database transaction.

db_inc_retry_interval**Type**

boolean

Default

True

If True, increases the interval between retries of a database operation up to db_max_retry_interval.

db_max_retry_interval**Type**

integer

Default

10

If db_inc_retry_interval is set, the maximum seconds between retries of a database operation.

db_max_retries**Type**

integer

Default

20

Maximum retries in case of connection error or deadlock error before error is raised. Set to -1 to specify an infinite retry count.

connection_parameters**Type**

string

Default

''

Optional URL parameters to append onto the connection URL at connect time; specify as param1=value1¶m2=value2&

handler:neutron_floatingip**notification_topics****Type**

list

Default

['notifications']

notification any events from neutron

control_exchange**Type**

string

Default
neutron

control-exchange for neutron notification

zone_id

Type
string

Default
<None>

Zone ID with each notification

formatv4

Type
multi-valued

Default
, ,

IPv4 format

format

Type
multi-valued

Default
, ,

format which replaced by formatv4/formatv6

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason
Replaced by formatv4/formatv6

formatv6

Type
multi-valued

Default
, ,

IPv6 format

handler:nova_fixed**notification_topics****Type**

list

Default

['notifications']

notification any events from nova

control_exchange**Type**

string

Default

nova

control-exchange for nova notification

zone_id**Type**

string

Default

<None>

Zone ID with each notification

formatv4**Type**

multi-valued

Default

''

IPv4 format

format**Type**

multi-valued

Default

''

format which replaced by formatv4/formatv6

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Replaced by formatv4/formatv6

formatv6

Type

multi-valued

Default

''

IPv6 format

healthcheck

path

Type

string

Default

/healthcheck

The path to respond to healthcheck requests on.

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

detailed

Type

boolean

Default

False

Show more detailed information as part of the response. Security note: Enabling this option may expose sensitive details about the service being monitored. Be sure to verify that it will not violate your security policies.

backends

Type

list

Default

[]

Additional backends that can perform health checks and report that information back as part of a request.

disable_by_file_path

Type

string

Default

<None>

Check the presence of a file to determine if an application is running on a port. Used by Disable-ByFileHealthcheck plugin.

disable_by_file_paths**Type**

list

Default

[]

Check the presence of a file based on a port to determine if an application is running on a port. Expects a port:path list of strings. Used by DisableByFilesPortsHealthcheck plugin.

heartbeat_emitter**heartbeat_interval****Type**

floating point

Default

10.0

Number of seconds between heartbeats for reporting state

emitter_type**Type**

string

Default

rpc

Emitter to use

keystone**service_type****Type**

string

Default

<None>

The default service_type for endpoint URL discovery.

service_name**Type**

string

Default

<None>

The default service_name for endpoint URL discovery.

valid_interfaces

Type

list

Default

<None>

List of interfaces, in order of preference, for endpoint URL.

region_name

Type

string

Default

<None>

The default region_name for endpoint URL discovery.

endpoint_override

Type

string

Default

<None>

Always use this endpoint URL for requests for this client. NOTE: The unversioned endpoint should be specified here; to request a particular API version, use the *version*, *min-version*, and/or *max-version* options.

version

Type

string

Default

<None>

Minimum Major API version within a given Major API version for endpoint URL discovery. Mutually exclusive with min_version and max_version

min_version

Type

string

Default

<None>

The minimum major version of a given API, intended to be used as the lower bound of a range with max_version. Mutually exclusive with version. If min_version is given with no max_version it is as if max version is latest.

max_version

Type

string

Default

<None>

The maximum major version of a given API, intended to be used as the upper bound of a range with min_version. Mutually exclusive with version.

connect_retries**Type**

integer

Default

<None>

The maximum number of retries that should be attempted for connection errors.

connect_retry_delay**Type**

floating point

Default

<None>

Delay (in seconds) between two retries for connection errors. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

status_code_retries**Type**

integer

Default

<None>

The maximum number of retries that should be attempted for retrieable HTTP status codes.

status_code_retry_delay**Type**

floating point

Default

<None>

Delay (in seconds) between two retries for retrieable status codes. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

interface**Type**

string

Default

<None>

The default interface for endpoint URL discovery.

<p>Warning: This option is deprecated for removal. Its value may be silently ignored in the future.</p>
--

Reason

Using valid-interfaces is preferable because it is capable of accepting a list of possible interfaces.

cafile

Type

string

Default

<None>

PEM encoded Certificate Authority to use when verifying HTTPs connections.

certfile

Type

string

Default

<None>

PEM encoded client certificate cert file

keyfile

Type

string

Default

<None>

PEM encoded client certificate key file

insecure

Type

boolean

Default

False

Verify HTTPS connections.

timeout

Type

integer

Default

<None>

Timeout value for http requests

collect_timing

Type

boolean

Default

False

Collect per-API call timing information.

split_loggers**Type**

boolean

Default

False

Log requests to multiple loggers.

keystone_authtoken**www_authenticate_uri****Type**

string

Default

<None>

Complete public Identity API endpoint. This endpoint should not be an admin endpoint, as it should be accessible by all end users. Unauthenticated clients are redirected to this endpoint to authenticate. Although this endpoint should ideally be unversioned, client support in the wild varies. If you're using a versioned v2 endpoint here, then this should *not* be the same endpoint the service user utilizes for validating tokens, because normal end users may not be able to reach that endpoint.

Table 17: Deprecated Variations

Group	Name
keystone_authtoken	auth_uri

auth_uri**Type**

string

Default

<None>

Complete public Identity API endpoint. This endpoint should not be an admin endpoint, as it should be accessible by all end users. Unauthenticated clients are redirected to this endpoint to authenticate. Although this endpoint should ideally be unversioned, client support in the wild varies. If you're using a versioned v2 endpoint here, then this should *not* be the same endpoint the service user utilizes for validating tokens, because normal end users may not be able to reach that endpoint. This option is deprecated in favor of `www_authenticate_uri` and will be removed in the S release.

Warning: This option is deprecated for removal since Queens. Its value may be silently ignored in the future.

Reason

The auth_uri option is deprecated in favor of www_authenticate_uri and will be removed in the S release.

auth_version

Type

string

Default

<None>

API version of the Identity API endpoint.

interface

Type

string

Default

internal

Interface to use for the Identity API endpoint. Valid values are public, internal (default) or admin.

delay_auth_decision

Type

boolean

Default

False

Do not handle authorization requests within the middleware, but delegate the authorization decision to downstream WSGI components.

http_connect_timeout

Type

integer

Default

<None>

Request timeout value for communicating with Identity API server.

http_request_max_retries

Type

integer

Default

3

How many times are we trying to reconnect when communicating with Identity API Server.

cache**Type**

string

Default

<None>

Request environment key where the Swift cache object is stored. When `auth_token` middleware is deployed with a Swift cache, use this option to have the middleware share a caching backend with swift. Otherwise, use the `memcached_servers` option instead.

certfile**Type**

string

Default

<None>

Required if identity server requires client certificate

keyfile**Type**

string

Default

<None>

Required if identity server requires client certificate

cafile**Type**

string

Default

<None>

A PEM encoded Certificate Authority to use when verifying HTTPs connections. Defaults to system CAs.

insecure**Type**

boolean

Default

False

Verify HTTPS connections.

region_name**Type**

string

Default

<None>

The region in which the identity server can be found.

memcached_servers**Type**

list

Default

<None>

Optionally specify a list of memcached server(s) to use for caching. If left undefined, tokens will instead be cached in-process.

Table 18: Deprecatcd Variations

Group	Name
keystone_authtoken	memcache_servers

token_cache_time**Type**

integer

Default

300

In order to prevent excessive effort spent validating tokens, the middleware caches previously-seen tokens for a configurable duration (in seconds). Set to -1 to disable caching completely.

memcache_security_strategy**Type**

string

Default

None

Valid Values

None, MAC, ENCRYPT

(Optional) If defined, indicate whether token data should be authenticated or authenticated and encrypted. If MAC, token data is authenticated (with HMAC) in the cache. If ENCRYPT, token data is encrypted and authenticated in the cache. If the value is not one of these options or empty, auth_token will raise an exception on initialization.

memcache_secret_key**Type**

string

Default

<None>

(Optional, mandatory if memcache_security_strategy is defined) This string is used for key derivation.

memcache_pool_dead_retry**Type**

integer

Default

300

(Optional) Number of seconds memcached server is considered dead before it is tried again.

memcache_pool_maxsize**Type**

integer

Default

10

(Optional) Maximum total number of open connections to every memcached server.

memcache_pool_socket_timeout**Type**

integer

Default

3

(Optional) Socket timeout in seconds for communicating with a memcached server.

memcache_pool_unused_timeout**Type**

integer

Default

60

(Optional) Number of seconds a connection to memcached is held unused in the pool before it is closed.

memcache_pool_conn_get_timeout**Type**

integer

Default

10

(Optional) Number of seconds that an operation will wait to get a memcached client connection from the pool.

memcache_use_advanced_pool**Type**

boolean

Default

True

(Optional) Use the advanced (eventlet safe) memcached client pool.

include_service_catalog**Type**

boolean

Default

True

(Optional) Indicate whether to set the X-Service-Catalog header. If False, middleware will not ask for service catalog on token validation and will not set the X-Service-Catalog header.

enforce_token_bind

Type

string

Default

permissive

Used to control the use and type of token binding. Can be set to: disabled to not check token binding. permissive (default) to validate binding information if the bind type is of a form known to the server and ignore it if not. strict like permissive but if the bind type is unknown the token will be rejected. required any form of token binding is needed to be allowed. Finally the name of a binding method that must be present in tokens.

service_token_roles

Type

list

Default

['service']

A choice of roles that must be present in a service token. Service tokens are allowed to request that an expired token can be used and so this check should tightly control that only actual services should be sending this token. Roles here are applied as an ANY check so any role in this list must be present. For backwards compatibility reasons this currently only affects the allow_expired check.

service_token_roles_required

Type

boolean

Default

False

For backwards compatibility reasons we must let valid service tokens pass that dont pass the service_token_roles check as valid. Setting this true will become the default in a future release and should be enabled if possible.

service_type

Type

string

Default

<None>

The name or type of the service as it appears in the service catalog. This is used to validate tokens that have restricted access rules.

auth_type

Type

unknown type

Default

<None>

Authentication type to load

Table 19: Deprecatcd Variations

Group	Name
keystone_authtoken	auth_plugin

auth_section**Type**

unknown type

Default

<None>

Config Section from which to load plugin specific options

network_api:neutron**endpoints****Type**

list

Default

<None>

URL to use if None in the ServiceCatalog that is passed by the request context. Format: <region>|<url>

endpoint_type**Type**

string

Default

publicURL

Endpoint type to use

timeout**Type**

integer

Default

30

timeout value for connecting to neutron in seconds

insecure

Type

boolean

Default

False

if set, ignore any SSL validation issues

ca_certificates_file

Type

string

Default

<None>

Location of ca certificates file to use for neutron client requests.

client_certificate_file

Type

string

Default

<None>

Location of client certificate file to use for neutron client requests.

admin_username

Type

string

Default

<None>

username for connecting to neutron in admin context

Warning: This option is deprecated for removal since 2023.2. Its value may be silently ignored in the future.

Reason

This parameter is no longer used.

admin_password

Type

string

Default

<None>

password for connecting to neutron in admin context

Warning: This option is deprecated for removal since 2023.2. Its value may be silently ignored in the future.

Reason

This parameter is no longer used.

admin_tenant_name

Type

string

Default

<None>

tenant name for connecting to neutron in admin context

Warning: This option is deprecated for removal since 2023.2. Its value may be silently ignored in the future.

Reason

This parameter is no longer used.

auth_url

Type

string

Default

<None>

auth url for connecting to neutron in admin context

Warning: This option is deprecated for removal since 2023.2. Its value may be silently ignored in the future.

Reason

This parameter is no longer used.

auth_strategy

Type

string

Default

keystone

auth strategy for connecting to neutron in admin context

Warning: This option is deprecated for removal since 2023.2. Its value may be silently ignored in the future.

Reason

This parameter is no longer used.

oslo_concurrency**disable_process_locking****Type**

boolean

Default

False

Enables or disables inter-process locks.

Table 20: Deprecated Variations

Group	Name
DEFAULT	disable_process_locking

lock_path**Type**

string

Default

`$state_path`

Directory to use for lock files. For security, the specified directory should only be writable by the user running the processes that need locking. Defaults to environment variable `OSLO_LOCK_PATH`. If external locks are used, a lock path must be set.

Table 21: Deprecated Variations

Group	Name
DEFAULT	lock_path

oslo_messaging_amqp**container_name****Type**

string

Default

<None>

Name for the AMQP container. must be globally unique. Defaults to a generated UUID

Table 22: Deprecated Variations

Group	Name
amqp1	container_name

idle_timeout

Type
integer

Default
0

Timeout for inactive connections (in seconds)

Table 23: Deprecated Variations

Group	Name
amqp1	idle_timeout

trace

Type
boolean

Default
False

Debug: dump AMQP frames to stdout

Table 24: Deprecated Variations

Group	Name
amqp1	trace

ssl

Type
boolean

Default
False

Attempt to connect via SSL. If no other ssl-related parameters are given, it will use the systems CA-bundle to verify the servers certificate.

ssl_ca_file

Type
string

Default
' '

CA certificate PEM file used to verify the servers certificate

Table 25: Deprecated Variations

Group	Name
amqp1	ssl_ca_file

ssl_cert_file

Type
string

Default
''

Self-identifying certificate PEM file for client authentication

Table 26: Deprecated Variations

Group	Name
amqp1	ssl_cert_file

ssl_key_file

Type
string

Default
''

Private key PEM file used to sign ssl_cert_file certificate (optional)

Table 27: Deprecated Variations

Group	Name
amqp1	ssl_key_file

ssl_key_password

Type
string

Default
<None>

Password for decrypting ssl_key_file (if encrypted)

Table 28: Deprecated Variations

Group	Name
amqp1	ssl_key_password

ssl_verify_vhost**Type**

boolean

Default

False

By default SSL checks that the name in the servers certificate matches the hostname in the transport_url. In some configurations it may be preferable to use the virtual hostname instead, for example if the server uses the Server Name Indication TLS extension (rfc6066) to provide a certificate per virtual host. Set ssl_verify_vhost to True if the servers SSL certificate uses the virtual host name instead of the DNS name.

sasl_mechanisms**Type**

string

Default

''

Space separated list of acceptable SASL mechanisms

Table 29: Deprecated Variations

Group	Name
amqp1	sasl_mechanisms

sasl_config_dir**Type**

string

Default

''

Path to directory that contains the SASL configuration

Table 30: Deprecated Variations

Group	Name
amqp1	sasl_config_dir

sasl_config_name**Type**

string

Default

''

Name of configuration file (without .conf suffix)

Table 31: Deprecatcd Variations

Group	Name
amqp1	sasl_config_name

sasl_default_realm

Type
string

Default
' '

SASL realm to use if no realm present in username

connection_retry_interval

Type
integer

Default
1

Minimum Value
1

Seconds to pause before attempting to re-connect.

connection_retry_backoff

Type
integer

Default
2

Minimum Value
0

Increase the connection_retry_interval by this many seconds after each unsuccessful failover attempt.

connection_retry_interval_max

Type
integer

Default
30

Minimum Value
1

Maximum limit for connection_retry_interval + connection_retry_backoff

link_retry_delay

Type
integer

Default

10

Minimum Value

1

Time to pause between re-connecting an AMQP 1.0 link that failed due to a recoverable error.

default_reply_retry**Type**

integer

Default

0

Minimum Value

-1

The maximum number of attempts to re-send a reply message which failed due to a recoverable error.

default_reply_timeout**Type**

integer

Default

30

Minimum Value

5

The deadline for an rpc reply message delivery.

default_send_timeout**Type**

integer

Default

30

Minimum Value

5

The deadline for an rpc cast or call message delivery. Only used when caller does not provide a timeout expiry.

default_notify_timeout**Type**

integer

Default

30

Minimum Value

5

The deadline for a sent notification message delivery. Only used when caller does not provide a timeout expiry.

default_sender_link_timeout**Type**

integer

Default

600

Minimum Value

1

The duration to schedule a purge of idle sender links. Detach link after expiry.

addressing_mode**Type**

string

Default

dynamic

Indicates the addressing mode used by the driver. Permitted values: legacy - use legacy non-routable addressing routable - use routable addresses dynamic - use legacy addresses if the message bus does not support routing otherwise use routable addressing

pseudo_vhost**Type**

boolean

Default

True

Enable virtual host support for those message buses that do not natively support virtual hosting (such as qpid). When set to true the virtual host name will be added to all message bus addresses, effectively creating a private subnet per virtual host. Set to False if the message bus supports virtual hosting using the hostname field in the AMQP 1.0 Open performative as the name of the virtual host.

server_request_prefix**Type**

string

Default

exclusive

address prefix used when sending to a specific server

Table 32: Deprecated Variations

Group	Name
amqp1	server_request_prefix

broadcast_prefix**Type**

string

Default

broadcast

address prefix used when broadcasting to all servers

Table 33: Deprecatcd Variations

Group	Name
amqp1	broadcast_prefix

group_request_prefix**Type**

string

Default

unicast

address prefix when sending to any server in group

Table 34: Deprecatcd Variations

Group	Name
amqp1	group_request_prefix

rpc_address_prefix**Type**

string

Default

openstack.org/om/rpc

Address prefix for all generated RPC addresses

notify_address_prefix**Type**

string

Default

openstack.org/om/notify

Address prefix for all generated Notification addresses

multicast_address**Type**

string

Default

multicast

Appended to the address prefix when sending a fanout message. Used by the message bus to identify fanout messages.

unicast_address

Type

string

Default

unicast

Appended to the address prefix when sending to a particular RPC/Notification server. Used by the message bus to identify messages sent to a single destination.

anycast_address

Type

string

Default

anycast

Appended to the address prefix when sending to a group of consumers. Used by the message bus to identify messages that should be delivered in a round-robin fashion across consumers.

default_notification_exchange

Type

string

Default

<None>

Exchange name used in notification addresses. Exchange name resolution precedence: Target.exchange if set else default_notification_exchange if set else control_exchange if set else notify

default_rpc_exchange

Type

string

Default

<None>

Exchange name used in RPC addresses. Exchange name resolution precedence: Target.exchange if set else default_rpc_exchange if set else control_exchange if set else rpc

reply_link_credit

Type

integer

Default

200

Minimum Value

1

Window size for incoming RPC Reply messages.

rpc_server_credit

Type

integer

Default

100

Minimum Value

1

Window size for incoming RPC Request messages

notify_server_credit**Type**

integer

Default

100

Minimum Value

1

Window size for incoming Notification messages

pre_settled**Type**

multi-valued

Default

rpc-cast

Default

rpc-reply

Send messages of this type pre-settled. Pre-settled messages will not receive acknowledgement from the peer. Note well: pre-settled messages may be silently discarded if the delivery fails. Permitted values: rpc-call - send RPC Calls pre-settled rpc-reply- send RPC Replies pre-settled rpc-cast - Send RPC Casts pre-settled notify - Send Notifications pre-settled

oslo_messaging_kafka**kafka_max_fetch_bytes****Type**

integer

Default

1048576

Max fetch bytes of Kafka consumer

kafka_consumer_timeout**Type**

floating point

Default

1.0

Default timeout(s) for Kafka consumers

pool_size

Type
integer

Default
10

Pool Size for Kafka Consumers

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason
Driver no longer uses connection pool.

conn_pool_min_size

Type
integer

Default
2

The pool size limit for connections expiration policy

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason
Driver no longer uses connection pool.

conn_pool_ttl

Type
integer

Default
1200

The time-to-live in sec of idle connections in the pool

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason
Driver no longer uses connection pool.

consumer_group

Type
string

Default`oslo_messaging_consumer`

Group id for Kafka consumer. Consumers in one group will coordinate message consumption

producer_batch_timeout**Type**`floating point`**Default**`0.0`

Upper bound on the delay for KafkaProducer batching in seconds

producer_batch_size**Type**`integer`**Default**`16384`

Size of batch for the producer async send

compression_codec**Type**`string`**Default**`none`**Valid Values**`none, gzip, snappy, lz4, zstd`

The compression codec for all data generated by the producer. If not set, compression will not be used. Note that the allowed values of this depend on the kafka version

enable_auto_commit**Type**`boolean`**Default**`False`

Enable asynchronous consumer commits

max_poll_records**Type**`integer`**Default**`500`

The maximum number of records returned in a poll call

security_protocol

Type

string

Default

PLAINTEXT

Valid Values

PLAINTEXT, SASL_PLAINTEXT, SSL, SASL_SSL

Protocol used to communicate with brokers

sasl_mechanism

Type

string

Default

PLAIN

Mechanism when security protocol is SASL

ssl_cafile

Type

string

Default

''

CA certificate PEM file used to verify the server certificate

ssl_client_cert_file

Type

string

Default

''

Client certificate PEM file used for authentication.

ssl_client_key_file

Type

string

Default

''

Client key PEM file used for authentication.

ssl_client_key_password

Type

string

Default

''

Client key password file used for authentication.

oslo_messaging_notifications**driver****Type**

multi-valued

Default

''

The Drivers(s) to handle sending notifications. Possible values are messaging, messagingv2, routing, log, test, noop

Table 35: Deprecated Variations

Group	Name
DEFAULT	notification_driver

transport_url**Type**

string

Default

<None>

A URL representing the messaging driver to use for notifications. If not set, we fall back to the same configuration used for RPC.

Table 36: Deprecated Variations

Group	Name
DEFAULT	notification_transport_url

topics**Type**

list

Default

['notifications']

AMQP topic used for OpenStack notifications.

Table 37: Deprecated Variations

Group	Name
rpc_notifier2	topics
DEFAULT	notification_topics

retry**Type**

integer

Default

-1

The maximum number of attempts to re-send a notification message which failed to be delivered due to a recoverable error. 0 - No retry, -1 - indefinite

oslo_messaging_rabbit**amqp_durable_queues****Type**

boolean

Default

False

Use durable queues in AMQP. If rabbit_quorum_queue is enabled, queues will be durable and this value will be ignored.

amqp_auto_delete**Type**

boolean

Default

False

Auto-delete queues in AMQP.

Table 38: Deprecated Variations

Group	Name
DEFAULT	amqp_auto_delete

ssl**Type**

boolean

Default

False

Connect over SSL.

Table 39: Deprecated Variations

Group	Name
oslo_messaging_rabbit	rabbit_use_ssl

ssl_version**Type**

string

Default

''

SSL version to use (valid only if SSL enabled). Valid values are TLSv1 and SSLv23. SSLv2, SSLv3, TLSv1_1, and TLSv1_2 may be available on some distributions.

Table 40: Deprecated Variations

Group	Name
oslo_messaging_rabbit	kombu_ssl_version

ssl_key_file**Type**

string

Default

''

SSL key file (valid only if SSL enabled).

Table 41: Deprecated Variations

Group	Name
oslo_messaging_rabbit	kombu_ssl_keyfile

ssl_cert_file**Type**

string

Default

''

SSL cert file (valid only if SSL enabled).

Table 42: Deprecated Variations

Group	Name
oslo_messaging_rabbit	kombu_ssl_certfile

ssl_ca_file**Type**

string

Default

''

SSL certification authority file (valid only if SSL enabled).

Table 43: Deprecated Variations

Group	Name
oslo_messaging_rabbit	kombu_ssl_ca_certs

ssl_enforce_fips_mode**Type**

boolean

Default

False

Global toggle for enforcing the OpenSSL FIPS mode. This feature requires Python support. This is available in Python 3.9 in all environments and may have been backported to older Python versions on select environments. If the Python executable used does not support OpenSSL FIPS mode, an exception will be raised.

heartbeat_in_pthread**Type**

boolean

Default

False

Run the health check heartbeat thread through a native python thread by default. If this option is equal to False then the health check heartbeat will inherit the execution model from the parent process. For example if the parent process has monkey patched the stdlib by using eventlet/greenlet then the heartbeat will be run through a green thread. This option should be set to True only for the wsgi services.

kombu_reconnect_delay**Type**

floating point

Default

1.0

Minimum Value

0.0

Maximum Value

4.5

How long to wait (in seconds) before reconnecting in response to an AMQP consumer cancel notification.

Table 44: Deprecated Variations

Group	Name
DEFAULT	kombu_reconnect_delay

kombu_compression**Type**

string

Default

<None>

EXPERIMENTAL: Possible values are: gzip, bz2. If not set compression will not be used. This option may not be available in future versions.

kombu_missing_consumer_retry_timeout**Type**

integer

Default

60

How long to wait a missing client before abandoning to send it its replies. This value should not be longer than `rpc_response_timeout`.

Table 45: Deprecated Variations

Group	Name
oslo_messaging_rabbit	kombu_reconnect_timeout

kombu_failover_strategy**Type**

string

Default

round-robin

Valid Values

round-robin, shuffle

Determines how the next RabbitMQ node is chosen in case the one we are currently connected to becomes unavailable. Takes effect only if more than one RabbitMQ node is provided in config.

rabbit_login_method**Type**

string

Default

AMQPLAIN

Valid Values

PLAIN, AMQPLAIN, EXTERNAL, RABBIT-CR-DEMO

The RabbitMQ login method.

Table 46: Deprecated Variations

Group	Name
DEFAULT	rabbit_login_method

rabbit_retry_interval

Type
integer

Default
1

How frequently to retry connecting with RabbitMQ.

rabbit_retry_backoff

Type
integer

Default
2

How long to backoff for between retries when connecting to RabbitMQ.

Table 47: Deprecated Variations

Group	Name
DEFAULT	rabbit_retry_backoff

rabbit_interval_max

Type
integer

Default
30

Maximum interval of RabbitMQ connection retries. Default is 30 seconds.

rabbit_ha_queues

Type
boolean

Default
False

Try to use HA queues in RabbitMQ (x-ha-policy: all). If you change this option, you must wipe the RabbitMQ database. In RabbitMQ 3.0, queue mirroring is no longer controlled by the x-ha-policy argument when declaring a queue. If you just want to make sure that all queues (except those with auto-generated names) are mirrored across all nodes, run: `rabbitmqctl set_policy HA ^(?!amq.).* {ha-mode: all}`

Table 48: Deprecated Variations

Group	Name
DEFAULT	rabbit_ha_queues

rabbit_quorum_queue

Type

boolean

Default

False

Use quorum queues in RabbitMQ (x-queue-type: quorum). The quorum queue is a modern queue type for RabbitMQ implementing a durable, replicated FIFO queue based on the Raft consensus algorithm. It is available as of RabbitMQ 3.8.0. If set this option will conflict with the HA queues (rabbit_ha_queues) aka mirrored queues, in other words the HA queues should be disabled, quorum queues durable by default so the amqp_durable_queues option is ignored when this option enabled.

rabbit_quorum_delivery_limit**Type**

integer

Default

0

Each time a message is redelivered to a consumer, a counter is incremented. Once the redelivery count exceeds the delivery limit the message gets dropped or dead-lettered (if a DLX exchange has been configured) Used only when rabbit_quorum_queue is enabled, Default 0 which means dont set a limit.

rabbit_quorum_max_memory_length**Type**

integer

Default

0

By default all messages are maintained in memory if a quorum queue grows in length it can put memory pressure on a cluster. This option can limit the number of messages in the quorum queue. Used only when rabbit_quorum_queue is enabled, Default 0 which means dont set a limit.

Table 49: Deprecated Variations

Group	Name
oslo_messaging_rabbit	rabbit_quroum_max_memory_length

rabbit_quorum_max_memory_bytes**Type**

integer

Default

0

By default all messages are maintained in memory if a quorum queue grows in length it can put memory pressure on a cluster. This option can limit the number of memory bytes used by the quorum queue. Used only when rabbit_quorum_queue is enabled, Default 0 which means dont set a limit.

Table 50: Deprecated Variations

Group	Name
oslo_messaging_rabbit	rabbit_quorum_max_memory_bytes

rabbit_transient_queues_ttl**Type**

integer

Default

1800

Minimum Value

1

Positive integer representing duration in seconds for queue TTL (x-expires). Queues which are unused for the duration of the TTL are automatically deleted. The parameter affects only reply and fanout queues.

rabbit_qos_prefetch_count**Type**

integer

Default

0

Specifies the number of messages to prefetch. Setting to zero allows unlimited messages.

heartbeat_timeout_threshold**Type**

integer

Default

60

Number of seconds after which the Rabbit broker is considered down if heartbeats keep-alive fails (0 disables heartbeat).

heartbeat_rate**Type**

integer

Default

2

How often times during the heartbeat_timeout_threshold we check the heartbeat.

direct_mandatory_flag**Type**

boolean

Default

True

(DEPRECATED) Enable/Disable the RabbitMQ mandatory flag for direct send. The direct send is used as reply, so the MessageUndeliverable exception is raised in case the client queue does not exist. MessageUndeliverable exception will be used to loop for a timeout to let a chance to sender to recover. This flag is deprecated and it will not be possible to deactivate this functionality anymore.

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Mandatory flag no longer deactivable.

enable_cancel_on_failover

Type

boolean

Default

False

Enable x-cancel-on-ha-failover flag so that rabbitmq server will cancel and notify consumers when queue is down

oslo_middleware

max_request_body_size

Type

integer

Default

114688

The maximum body size for each request, in bytes.

Table 51: Deprecated Variations

Group	Name
DEFAULT	osapi_max_request_body_size
DEFAULT	max_request_body_size

secure_proxy_ssl_header

Type

string

Default

X-Forwarded-Proto

The HTTP Header that will be used to determine what the original request protocol scheme was, even if it was hidden by a SSL termination proxy.

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

enable_proxy_headers_parsing

Type

boolean

Default

False

Whether the application is behind a proxy or not. This determines if the middleware should parse the headers or not.

http_basic_auth_user_file

Type

string

Default

/etc/htpasswd

HTTP basic auth password file.

oslo_policy

enforce_scope

Type

boolean

Default

False

This option controls whether or not to enforce scope when evaluating policies. If **True**, the scope of the token used in the request is compared to the `scope_types` of the policy being enforced. If the scopes do not match, an `InvalidScope` exception will be raised. If **False**, a message will be logged informing operators that policies are being invoked with mismatching scope.

enforce_new_defaults

Type

boolean

Default

False

This option controls whether or not to use old deprecated defaults when evaluating policies. If **True**, the old deprecated defaults are not going to be evaluated. This means if any existing token is allowed for old defaults but is disallowed for new defaults, it will be disallowed. It is encouraged to enable this flag along with the `enforce_scope` flag so that you can get the benefits of new defaults and `scope_type` together. If **False**, the deprecated policy check string is logically OR'd with the new policy check string, allowing for a graceful upgrade experience between releases with new policies, which is the default behavior.

policy_file**Type**

string

Default

policy.yaml

The relative or absolute path of a file that maps roles to permissions for a given service. Relative paths must be specified in relation to the configuration file setting this option.

Table 52: Deprecated Variations

Group	Name
DEFAULT	policy_file

policy_default_rule**Type**

string

Default

default

Default rule. Enforced when a requested rule is not found.

Table 53: Deprecated Variations

Group	Name
DEFAULT	policy_default_rule

policy_dirs**Type**

multi-valued

Default

policy.d

Directories where policy configuration files are stored. They can be relative to any directory in the search path defined by the config_dir option, or absolute paths. The file defined by policy_file must exist for these directories to be searched. Missing or empty directories are ignored.

Table 54: Deprecated Variations

Group	Name
DEFAULT	policy_dirs

remote_content_type**Type**

string

Default

application/x-www-form-urlencoded

Valid Values

application/x-www-form-urlencoded, application/json

Content Type to send and receive data for REST based policy check

remote_ssl_verify_server_cert

Type

boolean

Default

False

server identity verification for REST based policy check

remote_ssl_ca_cert_file

Type

string

Default

<None>

Absolute path to ca cert file for REST based policy check

remote_ssl_client_cert_file

Type

string

Default

<None>

Absolute path to client cert for REST based policy check

remote_ssl_client_key_file

Type

string

Default

<None>

Absolute path client key file REST based policy check

oslo_reports

log_dir

Type

string

Default

<None>

Path to a log directory where to create a file

file_event_handler**Type**

string

Default

<None>

The path to a file to watch for changes to trigger the reports, instead of signals. Setting this option disables the signal trigger for the reports. If application is running as a WSGI application it is recommended to use this instead of signals.

file_event_handler_interval**Type**

integer

Default

1

How many seconds to wait between polls when file_event_handler is set

oslo_versionedobjects**fatal_exception_format_errors****Type**

boolean

Default

False

Make exception message format errors fatal

producer_task:delayed_notify**interval****Type**

integer

Default

5

Run interval in seconds

per_page**Type**

integer

Default

100

Default amount of results returned per page

batch_size

Type

integer

Default

100

How many zones to receive NOTIFY on each run

producer_task:periodic_exists

interval

Type

integer

Default

3600

Run interval in seconds

per_page

Type

integer

Default

100

Default amount of results returned per page

producer_task:periodic_secondary_refresh

interval

Type

integer

Default

3600

Run interval in seconds

per_page

Type

integer

Default

100

Default amount of results returned per page

producer_task:worker_periodic_recovery**interval**

Type
integer

Default
120

Run interval in seconds

per_page

Type
integer

Default
100

Default amount of results returned per page

producer_task:zone_purge**interval**

Type
integer

Default
3600

Run interval in seconds

per_page

Type
integer

Default
100

Default amount of results returned per page

time_threshold

Type
integer

Default
604800

How old deleted zones should be (deleted_at) to be purged, in seconds

batch_size

Type
integer

Default

100

How many zones to be purged on each run

proxy

http_proxy

Type

string

Default

<None>

Proxy HTTP requests via this proxy.

https_proxy

Type

string

Default

<None>

Proxy HTTPS requests via this proxy

no_proxy

Type

list

Default

[]

These addresses should not be proxied

service:agent

workers

Type

integer

Default

<None>

Number of agent worker processes to spawn

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

threads**Type**

integer

Default

1000

Number of agent greenthreads to spawn

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

listen**Type**

list

Default

['0.0.0.0:5358']

Agent host:port pairs to listen on

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

tcp_backlog**Type**

integer

Default

100

The Agent TCP Backlog

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

tcp_recv_timeout**Type**

floating point

Default

0.5

Agent TCP Receive Timeout

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

allow_notify

Type

list

Default

[]

List of IP addresses allowed to NOTIFY The Agent

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

masters

Type

list

Default

[]

List of masters for the Agent, format ip:port

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

backend_driver

Type

string

Default

bind9

The backend driver to use, e.g. bind9, djbdns, knot2

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

transfer_source

Type

string

Default

<None>

An IP address to be used to fetch zones transferred in

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

notify_delay

Type

floating point

Default

0.0

Delay after a NOTIFY arrives for a zone that the Agent will pause and drop subsequent NOTIFYs for that zone

Warning: This option is deprecated for removal since Antelope(2023.1). Its value may be silently ignored in the future.

Reason

The agent framework is deprecated.

service:api

workers

Type

integer

Default

<None>

Number of api worker processes to spawn

threads

Type

integer

Default

1000

Number of api greenthreads to spawn

enable_host_header

Type

boolean

Default

True

Enable host request headers

api_base_uri

Type

string

Default

http://127.0.0.1:9001/

the url used as the base for all API responses, This should consist of the scheme (http/https), the hostname, port, and any paths that are added to the base of Designate is URLs, For example <http://dns.openstack.example.com/dns>

listen

Type

list

Default

['0.0.0.0:9001']

API host:port pairs to listen on

api_paste_config

Type

string

Default

api-paste.ini

File name for the paste.deploy config for designate-api

auth_strategy

Type

string

Default

keystone

The strategy to use for auth. Supports noauth or keystone

enable_api_v2**Type**

boolean

Default

True

Enable the Designate V2 API

enable_api_admin**Type**

boolean

Default

False

enable-api-admin

max_header_line**Type**

integer

Default

16384

Maximum line size of message headers to be accepted. `max_header_line` may need to be increased when using large tokens (typically those generated by the Keystone v3 API with big service catalogs).

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

This parameter has had no effect since Train. Use [DEFAULT] `max_header_line` instead.

pecan_debug**Type**

boolean

Default

False

Pecan HTML Debug Interface

enabled_extensions_v2**Type**

list

Default

[]

Enabled API Extensions for the V2 API

default_limit_v2

Type
integer

Default
20

Default per-page limit for the V2 API, a value of None means show all results by default

max_limit_v2

Type
integer

Default
1000

Max per-page limit for the V2 API

quotas_verify_project_id

Type
boolean

Default
False

Verify that the requested Project ID for quota target is a valid project in Keystone.

enabled_extensions_admin

Type
list

Default
[]

Enabled Admin API Extensions

default_limit_admin

Type
integer

Default
20

Default per-page limit for the Admin API, a value of None means show all results by default

max_limit_admin

Type
integer

Default
1000

Max per-page limit for the Admin API

maintenance_mode**Type**

boolean

Default

False

Enable API Maintenance Mode

maintenance_mode_role**Type**

string

Default

admin

Role allowed to bypass maintaince mode

secure_proxy_ssl_header**Type**

string

Default

X-Forwarded-Proto

The HTTP Header that will be used to determine which the original request protocol scheme was, even if it was removed by an SSL terminating proxy.

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

This parameter has had no effect since SSLMiddleware was replaced by http_proxy_to_wsgi

override_proto**Type**

string

Default

<None>

A scheme that will be used to override the request protocol scheme, even if it was set by an SSL terminating proxy.

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

This parameter has had no effect since SSLMiddleware was replaced by http_proxy_to_wsgi

service:central

workers

Type

integer

Default

<None>

Number of central worker processes to spawn

threads

Type

integer

Default

1000

Number of central greenthreads to spawn

storage_driver

Type

string

Default

sqlalchemy

The storage driver to use

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Alternative storage drivers are no longer supported.

max_zone_name_len

Type

integer

Default

255

Maximum zone name length

max_recordset_name_len

Type

integer

Default

255

Maximum recordset name length

Table 55: Deprecated Variations

Group	Name
service:central	max_record_name_len

managed_resource_email**Type**

string

Default

hostmaster@example.com

E-Mail for Managed resources

managed_resource_tenant_id**Type**

string

Default

000000000-0000-0000-0000-000000000000

The Tenant ID that will own any managed resources.

min_ttl**Type**

integer

Default

<None>

Minimum TTL allowed

default_pool_id**Type**

string

Default

794ccc2c-d751-44fe-b57f-8894c9f5c842

The name of the default pool

topic**Type**

string

Default

central

RPC topic name for central

scheduler_filters**Type**

list

Default

`['default_pool']`

Enabled Pool Scheduling filters

service:mdns

workers

Type

integer

Default

<None>

Number of mdns worker processes to spawn

threads

Type

integer

Default

1000

Number of mdns greenthreads to spawn

listen

Type

list

Default

`['0.0.0.0:5354']`

mDNS host:port pairs to listen on

tcp_backlog

Type

integer

Default

100

mDNS TCP Backlog

tcp_recv_timeout

Type

floating point

Default

0.5

mDNS TCP Receive Timeout

all_tcp**Type**

integer

Default

<None>

Send all traffic over TCP

Warning: This option is deprecated for removal since Zed. Its value may be silently ignored in the future.

Reason

This parameter should now be configured inservice:worker instead

query_enforce_tsig**Type**

boolean

Default

False

Enforce all incoming queries (including AXFR) are TSIG signed

storage_driver**Type**

string

Default

sqlalchemy

The storage driver to use

max_message_size**Type**

integer

Default

65535

Maximum message size to emit

topic**Type**

string

Default

mdns

RPC topic name for mdns

xfr_timeout

Type

integer

Default

<None>

Timeout in seconds for XFRs.

Warning: This option is deprecated for removal since Zed. Its value may be silently ignored in the future.

Reason

This parameter should now be configured inservice:worker instead

service:producer

workers

Type

integer

Default

<None>

Number of Producer worker processes to spawn

threads

Type

integer

Default

1000

Number of Producer greenthreads to spawn

enabled_tasks

Type

list

Default

<None>

Enabled tasks to run

storage_driver

Type

string

Default

sqlalchemy

The storage driver to use

export_synchronous**Type**

boolean

Default

True

Whether to allow synchronous zone exports

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Migrated to designate-worker

topic**Type**

string

Default

producer

RPC topic name for producer

service:sink**workers****Type**

integer

Default

<None>

Number of sink worker processes to spawn

threads**Type**

integer

Default

1000

Number of sink greenthreads to spawn

enabled_notification_handlers**Type**

list

Default

[]

Enabled Notification Handlers

listener_pool_name

Type

string

Default

<None>

pool name to use for oslo.messaging notification listener. Note that listener pooling is not supported by all oslo.messaging drivers.

service:worker

workers

Type

integer

Default

<None>

Number of Worker worker processes to spawn

threads

Type

integer

Default

200

Number of Worker threads to spawn per process

storage_driver

Type

string

Default

sqlalchemy

The storage driver to use

threshold_percentage

Type

integer

Default

100

The percentage of servers requiring a successful update for a domain change to be considered active

poll_timeout

Type

integer

Default

30

The time to wait for a response from a server

poll_retry_interval**Type**

integer

Default

15

The time between retrying to send a request and waiting for a response from a server

poll_max_retries**Type**

integer

Default

10

The maximum number of times to retry sending a request and wait for a response from a server

poll_delay**Type**

integer

Default

5

The time to wait before sending the first request to a server

export_synchronous**Type**

boolean

Default

True

Whether to allow synchronous zone exports

topic**Type**

string

Default

worker

RPC topic name for worker

xfr_timeout**Type**

integer

Default

10

Timeout in seconds for XFRs.

serial_max_retries

Type
integer

Default
3

The maximum number of times to retry fetching a zones serial.

serial_retry_delay

Type
integer

Default
1

The time to wait before retrying a zone serial request.

serial_timeout

Type
integer

Default
1

Timeout in seconds before giving up on fetching a zones serial.

all_tcp

Type
boolean

Default
False

Send all traffic over TCP

ssl**ca_file**

Type
string

Default
<None>

CA certificate file to use to verify connecting clients.

Table 56: Deprecated Variations

Group	Name
DEFAULT	ssl_ca_file

cert_file**Type**

string

Default

<None>

Certificate file to use when starting the server securely.

Table 57: Deprecated Variations

Group	Name
DEFAULT	ssl_cert_file

key_file**Type**

string

Default

<None>

Private key file to use when starting the server securely.

Table 58: Deprecated Variations

Group	Name
DEFAULT	ssl_key_file

version**Type**

string

Default

<None>

SSL version to use (valid only if SSL enabled). Valid values are TLSv1 and SSLv23. SSLv2, SSLv3, TLSv1_1, and TLSv1_2 may be available on some distributions.

ciphers**Type**

string

Default

<None>

Sets the list of available ciphers. value should be a string in the OpenSSL cipher list format.

storage:sqlalchemy**sqlite_synchronous**

Type
boolean

Default
True

If True, SQLite uses synchronous mode.

Table 59: Deprecated Variations

Group	Name
DEFAULT	sqlite_synchronous

backend

Type
string

Default
sqlalchemy

The back end to use for the database.

Table 60: Deprecated Variations

Group	Name
DEFAULT	db_backend

connection

Type
string

Default
<None>

The SQLAlchemy connection string to use to connect to the database.

Table 61: Deprecated Variations

Group	Name
DEFAULT	sql_connection
DATABASE	sql_connection
sql	connection

slave_connection

Type
string

Default

<None>

The SQLAlchemy connection string to use to connect to the slave database.

mysql_sql_mode**Type**

string

Default

TRADITIONAL

The SQL mode to be used for MySQL sessions. This option, including the default, overrides any server-set SQL mode. To use whatever SQL mode is set by the server configuration, set this to no value. Example: `mysql_sql_mode=`

mysql_wsrep_sync_wait**Type**

integer

Default

<None>

For Galera only, configure `wsrep_sync_wait` causality checks on new connections. Default is None, meaning don't configure any setting.

connection_recycle_time**Type**

integer

Default

3600

Connections which have been present in the connection pool longer than this number of seconds will be replaced with a new one the next time they are checked out from the pool.

max_pool_size**Type**

integer

Default

5

Maximum number of SQL connections to keep open in a pool. Setting a value of 0 indicates no limit.

max_retries**Type**

integer

Default

10

Maximum number of database connection retries during startup. Set to -1 to specify an infinite retry count.

Table 62: Deprecated Variations

Group	Name
DEFAULT	sql_max_retries
DATABASE	sql_max_retries

retry_interval

Type
integer

Default
10

Interval between retries of opening a SQL connection.

Table 63: Deprecated Variations

Group	Name
DEFAULT	sql_retry_interval
DATABASE	reconnect_interval

max_overflow

Type
integer

Default
50

If set, use this value for max_overflow with SQLAlchemy.

Table 64: Deprecated Variations

Group	Name
DEFAULT	sql_max_overflow
DATABASE	sqlalchemy_max_overflow

connection_debug

Type
integer

Default
0

Minimum Value
0

Maximum Value
100

Verbosity of SQL debugging information: 0=None, 100=Everything.

Table 65: Deprecated Variations

Group	Name
DEFAULT	sql_connection_debug

connection_trace**Type**

boolean

Default

False

Add Python stack traces to SQL as comment strings.

Table 66: Deprecated Variations

Group	Name
DEFAULT	sql_connection_trace

pool_timeout**Type**

integer

Default

<None>

If set, use this value for pool_timeout with SQLAlchemy.

Table 67: Deprecated Variations

Group	Name
DATABASE	sqlalchemy_pool_timeout

use_db_reconnect**Type**

boolean

Default

False

Enable the experimental use of database reconnect on connection lost.

db_retry_interval**Type**

integer

Default

1

Seconds between retries of a database transaction.

db_inc_retry_interval

Type

boolean

Default

True

If True, increases the interval between retries of a database operation up to db_max_retry_interval.

db_max_retry_interval

Type

integer

Default

10

If db_inc_retry_interval is set, the maximum seconds between retries of a database operation.

db_max_retries

Type

integer

Default

20

Maximum retries in case of connection error or deadlock error before error is raised. Set to -1 to specify an infinite retry count.

connection_parameters

Type

string

Default

''

Optional URL parameters to append onto the connection URL at connect time; specify as param1=value1¶m2=value2&

1.5.11 Notifications

Hint: In this context, notifications are not related to the DNS NOTIFY message.

Notifications are RPC calls that contain a JSON object. Designate both generates and receives notifications.

The purpose of notifications is to inform unrelated OpenStack components of events in real time and trigger actions.

Emitters

They are emitted by Central on the following events:

- dns.tld.create
- dns.tld.update
- dns.tld.delete
- dns.tsigkey.create
- dns.tsigkey.update
- dns.tsigkey.delete
- dns.domain.create
- dns.zone.create
- dns.domain.update
- dns.zone.update
- dns.domain.delete
- dns.zone.delete
- dns.zone.touch
- dns.recordset.create
- dns.recordset.update
- dns.recordset.delete
- dns.record.create
- dns.record.update
- dns.record.delete
- dns.blacklist.create
- dns.blacklist.update
- dns.blacklist.delete
- dns.pool.create
- dns.pool.update
- dns.pool.delete
- dns.domain.update
- dns.zone.update
- dns.zone_transfer_request.create
- dns.zone_transfer_request.update
- dns.zone_transfer_request.delete
- dns.zone_transfer_accept.create
- dns.zone_transfer_accept.update

- dns.zone_transfer_accept.delete
- dns.zone_import.create
- dns.zone_import.update
- dns.zone_import.delete
- dns.zone_export.create
- dns.zone_export.update
- dns.zone_export.delete
- dns.zone.share
- dns.zone.unshare

Receivers

Notification from other OpenStack component outside of Designate are received by *Designate Sink*.

Format

An example notification from Neutron:

```
{
  "priority" : "INFO",
  "message_id" : "95ecdca3-967f-40aa-9469-d9fccc91d64b",
  "event_type" : "port.delete.start",
  "_context_roles" : [
    "Member"
  ],
  "_context_tenant_id" : "c97027dd880d4c129ae7a4ba7edade05",
  "timestamp" : "2012-11-16 12:56:17.155860",
  "_context_is_admin" : false,
  "_context_user_id" : "4ce5c085e09a478ea4edcd667a92df78",
  "payload" : {
    "port_id" : "bfdcb007-f68d-46bd-8150-abcae9fb3af6"
  },
  "_context_timestamp" : "2012-11-16 12:56:17.154672",
  "publisher_id" : "network.svc02.os.lan",
  "_context_read_deleted" : "no"
}
```

More examples can be found at `designate/tests/resources/sample_notifications`

1.5.12 Production Guidelines

This document aims to provide a location for documented production configurations and considerations. Including common misconfigurations, attack mitigation techniques, and other relevant tips.

DNS Zone Squatting

Designates multi-tenant nature allows for any user to create (almost) any zone, which can result in the legitimate owner being unable to create the zone within Designate. There are several ways this can occur:

1. The squatter simply creates `example.com.` in Designate before the legitimate owner can.
2. The squatter creates `foo.example.com.` as a zone in Designate, preventing the creation of any parent zones (`example.com.`, `com.`) by any other tenant.
3. The squatter creates `com.` as a zone in Designate, preventing the creation of any zones ending in `com.` by any other tenant.
4. The squatter creates `co.uk.` as a zone in Designate, preventing the creation of any zones ending in `co.uk.` by any other tenant.

Scenario #1 and #2 Mitigation

There is no automated mitigation that can reasonably be performed here, DNS providers have typically used a manual process, triggered through a support request, to identify the legitimate owner and request the illegitimate owner relinquish control, or action any other provider specific policy for handling these scenarios.

Scenario #3 Mitigation

This scenario can be mitigated by ensuring Designate has been configured, and is updated periodically, with the latest list of gTLDs published as the [IANA TLD list](#). These TLDs can be entered into Designate through the [TLD API](#)

Scenario #4 Mitigation

This is a variation on Scenario #3, where public registration is available for a second level domain, such as is the case with `co.uk.`. Due to the nature of public second level domains, where the IANA has no authority, these are not included in the [IANA TLD list](#). A Mozilla sponsored initiative has stepped up to fill this gap, crowdsourcing the list of public suffixes, which includes both standard TLDs and public second level domains. We recommend configuring, and periodically updating, Designate with Mozillas [Public Suffix list](#). These public suffixes can be entered into Designate through the [TLD API](#)

DNS Cache Poisoning

Multi-tenant nameservers can lead to an interesting variation of DNS Cache Poisoning if nameservers are configured without consideration. Two tenants, both owning different zones, can under the right circumstances inject content into DNS responses for the other tenants zone. Lets consider an example:

Tenant A owns example.com., and has created an additional NS record within their zone pointing to ns.example.org. Tenant B, the attacker in this example, can now create the example.org. zone within their tenant. Within this zone, they can legitimately create an A record with the name ns.example.org.. Under default configurations, many DNS servers (e.g. BIND), will now include Tenant Bs A record within responses for several queries for example.com.. Should the recursive resolver used by the end-user not be configured to ignore out-of-bailiwick responses, this potentially invalid A record for ns.example.org. will be injected into the resolvers cache, resulting in a cache poisoning attack.

This is an interesting variation of DNS cache poisoning, because the poison records are returned by the authoritative nameserver for a given zone, rather than in responses for the attackers zone.

[Bug 1471159](#) includes additional worked examples of this attack.

BIND9 Mitigation

BIND9 by default will include out-of-zone additional, resulting is susceptibility to this attack. We recommend BIND is configured to send minimal responses - preventing the out-of-zone additional from being processed.

In BINDs global options clause, include the following statement:

```
minimal-responses yes;
```

PowerDNS Mitigation

PowerDNS by default will include out-of-zone additional, resulting is susceptibility to this attack. We recommend setting the *out-of-zone-additional-processing* configuration flag set to no - preventing the out-of-zone additional from being processed.

In the main PowerDNS configuration file, include the following statement:

```
out-of-zone-additional-processing=no
```

1.5.13 Upgrades

In this section, you will find documentation relevant for upgrading Designate.

Note: The *designate-status upgrade check* command can be used to verify a deployment before starting services with new code.

Contents:

Upgrading to Kilo from Juno

Note: This doc section is a work in progress, for now, we have some smaller hints and tips for watchout for during the upgrade.

Tips and Tricks

1. Two new Designate services

Two new Designate services were added in Kilo, designate-pool-manager and designate-mdns. Please ensure to configure and enable these services as part of the upgrade.

2. Post-Migration, existing DNS domains hosted by PowerDNS must have their masters column manually populated with the list of designate-mdns ip and port pairs, and their type switched to SECONDARY. For example:

```
UPDATE powerdns.domains SET type = "SECONDARY", masters = "192.0.2.1:5354,192.
↪0.2.2:5354" WHERE masters IS NULL;
```

Upgrading to Mitaka from Liberty

Pools Configuration

We have updated how the config data for pools is now stored.

Previously there was a mix of content in the `designate.conf` file and in the designate database.

We have moved all of the data to the database in Mitaka, to avoid confusion, and avoid the massive complexity that exists in the config file.

Warning: This part of the upgrade **requires** downtime.

We have 2 new commands in the `designate-manage` utility that are able to assist the migration.

To make the config syntax simpler we have a new YAML based config file that is used to load information into the database.

```
---
- name: default
  # The name is immutable. There will be no option to change the name after
  # creation and the only way will to change it will be to delete it
  # (and all zones associated with it) and recreate it.
  description: Default PowerDNS Pool

  # Attributes are Key:Value pairs that describe the pool. for example the_
  ↪level
```

(continues on next page)

(continued from previous page)

```
# of service (i.e. service_tier:GOLD), capabilities (i.e. anycast: true) or
# other metadata. Users can use this information to point their zones to the
# correct pool
attributes: {}

# List out the NS records for zones hosted within this pool
ns_records:
  - hostname: ns1-1.example.org.
    priority: 1
  - hostname: ns1-2.example.org.
    priority: 2

# List out the nameservers for this pool. These are the actual PowerDNS
# servers. We use these to verify changes have propagated to all
↪nameservers.
nameservers:
  - host: 192.0.2.2
    port: 53

# List out the targets for this pool. For PowerDNS, this is the database
# (or databases, if you deploy a separate DB for each PowerDNS server)
targets:
  - type: powerdns
    description: PowerDNS Database Cluster

# List out the designate-mdns servers from which PowerDNS servers should
# request zone transfers (AXFRs) from.
masters:
  - host: 192.0.2.1
    port: 5354

# PowerDNS Configuration options
options:
  host: 192.0.2.2
  port: 53
  connection: 'mysql+pymysql://designate:password@127.0.0.1/designate_
↪pdns?charset=utf8'

# Optional list of additional IP/Port's for which designate-mdns will send
# DNS NOTIFY packets to
also_notifies:
  - host: 192.0.2.4
    port: 53
```

We have a command that will allow you to take your current running config, and export it to the new YAML format.

Note: You will need to have at least one instance of central running, and machine designate-manage is running on will need access to the messaging queue

```
designate-manage pool generate_file --file output.yml
```

This will create a YAML file, with all the currently defined pools, and all of their config.

We suggest this is then migrated into a config management system, or other document management system.

From this point on all updates to pools should be done by updating this file, and running:

```
designate-manage pool update --file /path/to/file.yml
```

Pools - Step by Step

1. Ensure there is not 2 pools with the same name.
2. Stop all Designate Services.
3. Deploy new Mitaka code
4. Start `designate-central`
5. **Run**

```
designate-manage pool export_from_config --file output.yml
```

6. Ensure the output file is correct (reference sample file for each value)
7. Run

```
designate-manage pool update --file output.yml --dry_run True --  
↪delete True
```

8. Ensure the output of this command is not removing any Pools
9. Run

```
designate-manage pool update --file output.yml --delete True
```

10. Start the remaining designate services.

Upgrading to Newton from Mitaka

The Newton release of Designate adds two new services `designate-producer`, `designate-worker`. These replace `designate-zone-manager` and `designate-pool-manager`, respectively. In a future cycle, the old services will be removed, and the new ones will be enabled by default. In Newton, you must enable the new services yourself. Designate will work with both configurations, as there is no breaking change from Mitaka.

Breaking Changes

The default port the `designate-agent` service listens on has changed from 53 to 5358. This matches the port we have always used in the sample configuration, and the port used in the agent backend class.

Upgrading Code and Enabling Services

To enable the new services with minimal impact, the following process can be followed. This assumes you have all Mitaka Designate services running.

1. Deploy the Newton code.
2. Add the `[service:worker]` and `[service:producer]` sections to your configuration file. Ensure `enabled` and `notify` in the worker section are `True`.

```
[service:worker]
enabled = True
#workers = None
#threads = 1000
#threshold_percentage = 100
#poll_timeout = 30
#poll_retry_interval = 15
#poll_max_retries = 10
#poll_delay = 5
notify = True

[service:producer]
#workers = None
#threads = 1000
# Can be any/all of: periodic_exists, delayed_notify, worker_
↪periodic_recovery
# None => All tasks enabled
#enabled_tasks = None

[producer_task:domain_purge]
#interval = 3600 # 1h
#batch_size = 100
#time_threshold = 604800 # 7 days

[producer_task:delayed_notify]
#interval = 5

[producer_task:worker_periodic_recovery]
#interval = 120
```

3. Stop the `designate-pool-manager` and `designate-zone-manager` processes.
4. Restart the `designate-api`, `designate-central` and `designate-mdns` services.
5. Start the `designate-producer` and `designate-worker` services.

New Features

- `designate-mdns`, `designate-agent` and `designate-api` can now bind to multiple host:port pairs via the new `listen` configuration arguments for each service.
- New pool scheduler attribute filter for scheduling zones across pools. This can be enabled in the `[service:central]` section of the config by adding `attribute` to the list of values in the `filters` option.
- An experimental agent backend to support TinyDNS, the DNS resolver from the `djbdns` tools.
- An experimental agent backend to support Knot DNS 2
- A new recordset api `/v2/recordsets` is exposed, docs can be found [here](#).
- Designate services now report running status. The information is exposed via `api`.
- The quotas API from the admin API has been ported to `/v2` with some changes and is now [stable](#).

Deprecation Notices

- `designate-apis` `api_host` and `api_port` configuration options have been deprecated, please use the new combined `listen` argument in place of these.
- `designate-mdnss` `host` and `port` configuration options have been deprecated, please use the new combined `listen` argument in place of these.
- `designate-agentss` `host` and `port` configuration options have been deprecated, please use the new combined `listen` argument in place of these.
- `designate-zone-manager` and `designate-pool-manager` are now deprecated and will be removed in a future release.

Upgrading to Ocata from Newton

Upgrading Code and Enabling Services

1. Deploy Ocata code or packages.
2. Restart all services. See the Newton upgrade guide for enabling `designate-producer` and `designate-worker`.

New Features

- The notifications Designate emits via MQ are now pluggable, drivers are defined by python entry-points and the new `notification_plugin` option in the `DEFAULT` config section enables selection. By default, the notifications have not changed. There is an `audit` plugin that can be used, if desired.
- Scheduling zones across pools. See *Pool Scheduler* for more details.

Deprecation Notices

- `designate-zone-manager` and `designate-pool-manager` remain deprecated and will be removed in a future release.

1.5.14 Troubleshooting

I have a broken zone

A zone is considered broken when it is not receiving updates anymore. Its status can be ERROR if Designate detected the error condition or it can be stuck in PENDING for a long time.

Review the logs from the API, Central, Producer, Worker and MiniDNS. Identify the transaction ID of the last successful change and the first failing change. Using the ID, you can filter logs from the Designate components that are related to the same transaction. Look for log messages with ERROR level before and after the first failing update.

Failures in updating a zone are usually related to problems in Producer, Worker, MiniDNS or the database.

Ensure the services are running and network connectivity is not impaired.

Transient network issues can be the cause of a broken zone. Producer and Worker are stateful services and perform attempts at restoring failing zones over time. Restarting the services will trigger new attempts.

I have a broken pool

I deleted a zone but its still in the database

Deleted zones are flagged with status set to DELETED and task set to NONE once the deletion process terminates successfully.

What ports should be open?

Port numbers are configurable: review your `designate.conf`

The default values are:

Component (header rows optional)	Protocol	Port numbers
Agent	TCP	5358
	UDP	5358
API	TCP	9001
Keystone (external)	TCP	35357
MiniDNS	TCP	5354
	UDP	5354
MySQL	TCP	3306
RabbitMQ	TCP	5672
Resolvers	TCP	53
	UDP	53
ZooKeeper	TCP	2181
	TCP	2888,3888

What network protocol are used?

HTTP[S] by the API, RabbitMQ and the MySQL protocol by most components, DNS (resolution and XFR), ZooKeeper, Memcached.

What needs access to the Database?

Central, MiniDNS

What needs access to RabbitMQ?

The API, Central, Producer, Worker, MiniDNS

What needs access to ZooKeeper?

Pool and Producer

What needs access to Memcached?

API and Worker

How do I monitor Designate?

Designate can be monitored by various [monitoring systems listed here](#)

What are useful metrics to monitor?

- General host monitoring, i.e. CPU load, memory usage, disk and network I/O
- MySQL performance, errors and free disk space
- Number of zones in ACTIVE, PENDING and ERROR status
- API queries per second, broken down by read and write operation on zones, records, etc
- Zone change propagation time i.e. how long does it takes for a record update to reach the resolvers
- Log messages containing having ERROR level
- Quotas utilization i.e. number of existing records/zones against the maximum allowed
- Memcached, RabbitMQ, ZooKeeper performance and errors

What are useful metrics to review first during an incident?

- Host, network and MySQL performance metrics
- Number of zones in ACTIVE, PENDING and ERROR status
- Log messages containing having ERROR level

1.5.15 Sample configuration files

Configuration files can alter how designate behaves at runtime and by default are located in `/etc/designate/`. Links to sample configuration files can be found below:

policy.yaml

Use the `policy.yaml` file to define additional access controls that apply to the DNS service:

```
#"admin": "role:admin or is_admin:True"

#"owner": "project_id:%(tenant_id)s"

#"admin_or_owner": "rule:admin or rule:owner"

#"default": "(role:admin) or (role:member and project_id:%(project_id)s)"

# DEPRECATED
# "default": "rule:admin_or_owner" has been deprecated since W in favor
# of "default": "(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The designate API now supports system scope and default roles.

# Create blacklist.
# POST /v2/blacklists
# Intended scope(s): project
#"create_blacklist": "role:admin"

# DEPRECATED
# "create_blacklist": "rule:admin" has been deprecated since W in favor
# of "create_blacklist": "role:admin".
# The blacklist API now supports system scope and default roles.

# Find blacklists.
# GET /v2/blacklists
# Intended scope(s): project
#"find_blacklists": "role:admin"

# DEPRECATED
# "find_blacklists": "rule:admin" has been deprecated since W in favor
# of "find_blacklists": "role:admin".
# The blacklist API now supports system scope and default roles.
```

(continues on next page)

(continued from previous page)

```

# Get blacklist.
# GET /v2/blacklists/{blacklist_id}
# Intended scope(s): project
#"get_blacklist": "role:admin"

# DEPRECATED
# "get_blacklist":"role:admin" has been deprecated since W in favor of
# "get_blacklist":"role:admin".
# The blacklist API now supports system scope and default roles.

# Update blacklist.
# PATCH /v2/blacklists/{blacklist_id}
# Intended scope(s): project
#"update_blacklist": "role:admin"

# DEPRECATED
# "update_blacklist":"role:admin" has been deprecated since W in favor
# of "update_blacklist":"role:admin".
# The blacklist API now supports system scope and default roles.

# Delete blacklist.
# DELETE /v2/blacklists/{blacklist_id}
# Intended scope(s): project
#"delete_blacklist": "role:admin"

# DEPRECATED
# "delete_blacklist":"role:admin" has been deprecated since W in favor
# of "delete_blacklist":"role:admin".
# The blacklist API now supports system scope and default roles.

# Allowed bypass the blacklist.
# POST /v2/zones
# Intended scope(s): project
#"use_blacklisted_zone": "role:admin"

# DEPRECATED
# "use_blacklisted_zone":"role:admin" has been deprecated since W in
# favor of "use_blacklisted_zone":"role:admin".
# The blacklist API now supports system scope and default roles.

# Action on all tenants.
# Intended scope(s): project
#"all_tenants": "role:admin"

# DEPRECATED
# "all_tenants":"role:admin" has been deprecated since W in favor of
# "all_tenants":"role:admin".
# The designate API now supports system scope and default roles.

```

(continues on next page)

(continued from previous page)

```
# Edit managed records.
# Intended scope(s): project
#"edit_managed_records": "role:admin"

# DEPRECATED
# "edit_managed_records":"rule:admin" has been deprecated since W in
# favor of "edit_managed_records":"role:admin".
# The designate API now supports system scope and default roles.

# Use low TTL.
# Intended scope(s): project
#"use_low_ttl": "role:admin"

# DEPRECATED
# "use_low_ttl":"rule:admin" has been deprecated since W in favor of
# "use_low_ttl":"role:admin".
# The designate API now supports system scope and default roles.

# Accept sudo from user to tenant.
# Intended scope(s): project
#"use_sudo": "role:admin"

# DEPRECATED
# "use_sudo":"rule:admin" has been deprecated since W in favor of
# "use_sudo":"role:admin".
# The designate API now supports system scope and default roles.

# Clean backend resources associated with zone
# Intended scope(s): project
#"hard_delete": "role:admin"

# DEPRECATED
# "hard_delete":"rule:admin" has been deprecated since W in favor of
# "hard_delete":"role:admin".
# The designate API now supports system scope and default roles.

# Create pool.
# Intended scope(s): project
#"create_pool": "role:admin"

# DEPRECATED
# "create_pool":"rule:admin" has been deprecated since W in favor of
# "create_pool":"role:admin".
# The pool API now supports system scope and default roles.

# Find pool.
# GET /v2/pools
# Intended scope(s): project
```

(continues on next page)

(continued from previous page)

```

#"find_pools": "role:admin"

# DEPRECATED
# "find_pools":"rule:admin" has been deprecated since W in favor of
# "find_pools":"role:admin".
# The pool API now supports system scope and default roles.

# Find pools.
# GET /v2/pools
# Intended scope(s): project
#"find_pool": "role:admin"

# DEPRECATED
# "find_pool":"rule:admin" has been deprecated since W in favor of
# "find_pool":"role:admin".
# The pool API now supports system scope and default roles.

# Get pool.
# GET /v2/pools/{pool_id}
# Intended scope(s): project
#"get_pool": "role:admin"

# DEPRECATED
# "get_pool":"rule:admin" has been deprecated since W in favor of
# "get_pool":"role:admin".
# The pool API now supports system scope and default roles.

# Update pool.
# Intended scope(s): project
#"update_pool": "role:admin"

# DEPRECATED
# "update_pool":"rule:admin" has been deprecated since W in favor of
# "update_pool":"role:admin".
# The pool API now supports system scope and default roles.

# Delete pool.
# Intended scope(s): project
#"delete_pool": "role:admin"

# DEPRECATED
# "delete_pool":"rule:admin" has been deprecated since W in favor of
# "delete_pool":"role:admin".
# The pool API now supports system scope and default roles.

# load and set the pool to the one provided in the Zone attributes.
# POST /v2/zones
# Intended scope(s): project
#"zone_create_forced_pool": "role:admin"

```

(continues on next page)

(continued from previous page)

```

# DEPRECATED
# "zone_create_forced_pool":"rule:admin" has been deprecated since W
# in favor of "zone_create_forced_pool":"role:admin".
# The pool API now supports system scope and default roles.

# View Current Project's Quotas.
# GET /v2/quotas
# Intended scope(s): project
#"get_quotas": "(role:admin) or (role:reader and project_id:$(project_id)s)
↳or (True:$(all_tenants)s and role:reader)"

# DEPRECATED
# "get_quotas":"rule:admin_or_owner" has been deprecated since W in
# favor of "get_quotas":"(role:admin) or (role:reader and
# project_id:$(project_id)s or (True:$(all_tenants)s and
# role:reader)".
# The quota API now supports system scope and default roles.

# Set Quotas.
# PATCH /v2/quotas/{project_id}
# Intended scope(s): project
#"set_quota": "role:admin"

# DEPRECATED
# "set_quota":"rule:admin" has been deprecated since W in favor of
# "set_quota":"role:admin".
# The quota API now supports system scope and default roles.

# Reset Quotas.
# DELETE /v2/quotas/{project_id}
# Intended scope(s): project
#"reset_quotas": "role:admin"

# DEPRECATED
# "reset_quotas":"rule:admin" has been deprecated since W in favor of
# "reset_quotas":"role:admin".
# The quota API now supports system scope and default roles.

# Find records.
# GET /v2/reverse/floatingips/{region}:{floatingip_id}
# GET /v2/reverse/floatingips
# Intended scope(s): project
#"find_records": "(role:admin) or (role:reader and project_id:$(project_id)s)"

# DEPRECATED
# "find_records":"rule:admin_or_owner" has been deprecated since W in
# favor of "find_records":"(role:admin) or (role:reader and
# project_id:$(project_id)s)".

```

(continues on next page)

(continued from previous page)

```

# The records API now supports system scope and default roles.

# Intended scope(s): project
#"count_records": "(role:admin) or (role:reader and project_id:%(project_id)s)
↪"

# DEPRECATED
# "count_records":"rule:admin_or_owner" has been deprecated since W in
# favor of "count_records":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The records API now supports system scope and default roles.

# Create Recordset
# POST /v2/zones/{zone_id}/recordsets
# Intended scope(s): project
#"create_recordset": "(role:member and project_id:%(project_id)s) and ('PRIMARY
↪':%(zone_type)s) or (role:admin) and ('PRIMARY':%(zone_type)s) or_
↪(role:admin) and ('SECONDARY':%(zone_type)s) or ('True':%(zone_shared)s) and (
↪'PRIMARY':%(zone_type)s)"

# DEPRECATED
# "create_recordset": "('PRIMARY':%(zone_type)s AND
# (rule:admin_or_owner OR 'True':%(zone_shared)s)) OR
# ('SECONDARY':%(zone_type)s AND is_admin:True)" has been deprecated
# since W in favor of "create_recordset": "(role:member and
# project_id:%(project_id)s) and ('PRIMARY':%(zone_type)s) or
# (role:admin) and ('PRIMARY':%(zone_type)s) or (role:admin) and
# ('SECONDARY':%(zone_type)s) or ('True':%(zone_shared)s) and
# ('PRIMARY':%(zone_type)s)".
# The record set API now supports system scope and default roles.

# Intended scope(s): project
#"get_recordsets": "(role:admin) or (role:reader and project_id:%(project_
↪id)s)"

# DEPRECATED
# "get_recordsets":"rule:admin_or_owner" has been deprecated since W
# in favor of "get_recordsets":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The record set API now supports system scope and default roles.

# Get recordset
# GET /v2/zones/{zone_id}/recordsets/{recordset_id}
# Intended scope(s): project
#"get_recordset": "(role:admin) or (role:reader and project_id:%(project_
↪id)s) or ('True':%(zone_shared)s)"

# DEPRECATED
# "get_recordset":"rule:admin_or_owner or ('True':%(zone_shared)s)"

```

(continues on next page)

(continued from previous page)

```

# has been deprecated since W in favor of
# "get_recordset": "(role:admin) or (role:reader and
# project_id:%(project_id)s) or ("True":%(zone_shared)s)".
# The record set API now supports system scope and default roles.

# List a Recordset in a Zone
# Intended scope(s): project
#"find_recordset": "(role:admin) or (role:reader and project_id:%(project_
↪id)s)"

# DEPRECATED
# "find_recordset": "rule:admin_or_owner" has been deprecated since W
# in favor of "find_recordset": "(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The record set API now supports system scope and default roles.

# List Recordsets in a Zone
# GET /v2/zones/{zone_id}/recordsets
# Intended scope(s): project
#"find_recordsets": "(role:admin) or (role:reader and project_id:%(project_
↪id)s)"

# DEPRECATED
# "find_recordsets": "rule:admin_or_owner" has been deprecated since W
# in favor of "find_recordsets": "(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The record set API now supports system scope and default roles.

# Update recordset
# PUT /v2/zones/{zone_id}/recordsets/{recordset_id}
# Intended scope(s): project
#"update_recordset": "(role:member and project_id:%(project_id)s) and ('PRIMARY
↪':%(zone_type)s) or (role:admin) and ('PRIMARY':%(zone_type)s) or_
↪(role:admin) and ('SECONDARY':%(zone_type)s) or role:member and (project_id:
↪%(recordset_project_id)s) and ('PRIMARY':%(zone_type)s)"

# DEPRECATED
# "update_recordset": "rule:admin or ('PRIMARY':%(zone_type)s and
# (rule:owner or project_id:%(recordset_project_id)s))" has been
# deprecated since W in favor of "update_recordset": "(role:member and
# project_id:%(project_id)s) and ('PRIMARY':%(zone_type)s) or
# (role:admin) and ('PRIMARY':%(zone_type)s) or (role:admin) and
# ('SECONDARY':%(zone_type)s) or role:member and
# (project_id:%(recordset_project_id)s) and
# ('PRIMARY':%(zone_type)s)".
# The record set API now supports system scope and default roles.

# Delete RecordSet
# DELETE /v2/zones/{zone_id}/recordsets/{recordset_id}

```

(continues on next page)

(continued from previous page)

```

# Intended scope(s): project
#"delete_recordset": "(role:member and project_id:%(project_id)s) and ('PRIMARY'
↳:%(zone_type)s) or (role:admin) and ('PRIMARY':%(zone_type)s) or
↳(role:admin) and ('SECONDARY':%(zone_type)s) or role:member and (project_id:
↳%(recordset_project_id)s) and ('PRIMARY':%(zone_type)s)"

# DEPRECATED
# "delete_recordset": "rule:admin or ('PRIMARY':%(zone_type)s and
# (rule:owner or project_id:%(recordset_project_id)s))" has been
# deprecated since W in favor of "delete_recordset": "(role:member and
# project_id:%(project_id)s) and ('PRIMARY':%(zone_type)s) or
# (role:admin) and ('PRIMARY':%(zone_type)s) or (role:admin) and
# ('SECONDARY':%(zone_type)s) or role:member and
# (project_id:%(recordset_project_id)s) and
# ('PRIMARY':%(zone_type)s)".
# The record set API now supports system scope and default roles.

# Count recordsets
# Intended scope(s): project
#"count_recordset": "(role:admin) or (role:reader and project_id:%(project_
↳id)s)"

# DEPRECATED
# "count_recordset": "rule:admin_or_owner" has been deprecated since W
# in favor of "count_recordset": "(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The record set API now supports system scope and default roles.

# Find a single Service Status
# GET /v2/service_status/{service_id}
# Intended scope(s): project
#"find_service_status": "role:admin"

# DEPRECATED
# "find_service_status": "rule:admin" has been deprecated since W in
# favor of "find_service_status": "role:admin".
# The service status API now supports system scope and default roles.

# List service statuses.
# GET /v2/service_status
# Intended scope(s): project
#"find_service_statuses": "role:admin"

# DEPRECATED
# "find_service_statuses": "rule:admin" has been deprecated since W in
# favor of "find_service_statuses": "role:admin".
# The service status API now supports system scope and default roles.

# Intended scope(s): project

```

(continues on next page)

(continued from previous page)

```

#"update_service_status": "role:admin"

# DEPRECATED
# "update_service_status":"rule:admin" has been deprecated since W in
# favor of "update_service_status":"role:admin".
# The service status API now supports system scope and default roles.

# Get a Zone Share
# GET /v2/zones/{zone_id}/shares/{zone_share_id}
# Intended scope(s): project
#"get_zone_share": "(role:admin) or (role:member and project_id:%(project_
↪id)s)"

# DEPRECATED
# "get_zone_share":"rule:admin_or_owner" has been deprecated since W
# in favor of "get_zone_share":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The shared zones API now supports system scope and default roles.

# Share a Zone
# POST /v2/zones/{zone_id}/shares
# Intended scope(s): project
#"share_zone": "(role:admin) or (role:member and project_id:%(project_id)s)"

# DEPRECATED
# "share_zone":"rule:admin_or_owner" has been deprecated since W in
# favor of "share_zone":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The shared zones API now supports system scope and default roles.

# List Shared Zones
# GET /v2/zones/{zone_id}/shares
#"find_zone_shares": "@"

# Check the can query for a specific projects shares.
# Intended scope(s): project
#"find_project_zone_share": "(role:admin) or (role:member and project_id:
↪%(project_id)s)"

# DEPRECATED
# "find_project_zone_share":"rule:admin_or_owner" has been deprecated
# since W in favor of "find_project_zone_share":"(role:admin) or
# (role:member and project_id:%(project_id)s)".
# The shared zones API now supports system scope and default roles.

# Unshare Zone
# DELETE /v2/zones/{zone_id}/shares/{shared_zone_id}
# Intended scope(s): project
#"unshare_zone": "(role:admin) or (role:member and project_id:%(project_id)s)"

```

(continues on next page)

(continued from previous page)

```

# DEPRECATED
# "unshare_zone":"rule:admin_or_owner" has been deprecated since W in
# favor of "unshare_zone":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The shared zones API now supports system scope and default roles.

# Find all Tenants.
# Intended scope(s): project
#"find_tenants": "role:admin"

# DEPRECATED
# "find_tenants":"rule:admin" has been deprecated since W in favor of
# "find_tenants":"role:admin".
# The tenant API now supports system scope and default roles.

# Get all Tenants.
# Intended scope(s): project
#"get_tenant": "role:admin"

# DEPRECATED
# "get_tenant":"rule:admin" has been deprecated since W in favor of
# "get_tenant":"role:admin".
# The tenant API now supports system scope and default roles.

# Count tenants
# Intended scope(s): project
#"count_tenants": "role:admin"

# DEPRECATED
# "count_tenants":"rule:admin" has been deprecated since W in favor of
# "count_tenants":"role:admin".
# The tenant API now supports system scope and default roles.

# Create Tld
# POST /v2/tlds
# Intended scope(s): project
#"create_tld": "role:admin"

# DEPRECATED
# "create_tld":"rule:admin" has been deprecated since W in favor of
# "create_tld":"role:admin".
# The top-level domain API now supports system scope and default
# roles.

# List Tlds
# GET /v2/tlds
# Intended scope(s): project
#"find_tlds": "role:admin"

```

(continues on next page)

(continued from previous page)

```
# DEPRECATED
# "find_tlds":"rule:admin" has been deprecated since W in favor of
# "find_tlds":"role:admin".
# The top-level domain API now supports system scope and default
# roles.

# Show Tld
# GET /v2/tlds/{tld_id}
# Intended scope(s): project
#"get_tld": "role:admin"

# DEPRECATED
# "get_tld":"rule:admin" has been deprecated since W in favor of
# "get_tld":"role:admin".
# The top-level domain API now supports system scope and default
# roles.

# Update Tld
# PATCH /v2/tlds/{tld_id}
# Intended scope(s): project
#"update_tld": "role:admin"

# DEPRECATED
# "update_tld":"rule:admin" has been deprecated since W in favor of
# "update_tld":"role:admin".
# The top-level domain API now supports system scope and default
# roles.

# Delete Tld
# DELETE /v2/tlds/{tld_id}
# Intended scope(s): project
#"delete_tld": "role:admin"

# DEPRECATED
# "delete_tld":"rule:admin" has been deprecated since W in favor of
# "delete_tld":"role:admin".
# The top-level domain API now supports system scope and default
# roles.

# Create Tsigkey
# POST /v2/tsigkeys
# Intended scope(s): project
#"create_tsigkey": "role:admin"

# DEPRECATED
# "create_tsigkey":"rule:admin" has been deprecated since W in favor
# of "create_tsigkey":"role:admin".
# The tsigkey API now supports system scope and default roles.
```

(continues on next page)

(continued from previous page)

```

# List Tsigkeys
# GET /v2/tsigkeys
# Intended scope(s): project
#"find_tsigkeys": "role:admin"

# DEPRECATED
# "find_tsigkeys":"role:admin" has been deprecated since W in favor of
# "find_tsigkeys":"role:admin".
# The tsigkey API now supports system scope and default roles.

# Show a Tsigkey
# GET /v2/tsigkeys/{tsigkey_id}
# Intended scope(s): project
#"get_tsigkey": "role:admin"

# DEPRECATED
# "get_tsigkey":"role:admin" has been deprecated since W in favor of
# "get_tsigkey":"role:admin".
# The tsigkey API now supports system scope and default roles.

# Update Tsigkey
# PATCH /v2/tsigkeys/{tsigkey_id}
# Intended scope(s): project
#"update_tsigkey": "role:admin"

# DEPRECATED
# "update_tsigkey":"role:admin" has been deprecated since W in favor
# of "update_tsigkey":"role:admin".
# The tsigkey API now supports system scope and default roles.

# Delete a Tsigkey
# DELETE /v2/tsigkeys/{tsigkey_id}
# Intended scope(s): project
#"delete_tsigkey": "role:admin"

# DEPRECATED
# "delete_tsigkey":"role:admin" has been deprecated since W in favor
# of "delete_tsigkey":"role:admin".
# The tsigkey API now supports system scope and default roles.

# Create Zone
# POST /v2/zones
# Intended scope(s): project
#"create_zone": "(role:admin) or (role:member and project_id:%(project_id)s)"

# DEPRECATED
# "create_zone":"role:admin_or_owner" has been deprecated since W in
# favor of "create_zone":"(role:admin) or (role:member and

```

(continues on next page)

(continued from previous page)

```

# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Intended scope(s): project
#"get_zones": "(role:admin) or (role:reader and project_id:%(project_id)s)"

# DEPRECATED
# "get_zones":"rule:admin_or_owner" has been deprecated since W in
# favor of "get_zones":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Get Zone
# GET /v2/zones/{zone_id}
# Intended scope(s): project
#"get_zone": "(role:admin) or (role:reader and project_id:%(project_id)s) or (
↪ "True":%(zone_shared)s)"

# DEPRECATED
# "get_zone":"rule:admin_or_owner or ("True":%(zone_shared)s)" has
# been deprecated since W in favor of "get_zone":"(role:admin) or
# (role:reader and project_id:%(project_id)s) or
# ("True":%(zone_shared)s)".
# The zone API now supports system scope and default roles.

# Intended scope(s): project
#"get_zone_servers": "(role:admin) or (role:reader and project_id:%(project_
↪ id)s)"

# DEPRECATED
# "get_zone_servers":"rule:admin_or_owner" has been deprecated since W
# in favor of "get_zone_servers":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Get the Name Servers for a Zone
# GET /v2/zones/{zone_id}/nameservers
# Intended scope(s): project
#"get_zone_ns_records": "(role:admin) or (role:reader and project_id:
↪ %(project_id)s)"

# DEPRECATED
# "get_zone_ns_records":"rule:admin_or_owner" has been deprecated
# since W in favor of "get_zone_ns_records":"(role:admin) or
# (role:reader and project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# List existing zones
# GET /v2/zones

```

(continues on next page)

(continued from previous page)

```

# Intended scope(s): project
#"find_zones": "(role:admin) or (role:reader and project_id:%(project_id)s)"

# DEPRECATED
# "find_zones":"rule:admin_or_owner" has been deprecated since W in
# favor of "find_zones":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Update Zone
# PATCH /v2/zones/{zone_id}
# Intended scope(s): project
#"update_zone": "(role:admin) or (role:member and project_id:%(project_id)s)"

# DEPRECATED
# "update_zone":"rule:admin_or_owner" has been deprecated since W in
# favor of "update_zone":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Delete Zone
# DELETE /v2/zones/{zone_id}
# Intended scope(s): project
#"delete_zone": "(role:admin) or (role:member and project_id:%(project_id)s)"

# DEPRECATED
# "delete_zone":"rule:admin_or_owner" has been deprecated since W in
# favor of "delete_zone":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Manually Trigger an Update of a Secondary Zone
# POST /v2/zones/{zone_id}/tasks/xfr
# Intended scope(s): project
#"xfr_zone": "(role:admin) or (role:member and project_id:%(project_id)s)"

# DEPRECATED
# "xfr_zone":"rule:admin_or_owner" has been deprecated since W in
# favor of "xfr_zone":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Abandon Zone
# POST /v2/zones/{zone_id}/tasks/abandon
# Intended scope(s): project
#"abandon_zone": "role:admin"

# DEPRECATED
# "abandon_zone":"rule:admin" has been deprecated since W in favor of

```

(continues on next page)

(continued from previous page)

```

# "abandon_zone":"role:admin".
# The zone API now supports system scope and default roles.

# Intended scope(s): project
#"count_zones": "(role:admin) or (role:reader and project_id:%(project_id)s)"

# DEPRECATED
# "count_zones":"rule:admin_or_owner" has been deprecated since W in
# favor of "count_zones":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Intended scope(s): project
#"count_zones_pending_notify": "(role:admin) or (role:reader and project_id:
↪%(project_id)s)"

# DEPRECATED
# "count_zones_pending_notify":"rule:admin_or_owner" has been
# deprecated since W in favor of
# "count_zones_pending_notify":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone API now supports system scope and default roles.

# Intended scope(s): project
#"purge_zones": "role:admin"

# DEPRECATED
# "purge_zones":"rule:admin" has been deprecated since W in favor of
# "purge_zones":"role:admin".
# The zone API now supports system scope and default roles.

# Retrieve a Zone Export from the Designate Datastore
# GET /v2/zones/tasks/exports/{zone_export_id}/export
# Intended scope(s): project
#"zone_export": "(role:admin) or (role:member and project_id:%(project_id)s)"

# DEPRECATED
# "zone_export":"rule:admin_or_owner" has been deprecated since W in
# favor of "zone_export":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone export API now supports system scope and default roles.

# Create Zone Export
# POST /v2/zones/{zone_id}/tasks/export
# Intended scope(s): project
#"create_zone_export": "(role:admin) or (role:member and project_id:%(project_
↪id)s)"

# DEPRECATED

```

(continues on next page)

(continued from previous page)

```

# "create_zone_export":"rule:admin_or_owner" has been deprecated since
# W in favor of "create_zone_export":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone export API now supports system scope and default roles.

# List Zone Exports
# GET /v2/zones/tasks/exports
# Intended scope(s): project
#"find_zone_exports": "(role:admin) or (role:reader and project_id:%(project_
↪id)s)"

# DEPRECATED
# "find_zone_exports":"rule:admin_or_owner" has been deprecated since
# W in favor of "find_zone_exports":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone export API now supports system scope and default roles.

# Get Zone Exports
# GET /v2/zones/tasks/exports/{zone_export_id}
# Intended scope(s): project
#"get_zone_export": "(role:admin) or (role:reader and project_id:%(project_
↪id)s)"

# DEPRECATED
# "get_zone_export":"rule:admin_or_owner" has been deprecated since W
# in favor of "get_zone_export":"(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone export API now supports system scope and default roles.

# Update Zone Exports
# POST /v2/zones/{zone_id}/tasks/export
# Intended scope(s): project
#"update_zone_export": "(role:admin) or (role:member and project_id:%(project_
↪id)s)"

# DEPRECATED
# "update_zone_export":"rule:admin_or_owner" has been deprecated since
# W in favor of "update_zone_export":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone export API now supports system scope and default roles.

# Delete a zone export
# DELETE /v2/zones/tasks/exports/{zone_export_id}
# Intended scope(s): project
#"delete_zone_export": "(role:admin) or (role:member and project_id:%(project_
↪id)s)"

# DEPRECATED
# "delete_zone_export":"rule:admin_or_owner" has been deprecated since

```

(continues on next page)

(continued from previous page)

```

# W in favor of "delete_zone_export": "(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone export API now supports system scope and default roles.

# Create Zone Import
# POST /v2/zones/tasks/imports
# Intended scope(s): project
#"create_zone_import": "(role:admin) or (role:member and project_id:%(project_
↪id)s)"

# DEPRECATED
# "create_zone_import": "rule:admin_or_owner" has been deprecated since
# W in favor of "create_zone_import": "(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone import API now supports system scope and default roles.

# List all Zone Imports
# GET /v2/zones/tasks/imports
# Intended scope(s): project
#"find_zone_imports": "(role:admin) or (role:reader and project_id:%(project_
↪id)s)"

# DEPRECATED
# "find_zone_imports": "rule:admin_or_owner" has been deprecated since
# W in favor of "find_zone_imports": "(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone import API now supports system scope and default roles.

# Get Zone Imports
# GET /v2/zones/tasks/imports/{zone_import_id}
# Intended scope(s): project
#"get_zone_import": "(role:admin) or (role:reader and project_id:%(project_
↪id)s)"

# DEPRECATED
# "get_zone_import": "rule:admin_or_owner" has been deprecated since W
# in favor of "get_zone_import": "(role:admin) or (role:reader and
# project_id:%(project_id)s)".
# The zone import API now supports system scope and default roles.

# Update Zone Imports
# POST /v2/zones/tasks/imports
# Intended scope(s): project
#"update_zone_import": "(role:admin) or (role:member and project_id:%(project_
↪id)s)"

# DEPRECATED
# "update_zone_import": "rule:admin_or_owner" has been deprecated since
# W in favor of "update_zone_import": "(role:admin) or (role:member and

```

(continues on next page)

(continued from previous page)

```

# project_id:$(project_id)s)".
# The zone import API now supports system scope and default roles.

# Delete a Zone Import
# DELETE /v2/zones/tasks/imports/{zone_import_id}
# Intended scope(s): project
#"delete_zone_import": "(role:admin) or (role:member and project_id:$(project_
↪id)s)"

# DEPRECATED
# "delete_zone_import": "rule:admin_or_owner" has been deprecated since
# W in favor of "delete_zone_import": "(role:admin) or (role:member and
# project_id:$(project_id)s)".
# The zone import API now supports system scope and default roles.

# Create Zone Transfer Accept
# POST /v2/zones/tasks/transfer_accepts
# Intended scope(s): project
#"create_zone_transfer_accept": "((role:admin) or (role:member and project_id:
↪$(project_id)s)) or project_id:$(target_project_id)s or None:$(target_
↪project_id)s"

# DEPRECATED
# "create_zone_transfer_accept": "rule:admin_or_owner OR
# project_id:$(target_tenant_id)s OR None:$(target_tenant_id)s" has
# been deprecated since W in favor of
# "create_zone_transfer_accept": "((role:admin) or (role:member and
# project_id:$(project_id)s)) or project_id:$(target_project_id)s or
# None:$(target_project_id)s".
# The zone transfer accept API now supports system scope and default
# roles.

# Get Zone Transfer Accept
# GET /v2/zones/tasks/transfer_requests/{zone_transfer_accept_id}
# Intended scope(s): project
#"get_zone_transfer_accept": "(role:admin) or (role:reader and project_id:
↪$(project_id)s)"

# DEPRECATED
# "get_zone_transfer_accept": "rule:admin_or_owner" has been deprecated
# since W in favor of "get_zone_transfer_accept": "(role:admin) or
# (role:reader and project_id:$(project_id)s)".
# The zone transfer accept API now supports system scope and default
# roles.

# List Zone Transfer Accepts
# GET /v2/zones/tasks/transfer_accepts
# Intended scope(s): project
#"find_zone_transfer_accepts": "role:admin"

```

(continues on next page)

(continued from previous page)

```

# DEPRECATED
# "find_zone_transfer_accepts":"rule:admin" has been deprecated since
# W in favor of "find_zone_transfer_accepts":"role:admin".
# The zone transfer accept API now supports system scope and default
# roles.

# Create Zone Transfer Accept
# POST /v2/zones/{zone_id}/tasks/transfer_requests
# Intended scope(s): project
#"create_zone_transfer_request": "(role:admin) or (role:member and project_id:
↪%(project_id)s)"

# DEPRECATED
# "create_zone_transfer_request":"rule:admin_or_owner" has been
# deprecated since W in favor of
# "create_zone_transfer_request":"(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone transfer request API now supports system scope and default
# roles.

# Show a Zone Transfer Request
# GET /v2/zones/tasks/transfer_requests/{zone_transfer_request_id}
# Intended scope(s): project
#"get_zone_transfer_request": "(role:admin) or (role:member and project_id:
↪%(project_id)s)) or project_id:(target_project_id)s or None:(target_
↪project_id)s"

# DEPRECATED
# "get_zone_transfer_request":"rule:admin_or_owner OR
# project_id:(target_tenant_id)s OR None:(target_tenant_id)s" has
# been deprecated since W in favor of
# "get_zone_transfer_request":"(role:admin) or (role:member and
# project_id:%(project_id)s)) or project_id:(target_project_id)s or
# None:(target_project_id)s".
# The zone transfer request API now supports system scope and default
# roles.

# Intended scope(s): project
#"get_zone_transfer_request_detailed": "(role:admin) or (role:reader and
↪project_id:%(project_id)s)"

# DEPRECATED
# "create_zone_transfer_request":"rule:admin_or_owner" has been
# deprecated since W in favor of
# "get_zone_transfer_request_detailed":"(role:admin) or (role:reader
# and project_id:%(project_id)s)".
# The zone transfer request API now supports system scope and default
# roles.

```

(continues on next page)

(continued from previous page)

```

# WARNING: A rule name change has been identified.
#         This may be an artifact of new rules being
#         included which require legacy fallback
#         rules to ensure proper policy behavior.
#         Alternatively, this may just be an alias.
#         Please evaluate on a case by case basis
#         keeping in mind the format for aliased
#         rules is:
#         "old_rule_name": "new_rule_name".
# "create_zone_transfer_request": "rule:get_zone_transfer_request_detailed"

# List Zone Transfer Requests
# GET /v2/zones/tasks/transfer_requests
#"find_zone_transfer_requests": "@"

# Update a Zone Transfer Request
# PATCH /v2/zones/tasks/transfer_requests/{zone_transfer_request_id}
# Intended scope(s): project
#"update_zone_transfer_request": "(role:admin) or (role:member and project_id:
↪%(project_id)s)"

# DEPRECATED
# "update_zone_transfer_request": "rule:admin_or_owner" has been
# deprecated since W in favor of
# "update_zone_transfer_request": "(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone transfer request API now supports system scope and default
# roles.

# Delete a Zone Transfer Request
# DELETE /v2/zones/tasks/transfer_requests/{zone_transfer_request_id}
# Intended scope(s): project
#"delete_zone_transfer_request": "(role:admin) or (role:member and project_id:
↪%(project_id)s)"

# DEPRECATED
# "delete_zone_transfer_request": "rule:admin_or_owner" has been
# deprecated since W in favor of
# "delete_zone_transfer_request": "(role:admin) or (role:member and
# project_id:%(project_id)s)".
# The zone transfer request API now supports system scope and default
# roles.

```

designate.conf

Please refer to the online version of this documentation for a full config file example.

1.5.16 DNS Server Driver Support Matrix

This info should be maintained along with the list of current driver maintainers responsible for the Non Integrated backends. The upkeep of this list will fall on the PTL or his/her delegate.

Should a backends grade be in dispute, it falls on the current project PTL to make the final decision after listening to all sides concerns.

Grades

Grade	Description
Integrated	Tested on every commit by the OpenStack CI Infrastructure, and maintained by designate developers as a reference backend
Master Compatible	Tested on every commit by 3rd party testing, and has a person or group dedicated to maintaining compatibility on a regular basis
Release Compatible	Not necessarily tested on every commit, but has a maintainer committed to ensuring compatibility for each release
Untested	All other backends in the designate repository
Failing	Backends that were previously Compatible, but tests are now failing on a regular basis.
Known Broken	Backends that do not work, and have been broken with no sign of any fixes
Experimental	Backends that are under development, and may change at any time
Deprecated	Backends have been superseded, and will be removed in the future
End of Life	A backend that has reached its end of life and has been removed from the code.

Backends - Summary

Backend	Status	Type	In Tree	Notes
Bind9	Integrated	xfr	✓	None
Power DNS 4	Integrated	xfr	✓	None
Agent	Untested	xfr	✓	None
Akamai DNS v2	Untested	xfr	✓	None
Bind9 (Agent)	Untested	agent	✓	None
Denominator	Untested	agent	✓	None
Designate to Designate	Untested	xfr	✓	None
DynECT	Untested	xfr	✓	None
Infoblox (XFR)	Untested	xfr	✓	None
Microsoft DNS (Agent)	Untested	agent	✓	None
NS1 DNS	Untested	xfr	✓	None
NSD4	Untested	xfr	✓	None
Djbdns (Agent)	Experimental	agent	✓	None
Gdnssd (Agent)	Experimental	agent	✓	None
Knot2 (Agent)	Experimental	agent	✓	None
Akamai eDNS	End of Life	xfr	×	Akamai has turned off the eDNS API - see https://community.akamai.com/customers/s/article/Big-Changes-Coming-to-Fast-DNS-in-2018

Backend Details

Bind9

Grade	Integrated
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Power DNS 4

Grade	Integrated
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Designate to Designate

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

DynECT

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Akamai eDNS

Grade	End of Life
In Tree	×
Main-tainers	Designate Team
Reposi-tory	Designate Repository
Notes	Akamai has turned off the eDNS API - see https://community.akamai.com/customers/s/article/Big-Changes-Coming-to-Fast-DNS-in-2018

Akamai DNS v2

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Infoblox (XFR)

Grade	Untested
In Tree	✓
Maintainers	Infoblox OpenStack Team <openstack-maintainer@infoblox.com>
Repository	Designate Repository
Notes	None

NSD4

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

NS1 DNS

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Agent

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Bind9 (Agent)

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Denominator

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Knot2 (Agent)

Grade	Experimental
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Djbdns (Agent)

Grade	Experimental
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Gdnssd (Agent)

Grade	Experimental
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

Microsoft DNS (Agent)

Grade	Untested
In Tree	✓
Maintainers	Designate Team
Repository	Designate Repository
Notes	None

1.6 Designate Configuration Guide

Designate configuration is needed for getting it work correctly either with real OpenStack environment or without OpenStack environment.

NOTE: The most of the following operations should performed in designate directory.

1. You can generate full sample *designate.conf* (if it does not already exist):

```
$ oslo-config-generator --config-file etc/designate/designate-config-  
generator.conf --output-file /etc/designate/designate.conf
```

2. You can generate full sample of default policies *policy.yaml* (if it does not already exist):

```
$ oslopolicy-sample-generator --config-file etc/designate/designate-  
policy-generator.conf --output-file /etc/designate/policy.yaml
```

For more information on Designate configuration see the following sections

1.7 Command-Line Interface Reference

Users can interact with designate using the Openstack client via the commands provided by the [designate plugin](#)

Information on the commands available through Designates Command Line Interface (CLI) can be found in this section.

1.7.1 Designate Manage CLI

This chapter documents **designate-manage**

For help on a specific **designate** command, enter:

```
$ designate-manage COMMAND --help
```

designate-manage

designate-manage usage

```
usage: designate-manage [-h] [--config-dir DIR] [--config-file PATH] [--debug]
                        [--log-config-append PATH] [--log-date-format DATE_
                        ↪FORMAT]
                        [--log-dir LOG_DIR] [--log-file PATH] [--nodebug]
                        [--nouse-syslog] [--nouse-syslog-rfc-format] [--
                        ↪noverbose]
                        [--nowatch-log-file]
                        [--syslog-log-facility SYSLOG_LOG_FACILITY] [--use-
                        ↪syslog]
                        [--use-syslog-rfc-format] [--verbose] [--version]
                        [--watch-log-file]
```

designate optional arguments

--config-dir DIR

Path to a config directory to pull *.conf files from. This file set is sorted, so as to provide a predictable parse order if individual options are over-ridden. The set is parsed after the file(s) specified via previous config-file, arguments hence over-ridden options in the directory take precedence.

--config-file PATH

Path to a config file to use. Multiple config files can be specified, with values in later files taking precedence. Defaults to None.

--debug, -d

If set to true, the logging level will be set to DEBUG instead of the default INFO level.

--log-config-append PATH, --log_config PATH

The name of a logging configuration file. This file is appended to any existing logging configuration files. For details about logging configuration files, see the Python logging module documentation. Note that when logging configuration files are used then all logging configuration is set in the configuration file and other logging configuration options are ignored (for example, logging_context_format_string).

--log-date-format DATE_FORMAT

Defines the format string for %(asctime)s in log records. Default: None . This option is ignored if log_config_append is set.

--log-dir LOG_DIR, --logdir LOG_DIR

(Optional) The base directory used for relative log_file paths. This option is ignored if log_config_append is set.

--log-file PATH, --logfile PATH

(Optional) Name of log file to send logging output to. If no default is set, logging will go to stderr as defined by use_stderr. This option is ignored if log_config_append is set.

--nodebug

The inverse of debug

--nouse-syslog

The inverse of use-syslog

--nouse-syslog-rfc-format

The inverse of use-syslog-rfc-format

--noverbose

The inverse of verbose

--nowatch-log-file

The inverse of watch-log-file

--syslog-log-facility SYSLOG_LOG_FACILITY

Syslog facility to receive log lines. This option is ignored if log_config_append is set.

--use-syslog

Use syslog for logging. Existing syslog format is DEPRECATED and will be changed later to honor RFC5424. This option is ignored if log_config_append is set.

--use-syslog-rfc-format

Enables or disables syslog rfc5424 format for logging. If enabled, prefixes the MSG part of the syslog message with APP-NAME (RFC5424). This option is ignored if log_config_append is set.

--verbose, -v

If set to false, the logging level will be set to WARNING instead of the default INFO level.

--watch-log-file

Uses logging handler designed to watch file system. When log file is moved or removed this handler will open a new log file with specified path instantaneously. It makes sense only if log_file option is specified and Linux platform is used. This option is ignored if log_config_append is set.

designate-manage pool

designate-manage pool generate_file

```
usage: designate-manage pool generate_file [-h] [--file FILE]
```

Export a YAML copy of the current running pool config

Optional arguments:**-h, --help**

show this help message and exit

--file FILE

The path to the file the yaml output should be written to (Defaults to /etc/designate/pools.yaml)

designate-manage pool update

```
usage: designate-manage pool update [-h] [--file FILE] [--delete]
                                     [--dry-run]
```

Update the running pool config from a YAML file

Optional arguments:

-h, --help

show this help message and exit

--file FILE

The path to the file that should be used to update the pools config (Defaults to /etc/designate/pools.yaml)

--delete

Any Pools not listed in the config file will be deleted. .. warning:: This will delete any zones left in this pool

--dry-run

This will simulate what will happen when you run this command

designate-manage database

designate-manage database sync

```
usage: designate-manage database sync [-h] [--revision REVISION]
```

Update the designate database schema

Optional arguments:

-h, --help

show this help message and exit

--revision REVISION

The version that the designate database should be synced to. (Defaults to latest version)

designate-manage database version

```
usage: designate-manage database version [-h]
```

Show what version of the database schema is currently in place

Optional arguments:

-h, --help

show this help message and exit

1.7.2 Designate Status CLI

This chapter documents **designate-status**.

For help on a specific **designate-status** command, enter:

```
$ designate-status COMMAND --help
```

designate-status

designate-status is a tool that provides routines for checking the status of a Designate deployment.

The standard pattern for executing a **designate-status** command is:

```
designate-status <category> <command> [<args>]
```

Run without arguments to see a list of available command categories:

```
designate-status
```

Categories are:

- upgrade

Detailed descriptions are below.

You can also run with a category argument such as **upgrade** to see a list of all commands in that category:

```
designate-status upgrade
```

The following sections describe the available categories and arguments for **designate-status**.

designate-status upgrade

designate-status upgrade check

designate-status upgrade check

Performs a release-specific readiness check before running db sync for the new version. This command expects to have complete configuration and access to the database.

Return Codes

Return code	Description
0	All upgrade readiness checks passed successfully and there is nothing to do.
1	At least one check encountered an issue and requires further investigation. This is considered a warning but the upgrade may be OK.
2	There was an upgrade status check failure that needs to be investigated. This should be considered something that stops an upgrade.
255	An unexpected error occurred.

History of Checks

8.0.0 (Stein)

- Checks that duplicate entries do not exist in the `service_statuses` table.

1.8 Designate Reference

1.8.1 Designate Glossary

The following is a glossary of terms that may be used throughout the Designate documentation and code.

Fully Qualified Domain Name

A domain name that includes all levels of the domain hierarchy, including the root domain (represented by a period at the end). Fully Qualified Domain Name is sometimes abbreviated as FQDN. Example: `www.example.com.`

Record

The data (also known as the RDATA in RFC1034) part of a recordset. Recordsets may have one or more records. An example of a record for a recordset of type **A** would be an IP address, such as `192.0.2.1`.

Recordset

A recordset represents one or more DNS *records* that share the same *Name* and *Type*. For example, a recordset *named* `www.example.com.`, with a *Type* of **A**, may contain two records; `192.0.2.1` and `192.0.2.2`.

Zone

A zone represents a namespace in DNS, for example the zone `example.com.` may contain a *recordset* for `www`.

For information on the Designate API, see the [API Reference](#).

This documentation is generated by the Sphinx toolkit and lives in the [source tree](#).

INDEX

Symbols

<code>__abstractmethods__</code>	(design- nate.backend.agent_backend.impl_djbdns.DjbdnsBackend attribute), 56	<code>__init__()</code>	(design- nate.backend.agent_backend.impl_gdnssd.GdnssdBackend method), 55
<code>__abstractmethods__</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 53	<code>__init__()</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend method), 53
<code>__abstractmethods__</code>	(design- nate.backend.agent_backend.impl_msdns.MSDNSBackend attribute), 55	<code>__init__()</code>	(design- nate.backend.agent_backend.impl_msdns.MSDNSBackend method), 57
<code>__abstractmethods__</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 53	<code>__module__</code>	(design- nate.backend.agent_backend.impl_djbdns.DjbdnsBackend attribute), 56
<code>__abstractmethods__</code>	(design- nate.backend.agent_backend.impl_msdns.MSDNSBackend attribute), 57	<code>__module__</code>	(design- nate.backend.agent_backend.impl_gdnssd.GdnssdBackend attribute), 55
<code>__annotations__</code>	(design- nate.backend.agent_backend.impl_djbdns.DjbdnsBackend attribute), 56	<code>__module__</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 53
<code>__annotations__</code>	(design- nate.backend.agent_backend.impl_gdnssd.GdnssdBackend attribute), 55	<code>__module__</code>	(design- nate.backend.agent_backend.impl_msdns.MSDNSBackend attribute), 57
<code>__annotations__</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 53	<code>__plugin_name__</code>	(design- nate.backend.agent_backend.impl_djbdns.DjbdnsBackend attribute), 56
<code>__annotations__</code>	(design- nate.backend.agent_backend.impl_msdns.MSDNSBackend attribute), 57	<code>__plugin_name__</code>	(design- nate.backend.agent_backend.impl_gdnssd.GdnssdBackend attribute), 55
<code>__backend_status__</code>	(design- nate.backend.agent_backend.impl_djbdns.DjbdnsBackend attribute), 56	<code>__plugin_name__</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 53
<code>__backend_status__</code>	(design- nate.backend.agent_backend.impl_gdnssd.GdnssdBackend attribute), 55	<code>__plugin_name__</code>	(design- nate.backend.agent_backend.impl_msdns.MSDNSBackend attribute), 57
<code>__backend_status__</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 53	<code>__abc_impl__</code>	(design- nate.backend.agent_backend.impl_djbdns.DjbdnsBackend attribute), 57
<code>__backend_status__</code>	(design- nate.backend.agent_backend.impl_msdns.MSDNSBackend attribute), 57	<code>__abc_impl__</code>	(design- nate.backend.agent_backend.impl_gdnssd.GdnssdBackend attribute), 55
<code>__init__()</code>	(design- nate.backend.agent_backend.impl_djbdns.DjbdnsBackend method), 56	<code>__abc_impl__</code>	(design- nate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 53
<code>__init__()</code>	(design- nate.backend.agent_backend.impl_gdnssd.GdnssdBackend method), 55		

[_abc_impl](#) (designate.backend.agent_backend.impl_msdns.MSDNSBackend property), 84
[_check_conf\(\)](#) (designate.backend.agent_backend.impl_gdnsd.GdnsdBackend method), 55
[_check_dirs\(\)](#) (designate.backend.agent_backend.impl_djb dns.Djb dnsBackend static method), 57
[_check_dirs\(\)](#) (designate.backend.agent_backend.impl_gdnsd.GdnsdBackend method), 55
[_concatenate_zone_datafiles\(\)](#) (designate.backend.agent_backend.impl_djb dns.Djb dnsBackend static method), 57
[_execute_knotc\(\)](#) (designate.backend.agent_backend.impl_knot2.Knot2Backend method), 53
[_generate_zone_filename\(\)](#) (designate.backend.agent_backend.impl_gdnsd.GdnsdBackend method), 55
[_lock_name](#) (designate.backend.agent_backend.impl_knot2.Knot2Backend attribute), 54
[_modify_zone\(\)](#) (designate.backend.agent_backend.impl_knot2.Knot2Backend method), 54
[_perform_axfr_from_minidns\(\)](#) (designate.backend.agent_backend.impl_djb dns.Djb dnsBackend method), 57
[_rebuild_data_cdb\(\)](#) (designate.backend.agent_backend.impl_djb dns.Djb dnsBackend method), 57
[_start_minidns_to_knot_axfr\(\)](#) (designate.backend.agent_backend.impl_knot2.Knot2Backend method), 54
[_write_zone_file\(\)](#) (designate.backend.agent_backend.impl_gdnsd.GdnsdBackend method), 55

A
 A (class in designate.objects.rrdata_a), 82
 AAAA (class in designate.objects.rrdata_aaaa), 84
 AAAAList (class in designate.objects.rrdata_aaaa), 86
 action (designate.objects.record.Record property), 75
 action (designate.objects.recordset.RecordSet property), 77
 action (designate.objects.rrdata_a.A property), 82
 action (designate.objects.rrdata_aaaa.AAAA property), 84
 action (designate.objects.rrdata_cname.CNAME property), 87
 action (designate.objects.rrdata_mx.MX property), 89
 action (designate.objects.rrdata_naptr.NAPTR property), 114
 action (designate.objects.rrdata_ns.NS property), 92
 action (designate.objects.rrdata_ptr.PTR property), 95
 action (designate.objects.rrdata_soa.SOA property), 98
 action (designate.objects.rrdata_spf.SPF property), 102
 action (designate.objects.rrdata_srv.SRV property), 104
 action (designate.objects.rrdata_sshfp.SSHFP property), 110
 action (designate.objects.rrdata_txt.TXT property), 108
 action (designate.objects.zone.Zone property), 70
 address (designate.objects.rrdata_a.A property), 82
 address (designate.objects.rrdata_aaaa.AAAA property), 84
 address (designate.objects.rrdata_sshfp.SSHFP property), 110
 address (designate.objects.tsigkey.TsigKey property), 81
 AList (class in designate.objects.rrdata_a), 84
 aliases (designate.objects.pool.Pool property), 73
 APIv2ValidationErrorMiddleware (class in designate.api.middleware), 47
 append() (designate.objects.base.ListObjectMixin method), 68
 architecture
 brief, 35
 AttributeFilter (class in designate.scheduler.filters.attribute_filter), 212
 AttributeListObjectMixin (class in designate.objects.base), 66
 attributes (designate.objects.pool.Pool property), 73
 attributes (designate.objects.zone.Zone property), 70

erty), 70
 auth_pipeline_factory() (in module designate.api.middleware), 47

B

Backend (class in designate.backend.base), 48
 bind9
 install, 137
 Bind9Backend (class in designate.backend.impl_bind9), 49
 Blacklist (class in designate.objects.blacklist), 69
 BlacklistList (class in designate.objects.blacklist), 70
 brief
 architecture, 35
 introduction, 3

C

central
 install, 139
 CentralAPI (class in designate.central.rpcapi), 58
 client (designate.backend.impl_designate.DesignateBackend property), 49
 CNAME (class in designate.objects.rrdata_cname), 87
 cname (designate.objects.rrdata_cname.CNAME property), 87
 CNAMEList (class in designate.objects.rrdata_cname), 89
 configure
 designate, 381
 ContextMiddleware (class in designate.api.middleware), 47
 count() (designate.objects.base.ListObjectMixin method), 68
 count_records() (designate.central.service.Service method), 62
 count_records() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 118
 count_recordsets() (designate.central.service.Service method), 62
 count_recordsets() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 118
 count_report() (designate.central.rpcapi.CentralAPI method), 58

count_report() (designate.central.service.Service method), 62
 count_tenants() (designate.central.service.Service method), 62
 count_tenants() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 118
 count_zone_tasks() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 118
 count_zone_transfer_accept() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 118
 count_zones() (designate.central.service.Service method), 62
 count_zones() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 119
 create_blacklist() (designate.central.rpcapi.CentralAPI method), 58
 create_blacklist() (designate.central.service.Service method), 62
 create_blacklist() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 119
 create_managed_records() (designate.central.rpcapi.CentralAPI method), 58
 create_managed_records() (designate.central.service.Service method), 62
 create_pool() (designate.central.rpcapi.CentralAPI method), 58
 create_pool() (designate.central.service.Service method), 62
 create_pool() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 119
 create_pool_also_notify() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 119
 create_pool_attribute() (designate.storage.sqlalchemy.SQLAlchemyStorage method), 119

<code>create_pool_nameserver()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 119	<code>nate.backend.agent_backend.impl_djbdns.DjbdnsBackend</code> method), 57
<code>create_pool_ns_record()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 119	<code>create_zone()</code> (designate.backend.agent_backend.impl_gdnssd.GdnssdBackend method), 55
<code>create_pool_target()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 119	<code>create_zone()</code> (designate.backend.agent_backend.impl_knot2.Knot2Backend method), 54
<code>create_pool_target_master()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 119	<code>create_zone()</code> (designate.backend.agent_backend.impl_msdns.MSDNSBackend method), 58
<code>create_pool_target_option()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 119	<code>create_zone()</code> (designate.backend.base.Backend method), 48
<code>create_quota()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 119	<code>create_zone()</code> (designate.backend.impl_bind9.Bind9Backend method), 49
<code>create_record()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 119	<code>create_zone()</code> (designate.backend.impl_designate.DesignateBackend method), 49
<code>create_recordset()</code>	(designate.central.rpcapi.CentralAPI method), 59	<code>create_zone()</code> (designate.backend.impl_dynect.DynECTBackend method), 51
<code>create_recordset()</code>	(designate.central.service.Service method), 62	<code>create_zone()</code> (designate.backend.impl_fake.FakeBackend method), 52
<code>create_recordset()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 120	<code>create_zone()</code> (designate.backend.impl_infoblox.InfobloxBackend method), 51
<code>create_service_status()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 120	<code>create_zone()</code> (designate.backend.impl_nsd4.NSD4Backend method), 52
<code>create_tld()</code>	(designate.central.rpcapi.CentralAPI method), 59	<code>create_zone()</code> (designate.backend.impl_pdns4.PDNS4Backend method), 53
<code>create_tld()</code>	(designate.central.service.Service method), 62	<code>create_zone()</code> (designate.central.rpcapi.CentralAPI method), 59
<code>create_tld()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 120	<code>create_zone()</code> (designate.central.service.Service method), 62
<code>create_tsigkey()</code>	(designate.central.rpcapi.CentralAPI method), 59	<code>create_zone()</code> (designate.storage.sqlalchemy.SQLAlchemyStorage method), 120
<code>create_tsigkey()</code>	(designate.central.service.Service method), 62	<code>create_zone_attribute()</code> (designate.storage.sqlalchemy.SQLAlchemyStorage method), 120
<code>create_tsigkey()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 120	<code>create_zone_export()</code> (designate.central.rpcapi.CentralAPI method), 59
<code>create_zone()</code>	(designate-	<code>create_zone_export()</code> (designate-

`nate.central.service.Service` method), `created_at` (designate.objects.rrdata_cname.CNAME property), 87
`create_zone_export()` (designate.storage.sqlalchemy.SQLAlchemyStorage method), 120
`create_zone_import()` (designate.central.rpcapi.CentralAPI method), 59
`create_zone_import()` (designate.central.service.Service method), 62
`create_zone_import()` (designate.storage.sqlalchemy.SQLAlchemyStorage method), 121
`create_zone_master()` (designate.storage.sqlalchemy.SQLAlchemyStorage method), 121
`create_zone_transfer_accept()` (designate.central.rpcapi.CentralAPI method), 59
`create_zone_transfer_accept()` (designate.central.service.Service method), 62
`create_zone_transfer_accept()` (designate.storage.sqlalchemy.SQLAlchemyStorage method), 121
`create_zone_transfer_request()` (designate.central.rpcapi.CentralAPI method), 59
`create_zone_transfer_request()` (designate.central.service.Service method), 62
`create_zone_transfer_request()` (designate.storage.sqlalchemy.SQLAlchemyStorage method), 121
`created_at` (designate.objects.blacklist.Blacklist property), 69
`created_at` (designate.objects.pool.Pool property), 73
`created_at` (designate.objects.quota.Quota property), 74
`created_at` (designate.objects.record.Record property), 75
`created_at` (designate.objects.recordset.RecordSet property), 77
`created_at` (designate.objects.rrdata_a.A property), 82
`created_at` (designate.objects.rrdata_aaaa.AAAA property), 84
`created_at` (designate.objects.rrdata_mx.MX property), 89
`created_at` (designate.objects.rrdata_naptr.NAPTR property), 114
`created_at` (designate.objects.rrdata_ns.NS property), 93
`created_at` (designate.objects.rrdata_ptr.PTR property), 96
`created_at` (designate.objects.rrdata_soa.SOA property), 98
`created_at` (designate.objects.rrdata_spf.SPF property), 102
`created_at` (designate.objects.rrdata_srv.SRV property), 104
`created_at` (designate.objects.rrdata_sshfp.SSHFP property), 111
`created_at` (designate.objects.rrdata_txt.TXT property), 108
`created_at` (designate.objects.server.Server property), 79
`created_at` (designate.objects.tld.Tld property), 80
`created_at` (designate.objects.tsigkey.TsigKey property), 81
`created_at` (designate.objects.zone.Zone property), 70

D

`data` (designate.objects.record.Record property), 75
`data` (designate.objects.rrdata_a.A property), 82
`data` (designate.objects.rrdata_aaaa.AAAA property), 85
`data` (designate.objects.rrdata_cname.CNAME property), 87
`data` (designate.objects.rrdata_mx.MX property), 89
`data` (designate.objects.rrdata_naptr.NAPTR property), 114
`data` (designate.objects.rrdata_ns.NS property), 93
`data` (designate.objects.rrdata_ptr.PTR property), 96
`data` (designate.objects.rrdata_soa.SOA property), 99
`data` (designate.objects.rrdata_spf.SPF property), 102

102
data (*designate.objects.rrdata_srv.SRV* property),
105
data (*designate.objects.rrdata_sshfp.SSHFP*
property), 111
data (*designate.objects.rrdata_txt.TXT* property),
108
database
install, 138
DefaultPoolFilter (class in *designate.scheduler.filters.default_pool_filter*),
215
delayed_notify (*designate.objects.zone.Zone*
property), 70
delete() (*designate.backend.impl_dynect.DynClient*
method), 50
delete_blacklist() (*designate.central.rpcapi.CentralAPI* method),
59
delete_blacklist() (*designate.central.service.Service* method),
62
delete_blacklist() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_managed_records() (*designate.central.rpcapi.CentralAPI* method),
59
delete_managed_records() (*designate.central.service.Service* method),
62
delete_pool() (*designate.central.rpcapi.CentralAPI* method),
59
delete_pool() (*designate.central.service.Service* method),
62
delete_pool() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_pool_also_notify() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_pool_attribute() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_pool_nameserver() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_pool_ns_record() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_pool_target() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_pool_target_master() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_pool_target_option() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_quota() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 121
delete_record() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 122
delete_recordset() (*designate.central.rpcapi.CentralAPI* method),
59
delete_recordset() (*designate.central.service.Service* method),
62
delete_recordset() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 122
delete_tld() (*designate.central.rpcapi.CentralAPI* method),
59
delete_tld() (*designate.central.service.Service* method), 62
delete_tld() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 122
delete_tsigkey() (*designate.central.rpcapi.CentralAPI* method),
59
delete_tsigkey() (*designate.central.service.Service* method),
62
delete_tsigkey() (*designate.storage.sqlalchemy.SQLAlchemyStorage*
method), 122
delete_zone() (*designate.backend.agent_backend.impl_djbdns.DjbdnsBackend*
method), 57
delete_zone() (*designate.backend.agent_backend.impl_gdnssd.GdnssdBackend*
method), 56
delete_zone() (*designate.backend.agent_backend.impl_knot2.Knot2Backend*

<code>method</code>), 54		59	
<code>delete_zone()</code>	(designate.backend.agent_backend.impl_msdns.MSDNSBackend method), 58	<code>delete_zone_import()</code>	(designate.backend.central.service.Service method), 63
<code>delete_zone()</code>	(designate.backend.base.Backend method), 48	<code>delete_zone_import()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 123
<code>delete_zone()</code>	(designate.backend.impl_bind9.Bind9Backend method), 49	<code>delete_zone_master()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 123
<code>delete_zone()</code>	(designate.backend.impl_designate.DesignateBackend method), 49	<code>delete_zone_shares()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 123
<code>delete_zone()</code>	(designate.backend.impl_dynect.DynECTBackend method), 51	<code>delete_zone_transfer_accept()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 123
<code>delete_zone()</code>	(designate.backend.impl_fake.FakeBackend method), 52	<code>delete_zone_transfer_request()</code>	(designate.central.rpcapi.CentralAPI method), 59
<code>delete_zone()</code>	(designate.backend.impl_infoblox.InfobloxBackend method), 51	<code>delete_zone_transfer_request()</code>	(designate.central.service.Service method), 63
<code>delete_zone()</code>	(designate.backend.impl_nsd4.NSD4Backend method), 52	<code>delete_zone_transfer_request()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 123
<code>delete_zone()</code>	(designate.backend.impl_pdns4.PDNS4Backend method), 53	<code>deleted</code>	(designate.objects.zone.Zone property), 70
<code>delete_zone()</code>	(designate.central.rpcapi.CentralAPI method), 59	<code>deleted_at</code>	(designate.objects.zone.Zone property), 70
<code>delete_zone()</code>	(designate.central.service.Service method), 62	<code>description</code>	(designate.objects.blacklist.Blacklist property), 69
<code>delete_zone()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 122	<code>description</code>	(designate.objects.pool.Pool property), 73
<code>delete_zone_attribute()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 122	<code>description</code>	(designate.objects.record.Record property), 75
<code>delete_zone_export()</code>	(designate.central.rpcapi.CentralAPI method), 59	<code>description</code>	(designate.objects.recordset.RecordSet property), 77
<code>delete_zone_export()</code>	(designate.central.service.Service method), 62	<code>description</code>	(designate.objects.rrdata_a.A property), 82
<code>delete_zone_export()</code>	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 122	<code>description</code>	(designate.objects.rrdata_aaaa.AAAA property), 85
<code>delete_zone_import()</code>	(designate.central.rpcapi.CentralAPI method),	<code>description</code>	(designate.objects.rrdata_cname.CNAME property), 87
		<code>description</code>	(designate.objects.rrdata_mx.MX property), 90
		<code>description</code>	(designate.objects.rrdata_naptr.NAPTR

property), 114

description (*designate.objects.rrdata_ns.NS property*), 93

description (*designate.objects.rrdata_ptr.PTR property*), 96

description (*designate.objects.rrdata_soa.SOA property*), 99

description (*designate.objects.rrdata_spf.SPF property*), 102

description (*designate.objects.rrdata_srv.SRV property*), 105

description (*designate.objects.rrdata_sshfp.SSHFP property*), 111

description (*designate.objects.rrdata_txt.TXT property*), 108

description (*designate.objects.tld.Tld property*), 80

description (*designate.objects.zone.Zone property*), 70

designate

- configure*, 381
- install*, 134

designate.api.middleware

- module*, 47

designate.api.service

- module*, 48

designate.backend.agent_backend.impl_djbdns

- module*, 56

designate.backend.agent_backend.impl_gdnssd

- module*, 55

designate.backend.agent_backend.impl_knot2

- module*, 53

designate.backend.agent_backend.impl_msdns

- module*, 57

designate.backend.base

- module*, 48

designate.backend.impl_bind9

- module*, 49

designate.backend.impl_designate

- module*, 49

designate.backend.impl_dynect

- module*, 50

designate.backend.impl_fake

- module*, 52

designate.backend.impl_infoblox

- module*, 51

designate.backend.impl_nsd4

- module*, 52

designate.backend.impl_pdns4

- module*, 53

designate.central.rpcapi

- module*, 58

designate.central.service

- module*, 62

designate.mdns.handler

- module*, 66

designate.mdns.service

- module*, 66

designate.objects.base

- module*, 66

designate.objects.blacklist

- module*, 69

designate.objects.pool

- module*, 73

designate.objects.quota

- module*, 74

designate.objects.record

- module*, 75

designate.objects.recordset

- module*, 77

designate.objects.rrdata_a

- module*, 82

designate.objects.rrdata_aaaa

- module*, 84

designate.objects.rrdata_caa

- module*, 117

designate.objects.rrdata_cert

- module*, 117

designate.objects.rrdata_cname

- module*, 87

designate.objects.rrdata_mx

- module*, 89

designate.objects.rrdata_naptr

- module*, 114

designate.objects.rrdata_ns

- module*, 92

designate.objects.rrdata_ptr

- module*, 95

designate.objects.rrdata_soa

- module*, 98

designate.objects.rrdata_spf

- module*, 102

designate.objects.rrdata_srv

- module*, 104

designate.objects.rrdata_sshfp

- module*, 110

designate.objects.rrdata_txt

- module*, 108

designate.objects.server

- module*, 79

designate.objects.tenant

- module, 80
- designate.objects.tld
 - module, 80
- designate.objects.tsigkey
 - module, 81
- designate.objects.zone
 - module, 70
- designate.quota.base
 - module, 117
- designate.quota.impl_storage
 - module, 117
- designate.sink.service
 - module, 118
- designate.storage.sqlalchemy
 - module, 118
- DesignateBackend (class in *designate.backend.impl_designate*), 49
- DesignateObject (class in *designate.objects.base*), 66
- DesignateRegistry (class in *designate.objects.base*), 68
- DjbdnsBackend (class in *designate.backend.agent_backend.impl_djbdns*), 56
- dns_application (*designate.mdns.service.Service* property), 66
- DynClient (class in *designate.backend.impl_dynect*), 50
- DynClientAuthError, 50
- DynClientError, 50
- DynClientOperationBlocked, 51
- DynECTBackend (class in *designate.backend.impl_dynect*), 51
- DynTimeoutError, 51
- E**
 - email (*designate.objects.zone.Zone* property), 70
 - error_code (*designate.backend.impl_dynect.DynTimeoutError* attribute), 51
 - error_type (*designate.backend.impl_dynect.DynClientOperationBlocked* attribute), 51
 - error_type (*designate.backend.impl_dynect.DynTimeoutError* attribute), 51
 - exchange (*designate.objects.rrdata_mx.MX* property), 90
 - expire (*designate.objects.rrdata_soa.SOA* property), 99
 - expire (*designate.objects.zone.Zone* property), 70
 - export_zone() (*designate.central.rpcapi.CentralAPI* method), 59
 - export_zone() (*designate.central.service.Service* method), 63
 - extend() (*designate.objects.base.ListObjectMixin* method), 68
- F**
 - FakeBackend (class in *designate.backend.impl_fake*), 52
 - FallbackFilter (class in *designate.scheduler.filters.fallback_filter*), 214
 - FaultWrapperMiddleware (class in *designate.api.middleware*), 47
 - fields (*designate.objects.base.PagedListObjectMixin* attribute), 68
 - fields (*designate.objects.base.PersistentObjectMixin* attribute), 68
 - fields (*designate.objects.base.SoftDeleteObjectMixin* attribute), 69
 - fields (*designate.objects.blacklist.Blacklist* attribute), 69
 - fields (*designate.objects.blacklist.BlacklistList* attribute), 70
 - fields (*designate.objects.pool.Pool* attribute), 73
 - fields (*designate.objects.pool.PoolList* attribute), 74
 - fields (*designate.objects.quota.Quota* attribute), 74
 - fields (*designate.objects.quota.QuotaList* attribute), 75
 - fields (*designate.objects.record.Record* attribute), 75
 - fields (*designate.objects.record.RecordList* attribute), 77
 - fields (*designate.objects.recordset.RecordSet* attribute), 77
 - fields (*designate.objects.recordset.RecordSetList* attribute), 79
 - fields (*designate.objects.rrdata_a.A* attribute), 82
 - fields (*designate.objects.rrdata_a.AList* attribute), 84
 - fields (*designate.objects.rrdata_aaaa.AAAA* attribute), 85

`fields` (*designate.objects.rrdata_aaaa.AAAAList* attribute), 86

`fields` (*designate.objects.rrdata_cname.CNAME* attribute), 87

`fields` (*designate.objects.rrdata_cname.CNAMEList* attribute), 89

`fields` (*designate.objects.rrdata_mx.MX* attribute), 90

`fields` (*designate.objects.rrdata_mx.MXList* attribute), 92

`fields` (*designate.objects.rrdata_naptr.NAPTR* attribute), 114

`fields` (*designate.objects.rrdata_naptr.NAPTRList* attribute), 116

`fields` (*designate.objects.rrdata_ns.NS* attribute), 93

`fields` (*designate.objects.rrdata_ns.NSList* attribute), 95

`fields` (*designate.objects.rrdata_ptr.PTR* attribute), 96

`fields` (*designate.objects.rrdata_ptr.PTRList* attribute), 98

`fields` (*designate.objects.rrdata_soa.SOA* attribute), 99

`fields` (*designate.objects.rrdata_soa.SOAList* attribute), 101

`fields` (*designate.objects.rrdata_spf.SPF* attribute), 102

`fields` (*designate.objects.rrdata_spf.SPFList* attribute), 104

`fields` (*designate.objects.rrdata_srv.SRV* attribute), 105

`fields` (*designate.objects.rrdata_srv.SRVList* attribute), 107

`fields` (*designate.objects.rrdata_sshfp.SSHFP* attribute), 111

`fields` (*designate.objects.rrdata_sshfp.SSHFPList* attribute), 113

`fields` (*designate.objects.rrdata_txt.TXT* attribute), 108

`fields` (*designate.objects.rrdata_txt.TXTList* attribute), 110

`fields` (*designate.objects.server.Server* attribute), 79

`fields` (*designate.objects.server.ServerList* attribute), 79

`fields` (*designate.objects.tenant.Tenant* attribute), 80

`fields` (*designate.objects.tenant.TenantList* attribute), 80

`fields` (*designate.objects.tld.Tld* attribute), 80

`fields` (*designate.objects.tld.TldList* attribute), 81

`fields` (*designate.objects.tsigkey.TsigKey* attribute), 81

`fields` (*designate.objects.tsigkey.TsigKeyList* attribute), 82

`fields` (*designate.objects.zone.Zone* attribute), 70

`fields` (*designate.objects.zone.ZoneList* attribute), 72

`Filter` (class in *designate.scheduler.filters.base*), 212

`filter()` (*designate.scheduler.filters.base.Filter* method), 212

`filter()` (*designate.scheduler.filters.pool_id_attribute_filter.PoolIDAttributeFilter* method), 213

`filter_exceptions()` (in module *designate.backend.agent_backend.impl_djbdns*), 57

`filter_exceptions()` (in module *designate.backend.agent_backend.impl_gdnssd*), 56

`find_blacklist()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 123

`find_blacklists()` (*designate.central.rpcapi.CentralAPI* method), 59

`find_blacklists()` (*designate.central.service.Service* method), 63

`find_blacklists()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 123

`find_pool()` (*designate.central.rpcapi.CentralAPI* method), 59

`find_pool()` (*designate.central.service.Service* method), 63

`find_pool()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 123

`find_pool_also_notifies()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 123

`find_pool_also_notify()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 123

`find_pool_attribute()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 123

<i>method</i>), 123	<i>find_recordsets()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 59
<i>find_pool_attributes()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 124	<i>find_recordsets()</i> (<i>designate.nate.central.service.Service method</i>), 63
<i>find_pool_nameserver()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 124	<i>find_recordsets()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 125
<i>find_pool_nameservers()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 124	<i>find_recordsets_axfr()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 126
<i>find_pool_target()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 124	<i>find_recordsets_export()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 126
<i>find_pool_targets()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 124	<i>find_service_status()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 59
<i>find_pools()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 59	<i>find_service_status()</i> (<i>designate.nate.central.service.Service method</i>), 63
<i>find_pools()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 124	<i>find_service_status()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 126
<i>find_quota()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 124	<i>find_service_statuses()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 59
<i>find_quotas()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 125	<i>find_service_statuses()</i> (<i>designate.nate.central.service.Service method</i>), 63
<i>find_record()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 125	<i>find_service_statuses()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 126
<i>find_records()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 59	<i>find_shared_zones()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 60
<i>find_records()</i> (<i>designate.nate.central.service.Service method</i>), 63	<i>find_shared_zones()</i> (<i>designate.nate.central.service.Service method</i>), 63
<i>find_records()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 125	<i>find_shared_zones()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 126
<i>find_recordset()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 59	<i>find_tenants()</i> (<i>designate.nate.central.rpcapi.CentralAPI method</i>), 60
<i>find_recordset()</i> (<i>designate.nate.central.service.Service method</i>), 63	<i>find_tenants()</i> (<i>designate.nate.central.service.Service method</i>), 63
<i>find_recordset()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 125	<i>find_tenants()</i> (<i>designate.nate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 127

<code>find_tld()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 127	<code>nate.storage.sqlalchemy.SQLAlchemyStorage</code> method), 128
<code>find_tlds()</code>	(designate.nate.central.rpcapi.CentralAPI method), 60	<code>find_zone_serial()</code> (designate.nate.backend.agent_backend.impl_djbdns.DjbdnsBackend method), 57
<code>find_tlds()</code>	(designate.central.service.Service method), 63	<code>find_zone_serial()</code> (designate.nate.backend.agent_backend.impl_gdnsd.GdnsdBackend method), 56
<code>find_tlds()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 127	<code>find_zone_serial()</code> (designate.nate.backend.agent_backend.impl_knot2.Knot2Backend method), 54
<code>find_tsigkey()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 127	<code>find_zone_serial()</code> (designate.nate.backend.agent_backend.impl_msdns.MSDNSBackend method), 58
<code>find_tsigkeys()</code>	(designate.nate.central.rpcapi.CentralAPI method), 60	<code>find_zone_transfer_accept()</code> (designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 129
<code>find_tsigkeys()</code>	(designate.nate.central.service.Service method), 63	<code>find_zone_transfer_accepts()</code> (designate.nate.central.rpcapi.CentralAPI method), 60
<code>find_tsigkeys()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 127	<code>find_zone_transfer_accepts()</code> (designate.nate.central.service.Service method), 63
<code>find_zone()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 128	<code>find_zone_transfer_accepts()</code> (designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 129
<code>find_zone_attributes()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 128	<code>find_zone_transfer_request()</code> (designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 129
<code>find_zone_export()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 128	<code>find_zone_transfer_requests()</code> (designate.nate.central.rpcapi.CentralAPI method), 60
<code>find_zone_exports()</code>	(designate.nate.central.rpcapi.CentralAPI method), 60	<code>find_zone_transfer_requests()</code> (designate.nate.central.service.Service method), 63
<code>find_zone_exports()</code>	(designate.nate.central.service.Service method), 63	<code>find_zone_transfer_requests()</code> (designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 129
<code>find_zone_exports()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 128	<code>find_zones()</code> (designate.nate.central.rpcapi.CentralAPI method), 60
<code>find_zone_import()</code>	(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 128	<code>find_zones()</code> (designate.central.service.Service method), 63
<code>find_zone_imports()</code>	(designate.nate.central.rpcapi.CentralAPI method), 60	<code>find_zones()</code> (designate.nate.storage.sqlalchemy.SQLAlchemyStorage method), 129
<code>find_zone_imports()</code>	(designate.nate.central.service.Service method), 63	<code>fingerprint</code> (designate.nate.objects.rrdata_sshfp.SSHFP property), 112
<code>find_zone_imports()</code>	(designate.nate.central.service.Service method), 63	<code>flags</code> (designate.objects.rrdata_naptr.NAPTR property), 116

- `fp_type` (*designate.objects.rrdata_sshfp.SSHFP* property), 113
- `from_dict()` (*designate.objects.base.AttributeListObjectMixin* class method), 66
- `from_dict()` (*designate.objects.base.DesignateObject* class method), 67
- `from_dict()` (*designate.objects.quota.QuotaList* class method), 75
- `from_list()` (*designate.objects.base.DesignateObject* class method), 67
- `from_list()` (*designate.objects.base.ListObjectMixin* class method), 68
- `from_primitive()` (*designate.objects.base.DesignateObject* class method), 67
- `from_response()` (*designate.backend.impl_dynect.DynClientError* static method), 50
- `from_string()` (*designate.objects.rrdata_a.A* method), 83
- `from_string()` (*designate.objects.rrdata_aaaa.AAAA* method), 85
- `from_string()` (*designate.objects.rrdata_cname.CNAME* method), 88
- `from_string()` (*designate.objects.rrdata_mx.MX* method), 91
- `from_string()` (*designate.objects.rrdata_naptr.NAPTR* method), 116
- `from_string()` (*designate.objects.rrdata_ns.NS* method), 94
- `from_string()` (*designate.objects.rrdata_ptr.PTR* method), 97
- `from_string()` (*designate.objects.rrdata_soa.SOA* method), 101
- `from_string()` (*designate.objects.rrdata_spf.SPF* method), 103
- `from_string()` (*designate.objects.rrdata_srv.SRV* method), 107
- `from_string()` (*designate.objects.rrdata_sshfp.SSHFP* method), 113
- `from_string()` (*designate.objects.rrdata_txt.TXT* method), 109
- Fully Qualified Domain Name, 386
- ## G
- `GdnssdBackend` (class in *designate.backend.agent_backend.impl_gdnssd*), 55
- `get()` (*designate.backend.impl_dynect.DynClient* method), 50
- `get()` (*designate.objects.base.AttributeListObjectMixin* method), 66
- `get_absolute_limits()` (*designate.central.rpcapi.CentralAPI* method), 60
- `get_absolute_limits()` (*designate.central.service.Service* method), 63
- `get_blacklist()` (*designate.central.rpcapi.CentralAPI* method), 60
- `get_blacklist()` (*designate.central.service.Service* method), 64
- `get_blacklist()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 129
- `get_client()` (*designate.backend.impl_dynect.DynECTBackend* method), 51
- `get_default_quotas()` (*designate.quota.base.Quota* method), 117
- `get_dict_attr()` (in module *designate.objects.base*), 69
- `get_floatingip()` (*designate.central.rpcapi.CentralAPI* method), 60
- `get_floatingip()` (*designate.central.service.Service* method), 64
- `get_inspector()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 129
- `get_instance()` (*designate.central.rpcapi.CentralAPI* class method), 60
- `get_master_by_ip()` (*designate.objects.zone.Zone* method), 72

<code>get_pool()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60	<i>ignite.objects.rdata_srv.SRV</i> class method), 107	
<code>get_pool()</code>	(<i>designate.central.service.Service</i> method), 64	<code>get_shared_zone()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60
<code>get_pool()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 129	<code>get_shared_zone()</code>	(<i>designate.central.service.Service</i> method), 64
<code>get_pool_also_notify()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 129	<code>get_shared_zone()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130
<code>get_pool_attribute()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 129	<code>get_tenant()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60
<code>get_pool_nameserver()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 129	<code>get_tenant()</code>	(<i>designate.central.service.Service</i> method), 64
<code>get_pool_target()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130	<code>get_tenant()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130
<code>get_quota()</code>	(<i>designate.quota.base.Quota</i> method), 117	<code>get_timings()</code>	(<i>designate.backend.impl_dynect.DynClient</i> method), 50
<code>get_quota()</code>	(<i>designate.quota.impl_storage.StorageQuota</i> method), 117	<code>get_tld()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60
<code>get_quota()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130	<code>get_tld()</code>	(<i>designate.central.service.Service</i> method), 64
<code>get_quotas()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60	<code>get_tld()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130
<code>get_quotas()</code>	(<i>designate.central.service.Service</i> method), 64	<code>get_tsigkey()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60
<code>get_quotas()</code>	(<i>designate.quota.base.Quota</i> method), 117	<code>get_tsigkey()</code>	(<i>designate.central.service.Service</i> method), 64
<code>get_record()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130	<code>get_tsigkey()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130
<code>get_recordset()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60	<code>get_zone()</code>	(<i>designate.backend.impl_bind9.Bind9Backend</i> method), 49
<code>get_recordset()</code>	(<i>designate.central.service.Service</i> method), 64	<code>get_zone()</code>	(<i>designate.central.rpcapi.CentralAPI</i> method), 60
<code>get_recordset_schema_changes()</code>	(<i>designate.objects.record.Record</i> class method), 76	<code>get_zone()</code>	(<i>designate.central.service.Service</i> method), 64
<code>get_recordset_schema_changes()</code>	(<i>designate.objects.rdata_ns.NS</i> class method), 94	<code>get_zone()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130
<code>get_recordset_schema_changes()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130	<code>get_zone_attributes()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage</i> method), 130

<i>method</i>), 131		<i>erty</i>), 86
<code>get_zone_export()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 60	<code>hash (designate.objects.rrdata_cname.CNAME property)</code> , 88
<code>get_zone_export()</code>	(<i>designate.central.service.Service method</i>), 64	<code>hash (designate.objects.rrdata_mx.MX property)</code> , 91
<code>get_zone_export()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>hash (designate.objects.rrdata_naptr.NAPTR property)</code> , 116
<code>get_zone_import()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>hash (designate.objects.rrdata_ns.NS property)</code> , 94
<code>get_zone_import()</code>	(<i>designate.central.service.Service method</i>), 64	<code>hash (designate.objects.rrdata_ptr.PTR property)</code> , 97
<code>get_zone_import()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>hash (designate.objects.rrdata_soa.SOA property)</code> , 101
<code>get_zone_ns_records()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>hash (designate.objects.rrdata_spf.SPF property)</code> , 103
<code>get_zone_ns_records()</code>	(<i>designate.central.service.Service method</i>), 64	<code>hash (designate.objects.rrdata_srv.SRV property)</code> , 107
<code>get_zone_ns_records()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>hash (designate.objects.rrdata_sshfp.SSHFP property)</code> , 113
<code>get_zone_txt_records()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>hash (designate.objects.rrdata_txt.TXT property)</code> , 109
<code>get_zone_txt_records()</code>	(<i>designate.central.service.Service method</i>), 64	<code>id (designate.objects.blacklist.Blacklist property)</code> , 69
<code>get_zone_transfer_accept()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>id (designate.objects.pool.Pool property)</code> , 73
<code>get_zone_transfer_accept()</code>	(<i>designate.central.service.Service method</i>), 64	<code>id (designate.objects.quota.Quota property)</code> , 74
<code>get_zone_transfer_accept()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>id (designate.objects.record.Record property)</code> , 76
<code>get_zone_transfer_request()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>id (designate.objects.recordset.RecordSet property)</code> , 78
<code>get_zone_transfer_request()</code>	(<i>designate.central.service.Service method</i>), 64	<code>id (designate.objects.rrdata_a.A property)</code> , 83
<code>get_zone_transfer_request()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>id (designate.objects.rrdata_aaaa.AAAA property)</code> , 86
<code>get_zone_transfer_request()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>id (designate.objects.rrdata_cname.CNAME property)</code> , 88
<code>get_zone_transfer_request()</code>	(<i>designate.central.service.Service method</i>), 64	<code>id (designate.objects.rrdata_mx.MX property)</code> , 92
<code>get_zone_transfer_request()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>id (designate.objects.rrdata_naptr.NAPTR property)</code> , 116
<code>get_zone_transfer_request()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>id (designate.objects.rrdata_ns.NS property)</code> , 94
<code>get_zone_transfer_request()</code>	(<i>designate.central.service.Service method</i>), 64	<code>id (designate.objects.rrdata_ptr.PTR property)</code> , 97
<code>get_zone_transfer_request()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>id (designate.objects.rrdata_soa.SOA property)</code> , 101
<code>get_zone_transfer_request()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>id (designate.objects.rrdata_spf.SPF property)</code> , 103
<code>get_zone_transfer_request()</code>	(<i>designate.central.service.Service method</i>), 64	<code>id (designate.objects.rrdata_srv.SRV property)</code> , 107
<code>get_zone_transfer_request()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	<code>id (designate.objects.rrdata_sshfp.SSHFP property)</code> , 113
<code>get_zone_transfer_request()</code>	(<i>designate.central.rpcapi.CentralAPI method</i>), 61	<code>id (designate.objects.rrdata_txt.TXT property)</code> , 109
<code>get_zone_transfer_request()</code>	(<i>designate.central.service.Service method</i>), 64	<code>id (designate.objects.server.Server property)</code> , 79
<code>get_zone_transfer_request()</code>	(<i>designate.storage.sqlalchemy.SQLAlchemyStorage method</i>), 131	
H		
<code>hard_limit</code>	(<i>designate.objects.quota.Quota property</i>), 74	
<code>hash</code>	(<i>designate.objects.record.Record property</i>), 76	
<code>hash</code>	(<i>designate.objects.rrdata_a.A property</i>), 83	
<code>hash</code>	(<i>designate.objects.rrdata_aaaa.AAAA property</i>), 86	

- [id \(designate.objects.tenant.Tenant property\), 80](#)
[id \(designate.objects.tld.Tld property\), 81](#)
[id \(designate.objects.tsigkey.TsigKey property\), 81](#)
[id \(designate.objects.zone.Zone property\), 72](#)
[increment_serial \(designate.objects.zone.Zone property\), 72](#)
[increment_serial\(\) \(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method\), 131](#)
[increment_zone_serial\(\) \(designate.nate.central.rpcapi.CentralAPI method\), 61](#)
[increment_zone_serial\(\) \(designate.nate.central.service.Service method\), 64](#)
[index\(\) \(designate.objects.base.ListObjectMixin method\), 68](#)
[InDoubtDefaultPoolFilter \(class in designate.scheduler.filters.in_doubt_default_pool_filter\), 215](#)
[info\(\) \(designate.sink.service.Service method\), 118](#)
[InfobloxBackend \(class in designate.backend.impl_infoblox\), 51](#)
[insert\(\) \(designate.nate.objects.base.ListObjectMixin method\), 68](#)
[install](#)
 [bind9, 137](#)
 [central, 139](#)
 [database, 138](#)
 [designate, 134](#)
 [mysql, 136](#)
 [pools, 137](#)
 [services, 139](#)
[introduction](#)
 [brief, 3](#)
[is_valid \(designate.nate.objects.base.DesignateObject property\), 67](#)
[is_zone_shared_with_project\(\) \(designate.nate.storage.sqlalchemy.SQLAlchemyStorage method\), 131](#)
- ## K
- [KeystoneContextMiddleware \(class in designate.api.middleware\), 47](#)
[Knot2Backend \(class in designate.backend.agent_backend.impl_knot2\), 53](#)
- ## L
- [limit_check\(\) \(designate.quota.base.Quota method\), 117](#)
[list_floatingips\(\) \(designate.nate.central.rpcapi.CentralAPI method\), 61](#)
[list_floatingips\(\) \(designate.nate.central.service.Service method\), 64](#)
[LIST_ITEM_TYPE \(designate.nate.objects.base.ListObjectMixin attribute\), 68](#)
[LIST_ITEM_TYPE \(designate.nate.objects.blacklist.BlacklistList attribute\), 70](#)
[LIST_ITEM_TYPE \(designate.nate.objects.pool.PoolList attribute\), 74](#)
[LIST_ITEM_TYPE \(designate.nate.objects.quota.QuotaList attribute\), 75](#)
[LIST_ITEM_TYPE \(designate.nate.objects.record.RecordList attribute\), 77](#)
[LIST_ITEM_TYPE \(designate.nate.objects.recordset.RecordSetList attribute\), 79](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_a.AList attribute\), 84](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_aaaa.AAAAList attribute\), 86](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_cname.CNAMEList attribute\), 89](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_mx.MXList attribute\), 92](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_naptr.NAPTRList attribute\), 116](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_ns.NSList attribute\), 95](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_ptr.PTRList attribute\), 98](#)
[LIST_ITEM_TYPE \(designate.nate.objects.rrdata_soa.SOAList attribute\), 101](#)

LIST_ITEM_TYPE	(designate.objects.rrdata_spf.SPFList attribute), 104	managed (designate.objects.rrdata_cname.CNAME property), 88
LIST_ITEM_TYPE	(designate.objects.rrdata_srv.SRVList attribute), 107	managed (designate.objects.rrdata_mx.MX property), 92
LIST_ITEM_TYPE	(designate.objects.rrdata_sshfp.SSHFPList attribute), 113	managed (designate.objects.rrdata_naptr.NAPTR property), 116
LIST_ITEM_TYPE	(designate.objects.rrdata_txt.TXTList attribute), 110	managed (designate.objects.rrdata_ns.NS property), 95
LIST_ITEM_TYPE	(designate.objects.server.ServerList attribute), 79	managed (designate.objects.rrdata_ptr.PTR property), 97
LIST_ITEM_TYPE	(designate.objects.tenant.TenantList attribute), 80	managed (designate.objects.rrdata_soa.SOA property), 101
LIST_ITEM_TYPE	(designate.objects.tld.TldList attribute), 81	managed (designate.objects.rrdata_spf.SPF property), 103
LIST_ITEM_TYPE	(designate.objects.tsigkey.TsigKeyList attribute), 82	managed (designate.objects.rrdata_srv.SRV property), 107
LIST_ITEM_TYPE	(designate.objects.zone.ZoneList attribute), 72	managed (designate.objects.rrdata_sshfp.SSHFP property), 113
ListObjectMixin	(class in designate.objects.base), 68	managed (designate.objects.rrdata_txt.TXT property), 109
LOGGING_BLACKLIST	(designate.central.rpcapi.CentralAPI attribute), 58	managed_extra (designate.objects.record.Record property), 76
login()	(designate.backend.impl_dynect.DynClient method), 50	managed_extra (designate.objects.rrdata_a.A property), 84
logout()	(designate.backend.impl_dynect.DynClient method), 50	managed_extra (designate.objects.rrdata_aaaa.AAAA property), 86
M		managed_extra (designate.objects.rrdata_cname.CNAME property), 89
MaintenanceMiddleware	(class in designate.api.middleware), 47	managed_extra (designate.objects.rrdata_mx.MX property), 92
make_context()	(designate.api.middleware.ContextMiddleware method), 47	managed_extra (designate.objects.rrdata_naptr.NAPTR property), 116
managed	(designate.objects.record.Record property), 76	managed_extra (designate.objects.rrdata_ns.NS property), 95
managed	(designate.objects.recordset.RecordSet property), 78	managed_extra (designate.objects.rrdata_ptr.PTR property), 98
managed	(designate.objects.rrdata_a.A property), 83	managed_extra (designate.objects.rrdata_soa.SOA property), 101
managed	(designate.objects.rrdata_aaaa.AAAA property), 86	managed_extra (designate.objects.rrdata_spf.SPF property), 104
		managed_extra (designate.objects.rrdata_srv.SRV property), 107
		managed_extra (designate.objects.rrdata_cname.CNAME property), 89

<i>nate.objects.rrdata_sshfp.SSHFP</i> property), 113	<i>nate.objects.rrdata_aaaa.AAAA</i> property), 86
managed_extra (designate. <i>nate.objects.rrdata_txt.TXT</i> property), 110	managed_plugin_type (designate. <i>nate.objects.rrdata_cname.CNAME</i> property), 89
managed_plugin_name (designate. <i>nate.objects.record.Record</i> property), 77	managed_plugin_type (designate. <i>nate.objects.rrdata_mx.MX</i> property), 92
managed_plugin_name (designate. <i>nate.objects.rrdata_a.A</i> property), 84	managed_plugin_type (designate. <i>nate.objects.rrdata_naptr.NAPTR</i> property), 116
managed_plugin_name (designate. <i>nate.objects.rrdata_aaaa.AAAA</i> property), 86	managed_plugin_type (designate. <i>nate.objects.rrdata_ns.NS</i> property), 95
managed_plugin_name (designate. <i>nate.objects.rrdata_cname.CNAME</i> property), 89	managed_plugin_type (designate. <i>nate.objects.rrdata_ptr.PTR</i> property), 98
managed_plugin_name (designate. <i>nate.objects.rrdata_mx.MX</i> property), 92	managed_plugin_type (designate. <i>nate.objects.rrdata_soa.SOA</i> property), 101
managed_plugin_name (designate. <i>nate.objects.rrdata_naptr.NAPTR</i> property), 116	managed_plugin_type (designate. <i>nate.objects.rrdata_spf.SPF</i> property), 104
managed_plugin_name (designate. <i>nate.objects.rrdata_ns.NS</i> property), 95	managed_plugin_type (designate. <i>nate.objects.rrdata_srv.SRV</i> property), 107
managed_plugin_name (designate. <i>nate.objects.rrdata_ptr.PTR</i> property), 98	managed_plugin_type (designate. <i>nate.objects.rrdata_sshfp.SSHFP</i> property), 113
managed_plugin_name (designate. <i>nate.objects.rrdata_soa.SOA</i> property), 101	managed_plugin_type (designate. <i>nate.objects.rrdata_txt.TXT</i> property), 110
managed_plugin_name (designate. <i>nate.objects.rrdata_spf.SPF</i> property), 104	managed_resource_id (designate. <i>nate.objects.record.Record</i> property), 77
managed_plugin_name (designate. <i>nate.objects.rrdata_srv.SRV</i> property), 107	managed_resource_id (designate. <i>nate.objects.rrdata_a.A</i> property), 84
managed_plugin_name (designate. <i>nate.objects.rrdata_sshfp.SSHFP</i> property), 113	managed_resource_id (designate. <i>nate.objects.rrdata_aaaa.AAAA</i> property), 86
managed_plugin_name (designate. <i>nate.objects.rrdata_txt.TXT</i> property), 110	managed_resource_id (designate. <i>nate.objects.rrdata_cname.CNAME</i> property), 89
managed_plugin_type (designate. <i>nate.objects.record.Record</i> property), 77	managed_resource_id (designate. <i>nate.objects.rrdata_mx.MX</i> property), 92
managed_plugin_type (designate. <i>nate.objects.rrdata_a.A</i> property), 84	managed_resource_id (designate. <i>nate.objects.rrdata_naptr.NAPTR</i> property), 116
managed_plugin_type (designate.	managed_resource_id (designate.

nate.objects.rrdata_ns.NS property), 95	nate.objects.rrdata_srv.SRV property), 107
managed_resource_id (desig- nate.objects.rrdata_ptr.PTR property), 98	managed_resource_region (desig- nate.objects.rrdata_sshfp.SSHFP prop- erty), 113
managed_resource_id (desig- nate.objects.rrdata_soa.SOA property), 101	managed_resource_region (desig- nate.objects.rrdata_txt.TXT property), 110
managed_resource_id (desig- nate.objects.rrdata_spf.SPF property), 104	managed_resource_type (desig- nate.objects.record.Record property), 77
managed_resource_id (desig- nate.objects.rrdata_srv.SRV property), 107	managed_resource_type (desig- nate.objects.rrdata_a.A property), 84
managed_resource_id (desig- nate.objects.rrdata_sshfp.SSHFP prop- erty), 113	managed_resource_type (desig- nate.objects.rrdata_aaaa.AAAA prop- erty), 86
managed_resource_id (desig- nate.objects.rrdata_txt.TXT property), 110	managed_resource_type (desig- nate.objects.rrdata_cname.CNAME property), 89
managed_resource_region (desig- nate.objects.record.Record property), 77	managed_resource_type (desig- nate.objects.rrdata_mx.MX property), 92
managed_resource_region (desig- nate.objects.rrdata_a.A property), 84	managed_resource_type (desig- nate.objects.rrdata_naptr.NAPTR property), 116
managed_resource_region (desig- nate.objects.rrdata_aaaa.AAAA prop- erty), 86	managed_resource_type (desig- nate.objects.rrdata_ns.NS property), 95
managed_resource_region (desig- nate.objects.rrdata_cname.CNAME property), 89	managed_resource_type (desig- nate.objects.rrdata_ptr.PTR property), 98
managed_resource_region (desig- nate.objects.rrdata_mx.MX property), 92	managed_resource_type (desig- nate.objects.rrdata_soa.SOA property), 101
managed_resource_region (desig- nate.objects.rrdata_naptr.NAPTR property), 116	managed_resource_type (desig- nate.objects.rrdata_spf.SPF property), 104
managed_resource_region (desig- nate.objects.rrdata_ns.NS property), 95	managed_resource_type (desig- nate.objects.rrdata_srv.SRV property), 107
managed_resource_region (desig- nate.objects.rrdata_ptr.PTR property), 98	managed_resource_type (desig- nate.objects.rrdata_sshfp.SSHFP prop- erty), 113
managed_resource_region (desig- nate.objects.rrdata_soa.SOA property), 101	managed_resource_type (desig- nate.objects.rrdata_txt.TXT property), 110
managed_resource_region (desig- nate.objects.rrdata_spf.SPF property), 104	managed_tenant_id (desig- nate.objects.record.Record property), 77
managed_resource_region (desig-	managed_tenant_id (desig-

[nate.objects.rdata_a.A property](#),
[84](#)
[managed_tenant_id](#) ([designate.objects.rdata_aaaa.AAAA property](#)), [86](#)
[managed_tenant_id](#) ([designate.objects.rdata_cname.CNAME property](#)), [89](#)
[managed_tenant_id](#) ([designate.objects.rdata_mx.MX property](#)),
[92](#)
[managed_tenant_id](#) ([designate.objects.rdata_naptr.NAPTR property](#)), [116](#)
[managed_tenant_id](#) ([designate.objects.rdata_ns.NS property](#)),
[95](#)
[managed_tenant_id](#) ([designate.objects.rdata_ptr.PTR property](#)),
[98](#)
[managed_tenant_id](#) ([designate.objects.rdata_soa.SOA property](#)),
[101](#)
[managed_tenant_id](#) ([designate.objects.rdata_spf.SPF property](#)),
[104](#)
[managed_tenant_id](#) ([designate.objects.rdata_srv.SRV property](#)),
[107](#)
[managed_tenant_id](#) ([designate.objects.rdata_sshfp.SSHFP property](#)), [113](#)
[managed_tenant_id](#) ([designate.objects.rdata_txt.TXT property](#)),
[110](#)
[masters](#) ([designate.objects.zone.Zone property](#)),
[72](#)
[minimum](#) ([designate.objects.rdata_soa.SOA property](#)), [101](#)
[minimum](#) ([designate.objects.zone.Zone property](#)),
[72](#)
[mname](#) ([designate.objects.rdata_soa.SOA property](#)), [101](#)
[module](#)
[designate.api.middleware](#), [47](#)
[designate.api.service](#), [48](#)
[designate.backend.agent_backend.impl_djbdns](#), [57](#)
[56](#)
[designate.backend.agent_backend.impl_dnsdist](#), [55](#)
[55](#)
[designate.backend.agent_backend.impl_knot](#), [136](#)
[53](#)
[designate.backend.agent_backend.impl_msdns](#),
[57](#)
[designate.backend.base](#), [48](#)
[designate.backend.impl_bind9](#), [49](#)
[designate.backend.impl_designate](#), [49](#)
[designate.backend.impl_dynect](#), [50](#)
[designate.backend.impl_fake](#), [52](#)
[designate.backend.impl_infoblox](#), [51](#)
[designate.backend.impl_ns4](#), [52](#)
[designate.backend.impl_pdns4](#), [53](#)
[designate.central.rpcapi](#), [58](#)
[designate.central.service](#), [62](#)
[designate.mdns.handler](#), [66](#)
[designate.mdns.service](#), [66](#)
[designate.objects.base](#), [66](#)
[designate.objects.blacklist](#), [69](#)
[designate.objects.pool](#), [73](#)
[designate.objects.quota](#), [74](#)
[designate.objects.record](#), [75](#)
[designate.objects.recordset](#), [77](#)
[designate.objects.rdata_a](#), [82](#)
[designate.objects.rdata_aaaa](#), [84](#)
[designate.objects.rdata_caa](#), [117](#)
[designate.objects.rdata_cert](#), [117](#)
[designate.objects.rdata_cname](#), [87](#)
[designate.objects.rdata_mx](#), [89](#)
[designate.objects.rdata_naptr](#), [114](#)
[designate.objects.rdata_ns](#), [92](#)
[designate.objects.rdata_ptr](#), [95](#)
[designate.objects.rdata_soa](#), [98](#)
[designate.objects.rdata_spf](#), [102](#)
[designate.objects.rdata_srv](#), [104](#)
[designate.objects.rdata_sshfp](#), [110](#)
[designate.objects.rdata_txt](#), [108](#)
[designate.objects.server](#), [79](#)
[designate.objects.tenant](#), [80](#)
[designate.objects.tld](#), [80](#)
[designate.objects.tsigkey](#), [81](#)
[designate.objects.zone](#), [70](#)
[designate.quota.base](#), [117](#)
[designate.quota.impl_storage](#), [117](#)
[designate.sink.service](#), [118](#)
[designate.storage.sqlalchemy](#), [118](#)
[MSDNSBackend](#) (class in [designate.backend.agent_backend.impl_msdns](#)),
[57](#)
[MX](#) (class in [designate.objects.rdata_mx](#)), [89](#)
[MXdist](#) (class in [designate.objects.rdata_mx](#)), [92](#)
[mysql](#)
[install](#), [136](#)

N

[name \(designate.objects.pool.Pool property\), 73](#)
[name \(designate.objects.recordset.RecordSet property\), 78](#)
[name \(designate.objects.server.Server property\), 79](#)
[name \(designate.objects.tld.Tld property\), 81](#)
[name \(designate.objects.tsigkey.TsigKey property\), 81](#)
[name \(designate.objects.zone.Zone property\), 72](#)
[name \(designate.scheduler.filters.attribute_filter.AttributeFilter attribute\), 213](#)
[name \(designate.scheduler.filters.default_pool_filter.DefaultPoolFilter attribute\), 215](#)
[name \(designate.scheduler.filters.fallback_filter.FallbackFilter attribute\), 214](#)
[name \(designate.scheduler.filters.in_doubt_default_pool_filter.InDoubtDefaultPoolFilter attribute\), 215](#)
[name \(designate.scheduler.filters.pool_id_attribute_filter.PoolIDAttributeFilter attribute\), 214](#)
[name \(designate.scheduler.filters.random_filter.RandomFilter attribute\), 214](#)
[nameservers \(designate.objects.pool.Pool property\), 73](#)
[NAPTR \(class in designate.objects.rrdata_naptr\), 114](#)
[NAPTRList \(class in designate.objects.rrdata_naptr\), 116](#)
[nested_sort\(\) \(designate.objects.base.DesignateObject method\), 67](#)
[NoAuthContextMiddleware \(class in designate.api.middleware\), 47](#)
[NormalizeURIMiddleware \(class in designate.api.middleware\), 47](#)
[NS \(class in designate.objects.rrdata_ns\), 92](#)
[ns_records \(designate.objects.pool.Pool property\), 73](#)
[NSD4Backend \(class in designate.backend.impl_nsd4\), 52](#)
[NSDCT_VERSION \(designate.backend.impl_nsd4.NSD4Backend attribute\), 52](#)
[nsdname \(designate.objects.rrdata_ns.NS property\), 95](#)
[NSList \(class in designate.objects.rrdata_ns\), 95](#)

O

[obj_attr_is_set\(\) \(designate.objects.base.DesignateObject method\), 67](#)

[obj_cls_from_name\(\) \(designate.objects.base.DesignateObject class method\), 67](#)
[obj_context \(designate.objects.base.DesignateObject property\), 67](#)
[obj_fields \(designate.objects.base.DesignateObject property\), 67](#)
[obj_get_original_value\(\) \(designate.objects.base.DesignateObject method\), 67](#)
[obj_get_schema\(\) \(designate.objects.base.DesignateObject class method\), 67](#)
[OBJ_PROJECT_NAMESPACE \(designate.objects.base.DesignateObject attribute\), 67](#)
[obj_reset_changes\(\) \(designate.objects.base.DesignateObject method\), 67](#)
[OBJ_SERIAL_NAMESPACE \(designate.objects.base.DesignateObject attribute\), 67](#)
[objects \(designate.objects.blacklist.BlacklistList property\), 70](#)
[objects \(designate.objects.pool.PoolList property\), 74](#)
[objects \(designate.objects.quota.QuotaList property\), 75](#)
[objects \(designate.objects.record.RecordList property\), 77](#)
[objects \(designate.objects.recordset.RecordSetList property\), 79](#)
[objects \(designate.objects.rrdata_a.AList property\), 84](#)
[objects \(designate.objects.rrdata_aaaa.AAAAList property\), 86](#)
[objects \(designate.objects.rrdata_cname.CNAMEList property\), 89](#)
[objects \(designate.objects.rrdata_mx.MXList property\), 92](#)
[objects \(designate.objects.rrdata_naptr.NAPTRList property\), 117](#)
[objects \(designate.objects.rrdata_ns.NSList property\), 95](#)
[objects \(designate.objects.rrdata_ptr.PTRList property\), 98](#)
[objects \(designate.objects.rrdata_soa.SOAList property\), 101](#)
[objects \(designate.objects.rrdata_spf.SPFList property\), 101](#)

- property*), 104
 - objects* (*designate.objects.rrdata_srv.SRVList property*), 107
 - objects* (*designate.objects.rrdata_sshfp.SSHFPList property*), 113
 - objects* (*designate.objects.rrdata_txt.TXTList property*), 110
 - objects* (*designate.objects.server.ServerList property*), 79
 - objects* (*designate.objects.tenant.TenantList property*), 80
 - objects* (*designate.objects.tld.TldList property*), 81
 - objects* (*designate.objects.tsigkey.TsigKeyList property*), 82
 - objects* (*designate.objects.zone.ZoneList property*), 72
 - order* (*designate.objects.rrdata_naptr.NAPTR property*), 116
- P**
- PagedListObjectMixin* (*class in designate.objects.base*), 68
 - parent_zone_id* (*designate.objects.zone.Zone property*), 72
 - patch()* (*designate.backend.impl_dynect.DynClient method*), 50
 - pattern* (*designate.objects.blacklist.Blacklist property*), 69
 - PDNS4Backend* (*class in designate.backend.impl_pdns4*), 53
 - PersistentObjectMixin* (*class in designate.objects.base*), 68
 - poll_response()* (*designate.backend.impl_dynect.DynClient method*), 50
 - Pool* (*class in designate.objects.pool*), 73
 - pool_id* (*designate.objects.zone.Zone property*), 72
 - PoolIDAttributeFilter* (*class in designate.scheduler.filters.pool_id_attribute_filter*), 213
 - PoolList* (*class in designate.objects.pool*), 74
 - pools*
 - install*, 137
 - pop()* (*designate.objects.base.ListObjectMixin method*), 68
 - port* (*designate.objects.rrdata_srv.SRV property*), 107
 - post()* (*designate.backend.impl_dynect.DynClient method*), 50
 - preference* (*designate.objects.rrdata_naptr.NAPTR property*), 116
 - priority* (*designate.objects.rrdata_mx.MX property*), 92
 - priority* (*designate.objects.rrdata_srv.SRV property*), 107
 - process_request()* (*designate.api.middleware.KeystoneContextMiddleware method*), 47
 - process_request()* (*designate.api.middleware.MaintenanceMiddleware method*), 47
 - process_request()* (*designate.api.middleware.NoAuthContextMiddleware method*), 47
 - process_request()* (*designate.api.middleware.TestContextMiddleware method*), 47
 - provisioner* (*designate.objects.pool.Pool property*), 74
 - PTR* (*class in designate.objects.rrdata_ptr*), 95
 - ptrname* (*designate.objects.rrdata_ptr.PTR property*), 98
 - PTRList* (*class in designate.objects.rrdata_ptr*), 98
 - purge_zone()* (*designate.storage.sqlalchemy.SQLAlchemyStorage method*), 131
 - purge_zones()* (*designate.central.rpcapi.CentralAPI method*), 61
 - purge_zones()* (*designate.central.service.Service method*), 64
 - purge_zones()* (*designate.storage.sqlalchemy.SQLAlchemyStorage method*), 131
 - put()* (*designate.backend.impl_dynect.DynClient method*), 50
- Q**
- Quota* (*class in designate.objects.quota*), 74
 - Quota* (*class in designate.quota.base*), 117
 - quota* (*designate.central.service.Service property*), 64
 - QuotaList* (*class in designate.objects.quota*), 75
- R**
- RandomFilter* (*class in designate.scheduler.filters.random_filter*), 214

- Record**, 386
- Record** (class in *designate.objects.record*), 75
- RECORD_TYPE** (*designate.objects.rrdata_a.A* attribute), 82
- RECORD_TYPE** (*designate.objects.rrdata_aaaa.AAAA* attribute), 84
- RECORD_TYPE** (*designate.objects.rrdata_cname.CNAME* attribute), 87
- RECORD_TYPE** (*designate.objects.rrdata_mx.MX* attribute), 89
- RECORD_TYPE** (*designate.objects.rrdata_naptr.NAPTR* attribute), 114
- RECORD_TYPE** (*designate.objects.rrdata_ns.NS* attribute), 92
- RECORD_TYPE** (*designate.objects.rrdata_ptr.PTR* attribute), 95
- RECORD_TYPE** (*designate.objects.rrdata_soa.SOA* attribute), 98
- RECORD_TYPE** (*designate.objects.rrdata_spf.SPF* attribute), 102
- RECORD_TYPE** (*designate.objects.rrdata_srv.SRV* attribute), 104
- RECORD_TYPE** (*designate.objects.rrdata_sshfp.SSHFP* attribute), 110
- RECORD_TYPE** (*designate.objects.rrdata_txt.TXT* attribute), 108
- RecordList** (class in *designate.objects.record*), 77
- records** (*designate.objects.recordset.RecordSet* property), 78
- Recordset**, 386
- RecordSet** (class in *designate.objects.recordset*), 77
- recordset_id** (*designate.objects.record.Record* property), 77
- recordset_id** (*designate.objects.rrdata_a.A* property), 84
- recordset_id** (*designate.objects.rrdata_aaaa.AAAA* property), 86
- recordset_id** (*designate.objects.rrdata_cname.CNAME* property), 89
- recordset_id** (*designate.objects.rrdata_mx.MX* property), 92
- recordset_id** (*designate.objects.rrdata_naptr.NAPTR* property), 116
- recordset_id** (*designate.objects.rrdata_ns.NS* property), 95
- recordset_id** (*designate.objects.rrdata_ptr.PTR* property), 98
- recordset_id** (*designate.objects.rrdata_soa.SOA* property), 101
- recordset_id** (*designate.objects.rrdata_spf.SPF* property), 104
- recordset_id** (*designate.objects.rrdata_srv.SRV* property), 107
- recordset_id** (*designate.objects.rrdata_sshfp.SSHFP* property), 113
- recordset_id** (*designate.objects.rrdata_txt.TXT* property), 110
- RecordSetList** (class in *designate.objects.recordset*), 78
- recordsets** (*designate.objects.zone.Zone* property), 72
- refresh** (*designate.objects.rrdata_soa.SOA* property), 101
- refresh** (*designate.objects.zone.Zone* property), 72
- regex** (*designate.objects.rrdata_naptr.NAPTR* property), 116
- registration_hook()** (*designate.objects.base.DesignateRegistry* method), 68
- remove()** (*designate.objects.base.ListObjectMixin* method), 68
- replacement** (*designate.objects.rrdata_naptr.NAPTR* property), 116
- request()** (*designate.backend.impl_dynect.DynClient* method), 50
- RequestHandler** (class in *designate.mdns.handler*), 66
- reset()** (in module *designate.central.rpcapi*), 61
- reset_quotas()** (*designate.central.rpcapi.CentralAPI* method), 61
- reset_quotas()** (*designate.central.service.Service* method), 64
- reset_quotas()** (*designate.quota.base.Quota* method), 117
- reset_quotas()** (*designate.objects.rrdata_naptr.NAPTR* property), 116

`nate.quota.impl_storage.StorageQuota`
method), 117

`reset_timings()` (designate.backend.impl_dynect.DynClient
method), 50

`resource` (designate.objects.quota.Quota property), 74

`resource_id` (designate.objects.tsigkey.TsigKey
property), 82

`retry` (designate.objects.rrdata_soa.SOA property), 101

`retry` (designate.objects.zone.Zone property), 72

`rname` (designate.objects.rrdata_soa.SOA property), 101

`RPC_API_VERSION` (designate.central.rpcapi.CentralAPI
attribute), 58

`RPC_API_VERSION` (designate.central.service.Service
attribute), 62

S

`save()` (designate.objects.base.DesignateObject
method), 67

`scheduler` (designate.central.service.Service
property), 64

`scope` (designate.objects.tsigkey.TsigKey property), 82

`secret` (designate.objects.tsigkey.TsigKey property), 82

`serial` (designate.objects.record.Record property), 77

`serial` (designate.objects.rrdata_a.A property), 84

`serial` (designate.objects.rrdata_aaaa.AAAA
property), 86

`serial` (designate.objects.rrdata_cname.CNAME
property), 89

`serial` (designate.objects.rrdata_mx.MX property), 92

`serial` (designate.objects.rrdata_naptr.NAPTR
property), 116

`serial` (designate.objects.rrdata_ns.NS property), 95

`serial` (designate.objects.rrdata_ptr.PTR property), 98

`serial` (designate.objects.rrdata_soa.SOA property), 101

`serial` (designate.objects.rrdata_spf.SPF property), 104

`serial` (designate.objects.rrdata_srv.SRV property), 107

`serial` (designate.objects.rrdata_sshfp.SSHFP
property), 113

`serial` (designate.objects.rrdata_txt.TXT property), 110

`serial` (designate.objects.zone.Zone property), 72

`Server` (class in designate.objects.server), 79

`ServerList` (class in designate.objects.server), 79

`Service` (class in designate.api.service), 48

`Service` (class in designate.central.service), 62

`Service` (class in designate.mdns.service), 66

`Service` (class in designate.sink.service), 118

`service` (designate.objects.rrdata_naptr.NAPTR
property), 116

`service_name` (designate.api.service.Service
property), 48

`service_name` (designate.central.service.Service
property), 64

`service_name` (designate.mdns.service.Service
property), 66

`service_name` (designate.sink.service.Service
property), 118

`services`
install, 139

`set_quota()` (designate.central.rpcapi.CentralAPI
method), 61

`set_quota()` (designate.central.service.Service
method), 64

`set_quota()` (designate.quota.base.Quota
method), 117

`set_quota()` (designate.quota.impl_storage.StorageQuota
method), 117

`shard` (designate.objects.record.Record property), 77

`shard` (designate.objects.recordset.RecordSet
property), 78

`shard` (designate.objects.rrdata_a.A property), 84

`shard` (designate.objects.rrdata_aaaa.AAAA
property), 86

`shard` (designate.objects.rrdata_cname.CNAME
property), 89

`shard` (designate.objects.rrdata_mx.MX property), 92

`shard` (designate.objects.rrdata_naptr.NAPTR
property), 116

`shard` (designate.objects.rrdata_ns.NS property), 95

[shard](#) (*designate.objects.rrdata_ptr.PTR* property), 98
[shard](#) (*designate.objects.rrdata_soa.SOA* property), 101
[shard](#) (*designate.objects.rrdata_spf.SPF* property), 104
[shard](#) (*designate.objects.rrdata_srv.SRV* property), 107
[shard](#) (*designate.objects.rrdata_sshfp.SSHFP* property), 113
[shard](#) (*designate.objects.rrdata_txt.TXT* property), 110
[shard](#) (*designate.objects.zone.Zone* property), 72
[share_zone\(\)](#) (*designate.central.rpcapi.CentralAPI* method), 61
[share_zone\(\)](#) (*designate.central.service.Service* method), 64
[share_zone\(\)](#) (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
[shared](#) (*designate.objects.zone.Zone* property), 72
[SOA](#) (class in *designate.objects.rrdata_soa*), 98
[SOAList](#) (class in *designate.objects.rrdata_soa*), 101
[SoftDeleteObjectMixin](#) (class in *designate.objects.base*), 69
[SPF](#) (class in *designate.objects.rrdata_spf*), 102
[SPFList](#) (class in *designate.objects.rrdata_spf*), 104
[SQLAlchemyStorage](#) (class in *designate.storage.sqlalchemy*), 118
[SRV](#) (class in *designate.objects.rrdata_srv*), 104
[SRVList](#) (class in *designate.objects.rrdata_srv*), 107
[SSHFP](#) (class in *designate.objects.rrdata_sshfp*), 110
[SSHFPList](#) (class in *designate.objects.rrdata_sshfp*), 113
[start\(\)](#) (*designate.api.service.Service* method), 48
[start\(\)](#) (*designate.backend.agent_backend.impl_djbdns.DjbdnsBackend* method), 57
[start\(\)](#) (*designate.backend.agent_backend.impl_gdnssd.GdnssdBackend* method), 56
[start\(\)](#) (*designate.backend.agent_backend.impl_knot2.Knot2Backend* method), 54
[start\(\)](#) (*designate.backend.agent_backend.impl_msdns.MSDnsBackend* method), 58
[start\(\)](#) (*designate.central.service.Service* method), 64
[start\(\)](#) (*designate.mdns.service.Service* method), 66
[start\(\)](#) (*designate.sink.service.Service* method), 118
[status](#) (*designate.objects.record.Record* property), 77
[status](#) (*designate.objects.recordset.RecordSet* property), 78
[status](#) (*designate.objects.rrdata_a.A* property), 84
[status](#) (*designate.objects.rrdata_aaaa.AAAA* property), 86
[status](#) (*designate.objects.rrdata_cname.CNAME* property), 89
[status](#) (*designate.objects.rrdata_mx.MX* property), 92
[status](#) (*designate.objects.rrdata_naptr.NAPTR* property), 116
[status](#) (*designate.objects.rrdata_ns.NS* property), 95
[status](#) (*designate.objects.rrdata_ptr.PTR* property), 98
[status](#) (*designate.objects.rrdata_soa.SOA* property), 101
[status](#) (*designate.objects.rrdata_spf.SPF* property), 104
[status](#) (*designate.objects.rrdata_srv.SRV* property), 107
[status](#) (*designate.objects.rrdata_sshfp.SSHFP* property), 113
[status](#) (*designate.objects.rrdata_txt.TXT* property), 110
[status](#) (*designate.objects.zone.Zone* property), 72
[stop\(\)](#) (*designate.api.service.Service* method), 48
[stop\(\)](#) (*designate.central.service.Service* method), 65
[stop\(\)](#) (*designate.mdns.service.Service* method), 66
[stop\(\)](#) (*designate.sink.service.Service* method), 118
[storage](#) (*designate.central.service.Service* property), 65
[storage](#) (*designate.mdns.service.Service* property), 66
[StorageQuota](#) (class in *designate.backend.impl_storage*), 117
[STRING_KEYS](#) (*designate.objects.base.DesignateObject* method), 64

attribute), 67

STRING_KEYS (designate.objects.blacklist.Blacklist attribute), 69

STRING_KEYS (designate.objects.pool.Pool attribute), 73

STRING_KEYS (designate.objects.quota.Quota attribute), 74

STRING_KEYS (designate.objects.record.Record attribute), 75

STRING_KEYS (designate.objects.recordset.RecordSet attribute), 77

STRING_KEYS (designate.objects.server.Server attribute), 79

STRING_KEYS (designate.objects.tenant.Tenant attribute), 80

STRING_KEYS (designate.objects.tld.Tld attribute), 80

STRING_KEYS (designate.objects.tsigkey.TsigKey attribute), 81

STRING_KEYS (designate.objects.zone.Zone attribute), 70

T

target (designate.central.service.Service attribute), 65

target (designate.objects.rrdata_srv.SRV property), 107

targets (designate.objects.pool.Pool property), 74

Tenant (class in designate.objects.tenant), 80

tenant_id (designate.objects.pool.Pool property), 74

tenant_id (designate.objects.quota.Quota property), 74

tenant_id (designate.objects.record.Record property), 77

tenant_id (designate.objects.recordset.RecordSet property), 78

tenant_id (designate.objects.rrdata_a.A property), 84

tenant_id (designate.objects.rrdata_aaaa.AAAA property), 86

tenant_id (designate.objects.rrdata_cname.CNAME property), 89

tenant_id (designate.objects.rrdata_mx.MX property), 92

tenant_id (designate.objects.rrdata_naptr.NAPTR property), 116

tenant_id (designate.objects.rrdata_ns.NS property), 95

tenant_id (designate.objects.rrdata_ptr.PTR property), 98

tenant_id (designate.objects.rrdata_soa.SOA property), 101

tenant_id (designate.objects.rrdata_spf.SPF property), 104

tenant_id (designate.objects.rrdata_srv.SRV property), 107

tenant_id (designate.objects.rrdata_sshfp.SSHFP property), 113

tenant_id (designate.objects.rrdata_txt.TXT property), 110

tenant_id (designate.objects.zone.Zone property), 72

TenantList (class in designate.objects.tenant), 80

TestContextMiddleware (class in designate.api.middleware), 47

Tld (class in designate.objects.tld), 80

TldList (class in designate.objects.tld), 81

to_dict() (designate.objects.base.AttributeListObjectMixin method), 66

to_dict() (designate.objects.base.DesignateObject method), 67

to_dict() (designate.objects.quota.QuotaList method), 75

to_list() (designate.objects.base.ListObjectMixin method), 68

to_primitive() (designate.objects.base.DesignateObject method), 67

total_count (designate.objects.recordset.RecordSetList property), 79

total_count (designate.objects.zone.ZoneList property), 73

transferred_at (designate.objects.zone.Zone property), 72

TsigKey (class in designate.objects.tsigkey), 81

TsigKeyList (class in designate.objects.tsigkey), 82

ttd (designate.objects.recordset.RecordSet property), 78

- `ttl` (*designate.objects.zone.Zone* property), 72
- `TXT` (class in *designate.objects.rdata_txt*), 108
- `txt_data` (*designate.objects.rdata_spf.SPF* property), 104
- `txt_data` (*designate.objects.rdata_txt.TXT* property), 110
- `TXList` (class in *designate.objects.rdata_txt*), 110
- `type` (*designate.objects.recordset.RecordSet* property), 78
- `type` (*designate.objects.zone.Zone* property), 72
- ## U
- `unshare_zone()` (*designate.central.rpcapi.CentralAPI* method), 61
- `unshare_zone()` (*designate.central.service.Service* method), 65
- `unshare_zone()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update()` (*designate.objects.base.DesignateObject* method), 68
- `update_blacklist()` (*designate.central.rpcapi.CentralAPI* method), 61
- `update_blacklist()` (*designate.central.service.Service* method), 65
- `update_blacklist()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_floatingip()` (*designate.central.rpcapi.CentralAPI* method), 61
- `update_floatingip()` (*designate.central.service.Service* method), 65
- `update_pool()` (*designate.central.rpcapi.CentralAPI* method), 61
- `update_pool()` (*designate.central.service.Service* method), 65
- `update_pool()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_pool_also_notify()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_pool_attribute()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_pool_nameserver()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_pool_ns_record()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_pool_target()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_pool_target_master()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_pool_target_option()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_quota()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 132
- `update_record()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 133
- `update_recordset()` (*designate.central.rpcapi.CentralAPI* method), 61
- `update_recordset()` (*designate.central.service.Service* method), 65
- `update_recordset()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 133
- `update_service_status()` (*designate.central.rpcapi.CentralAPI* method), 61
- `update_service_status()` (*designate.central.service.Service* method), 65
- `update_service_status()` (*designate.storage.sqlalchemy.SQLAlchemyStorage* method), 133
- `update_status()` (*designate.central.rpcapi.CentralAPI* method), 61
- `update_status()` (*designate.central.service.Service* method), 65
- `update_tld()` (*designate.central.rpcapi.CentralAPI* method),

61		update_zone_export()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 134
update_tld()	(designate.central.service.Service method), 65	update_zone_import()	(designate.central.rpcapi.CentralAPI method), 61
update_tld()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 133	update_zone_import()	(designate.central.service.Service method), 65
update_tsigkey()	(designate.central.rpcapi.CentralAPI method), 61	update_zone_import()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 134
update_tsigkey()	(designate.central.service.Service method), 65	update_zone_master()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 134
update_tsigkey()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 133	update_zone_transfer_accept()	(designate.backend.agent_backend.impl_djbdns.DjbdnsBackend method), 57
update_zone()	(designate.backend.agent_backend.impl_djbdns.DjbdnsBackend method), 57	update_zone_transfer_request()	(designate.central.rpcapi.CentralAPI method), 61
update_zone()	(designate.backend.agent_backend.impl_gdnsd.GdnsdBackend method), 56	update_zone_transfer_request()	(designate.central.service.Service method), 65
update_zone()	(designate.backend.agent_backend.impl_knot2.Knot2Backend method), 54	update_zone_transfer_request()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 134
update_zone()	(designate.backend.agent_backend.impl_msdns.MSDNSBackend method), 58	updated_at	(designate.objects.blacklist.Blacklist property), 69
update_zone()	(designate.backend.base.Backend method), 48	updated_at	(designate.objects.pool.Pool property), 74
update_zone()	(designate.backend.impl_bind9.Bind9Backend method), 49	updated_at	(designate.objects.quota.Quota property), 75
update_zone()	(designate.central.rpcapi.CentralAPI method), 61	updated_at	(designate.objects.record.Record property), 77
update_zone()	(designate.central.service.Service method), 65	updated_at	(designate.objects.recordset.RecordSet property), 78
update_zone()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 133	updated_at	(designate.objects.rdata_a.A property), 84
update_zone_attribute()	(designate.storage.sqlalchemy.SQLAlchemyStorage method), 133	updated_at	(designate.objects.rdata_aaaa.AAAA property), 86
update_zone_export()	(designate.central.rpcapi.CentralAPI method), 61	updated_at	(designate.objects.rdata_cname.CNAME property), 89
update_zone_export()	(designate.central.service.Service method), 65	updated_at	(designate.objects.rdata_mx.MX property), 92
		updated_at	(designate.objects.rdata_naptr.NAPTR property), 116

`updated_at` (*designate.objects.rrdata_ns.NS* property), 95
`updated_at` (*designate.objects.rrdata_ptr.PTR* property), 98
`updated_at` (*designate.objects.rrdata_soa.SOA* property), 101
`updated_at` (*designate.objects.rrdata_spf.SPF* property), 104
`updated_at` (*designate.objects.rrdata_srv.SRV* property), 107
`updated_at` (*designate.objects.rrdata_sshfp.SSHFP* property), 113
`updated_at` (*designate.objects.rrdata_txt.TXT* property), 110
`updated_at` (*designate.objects.server.Server* property), 79
`updated_at` (*designate.objects.tld.Tld* property), 81
`updated_at` (*designate.objects.tsigkey.TsigKey* property), 82
`updated_at` (*designate.objects.zone.Zone* property), 72

V
`validate()` (*designate.objects.base.DesignateObject* method), 68
`validate()` (*designate.objects.recordset.RecordSet* method), 78
`validate()` (*designate.objects.zone.Zone* method), 72
`version` (*designate.objects.blacklist.Blacklist* property), 69
`version` (*designate.objects.pool.Pool* property), 74
`version` (*designate.objects.quota.Quota* property), 75
`version` (*designate.objects.record.Record* property), 77
`version` (*designate.objects.recordset.RecordSet* property), 78
`version` (*designate.objects.rrdata_a.A* property), 84
`version` (*designate.objects.rrdata_aaaa.AAAA* property), 86
`version` (*designate.objects.rrdata_cname.CNAME* property), 89
`version` (*designate.objects.rrdata_mx.MX* property), 92
`version` (*designate.objects.rrdata_naptr.NAPTR* property), 116
`version` (*designate.objects.rrdata_ns.NS* property), 95
`version` (*designate.objects.rrdata_ptr.PTR* property), 98
`version` (*designate.objects.rrdata_soa.SOA* property), 101
`version` (*designate.objects.rrdata_spf.SPF* property), 104
`version` (*designate.objects.rrdata_srv.SRV* property), 107
`version` (*designate.objects.rrdata_sshfp.SSHFP* property), 113
`version` (*designate.objects.rrdata_txt.TXT* property), 110
`version` (*designate.objects.server.Server* property), 79
`version` (*designate.objects.tld.Tld* property), 81
`version` (*designate.objects.tsigkey.TsigKey* property), 82
`version` (*designate.objects.zone.Zone* property), 72

V

`validate()` (*designate.objects.base.DesignateObject* method), 68
`validate()` (*designate.objects.recordset.RecordSet* method), 78
`validate()` (*designate.objects.zone.Zone* method), 72
`version` (*designate.objects.blacklist.Blacklist* property), 69
`version` (*designate.objects.pool.Pool* property), 74
`version` (*designate.objects.quota.Quota* property), 75
`version` (*designate.objects.record.Record* property), 77
`version` (*designate.objects.recordset.RecordSet* property), 78
`version` (*designate.objects.rrdata_a.A* property), 84
`version` (*designate.objects.rrdata_aaaa.AAAA* property), 86
`version` (*designate.objects.rrdata_cname.CNAME* property), 89
`version` (*designate.objects.rrdata_mx.MX* property), 92

W

`weight` (*designate.objects.rrdata_srv.SRV* property), 107
`worker_api` (*designate.central.service.Service* property), 65
`worker_api` (*designate.mdns.handler.RequestHandler* property), 66
`wsgi_application` (*designate.api.service.Service* property), 48

X

`xfr_zone()` (*designate.central.rpcapi.CentralAPI* method), 61
`xfr_zone()` (*designate.central.service.Service* method), 66

Z

`Zone`, 386
`Zone` (class in *designate.objects.zone*), 70
`zone_count` (*designate.objects.tenant.Tenant* property), 80
`zone_id` (*designate.objects.record.Record* property), 77
`zone_id` (*designate.objects.recordset.RecordSet* property), 78

`zone_id` (*designate.objects.rrdata_a.A* property),
84

`zone_id` (*designate.objects.rrdata_aaaa.AAAA*
property), 86

`zone_id` (*designate.objects.rrdata_cname.CNAME*
property), 89

`zone_id` (*designate.objects.rrdata_mx.MX* prop-
erty), 92

`zone_id` (*designate.objects.rrdata_naptr.NAPTR*
property), 116

`zone_id` (*designate.objects.rrdata_ns.NS* prop-
erty), 95

`zone_id` (*designate.objects.rrdata_ptr.PTR* prop-
erty), 98

`zone_id` (*designate.objects.rrdata_soa.SOA* prop-
erty), 101

`zone_id` (*designate.objects.rrdata_spf.SPF* prop-
erty), 104

`zone_id` (*designate.objects.rrdata_srv.SRV* prop-
erty), 107

`zone_id` (*designate.objects.rrdata_sshfp.SSHFP*
property), 113

`zone_id` (*designate.objects.rrdata_txt.TXT* prop-
erty), 110

`zone_name` (*designate.objects.recordset.RecordSet* prop-
erty), 78

`ZoneList` (*class in designate.objects.zone*), 72

`zones` (*designate.objects.tenant.Tenant* property),
80