Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language Python 3

main.py

```python
#list questions 1-10
#Name: Premnath Sonkusare

#find Largest number in a list
def find_largest_number(nums:list)->int:
  largest = float("-inf")
  for num in nums:
    if num>largest:
      largest = num
  return largest

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

#for Largest number of list
    input_list = list(input("Enter the numbers of a list").split(","))
    formatted_list = get_formatted_list(input_list)
    print(f"Given list is: {formatted_list}")
    largest_num = find_largest_number(formatted_list)
    print(f"largest number of a list is:{largest_num}")

```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the numbers of a list4,7,8,5,1,2,6,3
Given list is: [4, 7, 8, 5, 1, 2, 6, 3]
largest number of a list is:8


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:05 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language Python 3

main.py

```python
#List questions 1-10
#Name: Premnath Sonkusare

#Count a target value
def count_target_value(nums:list,target:int)->int:
  target_count = 0
  for num in nums:
    if num==target:
      target_count+=1
  return target_count

#get formatted list
def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

    #for count a target values
      input_list = list(input("Enter the numbers of a list").split(","))
      formatted_list = get_formatted_list(input_list)
      print(f"Given list is: {formatted_list}")
      target_value = int(input("Enter Target Value:"))
      target_count = count_target_value(formatted_list,target_value)
      print(f"Target count of {target_value} is: {target_count}")
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the numbers of a list4,5,8,6,8,6,6,96,5,6,96,7
Given list is: [4, 5, 8, 6, 8, 6, 6, 96, 5, 6, 96, 7]
Enter Target Value:5
Target count of 5 is: 2


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:05 AM 12-Nov-26

Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Google Cloud
Start free with 30 GB storage, 1 GB of outbound data transfers per month and more.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | { } Beautify | Language Python 3

main.py

```python
#List questions 1-10
#Name: Premnath Sonkusare

# #count even number of list

def count_even_numbers(nums:list)->int:
  even_count = 0
  for num in nums:
    if num%2 == 0:
      even_count += 1
  return even_count

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

    #for couting a even number of a list
    input_list = list(input("Enter the numbers of a list").split(","))
    formatted_list = get_formatted_list(input_list)
    print(f"Given list is: {formatted_list}")
    even_count = count_even_numbers(formatted_list)
    print(f"Even number count is:{even_count}")
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Generate presentation
Create a presentation about e-commerce from my files
Adobe Acrobat

input

```
Enter the numbers of a list7,2,4,7,5,3,20
Given list is: [7, 2, 4, 7, 5, 3, 20]
Even number count is:3


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
29°C Mostly sunny
ENG IN
8:03 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions II-25
#Name: Premnath Sonkusare

def find_sum_of_divisors(number:int)->int:
    if number < 1:
            raise ValueError("number must be positive")
    total_sum = 0
    factor = 1
    while factor * factor <= number:
        if number % factor == 0:
            total_sum += factor
            if factor != number // factor:
                total_sum = total_sum+(number//factor)
        factor += 1
    return total_sum

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        total_sum = find_sum_of_divisors(input_num)
        print(f"total sum of divisors is: {total_sum}")
    except Exception as e:
                print(type(e).__name__)
                print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the number:45
total sum of divisors is: 78


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:24 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

```python
#Maths questions 11-25
#Name: Premnath Sonkusare

def manhattan_distance(first: tuple[int, int], second: tuple[int, int]) -> int:
    if len(first)==2 and len(second)==2:
        return abs(first[0] - second[0]) + abs(first[1] - second[1])
    else:
        raise ValueError("Cordinate are not supported, Enter 2 Cordinates Only for both the points!")

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":
    try:

        first_input_cordinate = list(input("Enter Point 1 Cordinate(x,y):").split(","))
        second_input_cordinate = list(input("Enter Point 2 Cordinate(x,y):").split(","))
        point_1 = get_formatted_list(first_input_cordinate)
        point_2 = get_formatted_list(second_input_cordinate)
        man_dis = manhattan_distance(point_1,point_2)
        print(f"Manhattan Distance of {point_1} and {point_2} is : {man_dis}")

    except Exception as e:
        print(type(e).__name__)
        print(str(e))

```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter Point 1 Cordinate(x,y):1,4
Enter Point 2 Cordinate(x,y):21,4
Manhattan Distance of [1, 4] and [21, 4] is : 20


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:23 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions 11-25
#Name: Premnath Sonkusare

def find_digital_root(number:int)->int:
    if number < 0:
        raise ValueError("number must be non-negative")
    while number >= 10:
        total = 0
        for character in str(number):
            total += int(character)
        number = total
    return number

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        find_dig_root = find_digital_root(input_num)
        print(f"Digital root of {input_num} is: {find_dig_root}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the number:124
Digital root of 124 is: 7


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:22 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions 11-25
#Name: Premnath Sonkusare

def dec_to_hex(num:int)->str:
    if num<0:
        raise ValueError("Number cant be negative!")
    if num==0:
        return "0"
    hex_digits = "0123456789ABCDEF"
    hex_value = []
    while num>0:
        hex_value.append(hex_digits[num%16])
        num //= 16
    return "".join(reversed(hex_value))

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        hex_val = dec_to_hex(input_num)
        print(f"Hexadecimal value of {input_num} is: {hex_val}")
    except Exception as e:
            print(type(e).__name__)
            print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the number:123
Hexadecimal value of 123 is: 7B


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:22 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions II-25
#Name: Premnath Sonkusare


def dec_to_bin(num:int)->str:
    if num<0:
        raise ValueError("Number cant be negative!")
    if num==0:
        return "0"
    bin_num = []
    while num>0:
        bin_num.append(str(num%2))
        num //= 2
    return "".join(reversed(bin_num))

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        bin_num = dec_to_bin(input_num)
        print(f"Binary number of {input_num} is:{bin_num}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial



Adobe Acrobat

input

```
Enter the number:124
Binary number of 124 is:1111100


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

21°C Sunny

ENG IN

8:22 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

```python
#Maths questions II-25
#Name: Premnath Sonkusare

def decimal_to_base(number: int, base: int) -> str:
    if number < 0:
        raise ValueError("number must be non-negative")
    if base < 2 or base > 16:
        raise ValueError("base must be from 2 to 16")
    if number == 0:
        return "0"
    digits = "0123456789ABCDEF"
    result: list[str] = []
    while number > 0:
        result.append(digits[number % base])
        number //= base
    return "".join(reversed(result))

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the Decimal number:"))
        input_base = int(input("Enter the base of the number(2,8,10,16) which you want to convert:"))
        any_base = decimal_to_base(input_num,input_base)
        print(f"Decimal number in base{input_base} is :{any_base}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the Decimal number:125
Enter the base of the number(2,8,10,16) which you want to convert:2
Decimal number in base2 is :1111101


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

21°C Sunny

ENG IN

8:21 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions II-25
#Name: Premnath Sonkusare

def count_num_of_divisors(number:int)->int:
    if number < 1:
        raise ValueError("number must be positive")
    count = 0
    factor = 1
    while factor * factor <= number:
        if number % factor == 0:
            count += 1
            if factor != number // factor:
                count += 1
        factor += 1
    return count

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        counts = count_num_of_divisors(input_num)
        print(f"Count of divisors are : {counts}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the number:214
Count of divisors are : 4


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:20 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions II-15
#Name: Premnath Sonkusare

def is_perfect_square(num:int)->bool:
    if num<1:
        raise ValueError("Number must be Positive!")
    root = num**0.5
    if root*root == num:
        return True
    return False
if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        is_perf_sq = is_perfect_square(input_num)
        print(f"Input number is Perfect Square:{is_perf_sq}")
    except Exception as e:
            print(type(e).__name__)
            print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the number:412
Input number is Perfect Square:True


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

21°C Sunny

ENG IN

8:20 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions II-15
#Name: Premnath Sonkusare


def is_perfect_number(number:int)->bool:
    if number < 1:
        raise False
    if number==1:
        return False
    total =1
    factor = 2
    while factor * factor < number:
        if number % factor == 0:
            total += factor
            if factor != number // factor:
                total += number // factor
        factor += 1
    return total == number

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        is_perf_num = is_perfect_number(input_num)
        print(f"Input number is Perfect Number:{is_perf_num}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial



Adobe Acrobat

input

```
Enter the number:42
Input number is Perfect Number:False


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

21°C Sunny

ENG IN

8:19 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leading | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions 11-15
#Name: Premnath Sonkusare

def celsius_to_fahrenheit(celsius: float) -> float:
    return celsius * 9 / 5 + 32

if __name__ == "__main__":
    try:
        input_temp = int(input("Enter the temperature in celsius:"))
        fah_temp = celsius_to_fahrenheit(input_temp)
        print(f"Given temperature in fahrenheit is: {fah_temp}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))

```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the temperature in celsius:125
Given temperature in fahrenheit is: 257.0


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

21°C Sunny

ENG IN

8:19 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leading | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions II-25
#Name: Premnath Sonkusare

def bin_to_oct(num:str)->str:
    if len(num) == 0:
        raise ValueError("Binary number cant be empty!")
    dec_num = 0
    for digit in num:
        if digit not in "01":
            raise ValueError("Binary number can only contain 0 and 1!")
        dec_num = dec_num*2+int(digit)
    if dec_num==0:
        return "0"
    oct_num = []
    while dec_num>0:
        oct_num.append(str(dec_num%8))
        dec_num //= 8
    return "".join(reversed(oct_num))

if __name__ == "__main__":
    try:
        input_num = str(input("Enter the binary number:"))
        ans = bin_to_oct(input_num)
        print(f"Octal number of {input_num} is: {ans}")
    except Exception as e:
            print(type(e).__name__)
            print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the binary number:100111
Octal number of 100111 is: 47


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:18 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Download Current File | Language: Python 3

main.py

```python
#Maths questions 11-25
#Name: Premnath Sonkusare

def bin_to_dec(num:str)->int:
    if len(num) == 0:
        raise ValueError("Binary number cant be empty!")
    dec_num = 0
    for digit in num:
        if digit not in "01":
            raise ValueError("Binary number can only contain 0 and 1!")
        dec_num = dec_num*2+int(digit)
    return dec_num

if __name__ == "__main__":
    try:
        input_num = str(input("Enter the binary number:"))
        dec_num = bin_to_dec(input_num)
        print(f"Decimal number of {input_num} is:{dec_num}")
    except Exception as e:
            print(type(e).__name__)
            print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

Command line arguments:

Standard Input: Interactive Console | Text

29°C Mostly sunny | ENG IN | 8:17 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions 11-25
#Name: Premnath Sonkusare

def bin_to_dec(num:str)->int:
    if len(num) == 0:
        raise ValueError("Binary number cant be empty!")
    dec_num = 0
    for digit in num:
        if digit not in "01":
            raise ValueError("Binary number can only contain 0 and 1!")
        dec_num = dec_num*2+int(digit)
    return dec_num

if __name__ == "__main__":
    try:
        input_num = str(input("Enter the binary number:"))
        dec_num = bin_to_dec(input_num)
        print(f"Decimal number of {input_num} is:{dec_num}")
    except Exception as e:
            print(type(e).__name__)
            print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the binary number:10011
Decimal number of 10011 is:19


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:12 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#removing duplicate values of a list
def get_unique_list(nums:list)->list:
  unique_list = list()
  for num in nums:
    if num not in unique_list:
      unique_list.append(num)
  return unique_list

 #get formatted list
def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

    #for removing duplicates or get unique list
    input_list = list(input("Enter the numbers of a list").split(","))
    formatted_list = get_formatted_list(input_list)
    print(f"Given list is: {formatted_list}")
    unique_list = get_unique_list(formatted_list)
    print(f"Unique list is: {unique_list}")
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the numbers of a list1,4,54,2,6,6,5,7
Given list is: [1, 4, 54, 2, 6, 6, 5, 7]
Unique list is: [1, 4, 54, 2, 6, 5, 7]


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:11 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#List questions 1-10
#Name: Premnath Sonkusare

# #reverse a list
def  get_reverse_list(nums:list)->list:
  reverse_list = list()
  for num in range(len(nums)-1,-1,-1):
    reverse_list.append(nums[num])
  return reverse_list
  #return nums[::-1]

   #get formatted list
def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

      #for reverse a list
      input_list = list(input("Enter the numbers of a list").split(","))
      formatted_list = get_formatted_list(input_list)
      print(f"Given list is: {formatted_list}")
      reverse_list = get_reverse_list(formatted_list)
      print(f"Reverse list is: {reverse_list}")
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the numbers of a list1,2,6,3,6,6,54
Given list is: [1, 2, 6, 3, 6, 6, 54]
Reverse list is: [54, 6, 6, 3, 6, 2, 1]


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:10 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#List questions 1-10
#Name: Premnath Sonkusare

# #keep positive number of list
def find_positive_nums(nums:list)->list:
  positive_num_list = list()
  for num in nums:
    if num>0:
      positive_num_list.append(num)
  return positive_num_list

 #get formatted list
def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

    #for positive number list
       input_list = list(input("Enter the numbers of a list").split(","))
       formatted_list = get_formatted_list(input_list)
       print(f"Given list is: {formatted_list}")
       pos_num_list = find_positive_nums(formatted_list)
       print(f"Positive number list is:{pos_num_list}")
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the numbers of a list1,4,5,2,4,-7,1,2
Given list is: [1, 4, 5, 2, 4, -7, 1, 2]
Positive number list is:[1, 4, 5, 2, 4, 1, 2]


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:10 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

```python
#find merge sorted list
def find_merge_sorted_list(L1:list,L2:list)->list:
  merge_list = list()
  L1.sort()
  L2.sort()
  i1 = 0
  i2 = 0
  while i1<len(L1) and i2<len(L2):
    if L1[i1]<L2[i2]:
      merge_list.append(L1[i1])
      i1 += 1
    else :
      merge_list.append(L2[i2])
      i2 += 1
  while i1<len(L1):
      merge_list.append(L1[i1])
      i1 += 1
  while i2<len(L2):
      merge_list.append(L2[i2])
      i2 += 1
  return merge_list

 #get formatted list
def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

    #for merge list
    input_list = list(input("Enter the numbers of a list1:").split(","))
    formatted_list1 = get_formatted_list(input_list)
    print(f"Given list1 is: {formatted_list1}")
    input_list = list(input("Enter the numbers of a list2:").split(","))
    formatted_list2 = get_formatted_list(input_list)
    print(f"Given list2 is: {formatted_list2}")
    merge_list = find_merge_sorted_list(formatted_list1,formatted_list2)
    print(f"Merge list is: {merge_list}")
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the numbers of a list1:1,2,3,6,5,4,1,2
Given list1 is: [1, 2, 3, 6, 5, 4, 1, 2]
Enter the numbers of a list2:4,5,2,24
Given list2 is: [4, 5, 2, 24]
Merge list is: [1, 1, 2, 2, 2, 3, 4, 4, 5, 5, 6, 24]
```

Search

29°C Mostly sunny

ENG IN

8:08 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#list questions 1-10
#Name: Premnath Sonkusare

#find sum of all numbers of list
def find_sum_all_numbers(nums:list)->int:
  total_sum = 0
  for num in nums:
    total_sum +=num
  return total_sum

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

 #for total sum
    input_list = list(input("Enter the numbers of a list").split(","))
    formatted_list = get_formatted_list(input_list)
    print(f"Given list is: {formatted_list}")
    total_sum = find_sum_all_numbers(formatted_list)
    print(f"Total sum of the list is:{total_sum}")
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the numbers of a list4,5,6,5,6,5,2,1,2,3,7
Given list is: [4, 5, 6, 5, 6, 5, 2, 1, 2, 3, 7]
Total sum of the list is:46


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:07 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#list questions 1-10
#Name: Premnath Sonkusare

#find smallest number of list
def find_smallest_number(nums:list)->int:
  smallest = float("inf")
  for num in nums:
    if num<smallest:
      smallest = num
  return smallest

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

    #for smallest number of list
    input_list = list(input("Enter the numbers of a list").split(","))
    formatted_list = get_formatted_list(input_list)
    print(f"Given list is: {formatted_list}")
    smallest_num = find_smallest_number(formatted_list)
    print(f"smallest number of a list is:{smallest_num}")
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the numbers of a list4,5,6,5,9,6,5,6,5,6,67
Given list is: [4, 5, 6, 5, 9, 6, 5, 6, 5, 6, 67]
smallest number of a list is:4


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:06 AM 12-Nov-26

Online Python Compiler - onlin | New Tab | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
# #find second largest number of list
def find_second_largest_num(nums:list)->int:
  largest = float('-inf')
  second_largest = float('-inf')
  if len(nums)==0:
    raise ValueError("list have no values!")
  for num in nums:
    if num>largest:
      second_largest = largest
      largest = num
    elif num<largest and num>second_largest:
      second_largest = num
  if second_largest == float('-inf'):
    raise ValueError("Second largest doe not exist!")
  if largest == second_largest:
    raise ValueError("List must have distinct values!")
  return second_largest

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":

    #for finding a second largest Value
    input_list = list(input("Enter the numbers of a list").split(","))
    formatted_list = get_formatted_list(input_list)
    print(f"Given list is: {formatted_list}")
    sec_largest = find_second_largest_num(formatted_list)
    print(f"SEcond largest value is:{sec_largest}")
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the numbers of a list4,5,6,9,8,5,4,6,6,7
Given list is: [4, 5, 6, 9, 8, 5, 4, 6, 6, 7]
SEcond largest value is:8


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

29°C Mostly sunny

ENG IN

8:06 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def is_palindrome(text: str) -> bool:
    left = 0
    right = len(text) - 1
    while left < right:
        if text[left] != text[right]:
            return False
        left = left + 1
        right = right - 1
    return True

if __name__ == "__main__":
    try:
        input_str = str(input("Enter the String:"))
        is_palindrome_str = is_palindrome(input_str)
        print(f"Given String is Palindrome: {is_palindrome_str}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the String:BOB
Given String is Palindrome: True


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 8:36 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def find_num_sign(num:int)->str:
    if num<0:
        return "Negative"
    if num>0:
        return "Positive"
    return "Zero"

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        check_sign = find_num_sign(input_num)
        print(f"Sign of the Given number {input_num} is : {check_sign}")
    except Exception as e:
            print(type(e).__name__)
            print(str(e))

```

input

```
Enter the number:-85
Sign of the Given number -85 is : Negative


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 8:35 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def check_leap_year(year:int)->bool:
    if year%400 == 0:
        return True
    if year%100 == 0:
        return False
    return year%4 == 0

if __name__ == "__main__":
    try:
        input_year = int(input("Enter a year:"))
        is_leap_year = check_leap_year(input_year)
        print(f"{input_year} is Leap year : {is_leap_year}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))

```

input

```
Enter a year:1900
1900 is Leap year : False


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 8:34 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def check_even_or_odd(num:int)->str:
    if num % 2 == 0:
        return "Even"
    else:
        return "Odd"

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        check_num = check_even_or_odd(input_num)
        print(f"Given Number {input_num} is: {check_num} number.")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the number:125
Given Number 125 is: Odd number.


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:34 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def check_balance_brackets(problem:str)->bool:
  count_sq_bracket=0
  count_sm_bracket=0
  count_cr_bracket=0
  for ch in problem:
    if ch =="[":
      count_sq_bracket +=1
    if ch =="]":
      count_sq_bracket -=1
    if ch =="(":
      count_sm_bracket +=1
    if ch ==")":
      count_sm_bracket -=1
    if ch =="{":
      count_cr_bracket +=1
    if ch =="}":
      count_cr_bracket -=1
  if(count_sq_bracket==0 and count_sm_bracket==0 and count_cr_bracket==0):
      return True
  return False

if __name__ == "__main__":
    try:
        input_brackets = str(input("Enter the Brackets({}()[]):"))
        is_balanced = check_balance_brackets(input_brackets)
        print(f"Given bracket is Balanced bracket:{is_balanced}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the Brackets({}()[])::{}(){
Given bracket is Balanced bracket:False


...Program finished with exit code 0
Press ENTER to exit console.
```

Search
21°C Sunny
ENG IN
8:33 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def build_prefix_sum(nums:list[int])->list:
  ans = list()
  ans.append(nums[0])
  for index in range(1,len(nums)):
    ans.append(ans[index-1]+nums[index])
  return ans

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":
    try:
        input_list = list(input("Enter the numbers of list:").split(","))
        form_list = get_formatted_list(input_list)
        prefix_sum_list = build_prefix_sum(form_list)
        print(f"Builded prefix sum list is:{prefix_sum_list}")
    except Exception as e:
            print(type(e).__name__)
            print(str(e))
```

input

```
Enter the numbers of list:1,5,4,2,3,6,66,4
Builded prefix sum list is:[1, 6, 10, 12, 15, 21, 87, 91]


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 8:32 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def sorting_using_bubble_sort(numbers: list[int]) -> list[int]:
    result = numbers.copy()
    for end in range(len(result) - 1, 0, -1):
        for index in range(end):
            if result[index] > result[index + 1]:
                temporary = result[index]
                result[index] = result[index + 1]
                result[index + 1] = temporary
    return result

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":
    try:
        input_list = list(input("Enter the numbers of list:").split(","))
        form_list = get_formatted_list(input_list)
        sorted_list = sorting_using_bubble_sort(form_list)
        print(f"Sorted List is: {sorted_list}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the numbers of list:1,4,5,2,3,5
Sorted List is: [1, 2, 3, 4, 5, 5]


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:31 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def search_by_binary_search(numbers: list[int], target: int) -> tuple[int,bool]:
    left = 0
    right = len(numbers) - 1
    while left <= right:
        middle = (left + right) // 2
        if numbers[middle] == target:
            return middle,True
        if numbers[middle] < target:
            left = middle + 1
        else:
            right = middle - 1
    return -1,False

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list


if __name__ == "__main__":
    try:
        input_list = list(input("Enter the numbers of list:").split(","))
        form_list = sorted(get_formatted_list(input_list))
        print(f"sorted list is:{form_list}")
        inp_target = int(input("Enter the target valau:"))
        index,is_present = search_by_binary_search(form_list,inp_target)
        print(f"Target Value {inp_target} present at {index+1}th position in a input list:{is_present}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the numbers of list:1,5,4,2,63,6,5,6,64
sorted list is:[1, 2, 4, 5, 5, 6, 6, 63, 64]
Enter the target valau:64
Target Value 64 present at 9th position in a input list:True

...Program finished with exit code 0
```

Search | 21°C Sunny | ENG IN | 8:30 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
# Maths questions 11-25
# Name: Premnath Sonkusare

def hex_to_dec(num: str) -> int:
    num = num.upper()

    if len(num) == 0:
        raise ValueError("Hexadecimal number can't be empty!")

    dec_num = 0
    hex_digits = "0123456789ABCDEF"

    for digit in num:
        if digit not in hex_digits:
            raise ValueError(f"Character '{digit}' is not a valid hexadecimal number!")
        digit_val = hex_digits.index(digit)
        dec_num = dec_num * 16 + digit_val

    return dec_num

if __name__ == "__main__":
    try:
        input_num = input("Enter the hexadecimal number: ")
        dec_val = hex_to_dec(input_num)
        print(f"Decimal Value of {input_num} is : {dec_val}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.
Start free trial
Adobe Acrobat

input

```
Enter the hexadecimal number: AB
Decimal Value of AB is : 171


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:27 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leading | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions 11-25
#Name: Premnath Sonkusare

def sec_to_hour_min_sec(sec:int)->tuple[int,int,int]:
    hour = sec//3600
    remaining_sec = sec%3600
    min = remaining_sec//60
    seconds = remaining_sec%60
    return hour,min,seconds

if __name__ == "__main__":
    try:

        input_sec = int(input("Enter the seconds:"))
        hour,min,sec = sec_to_hour_min_sec(input_sec)
        print(f"Hour:{hour},Minutes:{min},Seconds:{sec}")

    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial

Adobe Acrobat

input

```
Enter the seconds:36215
Hour:10,Minutes:3,Seconds:35


...Program finished with exit code 0
Press ENTER to exit console.
```

Search | 21°C Sunny | ENG IN | 8:24 AM 12-Nov-26

Online Python Compiler - onlin | LeetCode - The World's Leadin | Ask Gemini

onlinegdb.com/online_python_compiler

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

```python
#Maths questions 11-25
#Name: Premnath Sonkusare


def find_sum_upto_n(num:int)->int:
    if num< 1:
        raise ValueError("Number must be positive!")
    total_sum = 0
    for n in range(num+1):
        total_sum += n
    return total_sum

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        total_sum = find_sum_upto_n(input_num)
        print(f"Total Sum is: {total_sum}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

Turn docs into presentations with AI.

Start free trial



Adobe Acrobat

input

```
Enter the number:9
Total Sum is: 45


...Program finished with exit code 0
Press ENTER to exit console.
```

Search

21°C Sunny

ENG IN

8:24 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def is_superset(left:set[int],right:set[int])->bool:
    return left.issuperset(right)


def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        set_2 = set(input("Enter the second set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        formatted_set_2 = get_formatted_set(set_2)
        is_super_set = is_superset(formatted_set_1, formatted_set_2)
        print(f"First set {formatted_set_1} is the superset of Second set {formatted_set_2} is:  {is_super_set}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first set:1,6,5,4,56,6,4
Enter the second set:1,5
First set {1, 4, 5, 6, 56} is the superset of Second set {1, 5} is:  True


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 8:49 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def is_subset(left:set[int],right:set[int])->bool:
    return left.issubset(right)


def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        set_2 = set(input("Enter the second set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        formatted_set_2 = get_formatted_set(set_2)
        is_sub_set = is_subset(formatted_set_1, formatted_set_2)
        print(f"First set {formatted_set_1} is the subset of Second set {formatted_set_2} is: {is_sub_set}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first set:1,4,5,2,6,6
Enter the second set:1,6
First set {1, 2, 4, 5, 6} is the subset of Second set {1, 6} is: False


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:49 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def are_disjoint(left:set[int],right:set[int])->bool:
    return left.isdisjoint(right)

def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:

        set_1 = set(input("Enter the first set:").split(","))
        set_2 = set(input("Enter the second set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        formatted_set_2 = get_formatted_set(set_2)
        is_disjoint_set= are_disjoint(formatted_set_1, formatted_set_2)
        print(f"First set {formatted_set_1} is the disjoint of Second set {formatted_set_2} is:  {is_disjoint_set}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

input

```
Enter the first set:1,4,5,2,6,6
Enter the second set:4,5,6,6,5,6
First set {1, 2, 4, 5, 6} is the disjoint of Second set {4, 5, 6} is:  False


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online
Search
21°C Sunny
ENG IN
8:48 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 50-60
#Name: Premnath Sonkusare

def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set



def add_value_to_set(nums:set[int], value:int)->set[int]:
    result = nums.copy()
    result.add(value)
    return result

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        value = int(input("Enter the value to add to a set (only one):"))
        formatted_set_1 = get_formatted_set(set_1)
        added_value_set = add_value_to_set(formatted_set_1,value)
        print(f"Set after adding a value is: {added_value_set}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))


```

input

```
Enter the first set:1,4,5,1,2,6,4
Enter the value to add to a set (only one):87
Set after adding a value is: {1, 2, 4, 5, 6, 87}


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:47 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def sorting_using_selection_sort(numbers: list[int]) -> list[int]:
    result = numbers.copy()
    for index in range(len(result)):
        smallest_index = index
        for candidate in range(index + 1, len(result)):
            if result[candidate] < result[smallest_index]:
                smallest_index = candidate
        temporary = result[index]
        result[index] = result[smallest_index]
        result[smallest_index] = temporary
    return result

def get_formatted_list(nums:list)->list:
     formatted_list = list()
     for num in nums:
         formatted_list.append(int(num))
     return formatted_list

if __name__ == "__main__":
    try:
        input_list = list(input("Enter the numbers of list:").split(","))
        form_list = get_formatted_list(input_list)
        sorted_list = sorting_using_selection_sort(form_list)
        print(f"Sorted List is: {sorted_list}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the numbers of list:1,4,5,5,6,56
Sorted List is: [1, 4, 5, 5, 6, 56]


...Program finished with exit code 0
Press ENTER to exit console.
```

close ad [x]

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:46 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

def search_by_linear_search(numbers: list[int], target: int) -> tuple[int,bool]:
    for index in range(len(numbers)):
        if numbers[index] == target:
            return index,True
    return -1,False

if __name__ == "__main__":
    try:
        input_list = list(input("Enter the numbers of list:").split(","))
        form_list = get_formatted_list(input_list)
        inp_target = int(input("Enter the target valau:"))
        index,is_present = search_by_linear_search(form_list,inp_target)
        print(f"Target Value {inp_target} present at {index+1}th position in a input list:{is_present}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```


input

```
Enter the numbers of list:1,2,5,6,6,5,6,6
Enter the target valau:2
Target Value 2 present at 2th position in a input list:True


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:46 AM 12-Nov-26

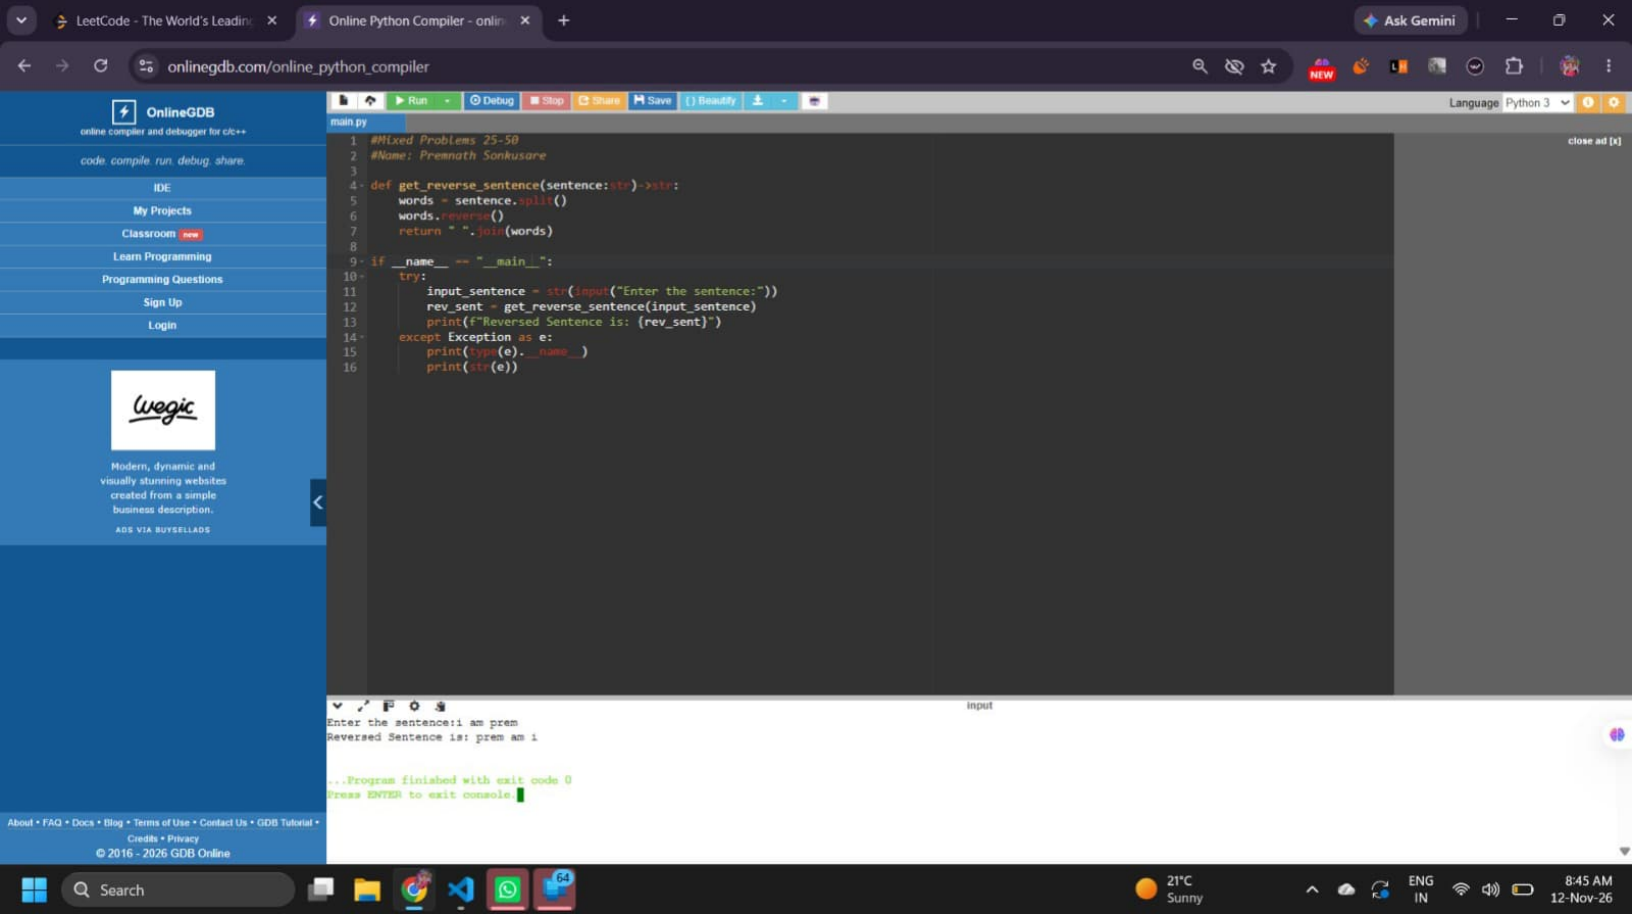
LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online
Run
Debug
Stop
Share
Save
{} Beautify
Language Python 3
main.py
close ad [x]
#Mixed Problems 25-50
#Name: Premnath Sonkusare
def get_reverse_sentence(sentence:str)->str:
words = sentence.split()
words.reverse()
return " ".join(words)
if __name__ == "__main__":
try:
input_sentence = str(input("Enter the sentence:"))
rev_sent = get_reverse_sentence(input_sentence)
print(f"Reversed Sentence is: {rev_sent}")
except Exception as e:
print(type(e).__name__)
print(str(e))
input
Enter the sentence:i am prem
Reversed Sentence is: prem am i
...Program finished with exit code 0
Press ENTER to exit console.
Search
21°C
Sunny
ENG
IN
8:45 AM
12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def get_reverse_num(number:int)->int:
    if number < 0:
        number = abs(number)
    reversed_number = 0
    while number > 0:
        digit = number % 10
        reversed_number = reversed_number * 10 + digit
        number = number // 10
    return reversed_number

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        count_zeros = str(input_num).count('0')
        for zero in str(input_num):
            if zero == '0':
                count_zeros += 1
        inp_copy = input_num
        reverse_num = get_reverse_num(inp_copy)
        if count_zeros > 0:
            reverse_num = reverse_num * (10 ** count_zeros)
        if input_num<0:
            reverse_num *= (-1)
        print(f"Reverse of the Given number {input_num} is: {reverse_num}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

input

```
Enter the number:4521
Reverse of the Given number 4521 is: 1254


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:45 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def get_mult_table(num:int)->list[int]:
    table = list()
    for i in range(1, 11):
        table.append(num * i)
    return table

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        mult_table = get_mult_table(input_num)
        print(f"Multiplication Table of {input_num} is: {mult_table}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))

```

input

```
Enter the number:6
Multiplication Table of 6 is: [6, 12, 18, 24, 30, 36, 42, 48, 54, 60]

...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:44 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def get_fizzbuzz_sequence(num:int)->list:
    if num<0:
        raise ValueError("Number not be Negetive!")
    result = list()
    for n in range(1,num+1):
        if n % 15 == 0:
            result.append("FizzBuzz")
        elif n % 3 == 0:
            result.append("Fizz")
        elif n % 5 == 0:
            result.append("Buzz")
        else:
            result.append(str(n))
    return result

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number for Fizzzbuzz series:"))
        fiz_seq = get_fizzbuzz_sequence(input_num)
        print(f"{input_num} number of Fizzbuzz sequence is: {fiz_seq}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

close ad [x]

input

```
Enter the number for Fizzzbuzz series:20
20 number of Fizzbuzz sequence is: ['1', '2', 'Fizz', '4', 'Buzz', 'Fizz', '7', '8', 'Fizz', 'Buzz', '11', 'Fizz', '13', '14', 'FizzBuzz', '16', '17', 'Fizz', '19', 'Buzz']

...Program finished with exit code 0
Press ENTER to exit console.
```


Search | 21°C Sunny | ENG IN | 8:43 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def find_sum_of_digits(number:int)->int:
    if number < 0:
        raise ValueError("number must not be negative")
    total = 0
    while number > 0:
        total = total + number % 10
        number = number // 10
    return total

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        sum_of_digits = find_sum_of_digits(input_num)
        print(f"Sum of digits of {input_num} is: {sum_of_digits}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the number:45
Sum of digits of 45 is: 9


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:43 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def find_lcm(first,second)->int:
    if first <= 0 or second <= 0:
        raise ValueError("numbers must be positive")
    left = first
    right = second
    while right != 0:
        left, right = right, left % right
    gcd = left
    return first * second // gcd

if __name__ == "__main__":
    try:
        input_num1 = int(input("Enter the first number:"))
        input_num2 = int(input("Enter the second number:"))
        lcm = find_lcm(input_num1,input_num2)
        print(f"LCM of {input_num1} and {input_num2} is: {lcm}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first number:14
Enter the second number:25
LCM of 14 and 25 is: 350

...Program finished with exit code 0
Press ENTER to exit console.
```

https://www.onlinegdb.com/online_python_compiler#tab-stdin
Search
21°C Sunny
ENG IN
8:42 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def largest_of_three(first: int, second: int, third: int) -> int:
    largest = first
    if second > largest:
        largest = second
    if third > largest:
        largest = third
    return largest

if __name__ == "__main__":
    try:
        input_num1 = int(input("Enter the first number:"))
        input_num2 = int(input("Enter the second number:"))
        input_num3 = int(input("Enter the third number:"))
        check_largest = largest_of_three(input_num1, input_num2, input_num3)
        print(f"Largest of three number is:{check_largest}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first number:12
Enter the second number:10
Enter the third number:25
Largest of three number is:25


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 8:42 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def find_gcd(first: int, second: int) -> int:
    if first <= 0 or second <= 0:
        raise ValueError("numbers must be positive")
    while second != 0:
        remainder = first % second
        first = second
        second = remainder
    return first

if __name__ == "__main__":
    try:
        input_num1 = int(input("Enter the first number:"))
        input_num2 = int(input("Enter the second number:"))
        gcd = find_gcd(input_num1,input_num2)
        print(f"GCD of {input_num1} and {input_num2} is: {gcd}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first number:12
Enter the second number:10
GCD of 12 and 10 is: 2


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:41 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def find_factorial(number: int) -> int:
    if number < 0:
        raise ValueError("number must not be negative")
    result = 1
    for value in range(2, number + 1):
        result = result * value
    return result

if __name__ == "__main__":
    try:
        input_num = int(input("Enter the number:"))
        factorial_num = find_factorial(input_num)
        print(f"Factorial of {input_num} is: {factorial_num}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the number:5
Factorial of 5 is: 120


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:40 AM 12-Nov-26

LeetCode - The World's Leading | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def get_fibonacci_series(count:int)->list:
    if count < 0:
        raise ValueError("count must not be negative")
    numbers: list[int] = []
    current = 0
    next_number = 1
    for _ in range(count):
        numbers.append(current)
        current, next_number = next_number, current + next_number
    return numbers

if __name__ == "__main__":
    try:
        input_num = int(input("Enter how many number of fibonacci series you want:"))
        fib_series = get_fibonacci_series(input_num)
        print(f"{input_num} sequence of fibonnaci series is: {fib_series}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```


input

```
Enter how many number of fibonacci series you want:15
15 sequence of fibonnaci series is: [0, 1, 1, 2, 3, 5, 8, 13, 21, 34, 55, 89, 144, 233, 377]


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 8:40 AM 12-Nov-26

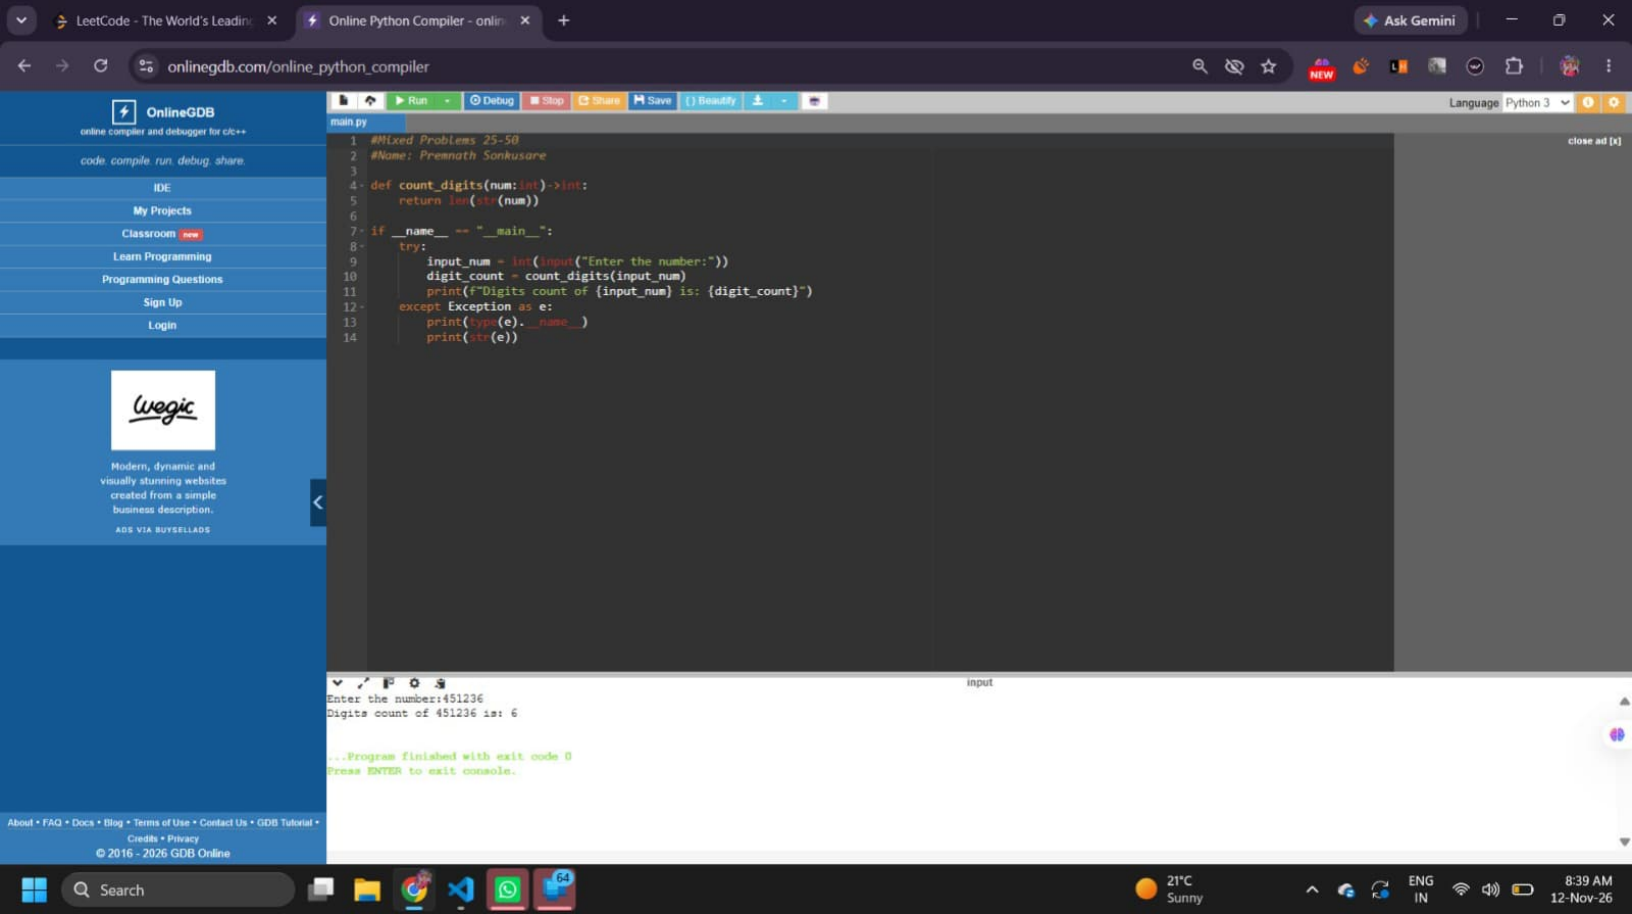
LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online
Run
Debug
Stop
Share
Save
{} Beautify
Language Python 3
main.py
close ad [x]
#Mixed Problems 25-50
#Name: Premnath Sonkusare
def count_digits(num:int)->int:
return len(str(num))
if __name__ == "__main__":
try:
input_num = int(input("Enter the number:"))
digit_count = count_digits(input_num)
print(f"Digits count of {input_num} is: {digit_count}")
except Exception as e:
print(type(e).__name__)
print(str(e))
input
Enter the number:451236
Digits count of 451236 is: 6
...Program finished with exit code 0
Press ENTER to exit console.
Search
21°C
Sunny
ENG
IN
8:39 AM
12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def count_vowels(word:str)->int:
    vowels = "aeiouAEIOU"
    count = 0
    for char in word:
        if char in vowels:
            count += 1
    return count


if __name__ == "__main__":
    try:
        input_word = str(input("Enter the Word:"))
        count_vowel = count_vowels(input_word)
        print(f"Count of vowels in {input_word} is: {count_vowel}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the Word:premnath
Count of vowels in premnath is: 2


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:39 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def count_each_character(word: str) -> str:
    low = 0
    ans = ""

    while low < len(word):
        count = 1
        high = low + 1

        while high < len(word) and word[low] == word[high]:
            count += 1
            high += 1

        ans = ans + word[low] + str(count)
        low = high
    return ans

if __name__ == "__main__":
    input_word = input("Enter the word: ")
    count = count_each_character(input_word)
    print(f"Character frequency: {count}")
```

input

```
Enter the word: AABBC
Character frequency: A2B2C1


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:37 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Mixed Problems 25-50
#Name: Premnath Sonkusare

def check_sorted_list(numbers: list[int]) -> bool:
    for index in range(1, len(numbers)):
        if numbers[index] < numbers[index - 1]:
            return False
    return True

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

if __name__ == "__main__":
    try:
        input_list = list(input("Enter the numbers of list:").split(","))
        form_list = get_formatted_list(input_list)
        is_sorted = check_sorted_list(form_list)
        print(f"Given list is sorted: {is_sorted}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```


input

```
Enter the numbers of list:1,2,3,4,5
Given list is sorted: True


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:37 AM 12-Nov-26

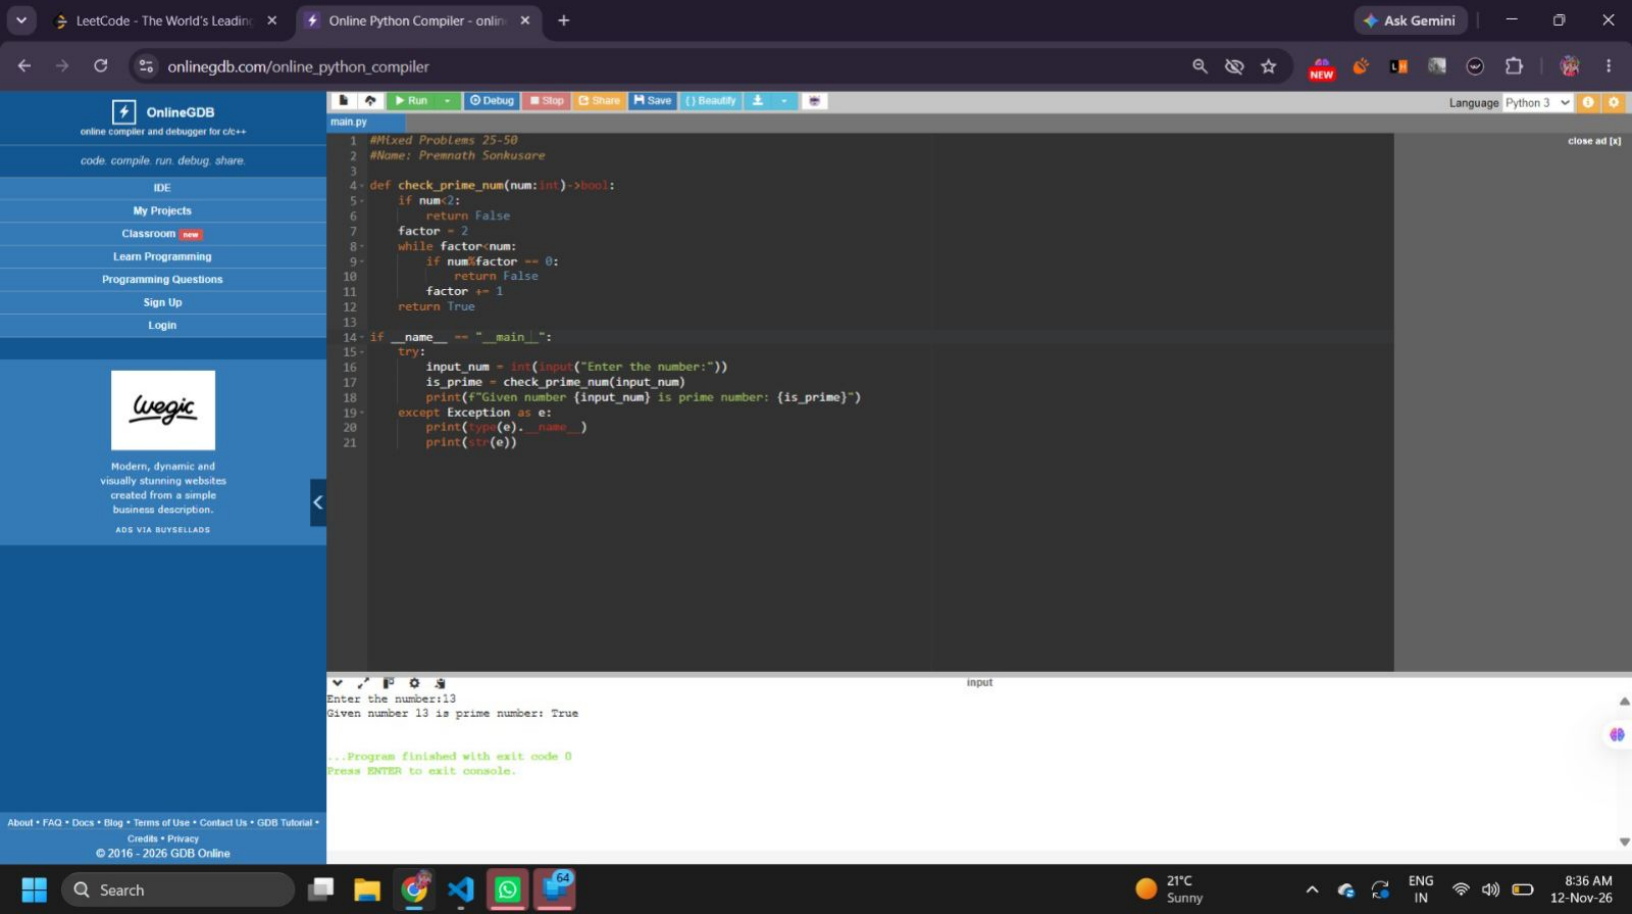
LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS
Run
Debug
Stop
Share
Save
{ } Beautify
Language
Python 3
main.py
close ad [x]
#Mixed Problems 25-50
#Name: Premnath Sonkusare
def check_prime_num(num:int)->bool:
if num<2:
return False
factor = 2
while factor<num:
if num%factor == 0:
return False
factor += 1
return True
if __name__ == "__main__":
try:
input_num = int(input("Enter the number:"))
is_prime = check_prime_num(input_num)
print(f"Given number {input_num} is prime number: {is_prime}")
except Exception as e:
print(type(e).__name__)
print(str(e))
input
Enter the number:13
Given number 13 is prime number: True
...Program finished with exit code 0
Press ENTER to exit console.
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online
Search
21°C
Sunny
ENG
IN
8:36 AM
12-Nov-26

Two Sum - LeetCode | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
def twoSum(nums: list[int], target: int) -> list[int]:
    list_dict = {}
    for index in range(len(nums)):
        complement = target - nums[index]
        if complement in list_dict:
            return [list_dict[complement], index]
        list_dict[nums[index]] = index
    return []


def get_formatted_list(nums: list) -> list:
    formatted_list = []
    for num in nums:
        formatted_list.append(int(num.strip()))
    return formatted_list

if __name__ == "__main__":
    try:
        input_string = input("Enter the list (comma-separated): ")
        input_list = input_string.split(",")
        form_list = get_formatted_list(input_list)
        print("Formatted List:", form_list)

        inp_target_sum = int(input("Enter the target Sum: "))
        target_sum_index = twoSum(form_list, inp_target_sum)
        print(f"Target Sum present at index: {target_sum_index}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the list (comma-separated): 1,4,5,2,6,64
Formatted List: [1, 4, 5, 2, 6, 64]
Enter the target Sum: 7
Target Sum present at index: [2, 3]


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 9:01 AM 12-Nov-26

OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def remove_value_from_set(nums:set[int], value:int)->set[int]:
    result = nums.copy()
    result.discard(value)
    return result

def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        value = int(input("Enter the value to remove from a set (only one):"))
        formatted_set_1 = get_formatted_set(set_1)
        removed_value_set = remove_value_from_set(formatted_set_1,value)
        print(f"Set after removing a value is: {removed_value_set}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first set:1,4,5,4,5,6
Enter the value to remove from a set (only one):6
Set after removing a value is: {1, 4, 5}

...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def get_formatted_list(nums:list)->list:
    formatted_list = list()
    for num in nums:
        formatted_list.append(int(num))
    return formatted_list

def get_unique_list_by_set(nums:list)->set:
   return set(nums)

if __name__=="__main__":
    try:
        input_list = list(input("Enter the list:").split(","))
        inp_list = get_formatted_list(input_list)
        unique_list = get_unique_list_by_set(inp_list)
        print(f"Unique List is:{unique_list}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the list:1,4,5,4,25,2,4,5,6,4
Unique List is:{1, 2, 4, 5, 6, 25}


...Program finished with exit code 0
Press ENTER to exit console.
```

Search
21°C Sunny
ENG IN
8:52 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def find_set_union(left:set[int],right:set[int])->set[int]:
    return left | right

def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        set_2 = set(input("Enter the second set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        formatted_set_2 = get_formatted_set(set_2)
        set_union = find_set_union(formatted_set_1, formatted_set_2)
        print(f"Union of set {formatted_set_1} and {formatted_set_2} is: {set_union}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first set:1,4,5,5,2,4
Enter the second set:4,4,5,56,6
Union of set {1, 2, 4, 5} and {56, 4, 5, 6} is: {1, 2, 4, 5, 6, 56}


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:51 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def find_set_symmetric_difference(left:set[int],right:set[int])->set[int]:
    return left ^ right

def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        set_2 = set(input("Enter the second set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        formatted_set_2 = get_formatted_set(set_2)
        set_symmetric_diff = find_set_symmetric_difference(formatted_set_1, formatted_set_2)
        print(f"Symmetric Difference of set {formatted_set_1} and {formatted_set_2} is: {set_symmetric_diff}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first set:1,4,5,5,5,6,4
Enter the second set:1,2,6,6
Symmetric Difference of set {1, 4, 5, 6} and {1, 2, 6} is: {2, 4, 5}

...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:51 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def find_set_difference(left:set[int],right:set[int])->set[int]:
    return left - right


def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        set_2 = set(input("Enter the second set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        formatted_set_2 = get_formatted_set(set_2)
        set_difference = find_set_difference(formatted_set_1, formatted_set_2)
        print(f"difference of set {formatted_set_1} and {formatted_set_2} is: {set_difference}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))

```

input

```
Enter the first set:4,5,6,56,6,1
Enter the second set:4,5,1,3
difference of set {1, 4, 5, 6, 56} and {1, 3, 4, 5} is: {56, 6}


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:51 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS
About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

def find_missing_num_of_set(nums:set[int], start:int, end:int)->set[int]:
    full_set = set(range(start, end + 1))
    return full_set - nums


if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        start = int(input("Enter a start value:"))
        end = int(input("Enter the end value:"))
        missing_values = find_missing_num_of_set(formatted_set_1,start,end)
        print(f"Missing Values of the set is:{missing_values}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the first set:4,5,1,2,6,6
Enter a start value:1
Enter the end value:10
Missing Values of the set is:{3, 7, 8, 9, 10}


...Program finished with exit code 0
Press ENTER to exit console.
```

Search
21°C Sunny
ENG IN
8:50 AM 12-Nov-26

LeetCode - The World's Leading
Online Python Compiler - onlin
Ask Gemini
onlinegdb.com/online_python_compiler
OnlineGDB
online compiler and debugger for c/c++
code. compile. run. debug. share.
IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login
wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | { } Beautify | Language: Python 3

main.py

close ad [x]

```python
#Set Problems 51-60
#Name: Premnath Sonkusare

def find_set_intersection(left:set[int],right:set[int])->set[int]:
    return left & right

def get_formatted_set(nums:list)->set:
    formatted_set = set()
    for num in nums:
        formatted_set.add(int(num))
    return formatted_set

if __name__=="__main__":
    try:
        set_1 = set(input("Enter the first set:").split(","))
        set_2 = set(input("Enter the second set:").split(","))
        formatted_set_1 = get_formatted_set(set_1)
        formatted_set_2 = get_formatted_set(set_2)
        set_intersection = find_set_intersection(formatted_set_1, formatted_set_2)
        print(f"Intersection of set {formatted_set_1} and {formatted_set_2} is: {set_intersection}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))

```

input

```
Enter the first set:4,5,14,6,6
Enter the second set:1,4,5,2,3
Intersection of set {4, 5, 6, 14} and {1, 2, 3, 4, 5} is: {4, 5}


...Program finished with exit code 0
Press ENTER to exit console.
```

About • FAQ • Docs • Blog • Terms of Use • Contact Us • GDB Tutorial • Credits • Privacy
© 2016 - 2026 GDB Online

Search
21°C Sunny
ENG IN
8:50 AM 12-Nov-26

Two Sum - LeetCode | Online Python Compiler - onlin | Ask Gemini

onlinegdb.com/online_python_compiler

OnlineGDB
online compiler and debugger for c/c++

code. compile. run. debug. share.

IDE
My Projects
Classroom new
Learn Programming
Programming Questions
Sign Up
Login

Wegic
Modern, dynamic and visually stunning websites created from a simple business description.
ADS VIA BUYSELLADS

Run | Debug | Stop | Share | Save | {} Beautify | Language: Python 3

main.py

close ad [x]

```python
def twoSum(nums: list[int], target: int) -> list[int]:
    list_dict = {}
    for index in range(len(nums)):
        complement = target - nums[index]
        if complement in list_dict:
            return [list_dict[complement], index]
        list_dict[nums[index]] = index
    return []


def get_formatted_list(nums: list) -> list:
    formatted_list = []
    for num in nums:
        formatted_list.append(int(num.strip()))
    return formatted_list

if __name__ == "__main__":
    try:
        input_string = input("Enter the list (comma-separated): ")
        input_list = input_string.split(",")
        form_list = get_formatted_list(input_list)
        print("Formatted List:", form_list)

        inp_target_sum = int(input("Enter the target Sum: "))
        target_sum_index = twoSum(form_list, inp_target_sum)
        print(f"Target Sum present at index: {target_sum_index}")
    except Exception as e:
        print(type(e).__name__)
        print(str(e))
```

input

```
Enter the list (comma-separated): 1,4,5,2,6,64
Formatted List: [1, 4, 5, 2, 6, 64]
Enter the target Sum: 7
Target Sum present at index: [2, 3]


...Program finished with exit code 0
Press ENTER to exit console.
```


© 2016 - 2026 GDB Online

Search | 21°C Sunny | ENG IN | 9:01 AM 12-Nov-26