


TASK 3 Outputs

```
CREATE TABLE class (  
    id INT,  
    name VARCHAR(30)  
);
```

```
CREATE TABLE class_info (  
    id INT,  
    address VARCHAR(30)  
);
```


```
INSERT INTO class VALUES  
  
(1,'Prem Sai'),  
  
(2,'Rahul'),  
  
(4,'Arjun');
```

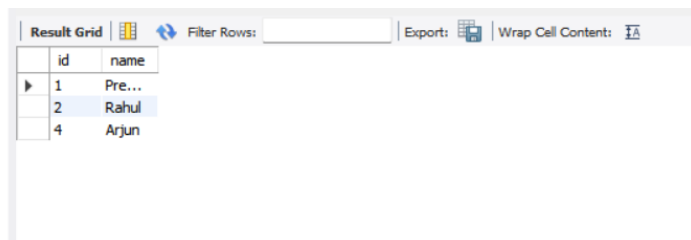

The screenshot shows a database query result grid. The grid has two columns: 'id' and 'name'. The data rows are: (1, 'Pre...'), (2, 'Rahul'), and (4, 'Arjun'). The row with id=2 is highlighted. Above the grid, there are controls for 'Filter Rows', 'Export', and 'Wrap Cell Content'.

	id	name
▶	1	Pre...
	2	Rahul
	4	Arjun

```
INSERT INTO class_info VALUES  
  
(1,'HYDERABAD'),  
  
(2,'VIZAG'),  
  
(3,'VIJAYAWADA');
```

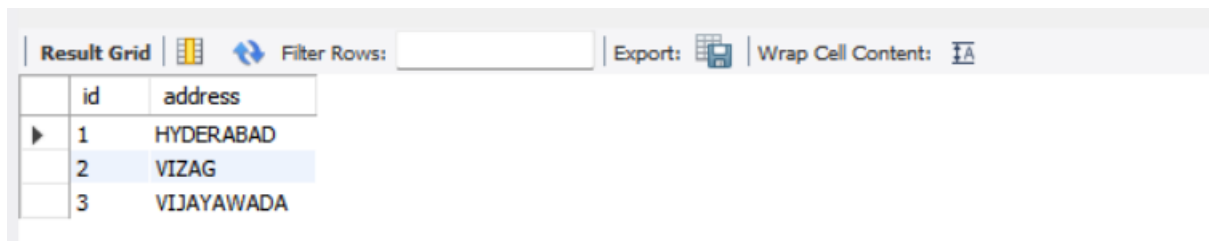

The screenshot shows a database query result grid. The grid has two columns: 'id' and 'address'. The data rows are: (1, 'HYDERABAD'), (2, 'VIZAG'), and (3, 'VIJAYAWADA'). The row with id=2 is highlighted. Above the grid, there are controls for 'Filter Rows', 'Export', and 'Wrap Cell Content'.

	id	address
▶	1	HYDERABAD
	2	VIZAG
	3	VIJAYAWADA

```
SELECT *  
  
FROM class  
  
CROSS JOIN class_info;
```

Result Grid			
Filter Rows:			
Export:			
Wrap Cell Content:			
	id	name	id
▶	4	Arjun	1
	2	Rahul	1
	1	Prem Sai	1
	4	Arjun	2
	2	Rahul	2
	1	Prem Sai	2
	4	Arjun	3
	2	Rahul	3
	1	Prem Sai	3

DROP TABLE class;

DROP TABLE class_info;

CREATE TABLE class (

id INT,

name VARCHAR(30)

);

CREATE TABLE class_info (

id INT,

address VARCHAR(30)

);

INSERT INTO class VALUES

(1,'Prem Sai'),

(2,'Rahul'),

(3,'Arjun'),

(4,'Sai Kiran');

Result Grid		
Filter Rows:		
Export:		
Wrap Cell Content:		
	id	name
▶	1	Pre...
	2	Rahul
	3	Arjun
	4	Sai K...

INSERT INTO class_info VALUES

(1,'HYDERABAD'),

(2,'VIZAG'),

(3,'VIJAYAWADA');

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

	id	address
▶	1	HYDERABAD
	2	VIZAG
	3	VIJAYAWADA

SELECT *

FROM class

INNER JOIN class_info

ON class.id = class_info.id;

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

	id	name	id	address
▶	1	Prem Sai	1	HYDERABAD
	2	Rahul	2	VIZAG
	3	Arjun	3	VIJAYAWADA

SELECT class.name,

class_info.address

FROM class

INNER JOIN class_info

ON class.id = class_info.id;

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

	name	address
▶	Prem Sai	HYDERABAD
	Rahul	VIZAG
	Arjun	VIJAYAWADA

SELECT *

FROM class

NATURAL JOIN class_info;

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

	id	name	address
▶	1	Prem Sai	HYDERABAD
	2	Rahul	VIZAG
	3	Arjun	VIJAYAWADA

INSERT INTO class VALUES

(5,'Vamsi');

Result Grid		
	id	name
1	1	Pre...
2	2	Rahul
3	3	Arjun
4	4	Sai K...
5	5	Vamsi

INSERT INTO class_info VALUES

(7,'GUNTUR'),

(8,'WARANGAL');

Result Grid		
	id	address
1	1	HYDERABAD
2	2	VIZAG
3	3	VIJAYAWADA
7	7	GUNTUR
8	8	WARANGAL

SELECT *

FROM class

LEFT OUTER JOIN class_info

ON class.id = class_info.id;

Result Grid				
	id	name	id	address
1	1	Prem Sai	1	HYDERABAD
2	2	Rahul	2	VIZAG
3	3	Arjun	3	VIJAYAWADA
4	4	Sai Kiran	NULL	NULL
5	5	Vamsi	NULL	NULL

SELECT *

FROM class

LEFT JOIN class_info

ON class.id = class_info.id

WHERE class_info.id IS NULL;


Result Grid				
	id	name	id	address
4	4	Sai Kiran	NULL	NULL
5	5	Vamsi	NULL	NULL

SELECT *

FROM class

RIGHT OUTER JOIN class_info

ON class.id = class_info.id;

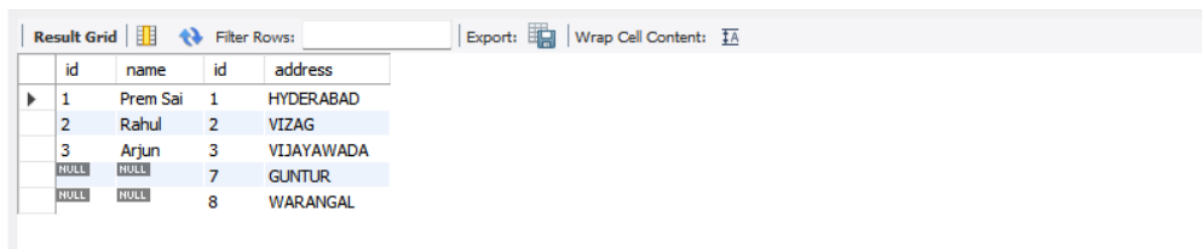

	id	name	id	address
▶	1	Prem Sai	1	HYDERABAD
	2	Rahul	2	VIZAG
	3	Arjun	3	VIJAYAWADA
	NULL	NULL	7	GUNTUR
	NULL	NULL	8	WARANGAL

SELECT *

FROM class

RIGHT JOIN class_info

ON class.id = class_info.id

WHERE class.id IS NULL;



	id	name	id	address
▶	NULL	NULL	7	GUNTUR
	NULL	NULL	8	WARANGAL

SELECT *

FROM class

FULL OUTER JOIN class_info

ON class.id = class_info.id;

SELECT *

FROM class

FULL OUTER JOIN class_info

ON class.id = class_info.id

WHERE class.id IS NULL

OR class_info.id IS NULL;

CREATE TABLE first_table(

id INT,

name VARCHAR(30)

);

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
id	name		
1	Prem Sai		
2	Rahul		

```
CREATE TABLE second_table(
  id INT,
  name VARCHAR(30)
);
```

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
id	name		
2	Rahul		
3	Karthik		

```
INSERT INTO first_table VALUES
(1,'Prem Sai'),
(2,'Rahul');
```

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
id	name		
1	Prem Sai		
2	Rahul		
3	Karthik		

```
INSERT INTO second_table VALUES
(2,'Rahul'),
(3,'Karthik');
```

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
name			
Prem Sai			
Rahul			
Karthik			

```
SELECT * FROM first_table
UNION
SELECT * FROM second_table;
```

Result Grid			Filter Rows:	Export:	Wrap Cell Content:
	id	name			
▶	1	Prem Sai			
	2	Rahul			
	2	Rahul			
	3	Karthik			

```
SELECT name FROM first_table
```

```
UNION
```

```
SELECT name FROM second_table;
```

```
SELECT * FROM first_table
```

```
UNION ALL
```

```
SELECT * FROM second_table;
```

```
SELECT COUNT(*)
```

```
FROM
```

```
(
```

```
    SELECT * FROM first_table
```

```
    UNION ALL
```

```
    SELECT * FROM second_table
```

```
) A;
```

```
SELECT * FROM first_table
```

```
INTERSECT
```

```
SELECT * FROM second_table;
```

```
SELECT name FROM first_table
```

```
INTERSECT
```

```
SELECT name FROM second_table;
```

```
SELECT * FROM first_table
```

```
MINUS
```

```
SELECT * FROM second_table;
```

```
SELECT name FROM first_table  
  
MINUS  
  
SELECT name FROM second_table;
```

```
SELECT c.id,  
       c.name,  
       ci.address  
FROM class c  
INNER JOIN class_info ci  
ON c.id = ci.id;
```

```
SELECT c.id,  
       c.name,  
       CASE  
         WHEN ci.address IS NULL  
         THEN 'Address Missing'  
         ELSE 'Address Available'  
       END AS Status  
FROM class c  
LEFT JOIN class_info ci  
ON c.id = ci.id;
```