

CONFIGURING A BASIC SPRING APPLICATION

pom.xml: (spring dependencies)

```
<dependencies>
  <dependency>
    <groupId>org.springframework</groupId>
    <artifactId>spring-context</artifactId>
    <version>6.1.14</version>
  </dependency>

  <dependency>
    <groupId>org.springframework</groupId>
    <artifactId>spring-aop</artifactId>
    <version>6.1.14</version>
  </dependency>

  <dependency>
    <groupId>org.springframework</groupId>
    <artifactId>spring-webmvc</artifactId>
    <version>6.1.14</version>
  </dependency>
</dependencies>
```

applicationContext.xml:

```
<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="
    http://www.springframework.org/schema/beans
    https://www.springframework.org/schema/beans/spring-beans.xsd">


  <bean id="bookRepository"
    class="com.library.repository.BookRepository"/>

  <bean id="bookService"
```

```
class="com.library.service.BookService"/>
```

```
</beans>
```

Project Structure:

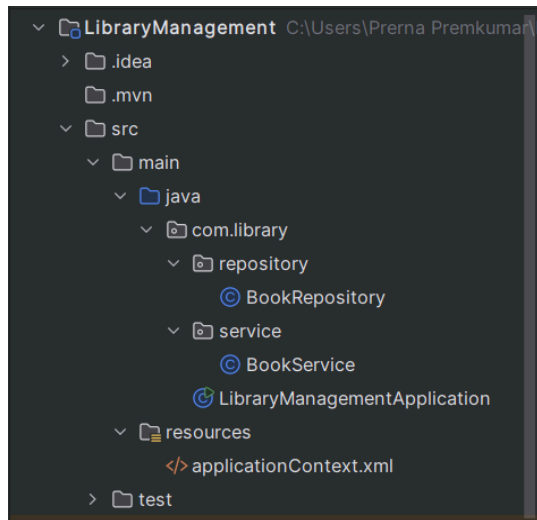

BookRepository.java:

```
package com.library.repository;

public class BookRepository {
    public void display() {
        System.out.println("BookRepository is working.");
    }
}
```

BookService.java:

```
package com.library.service;

public class BookService {
    public void display() {
        System.out.println("BookService is working.");
    }
}
```

LibraryManagementApplication.java:

```
package com.library;

import com.library.service.BookService;
import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

public class LibraryManagementApplication {
    public static void main(String[] args) {
        ApplicationContext context =
            new ClassPathXmlApplicationContext("applicationContext.xml");
        BookService service = context.getBean("bookService", BookService.class);
        service.display();
    }
}
```

Output:

