
DEPENDENCY-AWARE PRIVACY FOR MULTI-TURN LLM AGENTS

Divyam Anshumaan
University of Wisconsin-Madison

Sarthak Choudhary
University of Wisconsin-Madison

Nils Palumbo
University of Wisconsin-Madison

Somesh Jha
University of Wisconsin-Madison

May 6, 2026

ABSTRACT

LLM-based agents routinely release private data across multiple services and interactions. Existing prompt sanitizers based on metric differential privacy treat each release independently. In multi-turn workflows, an adversary can combine these independent releases to recover non-trivial information about the user’s private attributes, causing the effective privacy guarantee to degrade with every additional release. We show that this degradation is fundamental: if the user’s private attributes are the *roots* of a computation graph, independently noising a value derived from a root amplifies the root’s distinguishability by up to the deriving function’s Lipschitz constant L , which can greatly exceed the nominal privacy parameter for the nonlinear functions common in medical and financial workflows.

To address this, we propose RootGuard, which sanitizes root values once and computes all subsequent releases deterministically from the noised roots. By the post-processing theorem of differential privacy, the privacy guarantee depends only on the initial root sanitization — regardless of the adversary’s choice of functions or number of interaction turns. We show that derived values inherit privacy at zero marginal cost. RootGuard further exploits structural domain knowledge when available, such as dependencies among the declared roots (e.g., BMI is a function of height and weight) or knowledge of the task’s target function, to allocate privacy budget across roots and improve the privacy-utility tradeoff.

A worst-case multi-turn adversary forcing t turns of interaction increases the total privacy budget $B = t \cdot \epsilon$ available to the user. RootGuard distributes this larger budget across roots (reducing noise per root), while independent noising spends ϵ per release and gives the adversary t independent observations to combine via MAP reconstruction. The result is a *double asymmetry*: additional turns simultaneously improve RootGuard’s utility and weaken independent noising’s privacy. On eight medical diagnostic templates drawn from NHANES (the CDC’s National Health and Nutrition Examination Survey), RootGuard achieves $2.3\text{--}3.0\times$ lower target error than independent noising at $\epsilon = 0.1$ (7.6% vs. 17.1% wMAPE at $B = (2k+1)\epsilon$), with the advantage growing as the adversary forces more turns. Under MAP reconstruction attacks, additional queries strengthen the adversary against independent noising while reconstruction under RootGuard remains invariant.

1 Introduction

The rapid integration of large language models into sensitive domains, such as healthcare, finance, legal consultation, etc. has created a new attack surface for privacy. Users increasingly delegating tasks to LLM agents that act on their behalf — accessing external tools and services via protocols such as MCP [1, 2], and executing multi-step workflows. For instance, a medical agent might submit lab values to a diagnostic service, forward results to a medication advisor, and send recommendations to insurance providers, all without human oversight of the private data released at each step.

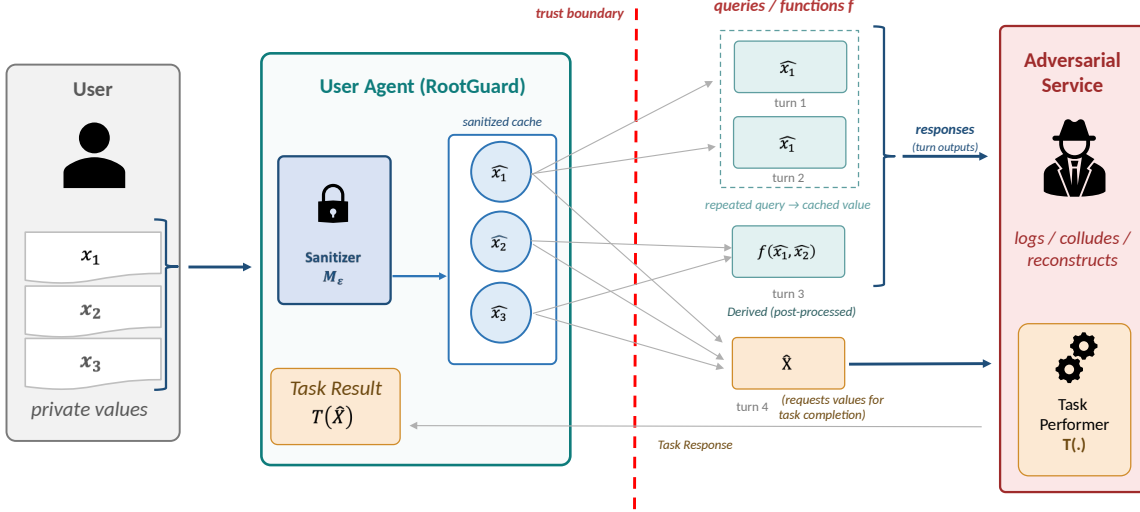


Figure 1: Overview of RootGuard in an agentic deployment. At initialization, the user passes its private values $X = (x_1, x_2, x_3)$ to the user agent, which sanitizes each root once via $\mathcal{M}_\epsilon$ and stores the result in the sanitized cache. All subsequent interactions with the adversarial service are answered from the cache: repeated requests for the same root return the identical cached value (turns 1, 2), derived requests are deterministic post-processing of cached roots (turn 3), and the request that supplies all roots for task computation (turn 4) carries no additional privacy cost. The trust boundary separates the user agent from the adversarial service, which performs the user’s task by computing $T(\hat{X})$ and may concurrently log, collude with other parties, or attempt to reconstruct the underlying X . The task result $T(\hat{X})$ is returned to the user agent. By the post-processing theorem, the adversary’s view across the boundary is no more informative than the initial root sanitization, regardless of which functions f it requests.

Every intermediary in this chain is a potential adversary. Services can be malicious by design, collecting private data under the guise of providing a task. They can be compromised through prompt injection attacks [3, 4, 5], where adversarial inputs force an agent to reveal user data or compute unintended functions on sensitive information, or they can be coerced through legal processes [6] or breached through conventional exploits. Therefore, client-side privacy protection is not only a precaution against dishonest providers, it is a necessary defense against the compromise of honest ones. The user agent must therefore assume that *any* value released to *any* service may be exposed, and sanitize accordingly.

The standard defense is to add noise to each released value independently, using metric differential privacy [7]. Methods such as *Preempt* [8] and *CAPE* [9] protect individual tokens in a prompt with formal guarantees. However, these methods treat each release in isolation, disregarding the relationships between released values. This independence assumption breaks down in practice — even when all parties are honest.

Benign leakage. Two routine scenarios suffice to break the per-release guarantee. *Cross-platform redundancy*: a single root (e.g., fasting glucose) sent to two services arrives as two independently noised copies, costing 2ϵ rather than ϵ by composition [10]; the budget scales linearly with services touched. *Structural redundancy*: a root and a derived value (e.g., height and BMI) released separately each leak the root, and we show (Theorem 2) that for nonlinear derivations the effective distinguishability is amplified by up to the Lipschitz constant, exceeding $100\times$ the nominal ϵ for common medical formulas. These are natural consequences of how independently-noising methods interact with multi-service, multi-value workflows.

Adversarial leakage. The problem is severe in adversarial settings. Services can be compromised through prompt injection [3, 4, 5], giving the adversary control of the interaction. It can then request the same value repeatedly (averaging away protection at rate $1/\sqrt{q}$ over q queries), force computation of arbitrary derived functions (each a fresh independent observation), or exploit the target release as a cross-root constraint linking all private values through the task function.

The fundamental problem. Both the benign and adversarial scenarios are instances of the same root cause: *uncontrolled independent releases* of correlated private values. Without a mechanism to track dependencies between

releases, every additional interaction, whether benign or adversarial, degrades the user’s privacy beyond the nominal budget. Existing sanitizers [8, 9] are stateless: they treat each value in isolation, discarding structural information that is already present in the interaction protocol.

Our approach. We propose RootGuard (Fig. 1), a dependency-aware privacy mechanism for multi-turn agentic interactions. We noise the private root values exactly once, and compute everything else deterministically from the noised roots. By the post-processing theorem of differential privacy [11], all derived values, regardless of the function the adversary chooses, inherit privacy at zero additional cost. Repeated queries return the same cached value. Cross-platform releases of the same root are identical. The adversary’s view after t turns is no more informative than after the first release.

This creates a *double asymmetry*. When the adversary forces t turns of interaction, the total privacy budget $B = t\varepsilon$ scales with t ; RootGuard redistributes this larger budget across the k roots, while independent noising spends ε per release. As a result, with additional turns, RootGuard’s utility improves (more budget per root) while its privacy stays constant (all releases are post-processing). Independent noising gains nothing, since the target is always a single release at ε , but its privacy degrades with each fresh independent observation.

Exploiting domain knowledge. RootGuard requires the user agent to identify sensitive values (the *roots*) — a baseline assumption shared with prior sanitizers [8, 9], typically discharged via NER or explicit user declaration. Beyond this, RootGuard can exploit two progressive levels of public domain knowledge to improve the privacy-utility tradeoff. The structural knowledge needed is increasingly available: MCP tool schemas [1] declare parameter types and computations (e.g., `computeBMI(height, weight)`), and many derived values rely on standardized public formulas (BMI, eGFR, HOMA-IR, FIB-4) that a domain-aware agent can recognize without service cooperation.

1. **Inter-root dependencies** (Level 1): identifying which declared roots are deterministic functions of others (e.g., BMI from height and weight) lets dependent values inherit privacy from their parents at zero cost (Theorem 3), freeing budget for truly independent roots.
2. **Target sensitivity** (Level 2): any indication of the target function’s form — whether the exact published formula or an approximation $\hat{f}$ — enables sensitivity-weighted budget allocation, $\varepsilon_i \propto (|h_i| \cdot D_i)^{1/2}$, which minimizes target error by directing budget to the roots that matter most (Sec. 3.4).

Each level requires only public information (tool schemas, published formulas, population statistics) and improves the privacy-utility tradeoff without weakening the privacy guarantee.

Contributions.

- We formalize multi-turn agentic privacy and prove RootGuard’s guarantee depends only on root sanitization parameters, independent of adversary function choices or query count (Thm. 1).
- We prove independently noising a derived value amplifies parent-root distinguishability by the function’s Lipschitz constant (Thm. 2); derived values from noised roots inherit privacy at zero marginal cost (Thm. 3).
- On 8 medical templates: RootGuard achieves $2.6\times$ lower target wMAPE than independent noising at $\varepsilon = 0.1$, $B = (2k+1)\varepsilon$ (7.8% vs. 20.3%), widening to $3.8\times$ at $(3k+1)\varepsilon$, with corresponding $2.2\text{--}3.3\times$ reductions in clinical Risk Class Error.
- Under matched per-root noise ($\varepsilon_r = 0.1$), MAP reconstruction degrades $\mathcal{M}$ -All from 21.8% to 6.2% wMAPE as queries grow $1\rightarrow 16$ ($3.5\times$); RootGuard is invariant.
- These findings transfer end-to-end: 21,600 LLM tool-call sessions (GPT-5.4 nano) reproduce RQ1’s ordering and per-template structure within bootstrap noise (Sec. 5.6).

We make the code to reproduce our experiments available at: <https://github.com/danshumaan/rootguard>

2 Background

2.1 Preliminaries

Definition 1 (Metric Differential Privacy [7]). Let $(\mathcal{X}, d_{\mathcal{X}})$ be a metric space. A randomized mechanism $\mathcal{M} : \mathcal{X} \rightarrow \mathcal{Z}$ satisfies ε -metric differential privacy (ε -mDP) if for all $x, x' \in \mathcal{X}$ and all measurable $S \subseteq \mathcal{Z}$:

$$\Pr[\mathcal{M}(x) \in S] \leq e^{\varepsilon \cdot d_{\mathcal{X}}(x, x')} \Pr[\mathcal{M}(x') \in S].$$

The privacy loss scales with the distance $d_{\mathcal{X}}(x, x')$ between inputs, providing stronger guarantees for nearby values. This generalizes standard ε -DP (which corresponds to the discrete metric $d(x, x') = \mathbf{1}[x \neq x']$) to structured domains where the distance between values is meaningful.

2.2 Threat Model

A user agent $\mathcal{U}$, holding private values $X = (x_1, \dots, x_k)$, engages a service $\mathcal{A}$ to obtain a useful output — a diagnostic, recommendation, or classification computed from X . The user wants $\mathcal{A}$'s output but does not trust $\mathcal{A}$ with the raw values: $\mathcal{A}$ may log queries, share data with partners, be breached, or be coerced through legal processes [6]. We model $\mathcal{A}$ as an adversary that performs the user's task while concurrently attempting to reconstruct X from whatever values cross the trust boundary. Concretely, $\mathcal{A}$ accepts sanitized inputs from $\mathcal{U}$ and returns a task response $T(\hat{X})$ on those inputs (e.g., the FIB-4 liver-fibrosis risk). T decomposes as $T = h \circ g$, where g is some intermediate value (such as published clinical formulas) and h is an opaque threshold, logic, or model the service uses to determine risk, and is not known to the user. The user agent's job is to control what crosses the trust boundary so that $\mathcal{A}$ can compute its task, but learns no more about X than the post-processing theorem permits.

Adversary goal. The adversary's goal is to reconstruct the user's true root values X from sanitized releases within t turns. It chooses a set of functions F to maximize its reconstruction advantage, and may use all released values and knowledge of the sanitization pipeline to estimate the roots. In particular, if the user agent independently noises both a root x_i and a derived value $f(x_i)$, the adversary obtains two independent noisy views of x_i , which it can combine to reduce uncertainty about the true value (Sec. 4.3.2). As the adversary must complete the task in t turns, we assume without loss of generality that it gathers reconstruction data for the first $t - 1$ turns and obtains the roots needed to compute the target in the final turn.

Adversary capabilities. $\mathcal{A}$ controls the interaction over t turns. In each of the first $t - 1$ turns, it can: (i) request a private root value x_i that has not yet been disclosed, (ii) force the user agent to compute $f(z_1, \dots, z_d)$ where $z_i \in X$, for some arbitrary function f specified by $\mathcal{A}$ and (iii) re-request a value that has already been disclosed. In the final turn, $\mathcal{A}$ requests the roots required for task computation and applies the target function T on the sanitized values it receives. The user does not compute T itself; computing $T(\hat{X})$ and the downstream clinical interpretation is $\mathcal{A}$'s service. This capability model captures both prompt injection attacks [3, 4], where a compromised service forces the agent to execute arbitrary computations, and malicious-by-design services that deliberately probe the user's data.

Adversary knowledge. The adversary has full knowledge of $\mathcal{U}$'s sanitization scheme: the mechanism, its parameters, and the per-root budget allocation (if any). Optionally, $\mathcal{A}$ may possess population-level statistics (e.g., mean and variance of each root in the general population), which it can use as a prior.

Public vs. private knowledge. The service's task computation $T(\hat{X})$ typically decomposes into a known intermediate $g(\hat{X})$ — a published clinical formula, an MCP tool schema [1], or any well-known computation a domain-aware agent can identify (e.g., the FIB-4 score $g = \text{age} \cdot \text{AST} / (\text{PLT} \cdot \sqrt{\text{ALT}})$) — followed by downstream interpretation that the user does not know (risk thresholds, classification rules, recommendation logic). The user agent exploits the public form of g to allocate sanitization budget across roots (Sec. 3.4). The opaque downstream interpretation is irrelevant for allocation as T is well-aligned with g 's accuracy: minimizing error in g is a faithful proxy for task utility. This asymmetry — public intermediate g , private root values, opaque service-side T — defines the operational regime where dependency-aware sanitization applies.

Adversary strategy. Given the $t - 1$ observations gathered during the interaction, the adversary computes the Maximum A Posteriori (MAP) estimate of the root values, combining the mechanism likelihood with any prior knowledge of the population. Under independent noising ($\mathcal{M}$ -All), each observation contributes a fresh factor to the likelihood; under RootGuard, repeated queries return identical cached values, collapsing the likelihood to a single factor regardless of t .

Benign setting. In a less adversarial scenario, $\mathcal{A}$ requests only task-relevant values and does not attempt reconstruction. The privacy concern in this case is passive: services may log released values, which could be later exposed through data breaches or subpoenas. RootGuard's guarantees hold in both settings — the post-processing property does not depend on the adversary's intent.

Scope of evaluation. Our experiments (Sec. 5.4) evaluate repeated direct root queries. Under independent noising, nonlinear derived-function queries could further amplify the adversary's advantage (Sec. 4.3.1), making our reported

numbers a lower bound on its vulnerability. Under RootGuard, the adversary’s function choice is irrelevant: all releases are post-processing of the initial noised roots (Theorem 1).

2.3 Setting

Given the adversary model above, we formalize the interaction between $\mathcal{U}$ and $\mathcal{A}$ as a directed acyclic graph (DAG) $G = (V, E)$, constructed incrementally as the conversation progresses.

- **Root nodes.** The user’s private input values $X = (x_1, \dots, x_k)$, which initialize the vertex set V . Each x_i takes values in a bounded domain $\mathcal{X}_i = [\ell_i, u_i] \subset \mathbb{R}$ with domain width $D_i = u_i - \ell_i$.
- **Computed nodes.** Derived values $Y = \{y_1, \dots, y_l\}$, where each $y_j = f_j(\text{parents}(y_j))$ for some function f_j specified by $\mathcal{A}$, with $\text{parents}(y_j) \subseteq X \cup Y$. Each dependency (p, y_j) forms a directed edge in E .
- **Target node.** The value $T(X)$ that completes the task — a known, deterministic function of the roots (e.g., risk thresholding the liver-fibrosis score $\text{FIB4} = \text{age} \cdot \text{AST} / (\text{PLT} \cdot \sqrt{\text{ALT}})$). In the final turn, $\mathcal{A}$ requests the roots needed for task computation, computes $T(\hat{X})$ on the sanitized values it receives, applies its downstream interpretation, and returns the resulting clinical decision to the user.

During the interaction, each request from $\mathcal{A}$ adds a node to G . The user agent $\mathcal{U}$ computes the requested value and releases a sanitized version according to its sanitization scheme. The DAG serves as a stateful record of what has been released and how values depend on one another.

User goal. The user agent must release sanitized values that enable accurate computation of $T(\hat{X})$ on $\mathcal{A}$ ’s side while minimizing the adversary’s ability to reconstruct the true root values X . The user may exploit public domain knowledge (tool schemas, published formulas) to improve its privacy-utility tradeoff (Sec. 3.3).

Remark on NER In a full deployment, a named entity recognition (NER) model identifies sensitive tokens in the user’s prompt before sanitization. Following `Pr€empt` [8], we assume perfect NER throughout this paper and focus on the sanitization mechanism itself, as it is orthogonal to the privacy-utility tradeoff we study.

3 Method

3.1 System Overview

RootGuard consists of a *DAG controller* that manages privacy state across the conversation, and a *prompt sanitizer* that formats each release into natural language. Figure 1 illustrates the end-to-end flow.

Initialization. Before the conversation begins, the controller sanitizes each root independently (Sec. 3.2) and caches the noised values $\hat{X} = (\hat{x}_1, \dots, \hat{x}_k)$. If the user has knowledge of dependencies among the declared roots (e.g., BMI depends on height and weight), the controller identifies the true independent roots, recomputes the dependent roots from their noised parents, and updates the cache accordingly (Sec. 3.3). If the user knows the intermediate g that the service’s task T depends on (Sec. 2.2), the controller computes per-root sensitivities of g and allocates budgets to minimize error in $g(\hat{X})$ (Sec. 3.4); otherwise, budget is distributed uniformly.

Per-turn operation. Each request from $\mathcal{A}$ is answered with the cached noised root or a derived value computed deterministically from cached parents; no fresh noise is drawn after initialization. By the post-processing theorem [10], no additional privacy cost is incurred beyond the initial root sanitization.

3.2 Sanitization

Baseline: independent noising ($\mathcal{M}$ -All). Without structural knowledge of the roots, the default sanitization strategy is to treat each request independently. When $\mathcal{A}$ requests a value, the user computes it from the original (unsanitized) values and applies fresh, independent noise. This produces independent noisy releases of values that share the same underlying roots, giving the adversary multiple observations to combine. The structural redundancy this creates is exploitable (Sec. 4.3.2), and the total privacy cost grows with the number of releases.

RootGuard. Our proposed framework improves on this by exploiting the user’s knowledge of the root nodes. It sanitizes the roots *once* at the start of the interaction and computes all subsequent releases deterministically from the noised roots. By the post-processing theorem [10], no additional privacy cost is incurred regardless of what $\mathcal{A}$ requests. The method’s effectiveness improves further with additional structural knowledge (Sec. 3.3).

Both methods sanitize values according to two categories of root, following *Preempt* [8].

Category-I roots (τ_I). Roots whose utility depends only on format (e.g., names, identifiers) are sanitized via format-preserving encryption: $\hat{x}_i \leftarrow E_F(K, N_{\tau_i}, x_i)$.

Category-II roots (τ_{II}). Roots whose utility depends on numerical value (e.g., lab measurements) are sanitized via a differentially private mechanism: $\hat{x}_i \leftarrow \mathcal{M}_{\epsilon_i}(x_i)$, with total budget $\sum_{i \in [\tau_{II}]} \epsilon_i = B$. Each root has domain $[\ell_i, u_i]$ with width D_i , discretized into m candidates with spacing $\delta_i = D_i/(m-1)$.

Index-space normalization. All Category-II mechanisms operate in a shared index space $\{0, \dots, m-1\}$. The true value x_i is mapped to a normalized index $t_i = (m-1)(x_i - \ell_i)/D_i$, noise is drawn in index units according to the mechanism’s distribution, the result is clamped to $[0, m-1]$ and rounded to the nearest integer s , and the output is mapped back to domain units as $x'_i = s \cdot \delta_i + \ell_i$. The sensitivity in index space is 1 for all three mechanisms used in our experiments (Sec. 5.1), so a unit of ϵ provides the same worst-case index-space distinguishability for every node and is directly comparable across mechanisms, regardless of domain width. Without this normalization, the noise scale in domain units ($\delta_i = D_i/(m-1)$) would vary across nodes, making the same ϵ provide vastly different physical protection (e.g., $\delta = 0.013$ for hemoglobin vs. $\delta = 2.67$ for triglycerides). This enables direct comparisons across nodes and a meaningful total budget $B = \sum_r \epsilon_r$ for principled budget allocation.

3.3 Exploiting Structural Knowledge

RootGuard’s privacy and utility improve with the user’s structural knowledge, exploited at two progressive levels.

Level 1: Inter-root dependencies. The user knows that some declared roots depend on others (e.g., BMI depends on height and weight). True independent roots are identified, and dependent roots are recomputed from noised parents. This reduces the number of noise draws from k to $k' < k$. By the Implied Privacy theorem (Theorem 3), dependent roots inherit privacy for free.

Level 2: Target sensitivity. The user wants the service’s clinical decision $T(\hat{X})$ to be accurate, but does not know the threshold logic that maps the service’s intermediate computation to the final decision. What the user does have is knowledge of an intermediate g that T depends on — typically a published clinical formula (e.g., the FIB-4 score $g = \text{age} \cdot \text{AST}/(\text{PLT} \cdot \sqrt{\text{ALT}})$, on which liver-fibrosis risk classification depends) or any computation declared in an MCP tool schema. Because T is well-aligned with g ’s accuracy, minimizing error in $g(\hat{X})$ is a faithful proxy for task utility. This enables sensitivity-weighted budget allocation (Sec. 3.4).

Configurations evaluated. We compare three configurations that progressively exploit structural knowledge: $\mathcal{M}$ -All (independent noising; no structural knowledge), $\mathcal{M}$ -Roots (root-only noising with uniform allocation $\epsilon_i = B/k$), and $\mathcal{M}$ -Opt (root-only noising with sensitivity-weighted allocation; full RootGuard). The progression $\mathcal{M}$ -All $\rightarrow$ $\mathcal{M}$ -Roots isolates the gain from eliminating redundant noising; $\mathcal{M}$ -Roots $\rightarrow$ $\mathcal{M}$ -Opt isolates the gain from dependency-aware allocation. The levels degrade gracefully: when structural knowledge is unavailable, the unknown dependencies are treated independently and the method reduces to the prior level.

3.4 Sensitivity-Weighted Budget Allocation

The user’s task utility is the accuracy of the service’s clinical decision $T(\hat{X})$, which depends on an intermediate $g(\hat{X})$ via threshold logic the user does not know (Sec. 2.2). Because T is well-aligned with g ’s accuracy, we minimize the expected absolute error of g at allocation time, subject to the total budget constraint. Without loss of generality, let $x = (x_1, \dots, x_k)$ contain only τ_{II} roots (Category-I roots are sanitized via FPE under a separate security parameter and do not consume the DP budget). Let $g: \mathbb{R}^k \rightarrow \mathbb{R}$ be a known, differentiable intermediate that the service consumes en route to its decision. Suppose root i has domain $[\ell_i, u_i]$, with width $D_i = u_i - \ell_i > 0$, discretized into m candidates of width $\delta_i = D_i/(m-1)$. The partial derivative $\partial g / \partial x_i$ measures how sensitively g responds to perturbations in

root i . We evaluate the sensitivity at the population mean of each root:

$$h_i = \left| \frac{\partial g}{\partial x_i}(\mu) \right|,$$

where the population means $\mu = (\mu_1, \dots, \mu_k)$ are a single publicly available vector (in our experiments, we use the NHANES data held out from the test set; see Sec. 5.3). The computed weights at the population means reflect how g responds to perturbations around a typical patient, rather than at the pathological worst case. Since μ is computed from a public dataset independent of the private data being sanitized, the allocation remains fixed across all patients and no information flows from patient to mechanism.

A first-order expansion of the error $\Delta = g(x') - g(x)$ in the per-root noise $\eta_i = x'_i - x_i$ gives $\Delta \approx \sum_i h_i \eta_i$. Minimizing the upper bound $\mathbb{E}[|\Delta|] \leq \sum_i |h_i| \bar{\eta}_i(\epsilon_i)$ subject to $\sum_i \epsilon_i = B$ and $\epsilon_i \geq \epsilon_{\min}$, where $\bar{\eta}_i$ is the worst-case expected noise over grid positions, yields the closed-form Laplace solution $\epsilon_i \propto \sqrt{|h_i| \delta_i}$ (full derivation, including saturation handling and the convexity argument, in App. A.7). The objective is separable and solved numerically for the discrete Exponential, Bounded Laplace, and Staircase mechanisms; RQ3 (Sec. 5.5) verifies the $\sqrt{|h_i| \delta_i}$ scaling holds empirically for all three.

4 Privacy Analysis

We define a privacy game to capture an adversary's ability to distinguish between two sanitized root vectors.

4.1 DAG Privacy Game G_{DAG}

The adversary $\mathcal{A}$ chooses two root vectors X^0 and X^1 with the same leakage and any arbitrary set of functions $F = \{f_1, \dots, f_l\}$. The user sanitizes a randomly selected root vector ($\hat{X}^b$) and returns it to the adversary. Since the adversary controls the interaction with the user agent, it can compute any f_i on the released root vector $\hat{X}^b$ to improve its advantage, and constructs the conversation DAG $\hat{G}_b$. Given X^0 and X^1 , the adversary must guess which root vector was selected.

Initialize:

1: $K \leftarrow S()$

2: $b \xleftarrow{\$} \{0, 1\}$ $\triangleright$ Select a random bit

Challenge(X^0, X^1, F): $\triangleright$ Adversary selects two root vectors and an arbitrary set of functions

3: $L_0 \leftarrow L(X^0, F, C)$; $L_1 \leftarrow L(X^1, F, C)$

$\triangleright L$ is the leakage function; F is the chosen function set

4: **if** $L_0 \neq L_1$ **then return** $\perp$

$\triangleright$ Only root pairs with the same leakage are valid

Sanitize and Construct:

5: **for** $i \in \mathcal{I}$: $\hat{x}_i^b \leftarrow E_F(K, N_{\tau_i}, x_i^b)$ $\triangleright$ FPE for category-I roots

6: **for** $i \in \mathcal{II}$: $\hat{x}_i^b \leftarrow \mathcal{M}_{\epsilon_i}(x_i^b)$ $\triangleright$ mDP for category-II roots; sampled once, reused

7: **return** $\hat{X}^b$ $\triangleright$ User returns the sanitized roots. Adversary may compute the full graph $\hat{G}_b \leftarrow C(\hat{X}^b, F)$ from sanitized roots and use any strategy to guess b .

Finalize(b'):

8: **return** $[b' = b]$

$\triangleright b'$ is the adversary's guess for b

The adversary's advantage is defined as:

$$\text{Adv}_{\text{DAG}}(\mathcal{A}) = |2 \Pr[G_{\text{DAG}}(\mathcal{A}) = 1] - 1| \quad (1)$$

4.2 Privacy Guarantee

Theorem 1 (DAG Privacy Guarantee). *Consider an adversary $\mathcal{A}$ in the setting of the full-graph privacy game G_{DAG} . Let (X^0, X^1, F) be the adversary's chosen root vectors and function set, with roots of type τ_I and τ_{II} . For the DAG privacy game with the privacy budget $\sum_{i \in [\tau_{II}]} \epsilon_i = B$ and the security parameter κ ,*

$$\text{Adv}_{\text{DAG}}(\mathcal{A}) \leq \sum_{i \in [\tau_{II}]} e^{\frac{\epsilon_i}{\delta_i} |x_i^0 - x_i^1|} + |\tau_I| \cdot \text{negl}(\kappa). \quad (2)$$

The bound depends only on the root sanitization parameters ϵ_i and the root distances $|x_i^0 - x_i^1|$. It is independent of the adversary's choice of functions F as it gains no additional distinguishing power from computing arbitrary functions on the sanitized roots.

Proof Sketch Since the adversary's view is entirely determined by $\hat{X}^b$, we bound the advantage directly via a hybrid argument over the roots. Define hybrids $X^{(0)} = X^0, \dots, X^{(k)} = X^1$, where each consecutive pair differs in a single root. By the triangle inequality, the total advantage is bounded by the sum of single-root advantages. Each single-root advantage is bounded by FPE security (for τ_I roots) or the ϵ_j -mDP guarantee (for τ_{II} roots). Since the bound involves only root parameters and distances, it holds for every choice of F , including the adversary's optimal choice. The full proof is given in App. A.9.

Remark 1 (Contrast with independent noising). Under $\mathcal{M}$ -All, the user independently noises each requested value and returns all noised values to the adversary. The adversary therefore receives independently noised versions of both x_i and $f(x_i)$, obtaining multiple independent observations about the same root. The privacy cost of these additional releases is not captured by the root-only bound above and is analyzed in Sec. 4.3.

4.3 Privacy Leakage due to Independent Noising

Under the index-space mechanisms described in Sec. 3.2, every node is mapped to the same index space $\{0, \dots, m-1\}$ before noising. Independently releasing $\mathcal{M}_1(x)$ and $\mathcal{M}_2(f(x))$, each with parameter ϵ , yields 2ϵ -mDP with respect to the index-space metric $d(t, t') = |t - t'|$. Since every node's index distance is bounded by $(m-1)$, this guarantee appears uniform across nodes.

However, independent noising creates two distinct sources of additional leakage that this guarantee does not capture: amplification through nonlinear functions (Sec. 4.3.1) and accumulation through repeated queries (Sec. 4.3.2).

4.3.1 Amplification through nonlinear functions.

Consider two root values x_0, x_1 separated by d index steps: $|t_{x_0} - t_{x_1}| = d$. In domain space, this corresponds to $|x_0 - x_1| = d \cdot D_x / (m-1)$. The derived values' index-space distance is:

$$|t_{f(x_0)} - t_{f(x_1)}| = \frac{m-1}{D_y} |f(x_0) - f(x_1)| \leq \frac{L \cdot D_x}{D_y} \cdot d,$$

where L is the Lipschitz constant of f and D_y is the derived domain width. The effective *index-space amplification factor* is $L \cdot D_x / D_y$.

For linear functions this factor is exactly 1 (normalization absorbs linear scaling). For nonlinear functions it can far exceed 1: e.g., $f(x) = 1/x$ on $[1, 100]$ yields $\sim 100\times$ amplification. The functions underlying the medical templates used in our experiments (Sec. 5.1) exhibit this behavior. We formalize the amplification in the following theorem:

Theorem 2 (Distinguishability Amplification). *Let $(\mathcal{X}, d_{\mathcal{X}})$ and $(\mathcal{Y}, d_{\mathcal{Y}})$ be metric spaces. Let $f: \mathcal{X} \rightarrow \mathcal{Y}$ be a Lipschitz function satisfying, for all $x, x' \in \mathcal{X}$,*

$$\alpha \cdot d_{\mathcal{X}}(x, x') \leq d_{\mathcal{Y}}(f(x), f(x')) \leq L \cdot d_{\mathcal{X}}(x, x'),$$

for constants $\alpha, L > 0$. Let $\mathcal{M}: \mathcal{Y} \rightarrow \mathcal{Y}$ be an ϵ -mDP mechanism on $(\mathcal{Y}, d_{\mathcal{Y}})$. Define $\psi = \mathcal{M} \circ f: \mathcal{X} \rightarrow \mathcal{Y}$. Then for all $x, x' \in \mathcal{X}$ and all measurable $T \subseteq \mathcal{Y}$:

$$\Pr[\psi(x) \in T] \leq e^{\epsilon L d_{\mathcal{X}}(x, x')} \Pr[\psi(x') \in T].$$

That is, the distinguishability level [7] between any two inputs x, x' is amplified by a factor of L relative to the nominal parameter ϵ . As L is a supremum, the bound is tight.

The proof is available in App. A.10. In index space, the amplification factor becomes $L_{\text{idx}} = L \cdot D_x / D_y$.

4.3.2 Accumulation through repeated releases.

When $\mathcal{M}$ -All independently sanitizes both x and $f(x)$, the joint distinguishability is additive: $\epsilon(1 + L) d_{\mathcal{X}}(x, x')$. More generally, with d independently noised derived nodes $f_i(x)$ (each (m_i, L_i) -bi-Lipschitz, parameter ϵ), the joint level is $\epsilon(1 + \sum_{i=1}^d L_i) d_{\mathcal{X}}(x, x')$. Under the worst-case adversary, even repeated root queries (where $L_{\text{idx}} = 1$) produce fresh noise draws, enabling MAP estimation that reduces reconstruction error as $\sqrt{t}$.

MAP reconstruction. The accumulation of independent observations has a concrete operational consequence. An adversary who observes $t - 1$ independent releases of a root x_r can compute the Maximum A Posteriori estimate:

$$\hat{x}_{\text{MAP}} = \arg \max_{x_r} \prod_{i=1}^{t-1} p_{\mathcal{M}}(\tilde{y}_i \mid x_r, \epsilon) \cdot \pi(x_r),$$

where $p_{\mathcal{M}}$ is the mechanism’s PMF and π is any prior. Under RootGuard, all queries return the same deterministic output $\hat{x}_r$, so the likelihood reduces to a single factor $p_{\mathcal{M}}(\hat{x}_r \mid x_r, \epsilon_r)$ regardless of t . We evaluate this attack empirically in Sec. 5.4.

4.4 Implied Privacy

The preceding section quantifies the cost of independent noising. We now show the converse, a coordinated mechanism that noises only the roots automatically extends privacy to all derived nodes, with no additional expenditure of budget.

Theorem 3 (Implied Privacy). *Let $(\mathcal{X}, d_{\mathcal{X}})$ and $(\mathcal{Y}, d_{\mathcal{Y}})$ be metric spaces. Let $\mathcal{M} : \mathcal{X} \rightarrow \mathcal{X}$ be an ϵ -metric differentially private (ϵ -mDP) mechanism on $(\mathcal{X}, d_{\mathcal{X}})$ that adds noise to its input.*

Let $f : \mathcal{X} \rightarrow \mathcal{Y}$ be a bi-Lipschitz function satisfying, for all $x, x' \in \mathcal{X}$,

$$\alpha \cdot d_{\mathcal{X}}(x, x') \leq d_{\mathcal{Y}}(f(x), f(x')) \leq L \cdot d_{\mathcal{X}}(x, x'),$$

for some constants $\alpha, L > 0$. Define a post-processing mechanism $\phi = f \circ \mathcal{M} : \mathcal{X} \rightarrow \mathcal{Y}$. Then, for all $x, x' \in \mathcal{X}$ and all measurable sets $T \subseteq \mathcal{Y}$,

$$\Pr[\phi(x) \in T] \leq e^{\frac{\epsilon}{\alpha} d_{\mathcal{Y}}(f(x), f(x'))} \Pr[\phi(x') \in T].$$

where the probability is taken over the randomness of $\mathcal{M}$. Equivalently, ϕ is $\frac{\epsilon}{\alpha}$ -mDP with respect to the metric $d_{\mathcal{Y}}(f(x), f(x'))$.

Hence, adding mDP noise directly to $y = f(x)$ in $(\mathcal{Y}, d_{\mathcal{Y}})$ with privacy parameter $\frac{\epsilon}{\alpha}$ provides at least as strong privacy as noising x and then applying f .

The proof is available in App. A.11. In index space, the inherited parameter is $\epsilon \cdot D_y / (\alpha \cdot D_x)$; when D_y / D_x is small, strong protection is inherited for free. Combined with Theorem 1, this guarantees that under RootGuard, repeated queries and derived functions return deterministic post-processing of the initial noised roots, and the adversary’s reconstruction power does not grow with t .

5 Experiments

We conduct experiments to answer the following research questions:

- RQ1: (Utility):** How much does root-only noising with dependency-aware budget allocation reduce target-node error compared to independent per-release noising?
- RQ2: (Reconstruction):** Under a MAP adversary with repeated queries at matched per-root noise, how much does $\mathcal{M}$ -All’s privacy degrade compared to RootGuard?
- RQ3: (Structural Analysis):** What structural properties of the template and budget allocation determine the advantage provided by dependency-aware noising?
- RQ4: (Deployment):** Do the mechanism-level findings transfer to a real LLM-driven tool-call deployment?

Summary of Findings.

RQ1 RootGuard achieves $2.6\times$ lower aggregate wMAPE than $\mathcal{M}$ -All at $\epsilon = 0.1$ (7.8% vs. 20.3%, Exponential, $B = (2k+1)\epsilon$), widening to $3.8\times$ at $(3k+1)\epsilon$ and at stronger privacy. The wMAPE wins translate to clinical decisions: $2.2\times$ lower Risk Class Error at $(2k+1)\epsilon$ (7.0% vs. 15.7%), widening to $3.3\times$ at $(3k+1)\epsilon$. Additional adversarial turns improve RootGuard’s utility while $\mathcal{M}$ -All is static.

RQ2 $\mathcal{M}$ -All’s reconstruction wMAPE drops from 10.2% to 3.2% as q increases from 1 to 16 ($\epsilon_r = 0.1$, Strategy B, informed prior); RootGuard is invariant. Each adversarial query produces an independent observation that tightens the MAP posterior; RootGuard’s responses contribute no new information after the first release.

RQ3 RootGuard wins on every template at every budget; the magnitude of the win tracks whether the target formula compresses or amplifies root noise. Compressive templates (AIP, HOMA, FIB4) yield the largest gains ($5.1\times$, $3.9\times$, $4.4\times$ at $B = (3k+1)\epsilon$); amplifying templates (ANEMIA, CONICITY) yield smaller multiplicative gains on already-low absolute errors. The allocation follows $\epsilon_i \propto (|h_i|D_i)^{1/2}$ (fitted slope 0.50), is mechanism-independent, and reclaims budget from zero-sensitivity roots.

RQ4 The RQ1–3 ordering and per-template structure transfer cell-for-cell to a real LLM-driven deployment (GPT-5.4 nano [12] agent harness, 21,600 sessions, 0% session-level compliance failures), confirming that the privacy-utility tradeoff established at the mechanism level holds end-to-end.

5.1 Setup

Data. We use CDC’s publicly available National Health and Nutrition Examination Survey (NHANES) 2017–2018 [13], which covers body measures, blood pressure, hematology, cholesterol, triglycerides, glucose, insulin etc. We consider 8 clinical templates for diagnosis. Each template defines k root attributes (a subset of the NHANES medical measurements) and a deterministic target function g that computes a clinical index used by the service’s threshold logic to complete the diagnosis. For example, the FIB4 template uses four roots (age, AST, PLT, ALT) and computes $g(\text{age}, \text{AST}, \text{PLT}, \text{ALT}) = \text{age} \cdot \text{AST} / (\text{PLT} \cdot \sqrt{\text{ALT}})$. This then is thresholded to determine with the risk as “Low”, “Indeterminate” or “High”. We draw 200 adult male patients per template from the NHANES population (the per-template subpopulation ranges from $n = 1,195$ to $2,840$) for RQ1–RQ3, and the first 100 of these for the deployment evaluation in RQ4. All template details are in App. A.1.

Interaction model. Following the threat model (Sec. 2.2), we evaluate a multi-turn interaction over t turns with total privacy budget $B = t \cdot \epsilon$. In each of the first $t - 1$ turns, the adversary requests a root or an arbitrary function of roots; in the final turn, it requests the roots required to compute g and applies it on the sanitized values it receives. RQ1 sweeps three turn budgets $t \in \{k+1, 2k+1, 3k+1\}$ across 10 privacy levels $\epsilon \in [0.005, 5.0]$; with $k \in \{2, 3, 4\}$, this gives 1, 2, or 3 adversarial queries per root before the final turn. RQ2 fixes per-root noise $\epsilon_r \in \{0.05, 0.1, 0.5, 1.0\}$ and varies the adversarial query count $q \in \{1, 4, 8, 16\}$ directly. For RQ1–RQ3, we simulate this interaction through mechanism implementations to isolate the privacy-utility tradeoff from NER errors and prompt formatting artifacts; RQ4 (Sec. 5.6) re-runs the same threat model end-to-end through an LLM tool-call pipeline.

Mechanisms and configurations. We evaluate three noise mechanisms (Discrete Exponential [14], Bounded Laplace, Staircase [15]) under the three configurations of Sec. 3.3: $\mathcal{M}$ -All (every release noised independently with ϵ budget), $\mathcal{M}$ -Roots (only k roots noised, uniform allocation $\epsilon_i = B/k$), and $\mathcal{M}$ -Opt (k roots noised, sensitivity-weighted allocation $\epsilon_i \propto \sqrt{|h_i| \cdot \delta_i}$); only the latter two are dependency-aware. All operate in normalized index space with $m = 1,000$ candidates; mechanism details are in App. A.2.

Budget allocation. The three configurations distribute B differently: $\mathcal{M}$ -All assigns ϵ to each of the t releases; $\mathcal{M}$ -Roots distributes B uniformly across k roots ($\epsilon_i = t\epsilon/k$); $\mathcal{M}$ -Opt allocates per the sensitivity-weighted solution of Sec. 3.4. Roots saturating at $\epsilon_{\min}$ have their budget redistributed to active roots.

Domain knowledge. RootGuard uses two forms of public knowledge, neither dependent on the private patient data: *domain bounds* $[\ell_i, u_i]$ from the per-template NHANES adult male subpopulation, and *population-mean root values* μ from the same population (excluding test samples) for evaluating sensitivities $h_i = |\partial g / \partial x_i(\mu)|$. The B -mDP guarantee holds regardless, as domain knowledge affects only utility.

Text-DP reference. We additionally include CAPE-F [9] as a text-DP reference, adapted to numeric values by constraining decoding to numerical characters. CAPE-F operates under a different DP definition and is not directly comparable on ϵ ; we include it to demonstrate that text-based DP is fundamentally unsuitable for structured numeric data.

5.2 Metrics

We evaluate each sanitization method along two axes: *numeric accuracy* of the target clinical index, and *clinical decision preservation*. Both are measured at the target node of each template—the final derived value from which the clinical risk class is determined. Let y denote the ground truth target value and $\hat{y}$ the target value obtained from (possibly noised) inputs.

Table 1: Aggregate wMAPE (%) at mid-to-high privacy levels across three adversary budget levels (Exponential mechanism). $\bar{B}$: average total budget across templates. $\mathcal{M}$ -All is invariant to the budget level; $\mathcal{M}$ -Opt improves with each additional adversarial turn. Aggregate values are the mean across 8 templates; bootstrap SEs are propagated from per-template SEs as $\sqrt{\sum_t \text{SE}_t^2}/k$. At $\varepsilon \geq 1.0$, all methods achieve $\leq 1\%$ wMAPE and differences are negligible (see App. A.12).

ε	$\bar{B}$	$B = (k+1)\varepsilon$			$\bar{B}$	$B = (2k+1)\varepsilon$			$\bar{B}$	$B = (3k+1)\varepsilon$		
		All	Roots	Opt		All	Roots	Opt		All	Roots	Opt
0.5	1.81	5.6 $\pm$ 0.30	4.0 $\pm$ 0.25	2.7$\pm$0.13	3.12	5.7 $\pm$ 0.30	2.4 $\pm$ 0.13	1.7$\pm$0.09	4.44	5.9 $\pm$ 0.33	1.8 $\pm$ 0.10	1.2$\pm$0.05
0.2	0.73	12.6 $\pm$ 0.64	10.1 $\pm$ 0.47	6.6$\pm$0.29	1.25	12.3 $\pm$ 0.62	5.9 $\pm$ 0.37	4.5$\pm$0.22	1.78	12.2 $\pm$ 0.55	4.6 $\pm$ 0.29	3.3$\pm$0.20
0.1	0.36	20.5 $\pm$ 0.88	14.9 $\pm$ 0.67	13.6$\pm$0.65	0.62	20.3 $\pm$ 0.96	11.4 $\pm$ 0.57	7.8$\pm$0.32	0.89	21.5 $\pm$ 0.96	8.7 $\pm$ 0.47	5.6$\pm$0.26
0.05	0.18	35.0 $\pm$ 1.45	26.0 $\pm$ 1.11	21.6$\pm$0.94	0.31	33.8 $\pm$ 1.69	18.0 $\pm$ 0.80	13.3$\pm$0.58	0.44	33.7 $\pm$ 1.75	14.3 $\pm$ 0.68	11.2$\pm$0.57
0.02	0.07	70.3 $\pm$ 4.35	55.5 $\pm$ 6.81	46.0$\pm$2.80	0.12	75.7 $\pm$ 10.89	34.1 $\pm$ 1.55	29.2$\pm$1.23	0.18	72.3 $\pm$ 5.10	27.9 $\pm$ 1.29	21.9$\pm$0.96
0.01	0.04	122.5 $\pm$ 10.10	101.9 $\pm$ 9.58	86.6$\pm$6.21	0.06	112.6 $\pm$ 8.41	63.0 $\pm$ 5.39	48.3$\pm$2.62	0.09	129.5 $\pm$ 9.85	47.3 $\pm$ 2.59	37.3$\pm$1.58

Weighted Mean Absolute Percentage Error (wMAPE) For each template with N samples, we compute:

$$\text{wMAPE} = \frac{\sum_{i=1}^N |\hat{y}_i - y_i|}{\sum_{i=1}^N |y_i|} \times 100\% \quad (3)$$

the mean absolute error normalized by the mean ground-truth magnitude [16, 17]. A wMAPE of 0% indicates perfect numeric preservation; values above 100% indicate that average distortion exceeds the typical value of the index. We use wMAPE rather than per-sample MAPE because MAPE is unstable when ground-truth values approach zero (e.g., FIB4 typical value ~ 1 within [0.12, 37.95]; AIP typical value ~ 0.4 within $[-0.64, 1.97]$).

Risk Class Error (RCE) Each template defines clinically meaningful risk categories based on published threshold values (App. A.1). For example, the FIB-4 template classifies patients into Low (< 1.30), Indeterminate (1.30–2.67), or High (> 2.67) fibrosis risk. We map both the ground truth and sanitized target values to their respective risk classes $c(y)$ and $c(\hat{y})$, then compute:

$$\text{Risk Class Error} = \frac{1}{N} \sum_{i=1}^N \frac{|c(\hat{y}_i) - c(y_i)|}{C - 1} \times 100\% \quad (4)$$

where C is the number of risk classes for the profile ($C = 3$ for ANEMIA, AIP, FIB4, HOMA; $C = 2$ for the remaining profiles). This metric directly measures *clinical harm*: a Risk Class Error of 0% means that sanitization never changes the clinical decision, regardless of numeric distortion. The two metrics are complementary: a method may achieve low wMAPE but non-zero RCE if perturbations cross decision boundaries.

5.3 RQ1: Target Utility Under Adversarial Queries

We evaluate target-node utility under the adversary budgets defined in Sec. 5.1. $\mathcal{M}$ -All noises each root release independently at ε , computing the target deterministically from the latest noised values at the target turn. $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt distribute the full budget B across roots once at initialization, then post-process all subsequent releases.

Data. We use the same 8 clinical templates and 200-patient NHANES 2017–2018 test split as in the experimental setup (Sec. 5.1), across 10 privacy budgets $\varepsilon \in [0.005, 5.0]$.

5.3.1 Aggregate results.

Table 1 reports aggregate wMAPE for the Exponential mechanism. The ordering $\mathcal{M}$ -All $>$ $\mathcal{M}$ -Roots $>$ $\mathcal{M}$ -Opt holds at every ε and every budget level, confirming that root-only noising and dependency-aware allocation provide additive gains; BLaP and Stair follow the same trend (App. A.12). At $\varepsilon = 0.1$ and $B = (2k+1)\varepsilon$, Exp-Opt achieves 7.8% vs. 20.3% for Exp-All — a $2.6\times$ improvement, widening to $3.8\times$ at $(3k+1)\varepsilon$ (5.6% vs. 21.5%). The gap also widens at lower ε : at $\varepsilon = 0.01$, $B = (2k+1)\varepsilon$, the gap is 48.3% vs. 112.6%.

5.3.2 Clinical decision preservation (RCE)

The wMAPE wins translate into clinical-decision wins. At the focal ($\varepsilon = 0.1$, Exp, $B = (2k+1)\varepsilon$), $\mathcal{M}$ -Opt achieves Risk Class Error of $7.0\% \pm 0.6\%$ vs. $\mathcal{M}$ -All’s $15.7\% \pm 0.8\%$, a $2.2\times$ reduction; the advantage widens to $3.3\times$ at

$B = (3k+1)\varepsilon$ (5.3% vs. 17.5%), tracking the wMAPE pattern. Table 2 reports the per-template breakdown. The Bounded Laplace and Staircase mechanisms exhibit the same ordering at every cell (App. A.12, Tables 17–23).

Table 2: Per-template Risk Class Error (%) at $\varepsilon = 0.1$ for the discrete Exponential mechanism across three adversarial budgets, under the controlled harness (RQ1). Bootstrap SE over patients ($n = 200$). Aggregate cross-mechanism results are in App. A.12, Tables 17–23. Lower is better.

Template	$\mathcal{M}\text{-All}$			$\mathcal{M}\text{-Opt}$		
	$k+1$	$2k+1$	$3k+1$	$k+1$	$2k+1$	$3k+1$
HOMA	36.0 $\pm$ 3.4	31.0 $\pm$ 3.3	42.0 $\pm$ 3.5	21.0 $\pm$ 2.9	19.0 $\pm$ 2.8	15.5$\pm$2.6
AIP	18.2 $\pm$ 2.7	20.8 $\pm$ 2.9	26.2 $\pm$ 3.1	12.0 $\pm$ 2.3	5.8 $\pm$ 1.7	4.5$\pm$1.5
FIB4	7.2 $\pm$ 1.8	10.0 $\pm$ 2.1	10.2 $\pm$ 2.1	5.5 $\pm$ 1.6	3.0 $\pm$ 1.2	1.8$\pm$0.9
NLR	21.5 $\pm$ 2.9	24.0 $\pm$ 3.0	19.5 $\pm$ 2.8	19.0 $\pm$ 2.8	12.0 $\pm$ 2.3	9.5$\pm$2.1
TYG	22.0 $\pm$ 2.9	22.0 $\pm$ 2.9	25.5 $\pm$ 3.1	18.0 $\pm$ 2.7	11.0 $\pm$ 2.2	9.0$\pm$2.0
ANEMIA	8.0 $\pm$ 1.9	6.0 $\pm$ 1.7	8.0 $\pm$ 1.9	2.2 $\pm$ 1.0	1.0 $\pm$ 0.7	1.0$\pm$0.7
CONICITY	7.0 $\pm$ 1.8	10.0 $\pm$ 2.1	7.5 $\pm$ 1.9	4.5 $\pm$ 1.5	3.0 $\pm$ 1.2	1.0$\pm$0.7
VASCULAR	3.0 $\pm$ 1.2	1.5 $\pm$ 0.9	1.0 $\pm$ 0.7	0.0 $\pm$ 0.0	1.0 $\pm$ 0.7	0.5$\pm$0.5

5.3.3 Budget scaling: the double asymmetry.

$\mathcal{M}\text{-All}$ ’s target utility depends only on ε , not B — the target is computed from a single fresh draw per root at the target turn, so the adversary’s additional turns do not improve target accuracy. $\mathcal{M}\text{-Roots}$ and $\mathcal{M}\text{-Opt}$ benefit from every unit of additional budget. Table 1 illustrates this *double asymmetry*: $\mathcal{M}\text{-All}$ columns are nearly flat across budget levels, while $\mathcal{M}\text{-Opt}$ columns decrease as budget concentrates on roots. At $\varepsilon = 0.1$, Exp-Opt improves from 13.6% ($k+1$) to 7.8% ($2k+1$) to 5.6% ($3k+1$), while Exp-All stays at $\sim 20\text{--}21\%$. RootGuard wins on every (template, mechanism) cell at every budget level (Sec. 5.5); the multiplicative advantage *grows* with B , driven by templates with compressive target formulas (FIB4, HOMA, AIP).

5.3.4 Text-DP reference (CAPE-F)

CAPE-F achieves 263–403% wMAPE across all ε ($65\text{--}125\times$ worse than BLap-Opt) and is essentially flat across the privacy axis, confirming that text-DP is unsuitable for structured numeric data regardless of ε .

5.3.5 Privacy cost of extra turns.

The $t - 1$ adversarial turns preceding the target have no utility cost for either method, but they impose a severe privacy cost on $\mathcal{M}\text{-All}$ — each query produces an independent observation a reconstruction adversary can exploit, while RootGuard’s post-processed responses reveal no additional information. We quantify this in Sec. 5.4.


5.4 RQ2: Reconstruction Attacks

RQ1 showed $\mathcal{M}\text{-All}$ ’s adversarial turns yield no utility benefit. We now ask: do they impose a *privacy cost*? The accumulation analysis (Sec. 4.3.2) predicts that each independent release gives the adversary a fresh observation, enabling MAP reconstruction that improves with query count. We test this by varying the number of queries under matched per-root noise.


5.4.1 Setup.

We fix per-root noise $\varepsilon_r \in \{0.05, 0.1, 0.5, 1.0\}$ and vary the adversarial query count $q \in \{1, 4, 8, 16\}$. $\mathcal{M}\text{-All}$ produces a fresh independent draw per query; $\mathcal{M}\text{-Roots}$ noises each root once at ε_r and caches; $\mathcal{M}\text{-Opt}$ noises each root once under the sensitivity-weighted allocation of total budget $B = k\varepsilon_r$. Method-agnostic RNG seeding makes $\mathcal{M}\text{-All}$ ’s first draw and the $\mathcal{M}\text{-Roots}$ cached value bit-identical at any (template, root, sample) triple, so any $q \geq 1$ difference is purely independent-draws vs. caching.

Adversary strategies. Each strategy uses q *root queries* (each requesting one or more sanitized root values) followed by one final *target query* that bundles all k roots needed for the diagnosis into a single turn. We bundle the final-turn roots rather than spreading them across k separate turns purely for narrative simplicity — every strategy has the same $q + 1$ -turn structure, and the privacy and utility accounting is unchanged either way. The total $q + 1$ turns yield $q + 1$ observations on at least one root.

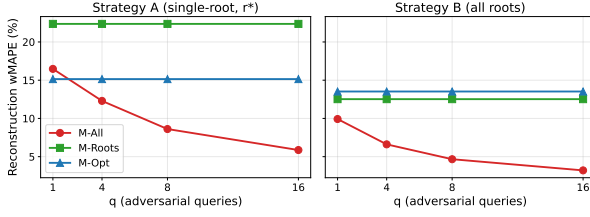Reconstruction wMAPE vs q — Exponential, $\varepsilon_r = 0.1$, uniform prior (mean across templates)

(a) Uniform prior. At $q = 1$, $\mathcal{M}$ -All has $q + 1 = 2$ observations on the targeted root, while $\mathcal{M}$ -Roots has the cached value replayed twice. The gap at $q = 1$ reflects the second independent draw under $\mathcal{M}$ -All; the divergence at $q > 1$ is the noise-averaging effect on accumulating draws.

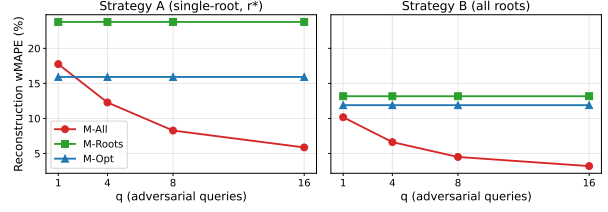Reconstruction wMAPE vs q — Exponential, $\varepsilon_r = 0.1$, informed prior (mean across templates)

(b) Informed prior. With Gaussian priors over unqueried roots, the qualitative behavior is unchanged from the uniform case: $\mathcal{M}$ -All decreases monotonically with q ; cached methods are flat.

Figure 2: Reconstruction wMAPE (%) vs. adversarial query count q at $\varepsilon_r = 0.1$ (Exponential, mean across 8 templates). Each row shows two strategies (A: single-root, B: all-roots). $\mathcal{M}$ -All (red) degrades with q in all settings; $\mathcal{M}$ -Roots (green) and $\mathcal{M}$ -Opt (blue) are flat.

Table 3: Aggregate reconstruction wMAPE (%) across privacy levels (Exponential, Strategy B, informed prior, mean across 8 templates). $\mathcal{M}$ -All decreases with q at every ε_r ; $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt are invariant. Lower values mean the adversary reconstructs more accurately (worse for privacy).

ε_r	$q = 1$			$q = 4$			$q = 8$			$q = 16$		
	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt
0.05	16.4	22.8	21.0	10.9	22.8	21.0	8.6	22.8	21.0	6.4	22.8	21.0
0.1	10.2	13.2	11.9	6.6	13.2	11.9	4.5	13.2	11.9	3.2	13.2	11.9
0.5	2.8	2.9	3.4	1.3	2.9	3.4	0.9	2.9	3.4	0.6	2.9	3.4
1.0	1.4	1.5	2.3	0.7	1.5	2.3	0.5	1.5	2.3	0.3	1.5	2.3

Strategy A (single-root, worst-case): the q root queries all target $r^* = \arg \max_r \varepsilon_r^{\text{Opt}}$ — the root that receives the largest budget under $\mathcal{M}$ -Opt’s sensitivity-weighted allocation, and therefore the least-noised one; combined with the target turn, the adversary observes $q+1$ values on r^* : under $\mathcal{M}$ -All, $q+1$ fresh independent draws; under cached methods, $q+1$ identical replays. We report wMAPE on r^* .

Strategy B (all-roots, average-case): the q queries are distributed across all k roots; combined with the target turn, each root accumulates $q/k + 1$ observations. We report mean wMAPE across roots.

MAP adversary and priors. The adversary performs a per-root 1-D argmax with full knowledge of the sanitization pipeline: $\hat{x}_r = \arg \max_x \prod_i p_{\mathcal{M}}(\tilde{y}_i | x, \varepsilon_r) \cdot \pi(x)$. The factorization across roots is exact: under both $\mathcal{M}$ -All and the cached methods, per-root observations are independent given the true value, and the user agent never releases a value that couples roots through the target. Unobserved roots return the prior mean (Strategy A only). For cached methods, the per-root likelihood collapses to a single factor regardless of q . We evaluate two priors — *uniform* ($\pi(x_r) \propto 1$, MAP reduces to MLE) and *informed* (independent Gaussian per root, $\pi(x_r) = \mathcal{N}(\mu_r, \sigma_r^2)$, calibrated from NHANES holdout statistics).

5.4.2 Results.

Fig. 2 and Table 3 present the main results (Exponential, informed prior, Strategy B). Full results across all privacy levels, mechanisms, and per-template breakdowns are in App. A.4.

Source of leakage. The result reveals a single effect compromising $\mathcal{M}$ -All’s privacy: *repeated query accumulation*. Each adversarial query produces a fresh independent observation on the queried root, and the target turn contributes one additional fresh draw under $\mathcal{M}$ -All (replayed cached value under RootGuard). As q grows, the adversary accumulates $q + 1$ independent observations on each affected root and combines them via per-root MAP, tightening the posterior around the true value. The reduction in wMAPE follows the standard $1/\sqrt{q+1}$ scaling for averaged estimators of a fixed parameter under additive noise. RootGuard’s cached methods provide no additional information after the first observation: every subsequent query returns the same value, leaving the per-root MAP unchanged.

Table 4: Agent-eval aggregate wMAPE (%) averaged across 8 templates, per (config, B , ϵ). 21,600 sessions total, GPT-5.4 nano user agent, Exponential mechanism. Bootstrap SEs (composed across templates) shown. The mechanism-level ordering $\mathcal{M}$ -All $>$ $\mathcal{M}$ -Roots $>$ $\mathcal{M}$ -Opt holds at every cell, matching RQ1 within bootstrap noise.

ϵ	M-All			M-Roots			M-Opt		
	$B = k + 1$	$B = 2k + 1$	$B = 3k + 1$	$B = k + 1$	$B = 2k + 1$	$B = 3k + 1$	$B = k + 1$	$B = 2k + 1$	$B = 3k + 1$
0.01	98.8 $\pm$ 7.3	108 $\pm$ 7.9	115 $\pm$ 10	82.6 $\pm$ 5.0	55.5 $\pm$ 3.0	43.2 $\pm$ 2.2	71.6 $\pm$ 4.6	47.2 $\pm$ 2.6	35.5 $\pm$ 1.8
0.05	32.8 $\pm$ 1.9	34.4 $\pm$ 1.8	34.6 $\pm$ 2.0	26.0 $\pm$ 1.4	17.8 $\pm$ 1.1	13.9 $\pm$ 0.9	20.9 $\pm$ 1.1	14.0 $\pm$ 0.8	10.5 $\pm$ 0.7
0.1	21.6 $\pm$ 1.3	22.2 $\pm$ 1.2	21.7 $\pm$ 1.3	15.9 $\pm$ 1.0	10.6 $\pm$ 0.7	7.9 $\pm$ 0.6	12.3 $\pm$ 0.8	7.6 $\pm$ 0.5	5.6 $\pm$ 0.4

Strategy A Fig. 2a (left panel) shows the targeted-root reconstruction. At $q = 1$, $\mathcal{M}$ -All has 2 observations on r^* (one query plus the target turn) while $\mathcal{M}$ -Roots has the cached value replayed twice; the gap (16.5% vs. 22.4% aggregate) is purely the gain from a second independent draw under $\mathcal{M}$ -All. As q grows, $\mathcal{M}$ -All’s wMAPE drops to 12.3% ($q = 4$), 8.6% ($q = 8$), and 5.9% ($q = 16$), tracking the expected $1/\sqrt{q+1}$ noise-averaging rate. $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt remain flat: at every q , $\mathcal{M}$ -Roots reconstructs r^* with 22.4% wMAPE (the per-root error of one ϵ_r -noised release), and $\mathcal{M}$ -Opt achieves 15.1% because it concentrates budget on r^* ($\epsilon_{r^*} > \epsilon_r$). The $2.8\times$ reduction (16.5% $\rightarrow$ 5.9%) under $\mathcal{M}$ -All is entirely attributable to independent noise averaging.

The informed prior (Fig. 2b, left panel) gives nearly identical results because the target release does not enter the MAP — the only effect of the informed prior on the targeted root is a soft regularization toward the population mean. At $\epsilon_r = 0.1$: $\mathcal{M}$ -All starts at 17.8% (vs. 16.5% uniform), drops to 5.9% at $q = 16$. $\mathcal{M}$ -Roots remains at 23.8%. The qualitative result is unchanged.

Strategy B Table 3 shows that the pattern is consistent across all privacy levels. At $\epsilon_r = 0.05$ (strong privacy), $\mathcal{M}$ -All drops from 16.4% to 6.4% as q goes from 1 to 16, while $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt remain at 22.8% and 21.0% respectively. At $\epsilon_r = 0.1$, $\mathcal{M}$ -All drops from 10.2% to 3.2% ($3.2\times$ reduction), against flat cached methods at 13.2% ($\mathcal{M}$ -Roots) and 11.9% ($\mathcal{M}$ -Opt). At $\epsilon_r = 0.5$ (moderate privacy), $\mathcal{M}$ -All drops from 2.8% to 0.6%, while $\mathcal{M}$ -Roots stays at 2.9%. At $q = 16$, $\mathcal{M}$ -All reconstructs $4\text{--}5\times$ more accurately than $\mathcal{M}$ -Roots across every privacy level. The per-template breakdown (Table 8, App. A.4) confirms $\mathcal{M}$ -All degrades on every template, with the largest absolute degradation on templates with wide root domains (HOMA: 19.1% $\rightarrow$ 5.1%, NLR: 20.9% $\rightarrow$ 7.6% at $\epsilon_r = 0.1$, informed prior).

$\mathcal{M}$ -Opt vs. $\mathcal{M}$ -Roots. The two cached methods show complementary behavior across strategies. In Strategy A, $\mathcal{M}$ -Opt achieves lower wMAPE than $\mathcal{M}$ -Roots on the targeted root (15.1% vs. 22.4% aggregate, uniform prior) because it concentrates budget on r^* . In Strategy B, $\mathcal{M}$ -Roots sometimes achieves lower *average* wMAPE than $\mathcal{M}$ -Opt — for example, ANEMIA: $\mathcal{M}$ -Roots 1.9% vs. $\mathcal{M}$ -Opt 3.6% — because $\mathcal{M}$ -Opt starves low-sensitivity roots (e.g., RBC at $\epsilon_{\min}$), making them harder to reconstruct, which increases the average. This illustrates a tradeoff: $\mathcal{M}$ -Opt protects the most sensitive root but at the cost of higher average reconstruction error across all roots.

Key result $\mathcal{M}$ -All’s reconstruction wMAPE decreases monotonically with q at every privacy level, every template, and under both priors. $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt are invariant to q . Under a worst-case adversary, $\mathcal{M}$ -All’s privacy degrades with each additional query; RootGuard maintains a constant guarantee determined solely by the initial root noising. The Bounded Laplace and Staircase mechanisms exhibit the same pattern (App. A.4).

Our reconstruction experiments use direct root queries, which is the simplest adversary strategy. Under $\mathcal{M}$ -All, nonlinear derived-function queries could further amplify the adversary’s advantage (Sec. 4.3.1); exploring optimal adversary function choice is left to future work. Under RootGuard, function choice is irrelevant by Theorem 1. Our results are therefore conservative estimates of $\mathcal{M}$ -All’s vulnerability.

5.5 RQ3: Structural Analysis

RQ1 showed that $\mathcal{M}$ -Opt consistently outperforms $\mathcal{M}$ -Roots in aggregate, demonstrating that *how* the budget is distributed matters beyond eliminating redundant noising. We now examine the structural conditions that determine the magnitude of RootGuard’s advantage and the allocation properties that drive it. RootGuard wins on every (template, mechanism, ϵ) cell at $B = (2k+1)\epsilon$ and above on both wMAPE and RCE; the size of the gap, however, varies substantially across templates, tracking two structural factors: (1) whether the target formula compresses or amplifies root noise, and (2) the geometry of the sensitivity-weighted budget allocation across roots. Per-template win counts across all mechanisms and privacy levels are reported in App. A.3 (Table 7).

5.5.1 Per-template analysis.

All per-template numbers in this section are reported at $B = (2k+1)\varepsilon$ for the Exponential mechanism unless otherwise noted. Full per-template wMAPE curves across ε and all three mechanisms are in App. A.5 (Fig. 5).

The per-template breakdown sorts templates into two regimes (Table 5). *Compressing* target formulas (logarithms, divisions by large constants) attenuate root noise with wide target domains, allowing RootGuard to recover utility (AIP, HOMA, FIB4, NLR; absolute gaps 14–29 pp). *Amplifying* formulas project root noise into narrow target domains, producing small absolute errors for both methods but preserving a 2–3 $\times$ multiplicative advantage for RootGuard (ANEMIA, CONICITY, TYG, VASCULAR; gaps ≤ 4 pp). Across all 8 templates, no template falls below $2.1\times$ at $B = (2k+1)\varepsilon$; the pattern holds across all three mechanisms (App. A.12) and grows more pronounced at $(3k+1)\varepsilon$, where ratios reach 3.0–5.4 $\times$.

Table 5: Per-template wMAPE (%) at $\varepsilon = 0.1$, $B = (2k+1)\varepsilon$ (Exponential). *Compressing* formulas show large absolute gaps; *amplifying* formulas show small absolute gaps but comparable multiplicative ratios. Full per-template tables in App. A.12.

Template	Formula	All	Opt	Ratio
<i>Compressing — large absolute gaps</i>				
AIP	$\log_{10}(\text{TG}/\text{HDL})$	41.9	12.7	3.3 $\times$
HOMA	$\text{Glu} \cdot \text{Ins}/405$	31.1	9.9	3.1 $\times$
NLR	NEU/LYM	49.2	23.1	2.1 $\times$
FIB4	$\text{age} \cdot \text{AST}/(\text{PLT}\sqrt{\text{ALT}})$	23.9	10.0	2.4 $\times$
<i>Amplifying — small absolute gaps</i>				
VASCULAR	$100(\text{SBP}-\text{DBP})/\text{SBP}$	6.3	2.6	2.4 $\times$
TYG	$\ln(\text{TG} \cdot \text{Glu}/2)$	4.6	2.0	2.3 $\times$
CONICITY	$\text{waist}/(0.109\sqrt{\text{wt}/\text{ht}})$	2.8	1.0	2.8 $\times$
ANEMIA	$100 \cdot \text{Hb}/\text{Hct}$	2.4	0.7	3.3 $\times$

5.5.2 Power-law allocation and mechanism independence.

The closed-form approximation (Sec. 3.4) predicts $\varepsilon_i \propto (|h_i| \cdot D_i)^{1/2}$. Empirically, normalized per-root allocations across all 8 templates collapse onto a single log-log line with fitted slope 0.50 (Exponential, $\varepsilon = 0.1$, $B = (2k+1)\varepsilon$; full plot in App. A.6, Fig. 4), confirming the prediction. Roots with higher sensitivity–domain products receive proportionally more budget.

The allocation is mechanism-independent: at $\varepsilon = 0.1$, all three mechanisms produce fitted slopes of exactly 0.50; at $\varepsilon = 0.5$, minor deviations appear (Exp 0.49, BLap 0.52, Stair 0.51). Full three-mechanism plots at all privacy levels are in App. A.6. This confirms that the budget distribution is governed by the DAG’s sensitivity geometry, not the noise distribution. A deployment can switch mechanisms without recomputing the allocation.

5.5.3 Zero-sensitivity roots.

Some roots have zero sensitivity to the target: RBC in ANEMIA ($\partial\text{MCHC}/\partial\text{RBC} = 0$) and TC in AIP ($\partial\text{AIP}/\partial\text{TC} = 0$). Under $\mathcal{M}$ -Roots, these consume $1/k$ of the budget without reducing target error. Under $\mathcal{M}$ -Opt, they are clamped at $\varepsilon_{\min}$ and their share is redistributed, effectively giving each active root 50% more budget on these 3-root templates.

This creates complementary effects in the two RQs. In RQ1, the budget reclamation amplifies RootGuard’s advantage on these 3-root templates: each active root receives effectively 50% more budget than under uniform allocation, contributing to the strong multiplicative wins on ANEMIA (3.3 $\times$) and AIP (3.3 $\times$) at $\varepsilon = 0.1$, $B = (2k+1)\varepsilon$. In RQ2, the clamped roots are very hard to reconstruct (high noise), increasing $\mathcal{M}$ -Opt’s average reconstruction wMAPE under Strategy B (e.g., ANEMIA: $\mathcal{M}$ -Opt 3.6% vs. $\mathcal{M}$ -Roots 1.9%) — while simultaneously making the high-budget roots harder for an adversary to improve upon under Strategy A.

5.6 RQ4: End-to-End Deployment in an LLM Tool-Call Pipeline

RQ1–3 establish the privacy-utility tradeoff at the mechanism level, with the user agent and adversary simulated directly through mechanism implementations. We now ask: do these findings transfer to a real LLM-driven tool-call deployment, where the user agent is an LLM that parses natural-language queries, sanitizes via the mechanism, and emits structured replies through a tool-call interface?

5.6.1 Setup.

We re-run RQ1’s threat model in a deployment harness: a GPT-5.4 nano user agent holds the patient’s private root values and answers per-turn queries from an adversary by invoking sanitization tools and emitting natural-language replies, which the adversary parses through an alias-resolving regex parser frozen before the sweep. We sweep 8 templates, 100 patients/template, three mechanisms ($\mathcal{M}$ -All, $\mathcal{M}$ -Roots, $\mathcal{M}$ -Opt; Exponential), three budgets ($t \in \{k+1, 2k+1, 3k+1\}$), and three privacy levels ($\varepsilon \in \{0.01, 0.05, 0.1\}$) for 21,600 sessions and 162,000 observations total.

5.6.2 Aggregate ordering reproduces.

Table 4 reports aggregate wMAPE across the agent-eval sweep. The ordering $\mathcal{M}$ -All $>$ $\mathcal{M}$ -Roots $>$ $\mathcal{M}$ -Opt holds at every cell, matching RQ1. At $\varepsilon = 0.1$, $B = (2k+1)\varepsilon$, agent-eval $\mathcal{M}$ -Opt achieves $7.6\% \pm 0.5\%$ vs. $\mathcal{M}$ -All’s $22.2\% \pm 1.2\%$ — a $2.9\times$ improvement, agreeing with RQ1’s $2.6\times$ (7.8% vs. 20.3%) within 0.12pp at the focal cell and within $\pm 1.9\text{pp}$ across all nine (ε, B) aggregate cells.

5.6.3 Clinical decision preservation under deployment.

Beyond numeric utility, the deployment evaluation lets us measure whether the sanitization layer preserves the clinical decision the service would make (Risk Class Error, Sec. 5.2). Aggregated across templates at $\varepsilon = 0.1$, $\mathcal{M}$ -Opt achieves 7.3% RCE at $B = (2k+1)\varepsilon$ vs. $\mathcal{M}$ -All’s 19.2% ($2.6\times$ reduction); the gap widens to $3.6\times$ at $(3k+1)\varepsilon$ (5.4% vs. 19.7%). The deployment numbers agree with RQ1’s harness within bootstrap noise (7.0% harness vs. 7.3% deployment for $\mathcal{M}$ -Opt at the focal cell), confirming the LLM-mediated tool call layer does not introduce systematic clinical-decision drift. Table 6 reports per-template RCE; the largest absolute gaps appear on compressing formulas (HOMA, AIP, FIB4), where $\mathcal{M}$ -All’s high numeric error spills into class-boundary crossings.

Table 6: Agent-eval Risk Class Error (%) per template at $\varepsilon = 0.1$ under deployment (RQ4), with bootstrap SE over patients ($n = 100$). Showing the two larger adversarial budgets; the $B = (k+1)\varepsilon$ column and the $\mathcal{M}$ -Roots configuration are in App. A.8 (Table 15). Lower is better; deployment ordering matches the controlled harness in Table 2 within bootstrap noise.

Template	$\mathcal{M}$ -All		$\mathcal{M}$ -Opt	
	$2k+1$	$3k+1$	$2k+1$	$3k+1$
HOMA	30.5 $\pm$ 3.2	33.0 $\pm$ 3.1	15.0 $\pm$ 2.5	10.5$\pm$2.1
AIP	30.5 $\pm$ 3.2	29.0 $\pm$ 3.2	11.0 $\pm$ 2.3	8.0$\pm$1.9
FIB4	18.0 $\pm$ 2.6	18.0 $\pm$ 2.7	4.0 $\pm$ 1.4	3.0$\pm$1.2
NLR	20.5 $\pm$ 2.8	24.5 $\pm$ 2.9	10.0 $\pm$ 2.1	7.5$\pm$1.9
TYG	30.0 $\pm$ 3.3	24.0 $\pm$ 3.1	12.5 $\pm$ 2.4	10.0$\pm$2.2
ANEMIA	12.0 $\pm$ 2.3	17.5 $\pm$ 2.7	2.5 $\pm$ 1.1	1.0$\pm$0.7
CONICITY	10.5 $\pm$ 2.2	9.5 $\pm$ 2.0	2.0 $\pm$ 1.0	2.0$\pm$1.0
VASCULAR	2.0 $\pm$ 1.0	2.0 $\pm$ 1.0	1.5 $\pm$ 0.9	1.5$\pm$0.9

5.6.4 Per-template structure reproduces.

The per-template ordering matches RQ1’s structural analysis (Sec. 5.5). Templates with compressing target formulas (AIP, HOMA, FIB4) yield the largest absolute gaps under deployment as in the controlled harness; templates with amplifying formulas (ANEMIA, CONICITY) yield smaller absolute gaps. $\mathcal{M}$ -Opt strictly improves on $\mathcal{M}$ -All in 9/9 (B, ε) cells for 7 of 8 templates; the eighth (NLR) shows $\mathcal{M}$ -Opt $<$ $\mathcal{M}$ -All in 7/9 cells, reflecting NLR’s narrow target domain and high baseline noise variance, where bootstrap intervals on $\mathcal{M}$ -All and $\mathcal{M}$ -Opt overlap at $B = (k+1)\varepsilon$.

5.6.5 Pipeline robustness.

The deployment-layer integration is end-to-end clean. Across 21,600 sessions, we recorded 162,000 sanitized observations. We observed zero sessions with parse failures (the LLM never emitted a malformed response that broke the adversary’s parser), no observation-level parse failures and no rounding gaps in the LLM’s text reply.

Scope of evaluation. Our deployment harness covers the Exponential mechanism, three ε levels, and one LLM backbone (GPT-5.4 nano); transfer to other mechanisms, backbones, or fully autonomous agents that decide what to disclose is out of scope.

6 Related Work

Inference-time prompt privacy. Prior sanitizers perturb prompts before submission via metric local DP over embeddings [18, 19], MLM sampling [20], context-aware bucket perturbation [9], format-preserving numeric protection [8], or token-level budget allocation [21]; see [22] for a survey. All treat releases independently in single-turn settings. RootGuard tracks dependencies across multi-turn interactions, noising only roots so that additional releases incur no additional cost.

DP under correlated data. Pufferfish [23], dependent DP [24], Bayesian DP [25], Wasserstein/Markov-Quilt mechanisms [26], Rényi composition [27], and recent temporal/cross-sequence work [28] all calibrate noise to account for statistical correlations *between records*. We eliminate redundancy via post-processing rather than recalibrating noise.

LLM agent privacy and security. Agentic systems face prompt injection [3, 4, 5, 2] and multi-turn extraction attacks [29] on the MCP protocol [1]. Architectural defenses include AirGapAgent [30] (dual-LLM minimization), PAPILLON [31] (local-remote proxy redaction), and CaMeL [32] (capability tracking). These enforce minimization empirically; RootGuard provides formal guarantees that hold *even when* unintended computations occur, since they are post-processing of noised roots. Broader LLM privacy risks — training-data extraction [33], attribute inference [34], contextual-norm violations [35, 36] — motivate client-side sanitization in the first place.

7 Conclusion

We presented RootGuard, a dependency-aware privacy mechanism for multi-turn agentic interactions: noise the roots once, compute everything else deterministically. Privacy then depends only on the initial root sanitization regardless of adversary function choices, query count, or turn order, while independent noising degrades with every additional release. The resulting double asymmetry — additional turns simultaneously improve RootGuard’s utility and degrade independent noising’s privacy — holds across 8 medical templates (2.6–3.8 $\times$ lower wMAPE at $\varepsilon = 0.1$), across MAP reconstruction attacks ($\mathcal{M}$ -All degrades from 16.5% to 5.9% as $q:1 \rightarrow 16$; RootGuard invariant), and end-to-end through a 21,600-session LLM tool-call deployment (GPT-5.4 nano, 0% compliance failures).

Limitations and future work. We assume perfect NER for root identification, following prior sanitizers [8, 9]; integrating noisy NER into the privacy analysis is open. Our evaluation covers structured numeric values in single-user sessions; extending to free-form text, multi-user composition, additional backbones, and nonlinear derived-function attacks (which would tighten the $\mathcal{M}$ -All vulnerability bound via Theorem 2) are natural next steps. Two further directions are promising: learning approximate target functions from public population data when the exact formula is unknown, and composing RootGuard with capability-based agent defenses [30, 32].

References

- [1] Anthropic. Introducing the model context protocol. <https://www.anthropic.com/news/model-context-protocol>, November 2024. Accessed: 2025-04-18.
- [2] Xinyi Hou, Yanjie Zhao, Shenao Wang, and Haoyu Wang. Model context protocol (MCP): Landscape, security threats, and future research directions, 2025.
- [3] Kai Greshake, Sahar Abdelnabi, Shailesh Mishra, Christoph Endres, Thorsten Holz, and Mario Fritz. Not what you’ve signed up for: Compromising real-world LLM-integrated applications with indirect prompt injection. In *Proc. 16th ACM Workshop on Artificial Intelligence and Security (AISec)*, 2023.
- [4] Qiusi Zhan, Zhixiang Liang, Zifan Ying, and Daniel Kang. InjecAgent: Benchmarking indirect prompt injections in tool-integrated large language model agents. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 10471–10506, 2024.
- [5] Edoardo Debenedetti, Jie Zhang, Mislav Balunović, Luca Beurer-Kellner, Marc Fischer, and Florian Tramèr. AgentDojo: A dynamic environment to evaluate prompt injection attacks and defenses for LLM agents. In *Advances in Neural Information Processing Systems 37 (NeurIPS)*, 2024.
- [6] Carl Franzen. Sam Altman calls for ‘AI privilege’ as OpenAI clarifies court order to retain temporary and deleted ChatGPT sessions. <https://venturebeat.com/ai/sam-altman-calls-for-ai-privilege-as-openai-clarifies-court-order-to-retain-temporary-and-deleted-chatgpt-sessions>, June 2025. Accessed: 2026-04-24.

- [7] Konstantinos Chatzikokolakis, Miguel E. Andrés, Nicolás Emilio Bordenabe, and Catuscia Palamidessi. Broadening the scope of differential privacy using metrics. In *Privacy Enhancing Technologies (PETs 2013)*, volume 7981 of *Lecture Notes in Computer Science*, pages 82–102. Springer, 2013.
- [8] Amrita Roy Chowdhury, David Glukhov, Divyam Anshumaan, Prasad Chalasani, Nicolas Papernot, Somesh Jha, and Mihir Bellare. Preempt: Sanitizing sensitive prompts for llms, 2025.
- [9] Haoqi Wu, Wei Dai, Li Wang, and Qiang Yan. Cape: Context-aware prompt perturbation mechanism with differential privacy, 2025.
- [10] Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating noise to sensitivity in private data analysis. In *Theory of Cryptography Conference (TCC 2006)*, volume 3876 of *Lecture Notes in Computer Science*, pages 265–284. Springer, 2006.
- [11] Cynthia Dwork and Aaron Roth. The algorithmic foundations of differential privacy. *Foundations and Trends in Theoretical Computer Science*, 9(3–4):211–407, 2014.
- [12] OpenAI. Introducing GPT-5.4 mini and nano. <https://openai.com/index/introducing-gpt-5-4-mini-and-nano/>, March 2026. Accessed: 2026-04-29.
- [13] National Center for Health Statistics. National health and nutrition examination survey, 2017–2018: Examination data, 2020. Accessed: 2026-04-12.
- [14] Frank McSherry and Kunal Talwar. Mechanism design via differential privacy. In *48th Annual IEEE Symposium on Foundations of Computer Science (FOCS '07)*, pages 94–103. IEEE, 2007.
- [15] Quan Geng, Peter Kairouz, Sewoong Oh, and Pramod Viswanath. The staircase mechanism in differential privacy. *IEEE Journal of Selected Topics in Signal Processing*, 9(7):1176–1184, 2015.
- [16] Rob J. Hyndman and Anne B. Koehler. Another look at measures of forecast accuracy. *International Journal of Forecasting*, 22(4):679–688, 2006.
- [17] Stephan Kolassa and Wolfgang Schütz. Advantages of the MAD/Mean ratio over the MAPE. *Foresight: The International Journal of Applied Forecasting*, (6):40–43, 2007.
- [18] Xiang Yue, Minxin Du, Tianhao Wang, Yaliang Li, Huan Sun, and Sherman S. M. Chow. Differential privacy for text analytics via natural text sanitization. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 3853–3866, Online, August 2021. Association for Computational Linguistics.
- [19] Sai Chen, Fengran Mo, Yanhao Wang, Cen Chen, Jian-Yun Nie, Chengyu Wang, and Jamie Cui. A customized text sanitization mechanism with differential privacy. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 5747–5758, Toronto, Canada, July 2023. Association for Computational Linguistics.
- [20] Stephen Meisenbacher, Maulik Chevli, Juraj Vladika, and Florian Matthes. DP-MLM: Differentially private text rewriting using masked language models. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Findings of the Association for Computational Linguistics: ACL 2024*, pages 9314–9328, Bangkok, Thailand, August 2024. Association for Computational Linguistics.
- [21] Stephen Meisenbacher, Chaeun Joy Lee, and Florian Matthes. Spend your budget wisely: Towards an intelligent distribution of the privacy budget in differentially private text rewriting. In *Proceedings of the Fifteenth ACM Conference on Data and Application Security and Privacy, CODASPY '25*, page 84–95, New York, NY, USA, 2025. Association for Computing Machinery.
- [22] Kennedy Edemacu and Xintao Wu. Privacy preserving prompt engineering: A survey. *ACM Computing Surveys*, 2025.
- [23] Daniel Kifer and Ashwin Machanavajjhala. Pufferfish: A framework for mathematical privacy definitions. *ACM Transactions on Database Systems*, 39(1):3:1–3:36, 2014.
- [24] Changchang Liu, Supriyo Chakraborty, and Prateek Mittal. Dependence makes you vulnerable: Differential privacy under dependent tuples. In *Proceedings of the 23rd Annual Network and Distributed System Security Symposium (NDSS)*. Internet Society, 2016.
- [25] Jun Zhao. Composition properties of Bayesian differential privacy. *arXiv preprint arXiv:1911.00763*, 2019.
- [26] Shuang Song, Yizhen Wang, and Kamalika Chaudhuri. Pufferfish privacy mechanisms for correlated data. In *Proceedings of the 2017 ACM International Conference on Management of Data (SIGMOD)*, pages 1291–1306. ACM, 2017.
- [27] Clément Pierquin, Aurélien Bellet, Marc Tommasi, and Matthieu Boussard. Rényi Pufferfish privacy: General additive noise mechanisms and privacy amplification by iteration via shift reduction lemmas. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, volume 235 of *Proceedings of Machine Learning Research*, pages 40762–40794. PMLR, 2024.

- [28] Yifan Luo, Meng Zhang, Jin Xu, Junting Chen, and Jianwei Huang. Correlated-sequence differential privacy. In *Proceedings of the 34th International Conference on Computer Communications and Networks (ICCCN)*. IEEE, 2025.
- [29] Yanzhe Zhang and Diyi Yang. Searching for privacy risks in LLM agents via simulation, 2025.
- [30] Eugene Bagdasarian, Ren Yi, Sahra Ghalebikesabi, Peter Kairouz, Marco Gruteser, Sewoong Oh, Borja Balle, and Daniel Ramage. AirGapAgent: Protecting privacy-conscious conversational agents. In *Proceedings of the 2024 ACM SIGSAC Conference on Computer and Communications Security (CCS '24)*, pages 3868–3882, New York, NY, USA, 2024. Association for Computing Machinery.
- [31] Li Siyan, Vethavikashini Chithrha Raghuram, Omar Khattab, Julia Hirschberg, and Zhou Yu. PAPILLON: Privacy preservation from internet-based and local language model ensembles. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 3371–3390, Albuquerque, New Mexico, April 2025. Association for Computational Linguistics.
- [32] Edoardo Debenedetti, Ilia Shumailov, Tianqi Fan, Jamie Hayes, Nicholas Carlini, Daniel Fabian, Christoph Kern, Chongyang Shi, Andreas Terzis, and Florian Tramèr. Defeating prompt injections by design, 2025.
- [33] Nicholas Carlini, Florian Tramèr, Eric Wallace, Matthew Jagielski, Ariel Herbert-Voss, Katherine Lee, Adam Roberts, Tom Brown, Dawn Song, Úlfar Erlingsson, Alina Oprea, and Colin Raffel. Extracting training data from large language models. In *30th USENIX Security Symposium*, pages 2633–2650, 2021.
- [34] Robin Staab, Mark Vero, Mislav Balunović, and Martin Vechev. Beyond memorization: Violating privacy via inference with large language models. In *International Conference on Learning Representations (ICLR)*, 2024.
- [35] Niloofar Mireshghallah, Hyunwoo Kim, Xuhui Zhou, Yulia Tsvetkov, Maarten Sap, Reza Shokri, and Yejin Choi. Can LLMs keep a secret? testing privacy implications of language models via contextual integrity theory. In *International Conference on Learning Representations (ICLR)*, 2024.
- [36] Yijia Shao, Tianshi Li, Weiyan Shi, Yanchen Liu, and Diyi Yang. PrivacyLens: Evaluating privacy norm awareness of language models in action. In *Advances in Neural Information Processing Systems 37 (NeurIPS 2024) Datasets and Benchmarks Track*, 2024.
- [37] A. Victor Hoffbrand and David A. Steensma. *Hoffbrand’s Essential Haematology*. Wiley-Blackwell, 8th edition, 2019.
- [38] Mauro Buttarello and Mario Plebani. Automated blood cell counts: State of the art. *American Journal of Clinical Pathology*, 130(1):104–116, 2008.
- [39] Richard K. Sterling, Eduardo Lissen, Nathan Clumeck, et al. Development of a simple noninvasive index to predict significant fibrosis in patients with HIV/HCV coinfection. *Hepatology*, 43(6):1317–1325, 2006.
- [40] Stuart McPherson, Timothy Hardy, Jean-François Dufour, et al. Age as a confounding factor for the accurate non-invasive diagnosis of advanced NAFLD fibrosis. *American Journal of Gastroenterology*, 112(5):740–751, 2017.
- [41] William T. Friedewald, Robert I. Levy, and Donald S. Fredrickson. Estimation of the concentration of low-density lipoprotein cholesterol in plasma, without use of the preparative ultracentrifuge. *Clinical Chemistry*, 18(6):499–502, 1972.
- [42] Milada Dobiasova and Jiri Frohlich. The plasma parameter log(TG/HDL-C) as an atherogenic index: Correlation with lipoprotein particle size and esterification rate in apoB-lipoprotein-depleted plasma. *Clinical Biochemistry*, 34(7):583–588, 2001.
- [43] Milada Dobiasova. Atherogenic index of plasma [log(triglycerides/HDL-cholesterol)]: Theoretical and practical implications. *Clinical Chemistry*, 50(7):1113–1115, 2004.
- [44] Rodolfo Valdez, Jacob C. Seidell, Young I. Ahn, and Kenneth M. Weiss. A new index of abdominal adiposity as an indicator of risk for cardiovascular disease: A cross-population study. *International Journal of Obesity*, 15(12):893–902, 1991.
- [45] Francisco José Gondim Pitanga and Inês Lessa. Sensitivity and specificity of the conicity index as a coronary risk predictor among adults in salvador, brazil. *Revista Brasileira de Epidemiologia*, 8(4):367–381, 2005.
- [46] Milda Kovaite, Sigita Gražulis, Jurgita Venclovaite, and Aleksandras Laurinavičius. Arterial stiffness parameters and pulse pressure index. *Medicina (Kaunas)*, 44(11):863–870, 2008.
- [47] Stanley S. Franklin. The importance of diastolic blood pressure in predicting cardiovascular risk. *Journal of the American Society of Hypertension*, 1(1):82–93, 2007.

- [48] Luis E. Simental-Mendía, Martha Rodríguez-Morán, and Fernando Guerrero-Romero. The product of fasting glucose and triglycerides as surrogate for identifying insulin resistance in apparently healthy subjects. *Metabolic Syndrome and Related Disorders*, 6(4):299–304, 2008.
- [49] Fernando Guerrero-Romero, Luis E. Simental-Mendía, Manuel González-Ortiz, Esperanza Martínez-Abundis, María G. Ramos-Zavala, Sandra O. Hernández-González, Omar Jacques-Camarena, and Martha Rodríguez-Morán. The product of triglycerides and glucose, a simple measure of insulin sensitivity: Comparison with the euglycemic-hyperinsulinemic clamp. *The Journal of Clinical Endocrinology & Metabolism*, 95(7):3347–3351, 2010.
- [50] David R. Matthews, Janet P. Hosker, Alan S. Rudenski, Barbara A. Naylor, David F. Treacher, and Robert C. Turner. Homeostasis model assessment: Insulin resistance and β -cell function from fasting plasma glucose and insulin concentrations in man. *Diabetologia*, 28(7):412–419, 1985.
- [51] Pilar Gayoso-Diz, Alfonso Otero-González, María Xosé Rodríguez-Álvarez, et al. Insulin resistance (HOMA-IR) cut-off values and the metabolic syndrome in a general adult population. *European Journal of Internal Medicine*, 24(8):818–823, 2013.
- [52] Roman Zahorec. Ratio of neutrophil to lymphocyte counts — rapid and simple parameter of systemic inflammation and stress in critically ill. *Bratislavské Lekárske Listy*, 102(1):5–14, 2001.
- [53] Patrice Forget, Cahrine Khalifa, Jean-Philippe Defour, Dominique Latinne, Marie-Céline Van Pel, and Marc De Kock. What is the normal value of the neutrophil-to-lymphocyte ratio? *BMC Research Notes*, 10(1):12, 2017.

A Appendix

A.1 Medical Profile Details

1. Anemia Classification (MCHC)

Red blood cell indices are derived from hemoglobin (Hb), hematocrit (Hct), and red blood cell count (RBC):

$$\text{MCV} = \frac{\text{Hct}}{\text{RBC}} \times 10, \quad \text{MCH} = \frac{\text{Hb}}{\text{RBC}} \times 10, \quad \text{MCHC} = \frac{\text{Hb}}{\text{Hct}} \times 100 \quad (5)$$

These are the standard red cell indices defined in clinical hematology [37]. The target value MCHC (mean corpuscular hemoglobin concentration, in g/dL) classifies chromicity: hypochromic ($\text{MCHC} < 32$), normochromic ($32 \leq \text{MCHC} \leq 36$), or hyperchromic ($\text{MCHC} > 36$) [38].

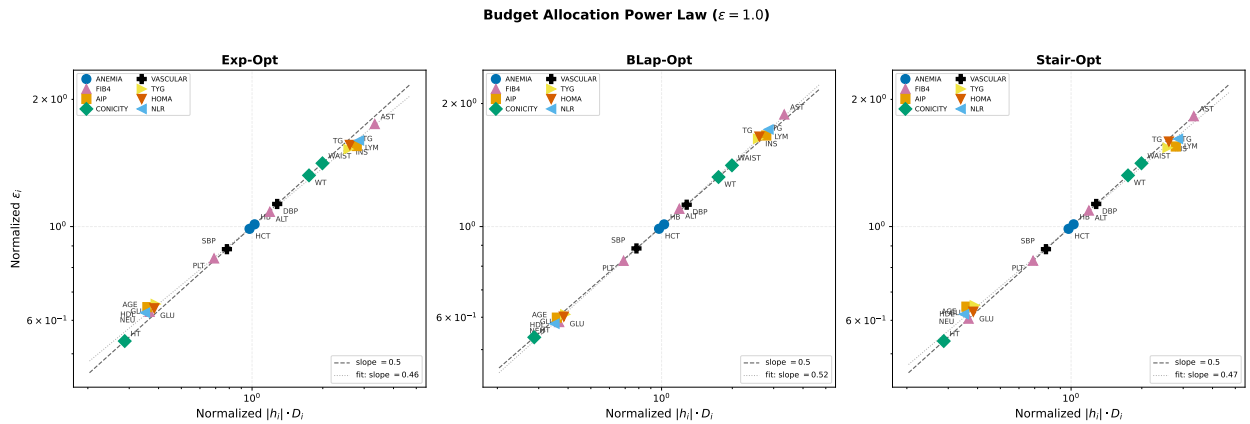


Figure 3: Log-log scatter of normalized per-root budget ε_i vs. sensitivity–domain product $|h_i| \cdot D_i$ at $\varepsilon = 0.1$. Each panel uses one mechanism’s optimizer. All three produce the same power law $\varepsilon_i \propto (|h_i| \cdot D_i)^{0.5}$ (dashed line; fitted slopes 0.46, 0.52, 0.47). Hollow markers indicate floor-clamped roots with zero target sensitivity.

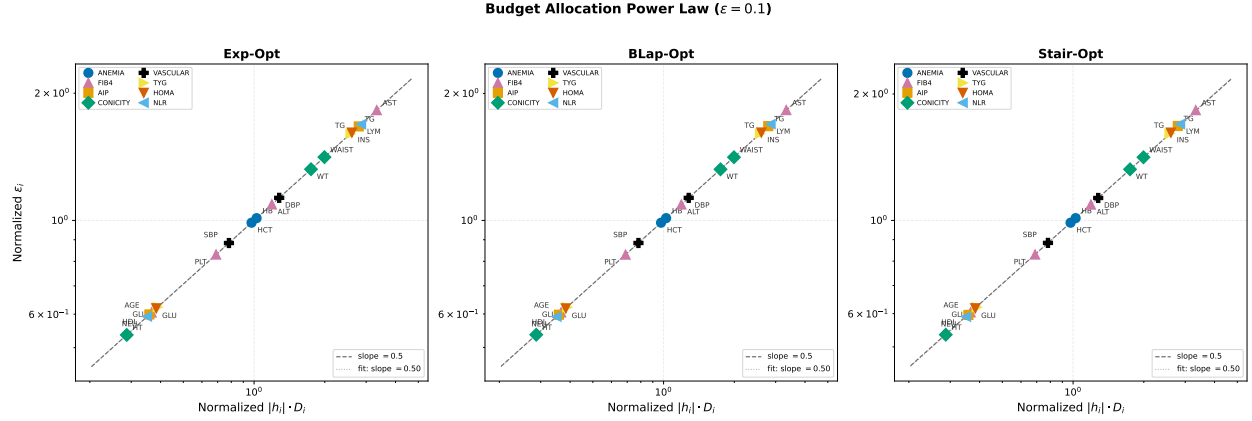


Figure 4: Log-log scatter of normalized per-root budget ε_i vs. sensitivity-domain product $|h_i| \cdot D_i$ at $\varepsilon = 0.1$. Each panel uses one mechanism's optimizer. All three produce the same power law $\varepsilon_i \propto (|h_i| \cdot D_i)^{0.5}$ (dashed line; fitted slopes 0.50, 0.50, 0.50). Hollow markers indicate floor-clamped roots with zero target sensitivity.

2. Liver Fibrosis (FIB-4)

The FIB-4 index [39] is a validated non-invasive biomarker for hepatic fibrosis staging:

$$\text{FIB-4} = \frac{\text{age} \times \text{AST}}{\text{PLT} \times \sqrt{\text{ALT}}} \quad (6)$$

where AST and ALT are in U/L and PLT is in $10^9/\text{L}$. Risk thresholds: low risk/rule out ($\text{FIB-4} < 1.30$), indeterminate ($1.30 \leq \text{FIB-4} \leq 2.67$), high risk/rule in ($\text{FIB-4} > 2.67$). These cutoffs are from Sterling et al. [39] and validated in subsequent NAFLD studies [40].

3. Atherogenic Index of Plasma (AIP)

Lipid-derived values include non-HDL cholesterol ($\text{TC} - \text{HDL}$) and Friedewald LDL ($\text{TC} - \text{HDL} - \text{TG}/5$) [41]. The atherogenic index of plasma [42] is:

$$\text{AIP} = \log_{10} \left(\frac{\text{TG}}{\text{HDL}} \right) \quad (7)$$

where TG and HDL are in mg/dL. Risk classification: low cardiovascular risk ($\text{AIP} < 0.11$), intermediate ($0.11 \leq \text{AIP} \leq 0.21$), high ($\text{AIP} > 0.21$) [43].

4. Conicity Index (Obesity)

Body composition is assessed via BMI (wt/ht^2), waist-to-height ratio (waist/ht), and the conicity index [44]:

$$\text{CI} = \frac{\text{waist}}{0.109 \times \sqrt{\text{wt}/\text{ht}}} \quad (8)$$

where waist and height are in meters, and weight is in kilograms. The denominator represents the circumference of a cylinder with the same height and mass. Central obesity is indicated when $\text{CI} > 1.25$ [45].

5. Vascular Stiffness (Pulse Pressure Index)

Blood pressure derivatives include pulse pressure ($\text{PP} = \text{SBP} - \text{DBP}$), mean arterial pressure ($\text{MAP} = \text{DBP} + \text{PP}/3$), and mid-blood pressure ($\text{MBP} = (\text{SBP} + \text{DBP})/2$). The pulse pressure index [46]:

$$\text{PPI} = \frac{\text{PP}}{\text{SBP}} = \frac{\text{SBP} - \text{DBP}}{\text{SBP}} \quad (9)$$

High arterial stiffness is indicated when $\text{PPI} > 0.60$ [47].

6. Triglyceride-Glucose Index (TyG)

The TyG index [48] is a surrogate marker for insulin resistance:

$$\text{TyG} = \ln\left(\frac{\text{TG} \times \text{Glu}}{2}\right) \quad (10)$$

where TG is in mg/dL and Glu is fasting glucose in mg/dL. Insulin resistance is indicated when $\text{TyG} > 8.5$ [49].

7. HOMA-IR (Insulin Resistance)

The Homeostatic Model Assessment for Insulin Resistance [50]:

$$\text{HOMA-IR} = \frac{\text{Glu} \times \text{Ins}}{405} \quad (11)$$

where Glu is fasting glucose (mg/dL) and Ins is fasting insulin ($\mu\text{U/mL}$). The constant 405 normalizes to conventional units. Classification: insulin sensitive ($\text{HOMA} < 1.0$), normal ($1.0 \leq \text{HOMA} < 2.5$), insulin resistant ($\text{HOMA} \geq 2.5$) [51].

8. Neutrophil-to-Lymphocyte Ratio (NLR)

The NLR is a marker of systemic inflammation [52]:

$$\text{NLR} = \frac{\text{Neutrophils}}{\text{Lymphocytes}} \quad (12)$$

with auxiliary values $\text{NLR}_{\text{sum}} = \text{Neu} + \text{Lym}$ and $\text{NLR}_{\text{diff}} = |\text{Neu} - \text{Lym}|$ included as intermediate nodes. Systemic inflammation or physiologic stress is indicated when $\text{NLR} \geq 3.0$ [53].

A.2 Additional Baseline Details

A.2.1 Discrete Exponential Mechanism

The mechanism samples index $s \in \{0, \dots, m-1\}$ with probability

$$P_{t_i}(s) = \frac{\alpha_i^{|t_i-s|}}{\sum_{r=0}^{m-1} \alpha_i^{|t_i-r|}}, \quad \alpha_i = \exp(-\epsilon_i/2).$$

The expected absolute noise in index units at position t_i is:

$$\mathbb{E}[|s - t_i|] = \frac{\sum_{s=0}^{m-1} |t_i - s| \alpha_i^{|t_i-s|}}{\sum_{s=0}^{m-1} \alpha_i^{|t_i-s|}}. \quad (13)$$

In domain units: $\bar{\eta}_i^{\text{Exp}}(\epsilon_i) = \delta_i \cdot \mathbb{E}[|s - t_i|]$. Evaluated at the grid center $t_i = (m-1)/2$, where both tails have full support.

A.2.2 Bounded Laplace

The Bounded Laplace mechanism sanitizes root i as follows. The true value x_i is mapped to index space via $t_i = (x_i - \ell_i)/\delta_i$. Continuous noise is drawn from a Laplace distribution:

$$\tilde{t}_i = t_i + Z, \quad Z \sim \text{Lap}(0, 1/\epsilon_i),$$

with density $p(z) = (\epsilon_i/2) \exp(-\epsilon_i|z|)$. The noisy index is clamped and rounded:

$$s = \text{round}(\text{clip}(\tilde{t}_i, 0, m-1)).$$

The output is $x'_i = s \delta_i + \ell_i$.

Table 7: $\mathcal{M}$ -Opt vs. $\mathcal{M}$ -All win rate per template (across 3 mechanisms $\times$ 10 ε values = 30 pairs). A “win” means $\mathcal{M}$ -Opt achieves lower wMAPE.

Template	k	$k+1$	$2k+1$	$3k+1$
ANEMIA	3	30/30	30/30	30/30
FIB4	4	30/30	30/30	30/30
AIP	3	30/30	30/30	30/30
CONICITY	3	30/30	30/30	30/30
VASCULAR	2	30/30	30/30	30/30
TYG	2	30/30	30/30	30/30
HOMA	2	30/30	30/30	30/30
NLR	2	26/30	29/30	29/30
Total		236/240 (98%)	239/240 ($\geq$ 99%)	239/240 ($\geq$ 99%)

A.2.3 Staircase Mechanism

The Staircase mechanism [15] replaces the Laplace’s smooth exponential density with a piecewise-constant density. For sensitivity $\Delta = 1$ in index space and privacy parameter ϵ_i , the noise $\hat{\eta}_i$ is sampled as follows:

1. Draw a sign $S \in \{-1, +1\}$ uniformly at random.
2. Draw $G \sim \text{Geom}(1 - e^{-\epsilon_i})$, with $\Pr[G = g] = (1 - e^{-\epsilon_i}) e^{-\epsilon_i g}$ for $g = 0, 1, 2, \dots$. The integer G selects which “step” the noise lands on: the noise magnitude will fall in the interval $[G, G+1)$ in index units.
3. Draw $U \sim \text{Uniform}(0, 1)$.
4. With probability $\gamma = 1/(1 + e^{\epsilon_i/2})$: set $\hat{\eta}_i = S \cdot (G + U)$.
With probability $1 - \gamma$: set $\hat{\eta}_i = S \cdot (G + 1 - U)$.

The geometric variable G determines the step, with each successive step having probability $e^{-\epsilon_i}$ times the previous — the same decay rate as the Laplace. The uniform variable U places the noise within the step. The γ -branch orients U toward the inner edge (closer to zero); the $(1-\gamma)$ -branch orients it toward the outer edge. The parameter $\gamma = 1/(1 + e^{\epsilon_i/2})$ balances these orientations.

The continuous noise is clamped to $[0, m-1]$ and rounded to the nearest grid point. The output in domain units is $\eta_i = (s - t_i) \delta_i$.

A.3 Per-template win rates

Table 7 reports the per-template win rate of $\mathcal{M}$ -Opt over $\mathcal{M}$ -All across all mechanisms and privacy levels. Under the unified single-draw root-based protocol (Sec. 5.3), $\mathcal{M}$ -Opt wins on essentially every (template, mechanism, ε) cell at every budget level: 98% at $B = (k+1)\varepsilon$ and $> 99\%$ at the larger budgets. The remaining few losses concentrate on NLR at very low ε , where wMAPE is already saturated above 80% and bootstrap intervals overlap.

A.4 Reconstruction Attack Results (RQ2)

This appendix supports the claims of Sec. 5.4 with three pieces of evidence: (i) a per-template breakdown showing that $\mathcal{M}$ -All’s reconstruction wMAPE degrades with query count on every template under the focal condition (Exponential, Strategy B, informed prior, $\varepsilon_r = 0.1$); (ii) Exponential aggregates under Strategy A and Strategy B for both priors, across all five privacy levels; (iii) aggregate reconstruction wMAPE for the Bounded Laplace and Staircase mechanisms under Strategy B (informed prior), confirming the same pattern observed for the Exponential mechanism (Table 3 in the main text). Bootstrap details and the full appendix (per-mechanism, per-strategy, per-prior, per-template at every ε_r) are in the supplementary material.

Per-template results (Exponential, $\varepsilon_r = 0.1$, Strategy B, informed prior). Table 8 reports per-template reconstruction wMAPE under Strategy B with the informed prior at $\varepsilon_r = 0.1$. $\mathcal{M}$ -All degrades monotonically with q on every template; $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt are invariant. The largest absolute degradations occur on templates with wide root domains (HOMA, NLR, TYG).

Exponential: Strategy A and Strategy B aggregates (both priors). Tables 9–12 report aggregate reconstruction wMAPE for the Exponential mechanism across all five privacy levels under both strategies and both priors. Under

Table 8: Per-template reconstruction wMAPE (%) at $\varepsilon_r = 0.1$ (Exponential, Strategy B, informed prior). $\mathcal{M}$ -All degrades monotonically with q on every template; $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt are invariant to q (single value shown).

Template	$\mathcal{M}$ -All				$\mathcal{M}$ -Roots (any q)	$\mathcal{M}$ -Opt (any q)
	$q=1$	$q=4$	$q=8$	$q=16$		
ANEMIA	1.6	0.8	0.6	0.4	1.9	3.6
FIB4	8.5	4.9	3.4	2.4	10.2	9.3
AIP	11.2	7.2	5.6	3.9	15.0	14.3
CONICITY	2.1	0.9	0.7	0.5	2.2	1.9
VASCULAR	2.5	1.3	0.9	0.6	2.7	2.7
TYG	15.5	11.0	7.3	5.0	20.4	17.3
HOMA	19.1	9.7	6.9	5.1	24.3	20.5
NLR	20.9	17.2	10.5	7.6	28.8	25.6

Strategy A (single targeted root r^*), $\mathcal{M}$ -All has $q + 1$ observations on r^* at each q and the gap to $\mathcal{M}$ -Roots widens monotonically; under Strategy B (queries distributed across all roots), the same pattern holds for the average across roots. The informed prior gives qualitatively identical behavior to uniform — under v3 there is no target-release coupling, so the prior contributes only soft regularization.

Table 9: Exponential, Strategy A, uniform prior: aggregate reconstruction wMAPE (%) (mean across 8 templates). Reports the targeted root r^* only.

ε_r	$q = 1$			$q = 4$			$q = 8$			$q = 16$		
	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt
0.01	127	213	104	97.2	213	104	74.7	213	104	55.4	213	104
0.05	26.1	42.4	27.9	23.3	42.4	27.9	16.9	42.4	27.9	12.3	42.4	27.9
0.1	16.5	22.4	15.1	12.3	22.4	15.1	8.6	22.4	15.1	5.9	22.4	15.1
0.5	4.9	5.3	3.4	2.3	5.3	3.4	1.7	5.3	3.4	1.1	5.3	3.4
1.0	2.5	2.7	1.7	1.2	2.7	1.7	0.9	2.7	1.7	0.6	2.7	1.7

Table 10: Exponential, Strategy A, informed prior: aggregate reconstruction wMAPE (%) (mean across 8 templates). Targeted root only.

ε_r	$q = 1$			$q = 4$			$q = 8$			$q = 16$		
	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt
0.01	35.4	38.4	44.8	34.7	38.4	44.8	34.1	38.4	44.8	32.5	38.4	44.8
0.05	28.3	40.3	29.1	19.7	40.3	29.1	15.6	40.3	29.1	11.7	40.3	29.1
0.1	17.8	23.8	15.9	12.3	23.8	15.9	8.3	23.8	15.9	5.9	23.8	15.9
0.5	5.0	5.3	3.4	2.3	5.3	3.4	1.7	5.3	3.4	1.1	5.3	3.4
1.0	2.6	2.7	1.7	1.2	2.7	1.7	0.9	2.7	1.7	0.6	2.7	1.7

Bounded Laplace and Staircase aggregates (Strategy B, informed prior). Tables 13 and 14 report aggregate reconstruction wMAPE for the Bounded Laplace and Staircase mechanisms under the focal condition (Strategy B, informed prior, mean across 8 templates). Both follow the same pattern as Exponential: $\mathcal{M}$ -All decreases with q at every ε_r , while $\mathcal{M}$ -Roots and $\mathcal{M}$ -Opt are invariant.

A.5 RQ1: Per-template wMAPE Curves

Fig. 5 shows the per-template wMAPE for all 8 medical templates across the full ε sweep at $B = (2k+1)\varepsilon$. Templates are arranged in two rows by absolute-gap regime (Sec. 5.5): the top row contains compressing-formula templates with the largest absolute $\mathcal{M}$ -All vs. RootGuard gaps; the bottom row contains amplifying-formula templates with smaller absolute gaps but comparable multiplicative ratios. Each panel overlays nine methods (3 mechanisms $\times$ 3 configurations).

Table 11: Exponential, Strategy B, uniform prior: aggregate reconstruction wMAPE (%) (mean across 8 templates). Reports the average across all k roots.

ε_r	$q = 1$			$q = 4$			$q = 8$			$q = 16$		
	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt
0.01	73.8	115	84.9	54.5	115	84.9	41.7	115	84.9	30.7	115	84.9
0.05	16.6	23.8	22.4	12.6	23.8	22.4	9.2	23.8	22.4	6.6	23.8	22.4
0.1	9.9	12.5	13.5	6.6	12.5	13.5	4.7	12.5	13.5	3.2	12.5	13.5
0.5	2.7	2.9	5.5	1.3	2.9	5.5	0.9	2.9	5.5	0.6	2.9	5.5
1.0	1.3	1.5	4.3	0.7	1.5	4.3	0.5	1.5	4.3	0.3	1.5	4.3

Table 12: Exponential, Strategy B, informed prior: aggregate reconstruction wMAPE (%) (mean across 8 templates). This is the focal condition reported in main-text Table 3.

ε_r	$q = 1$			$q = 4$			$q = 8$			$q = 16$		
	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt
0.01	24.7	28.8	30.3	23.3	28.8	30.3	21.6	28.8	30.3	19.6	28.8	30.3
0.05	16.4	22.8	21.0	10.9	22.8	21.0	8.6	22.8	21.0	6.4	22.8	21.0
0.1	10.2	13.2	11.9	6.6	13.2	11.9	4.5	13.2	11.9	3.2	13.2	11.9
0.5	2.8	2.9	3.4	1.3	2.9	3.4	0.9	2.9	3.4	0.6	2.9	3.4
1.0	1.4	1.5	2.3	0.7	1.5	2.3	0.5	1.5	2.3	0.3	1.5	2.3

A.6 Per-root Budget Allocation

Figure 6 shows the per-root budget shares across templates, mechanisms, and privacy levels: $\mathcal{M}$ -Opt allocates more budget to influential roots in every condition. Figures 3 and 4 confirm the closed-form prediction $\varepsilon_i \propto \sqrt{|h_i| \delta_i}$ (Sec. 3.4) on log-log axes for all three mechanisms at $\varepsilon = 0.1$ and $\varepsilon = 1.0$, with fitted slopes within ± 0.02 of the predicted 0.5.

A.7 Closed-Form Budget Allocation in the Laplace Limit

Sec. 3.4 establishes the optimization

$$\min_{\epsilon_1, \dots, \epsilon_k} \sum_{i=1}^k |h_i| \cdot \bar{\eta}_i(\epsilon_i) \quad \text{s.t.} \quad \sum_{i=1}^k \epsilon_i = B, \quad \epsilon_i \geq \epsilon_{\min}.$$

The objective is solved numerically for each mechanism. Here we derive the closed-form solution in the Laplace limit, where the discrete index-space distribution of Sec. 3.2 converges to a continuous Laplace distribution as the grid becomes fine ($m \rightarrow \infty$).

Setup and bound. Each root is independently sanitized via $\mathcal{M}_{\epsilon_i}$, producing output index s and domain-unit noise $\eta_i = (s - t_i) \delta_i$. Let $x' = (x'_1, \dots, x'_k)$ be the sanitized vector with $x'_i = s \delta_i + \ell_i$. The error in the intermediate g is $\Delta = g(x') - g(x)$; a first-order expansion gives $\Delta \approx \sum_{i=1}^k h_i \eta_i$. Applying the triangle inequality inside the expectation,

$$\mathbb{E}[|\Delta|] \approx \mathbb{E}\left[\left|\sum_{i=1}^k h_i \eta_i\right|\right] \leq \sum_{i=1}^k |h_i| \mathbb{E}[|\eta_i|].$$

Since the η_i are independent (each mechanism uses independent randomness), this upper bound is tight up to cancellation effects. The expected absolute noise $\mathbb{E}[|\eta_i|]$ depends on t_i , the true value’s position within the grid; to keep the optimization data-independent, we take the worst case over all positions:

$$\bar{\eta}_i(\epsilon_i) = \sup_{t_i \in [0, m-1]} \mathbb{E}[|\eta_i|]. \quad (14)$$

This yields the optimization restated above.

Continuum approximation. For the discrete Exponential mechanism, the sampling weight at index s is $P(s) \propto \exp(-\epsilon_i |t_i - s|/2)$. As $m \rightarrow \infty$, this converges to a Laplace distribution centered at t_i with scale $b_i = 2/\epsilon_i$ in index units. The expected absolute deviation of a Laplace with scale b_i is b_i . In domain units, $\bar{\eta}_i(\epsilon_i) \approx 2\delta_i/\epsilon_i$. The Bounded Laplace mechanism is asymptotically identical (truncation effects are exponentially small in $\epsilon_i(m-1)$).

Table 13: Bounded Laplace, Strategy B, informed prior: aggregate reconstruction wMAPE (%) (mean across 8 templates).

ε_r	$q = 1$			$q = 4$			$q = 8$			$q = 16$		
	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt
0.01	25.9	31.1	32.4	23.4	31.1	32.4	24.0	31.1	32.4	23.1	31.1	32.4
0.05	11.5	13.5	12.2	7.7	13.5	12.2	6.3	13.5	12.2	5.4	13.5	12.2
0.1	6.6	7.2	6.8	3.5	7.2	6.8	2.7	7.2	6.8	2.0	7.2	6.8
0.5	1.4	1.5	2.3	0.7	1.5	2.3	0.5	1.5	2.3	0.4	1.5	2.3
1.0	0.7	0.8	1.7	0.4	0.8	1.7	0.3	0.8	1.7	0.2	0.8	1.7

Table 14: Staircase, Strategy B, informed prior: aggregate reconstruction wMAPE (%) (mean across 8 templates). $\varepsilon_r = 1.0$ omitted (mechanism degenerate at high budget).

ε_r	$q = 1$			$q = 4$			$q = 8$			$q = 16$		
	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt	All	Rts	Opt
0.01	25.8	30.4	31.4	23.7	30.4	31.4	23.7	30.4	31.4	23.2	30.4	31.4
0.05	11.6	13.6	12.0	7.8	13.6	12.0	6.6	13.6	12.0	5.6	13.6	12.0
0.1	6.6	7.1	6.6	3.5	7.1	6.6	2.7	7.1	6.6	2.1	7.1	6.6
0.5	1.5	1.4	1.6	0.7	1.4	1.6	0.5	1.4	1.6	0.4	1.4	1.6

Lagrangian. Substituting into the objective, the Lagrangian for the active constraint set ($\epsilon_i > \epsilon_{\min}$) becomes

$$\mathcal{L}(\epsilon_1, \dots, \epsilon_k, \lambda) = \sum_{i=1}^k |h_i| \frac{2\delta_i}{\epsilon_i} + \lambda \left(\sum_{i=1}^k \epsilon_i - B \right),$$

where $\lambda \in \mathbb{R}$ is the multiplier for the budget constraint. Taking $\partial \mathcal{L} / \partial \epsilon_i = 0$,

$$-\frac{2|h_i|\delta_i}{\epsilon_i^2} + \lambda = 0 \implies \epsilon_i^* = \sqrt{\frac{2|h_i|\delta_i}{\lambda}} \propto \sqrt{|h_i|\delta_i}.$$

Let $w_i = \sqrt{|h_i|\delta_i}$. Substituting $\epsilon_i^* = w_i \sqrt{2/\lambda}$ into the budget constraint $\sum_{i \in \mathcal{R}_A} \epsilon_i = B - |\mathcal{R}_S| \epsilon_{\min}$ (where $\mathcal{R}_A$ is the set of active roots and $\mathcal{R}_S$ is the set of saturated roots) and solving for λ gives

$$\tilde{\epsilon}_i = \frac{w_i}{\sum_{j \in \mathcal{R}_A} w_j} (B - |\mathcal{R}_S| \epsilon_{\min}). \quad (15)$$

The second derivative of the objective, $4|h_i|\delta_i/\epsilon_i^3 > 0$ for all $\epsilon_i > 0$, confirms strict convexity, so this stationary point is the unique global minimum. This matches the closed-form claim made in Sec. 3.4.

Saturation handling. We solve (15) iteratively: roots whose allocation falls below $\epsilon_{\min}$ are clamped, removed from $\mathcal{R}_A$, added to $\mathcal{R}_S$, and the remaining budget is redistributed among the still-active roots. This terminates after at most k iterations.

Discrete mechanisms. For the discrete Exponential, Bounded Laplace, and Staircase mechanisms, we solve the optimization directly over the discrete $\tilde{\eta}_i(\epsilon_i)$ via standard numerical optimization. RQ3 (Sec. 5.5) verifies that the scaling $\epsilon_i \propto \sqrt{|h_i|\delta_i}$ predicted by the Laplace closed-form holds empirically across all three discrete mechanisms (fitted log-log slope 0.50 at $\varepsilon = 0.1$).

Sensitivity computation. Sec. 3.4 requires the sensitivity weights $h_i = |\partial g / \partial x_i(\mu)|$, evaluated at the population mean $\mu = (\mu_1, \dots, \mu_k)$. RootGuard computes these via a single forward-mode automatic differentiation pass through the conversation DAG:

1. Set all root values to their population means: $x = \mu$.
2. Propagate values forward through the DAG in topological order, computing all intermediate node values.
3. Propagate gradient seeds forward using the chain rule with exact analytical local partial derivatives at each node.

Per-template wMAPE vs ϵ at $B = (2k+1)\epsilon$ (root-based $\mathcal{M}$ -All). $\mathcal{M}$ -Opt dominates $\mathcal{M}$ -All on every template under this variant.

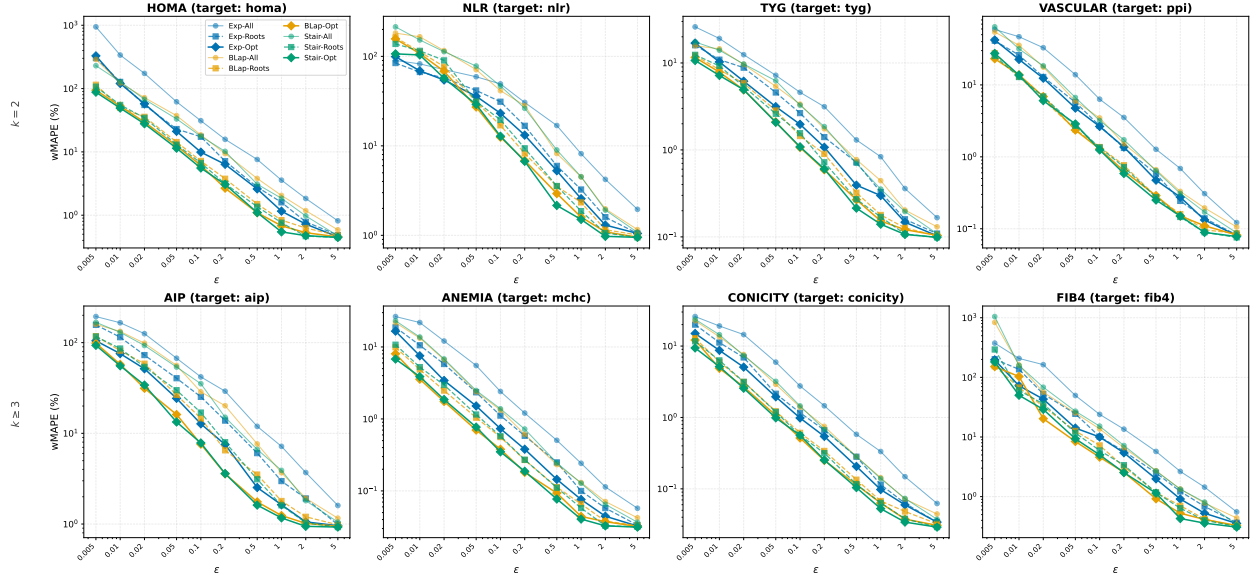


Figure 5: Per-template wMAPE (%) vs. ϵ at $B = (2k+1)\epsilon$. Top row: compressing formulas with high-error baselines (FIB4, HOMA, AIP, NLR). Bottom row: amplifying formulas with already-low base errors (ANEMIA, CONICITY, TYG, VASCULAR). Nine methods per panel (3 mechanisms $\times$ 3 variants). The headline cell ($\epsilon = 0.1$, Exponential) is summarized in main-text Table 5; full numerical tables follow in App. A.12.

Table 15: Per-template agent-eval Risk Class Error (%) at $\epsilon = 0.1$, with bootstrap SE over patients ($n = 100$ per template-cell). Best per row in **bold**.

Template	$\mathcal{M}$ -All			$\mathcal{M}$ -Roots			$\mathcal{M}$ -Opt		
	$B=k+1$	$B=2k+1$	$B=3k+1$	$B=k+1$	$B=2k+1$	$B=3k+1$	$B=k+1$	$B=2k+1$	$B=3k+1$
HOMA	28.0 $\pm$ 3.2	30.5 $\pm$ 3.2	33.0 $\pm$ 3.1	27.0 $\pm$ 3.0	18.5 $\pm$ 2.7	15.5 $\pm$ 2.5	21.0 $\pm$ 2.8	15.0 $\pm$ 2.5	10.5$\pm$2.1
ANEMIA	10.0 $\pm$ 2.2	12.0 $\pm$ 2.3	17.5 $\pm$ 2.7	11.0 $\pm$ 2.2	4.0 $\pm$ 1.4	3.0 $\pm$ 1.2	5.5 $\pm$ 1.6	2.5 $\pm$ 1.1	1.0$\pm$0.7
FIB4	13.5 $\pm$ 2.4	18.0 $\pm$ 2.6	18.0 $\pm$ 2.7	12.5 $\pm$ 2.3	5.0 $\pm$ 1.6	3.5 $\pm$ 1.3	9.5 $\pm$ 2.1	4.0 $\pm$ 1.4	3.0$\pm$1.2
AIP	34.5 $\pm$ 3.3	30.5 $\pm$ 3.2	29.0 $\pm$ 3.2	30.5 $\pm$ 3.2	22.5 $\pm$ 2.9	17.0 $\pm$ 2.7	18.5 $\pm$ 2.7	11.0 $\pm$ 2.3	8.0$\pm$1.9
CONICITY	9.0 $\pm$ 1.9	10.5 $\pm$ 2.2	9.5 $\pm$ 2.0	5.5 $\pm$ 1.6	2.5 $\pm$ 1.1	2.5 $\pm$ 1.1	3.0 $\pm$ 1.2	2.0$\pm$1.0	2.0 $\pm$ 1.0
VASCULAR	1.5$\pm$0.8	2.0 $\pm$ 1.0	2.0 $\pm$ 1.0	1.5 $\pm$ 0.9	1.5 $\pm$ 0.9	1.5 $\pm$ 0.9	1.5 $\pm$ 0.9	1.5 $\pm$ 0.9	1.5 $\pm$ 0.9
TYG	27.0 $\pm$ 3.0	30.0 $\pm$ 3.3	24.0 $\pm$ 3.1	24.0 $\pm$ 3.2	15.5 $\pm$ 2.7	13.0 $\pm$ 2.5	18.0 $\pm$ 2.8	12.5 $\pm$ 2.4	10.0$\pm$2.2
NLR	18.5 $\pm$ 2.7	20.5 $\pm$ 2.8	24.5 $\pm$ 2.9	15.0 $\pm$ 2.6	13.0 $\pm$ 2.4	10.5 $\pm$ 2.2	15.0 $\pm$ 2.6	10.0 $\pm$ 2.1	7.5$\pm$1.9

4. Take absolute values: $h_i = |\partial g / \partial x_i(\mu)|$.

Since target formulas may be nonlinear, $\partial g / \partial x_i$ can depend on the values of other roots; evaluating at μ captures these cross-dependencies at a representative operating point. The population means are domain knowledge — in our experiments, computed from the NHANES [13] reference population (excluding test data). If the deployment population differs substantially from the reference, the allocation may be suboptimal for that population, but the privacy guarantee remains B -mDP regardless: the weights h_i enter the utility objective only and do not affect the privacy proof.

A.8 Agent-Eval RCE: Per-Template Numbers (RQ4)

Table 15 reports the per-template deployment-RCE numbers, with bootstrap standard errors over patients. Aggregated across templates at the focal cell ($\epsilon = 0.1$, $B = (2k+1)\epsilon$), $\mathcal{M}$ -Opt achieves 7.3% RCE vs. $\mathcal{M}$ -All’s 19.2%; at $B = (3k+1)\epsilon$, 5.4% vs. 19.7%. The cell-by-cell ordering matches the harness RCE results (App. A.12, Tables 17–23).

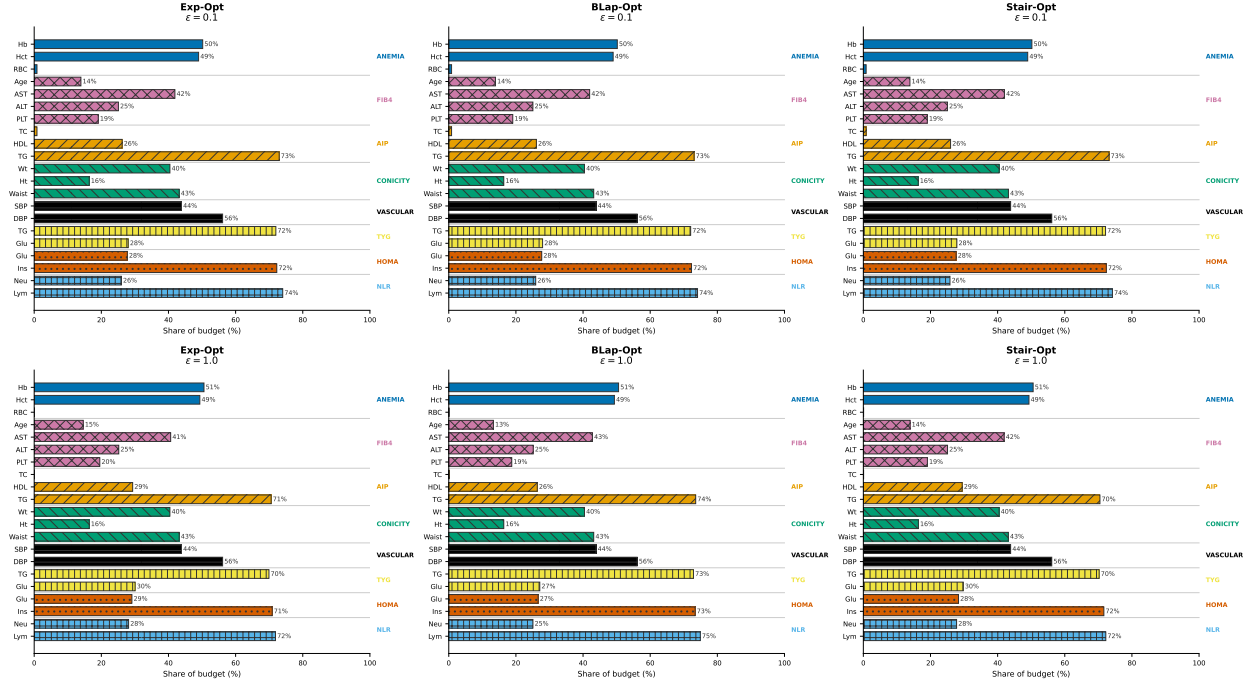


Figure 6: Per-root budget shares (%) for three mechanisms at $\varepsilon = 0.1$ (left three panels) and $\varepsilon = 1.0$ (right three). Allocations are nearly identical across mechanisms at low ε ; at $\varepsilon = 1.0$ minor mechanism-specific differences emerge (e.g., BLap assigns 43% to AST in FIB4 vs. Exp's 41%).

A.9 Proof of Theorem 1

Proof of Theorem 1. By the privacy game definition,

$$\begin{aligned} \text{Adv}_{\text{DAG}}(\mathcal{A}) &= |2 \Pr[G_{\text{DAG}}(\mathcal{A}) = 1] - 1| \\ &= |\Pr[b'=0 \mid b=0] - \Pr[b'=0 \mid b=1]|. \end{aligned}$$

The adversary's view in the game is fully determined by $\hat{X}^b$: $\mathcal{A}$ chooses F at challenge time and computes $\hat{G}_b = C(\hat{X}^b, F)$ deterministically. Hence $\Pr[b'=0 \mid b]$ depends only on the distribution of $\hat{X}^b$ (and on $\mathcal{A}$'s fixed strategy on its view).

Hybrid argument. Without loss of generality, assume X^0 and X^1 differ in exactly the roots $\{1, \dots, k\}$. Define hybrids

$$X^{(0)} = X^0, \quad X^{(j)} = (x_1^1, \dots, x_j^1, x_{j+1}^0, \dots, x_k^0), \quad X^{(k)} = X^1.$$

Each consecutive pair $(X^{(j-1)}, X^{(j)})$ differs in exactly root j . Let

$$p_j := \Pr[\mathcal{A} \text{ outputs } 0 \mid \text{input } X^{(j)} \text{ is sanitized}].$$

Then $\Pr[b'=0 \mid b=0] = p_0$ and $\Pr[b'=0 \mid b=1] = p_k$, so

$$\text{Adv}_{\text{DAG}}(\mathcal{A}) = |p_0 - p_k| = \left| \sum_{j=1}^k (p_{j-1} - p_j) \right| \leq \sum_{j=1}^k |p_{j-1} - p_j|.$$

Single-root step. For each j , $X^{(j-1)}$ and $X^{(j)}$ agree everywhere except at root j (where they take values x_j^0 and x_j^1 respectively), and the rest of the noised vector is sampled from the same distribution. Marginalizing over the shared roots, $|p_{j-1} - p_j|$ depends only on the distribution of the j -th sanitized component. Conditioning on the realized values of all other (shared) roots, denote

$$q_j(z) := \Pr[\mathcal{A} \text{ outputs } 0 \mid \text{root } j \text{ is sanitized to } z, \text{ rest fixed to } X'^{(j)}].$$

Then $|p_{j-1} - p_j| \leq \mathbb{E}_{X^{(j)}} |\mathbb{E}_z[q_j(z) | x_j^0] - \mathbb{E}_z[q_j(z) | x_j^1]|$ where the inner expectations are over the noise of root j . We bound the inner difference for each fixed shared context.

Case 1: root j is type τ_I (FPE). By PRP security of FPE under security parameter κ , no polynomial-time adversary can distinguish $E_F(K, N_{\tau_j}, x_j^0)$ from $E_F(K, N_{\tau_j}, x_j^1)$ except with probability $\text{negl}(\kappa)$. Hence

$$|p_{j-1} - p_j| \leq \text{negl}(\kappa).$$

Case 2: root j is type τ_{II} (mDP with budget ϵ_j). The mechanism M_{ϵ_j} is ϵ_j -mDP under the index-space metric $d(t, t') = |t - t'|$, with $|t_j^0 - t_j^1| = |x_j^0 - x_j^1|/\delta_j$. Hence for every measurable output set S ,

$$\Pr[M_{\epsilon_j}(x_j^0) \in S] \leq e^{\epsilon_j |x_j^0 - x_j^1|/\delta_j} \Pr[M_{\epsilon_j}(x_j^1) \in S].$$

Marginalizing $\mathcal{A}$'s output (a function of $\hat{X}^b$) over the noise distribution of root j and applying this pointwise,

$$\begin{aligned} \mathbb{E}_z[q_j(z) | x_j^0] &= \sum_z \Pr[M_{\epsilon_j}(x_j^0) = z] q_j(z) \\ &\leq e^{\epsilon_j |x_j^0 - x_j^1|/\delta_j} \sum_z \Pr[M_{\epsilon_j}(x_j^1) = z] q_j(z) \\ &= e^{\epsilon_j |x_j^0 - x_j^1|/\delta_j} \mathbb{E}_z[q_j(z) | x_j^1]. \end{aligned}$$

Since each expectation is in $[0, 1]$, this gives

$$|\mathbb{E}_z[q_j(z) | x_j^0] - \mathbb{E}_z[q_j(z) | x_j^1]| \leq e^{\epsilon_j |x_j^0 - x_j^1|/\delta_j} - 1 \leq e^{\epsilon_j |x_j^0 - x_j^1|/\delta_j}.$$

Taking expectation over $X^{(j)}$,

$$|p_{j-1} - p_j| \leq e^{\epsilon_j |x_j^0 - x_j^1|/\delta_j}.$$

Combining. Summing over j ,

$$\text{Adv}_{\text{DAG}}(\mathcal{A}) \leq \sum_{j \in [\tau_{II}]} e^{\epsilon_j |x_j^0 - x_j^1|/\delta_j} + |\tau_I| \cdot \text{negl}(\kappa).$$

□

A.10 Proof of Theorem 2

Proof. Since $\mathcal{M}$ is ϵ -mDP on $(\mathcal{Y}, d_Y)$, for all $y, y' \in \mathcal{Y}$ and measurable $T \subseteq \mathcal{Y}$:

$$\Pr[\mathcal{M}(y) \in T] \leq e^{\epsilon d_Y(y, y')} \Pr[\mathcal{M}(y') \in T].$$

Let $y = f(x)$ and $y' = f(x')$ for some $x, x' \in \mathcal{X}$. Then:

$$\Pr[\mathcal{M}(f(x)) \in T] \leq e^{\epsilon d_Y(f(x), f(x'))} \Pr[\mathcal{M}(f(x')) \in T].$$

Apply the upper Lipschitz bound $d_Y(f(x), f(x')) \leq L d_X(x, x')$ and substitute ψ :

$$\Pr[\psi(x) \in T] \leq e^{\epsilon L d_X(x, x')} \Pr[\psi(x') \in T].$$

□

A.11 Proof of Theorem 3

Proof. Since $\mathcal{M}$ is an ϵ -mDP mechanism on $(\mathcal{X}, d_X)$,

$$\Pr[\mathcal{M}(x) \in S] \leq e^{\epsilon d_X(x, x')} \Pr[\mathcal{M}(x') \in S],$$

where the probability is taken over the randomness of $\mathcal{M}$.

Table 16: Aggregate wMAPE (%) averaged across 8 templates with bootstrap SE. Budget $B = (k + 1) \cdot \varepsilon$. Best mean per row in **bold**.

ε	$\bar{B}$	Exponential			Bounded Laplace			Staircase		
		All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
5.0	18.12	0.6±0.0	0.5±0.0	0.4±0.0	0.5±0.0	0.4±0.0	0.4±0.0	0.4±0.0	0.4±0.0	0.4±0.0
2.0	7.25	1.4±0.1	1.0±0.1	0.7±0.0	0.8±0.0	0.7±0.0	0.5±0.0	0.8±0.0	0.5±0.0	0.4±0.0
1.0	3.62	3.0±0.2	2.0±0.1	1.3±0.1	1.6±0.1	1.1±0.1	0.8±0.0	1.5±0.1	1.0±0.1	0.7±0.0
0.5	1.81	5.6±0.3	4.0±0.2	2.7±0.1	3.1±0.2	2.2±0.1	1.4±0.1	3.1±0.2	2.1±0.1	1.5±0.1
0.2	0.73	12.6±0.6	10.1±0.5	6.6±0.3	7.7±0.5	5.6±0.3	3.7±0.2	7.4±0.4	5.3±0.3	3.4±0.2
0.1	0.36	20.5±0.9	14.9±0.7	13.6±0.7	14.3±0.7	10.2±0.5	6.9±0.4	14.8±0.8	10.5±0.6	6.9±0.3
0.05	0.18	35.0±1.4	26.0±1.1	21.6±0.9	25.8±1.2	19.0±1.0	14.6±0.7	26.9±1.2	20.7±1.0	15.4±0.8
0.02	0.07	70.3±4.3	55.5±6.8	46.0±2.8	51.5±2.4	39.1±1.7	29.8±1.3	50.6±2.3	38.5±1.6	31.3±1.3
0.01	0.04	122±10.1	102±9.6	86.6±6.2	118±33.3	63.7±3.1	56.5±2.9	90.4±6.4	61.1±3.4	57.6±5.1
0.005	0.02	218±18.4	154±11.7	120±10.1	202±29.9	138±21.7	161±19.5	158±25.8	122±12.1	136±19.7

Fix $x, x' \in \mathcal{X}$ and let $T \subseteq \mathcal{Y}$ be any measurable set. Define $S = f^{-1}(T) \subseteq \mathcal{X}$.

Then, by the definition of $\phi = f \circ \mathcal{M}$,

$$\Pr[\phi(x) \in T] = \Pr[f(\mathcal{M}(x)) \in T] = \Pr[\mathcal{M}(x) \in S].$$

Applying the mDP property of $\mathcal{M}$ yields

$$\begin{aligned} \Pr[\mathcal{M}(x) \in S] &\leq e^{\varepsilon d_{\mathcal{X}}(x, x')} \Pr[\mathcal{M}(x') \in S] \\ \Rightarrow \Pr[\phi(x) \in T] &\leq e^{\varepsilon d_{\mathcal{X}}(x, x')} \Pr[\phi(x') \in T]. \end{aligned}$$

Since f is bi-Lipschitz, we have

$$d_{\mathcal{X}}(x, x') \leq \frac{1}{\alpha} d_{\mathcal{Y}}(f(x), f(x')).$$

Substituting this bound into the inequality above gives

$$\Pr[\phi(x) \in T] \leq e^{\frac{\varepsilon}{\alpha} d_{\mathcal{Y}}(f(x), f(x'))} \Pr[\phi(x') \in T].$$

Thus, ϕ is $\frac{\varepsilon}{\alpha}$ -mDP with respect to the metric $d_{\mathcal{Y}}(f(x), f(x'))$. Consequently, adding mDP noise directly to $y = f(x)$ in $(\mathcal{Y}, d_{\mathcal{Y}})$ with privacy parameter $\frac{\varepsilon}{\alpha}$ provides at least as strong a privacy guarantee as first noising x and then applying f . $\square$

A.12 RQ1: Full Adversarial Utility Tables

This appendix provides the complete aggregate wMAPE and Risk Class Error (RCE) tables for all three mechanisms (Exponential, Bounded Laplace, Staircase) under each of the three adversary turn budgets ($t \in \{k+1, 2k+1, 3k+1\}$). Per-template wMAPE breakdowns at $\varepsilon = 0.1$ are also included. The main text (Sec. 5.3) reports the Exponential mechanism; the Bounded Laplace and Staircase results follow the same trends. Bootstrap standard errors (1000 resamples) are shown inline as $\pm$ SE; aggregate SEs are propagated from per-template SEs as $\sqrt{\sum_i \text{SE}_i^2}/k$.

Table 17: Aggregate Risk Class Error (%) averaged across 8 templates with bootstrap SE. Budget $B = (k + 1) \cdot \varepsilon$. Best mean per row in **bold**.

ε	$\bar{B}$	Exponential			Bounded Laplace			Staircase		
		All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
5.0	18.12	0.7±0.2	0.6±0.2	0.4±0.2	0.5±0.2	0.5±0.2	0.6±0.2	0.6±0.2	0.4±0.2	0.4±0.2
2.0	7.25	1.6±0.3	1.2±0.3	0.6±0.2	1.0±0.2	0.9±0.2	0.7±0.2	1.0±0.2	1.1±0.3	0.5±0.2
1.0	3.62	2.9±0.4	2.1±0.3	1.4±0.3	1.7±0.3	0.9±0.2	0.8±0.2	1.5±0.3	0.7±0.2	0.9±0.2
0.5	1.81	5.1±0.5	3.2±0.4	2.8±0.4	3.0±0.4	2.2±0.4	1.5±0.3	3.3±0.4	2.0±0.3	1.4±0.3
0.2	0.73	11.2±0.7	8.6±0.7	5.8±0.5	5.9±0.6	4.4±0.5	3.5±0.4	5.5±0.5	4.6±0.5	3.4±0.4
0.1	0.36	15.4±0.9	12.4±0.7	10.3±0.7	11.5±0.7	8.5±0.6	6.2±0.6	10.3±0.7	7.8±0.6	5.2±0.5
0.05	0.18	24.2±1.0	19.1±0.9	16.5±0.9	19.3±0.9	13.7±0.8	11.5±0.7	18.3±0.9	14.2±0.8	11.0±0.7
0.02	0.07	32.3±1.1	29.6±1.1	26.0±1.0	29.4±1.1	26.3±1.1	18.8±0.9	29.5±1.1	24.9±1.0	19.5±0.9
0.01	0.04	36.7±1.1	34.4±1.1	34.6±1.1	37.4±1.2	34.2±1.1	30.0±1.1	38.2±1.2	33.8±1.1	28.6±1.1
0.005	0.02	38.3±1.2	38.8±1.1	37.9±1.2	46.1±1.2	41.5±1.2	40.4±1.2	44.3±1.2	41.9±1.2	37.6±1.2

Table 18: Per-template wMAPE (%) with bootstrap SE at $\varepsilon = 0.1$ ($\bar{B} = 0.36$). Budget $B = (k + 1) \cdot \varepsilon$. Best per row in **bold**.

Template	Exponential			Bounded Laplace			Staircase		
	All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
ANEMIA	2.6±0.2	1.9±0.1	1.2±0.1	1.4±0.1	0.9±0.1	0.7±0.1	1.2±0.1	0.9±0.1	0.6±0.0
FIB4	25.3±2.4	21.4±2.1	17.8±2.2	14.3±1.4	11.0±0.9	8.0±0.7	15.1±2.0	9.8±0.8	8.8±0.8
AIP	43.8±4.2	33.8±3.3	25.3±2.5	30.7±3.3	23.5±2.5	12.7±1.3	29.1±3.1	25.1±2.7	12.0±1.3
CONICITY	2.6±0.2	2.4±0.1	1.8±0.1	1.5±0.1	0.9±0.1	0.9±0.1	1.5±0.1	1.0±0.1	0.9±0.1
VASCULAR	6.6±0.5	4.4±0.3	4.4±0.3	3.3±0.3	2.2±0.2	2.4±0.2	3.5±0.3	2.1±0.2	2.1±0.1
TYG	4.5±0.3	3.4±0.2	3.1±0.2	3.5±0.3	2.3±0.2	1.7±0.1	3.2±0.2	2.2±0.2	1.8±0.2
HOMA	28.5±3.6	19.0±2.8	18.1±2.4	18.9±2.2	12.3±1.6	9.9±1.3	18.9±2.3	12.2±1.8	11.1±1.0
NLR	49.8±3.7	32.8±2.4	37.5±3.2	40.8±3.8	28.2±3.0	19.0±2.0	46.1±4.7	30.4±3.0	18.1±1.7

Table 19: Aggregate wMAPE (%) averaged across 8 templates with bootstrap SE. Budget $B = (2k + 1) \cdot \varepsilon$. Best mean per row in **bold**.

ε	$\bar{B}$	Exponential			Bounded Laplace			Staircase		
		All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
5.0	31.25	0.7±0.0	0.4±0.0	0.4±0.0	0.5±0.0	0.4±0.0	0.4±0.0	0.4±0.0	0.4±0.0	0.4±0.0
2.0	12.50	1.5±0.1	0.7±0.0	0.5±0.0	0.8±0.0	0.5±0.0	0.4±0.0	0.8±0.0	0.4±0.0	0.4±0.0
1.0	6.25	3.0±0.2	1.2±0.1	0.9±0.1	1.6±0.1	0.8±0.0	0.6±0.0	1.6±0.1	0.7±0.0	0.5±0.0
0.5	3.12	5.7±0.3	2.4±0.1	1.7±0.1	3.0±0.2	1.3±0.1	0.9±0.0	2.9±0.2	1.2±0.1	0.8±0.0
0.2	1.25	12.3±0.6	5.9±0.4	4.5±0.2	8.6±0.5	3.0±0.2	2.2±0.1	8.0±0.5	3.2±0.2	2.2±0.1
0.1	0.62	20.3±1.0	11.4±0.6	7.8±0.3	14.0±0.8	6.2±0.4	4.3±0.3	15.5±0.8	6.6±0.4	4.3±0.2
0.05	0.31	33.8±1.7	18.0±0.8	13.3±0.6	25.8±1.3	11.5±0.6	8.8±0.5	26.3±1.2	11.7±0.6	8.7±0.4
0.02	0.12	75.7±10.9	34.1±1.5	29.2±1.2	48.1±2.0	27.7±1.3	20.7±1.0	48.0±2.1	29.1±1.3	20.4±1.0
0.01	0.06	113±8.4	63.0±5.4	48.3±2.6	82.4±3.9	43.0±1.8	43.9±5.8	80.4±5.4	43.9±2.0	36.1±1.7
0.005	0.03	218±20.7	105±6.9	102±6.8	198±27.5	76.5±4.2	69.5±5.2	223±44.9	89.4±13.8	65.5±4.6

Table 20: Aggregate Risk Class Error (%) averaged across 8 templates with bootstrap SE. Budget $B = (2k + 1) \cdot \varepsilon$. Best mean per row in **bold**.

ε	$\bar{B}$	Exponential			Bounded Laplace			Staircase		
		All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
5.0	31.25	0.6±0.2	0.5±0.2	0.6±0.2	0.7±0.2	0.5±0.2	0.3±0.1	0.5±0.2	0.4±0.2	0.4±0.2
2.0	12.50	1.7±0.3	0.9±0.2	0.9±0.2	1.1±0.2	0.5±0.2	0.4±0.2	0.8±0.2	0.5±0.2	0.3±0.1
1.0	6.25	2.7±0.4	1.5±0.3	0.8±0.2	1.9±0.3	0.6±0.2	0.9±0.2	1.4±0.3	0.9±0.2	0.4±0.2
0.5	3.12	4.8±0.5	2.8±0.4	1.9±0.3	2.8±0.4	1.3±0.3	1.2±0.3	2.9±0.4	1.0±0.2	0.9±0.2
0.2	1.25	10.2±0.7	4.6±0.5	4.5±0.5	6.2±0.6	3.0±0.4	2.2±0.4	6.6±0.6	2.8±0.4	2.4±0.4
0.1	0.62	15.7±0.8	10.1±0.7	7.0±0.6	10.6±0.7	5.4±0.5	4.4±0.5	11.5±0.7	5.4±0.5	3.6±0.4
0.05	0.31	23.2±1.0	14.5±0.8	11.7±0.7	18.3±0.9	9.2±0.7	7.4±0.6	19.5±1.0	8.7±0.7	6.4±0.6
0.02	0.12	32.0±1.1	25.4±1.0	21.8±1.0	30.2±1.1	18.0±0.9	14.8±0.8	29.4±1.1	20.4±0.9	14.6±0.8
0.01	0.06	35.8±1.1	30.1±1.1	27.2±1.0	37.0±1.2	27.1±1.1	24.0±1.0	37.8±1.2	25.9±1.1	23.1±1.0
0.005	0.03	38.0±1.1	34.6±1.1	35.7±1.1	42.5±1.2	34.8±1.2	33.6±1.2	42.4±1.2	35.1±1.2	30.7±1.1

Table 21: Per-template wMAPE (%) with bootstrap SE at $\varepsilon = 0.1$ ($\bar{B} = 0.62$). Budget $B = (2k + 1) \cdot \varepsilon$. Best per row in **bold**.

Template	Exponential			Bounded Laplace			Staircase		
	All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
ANEMIA	2.4±0.1	1.1±0.1	0.7±0.0	1.3±0.1	0.6±0.0	0.4±0.0	1.4±0.1	0.6±0.0	0.3±0.0
FIB4	23.9±1.8	10.1±0.8	10.0±0.9	13.7±1.2	7.2±0.7	4.6±0.4	15.2±1.2	5.9±0.5	5.0±0.4
AIP	41.9±4.1	25.3±2.4	12.7±1.4	28.7±3.1	14.6±1.6	7.6±0.8	35.3±3.9	17.0±2.0	7.8±1.0
CONICITY	2.8±0.2	1.2±0.1	1.0±0.1	1.4±0.1	0.6±0.0	0.5±0.0	1.5±0.1	0.6±0.0	0.6±0.0
VASCULAR	6.3±0.5	2.7±0.2	2.6±0.2	3.5±0.2	1.4±0.1	1.3±0.1	3.2±0.2	1.4±0.1	1.2±0.1
TYG	4.6±0.3	2.6±0.2	2.0±0.1	3.4±0.3	1.4±0.1	1.1±0.1	3.3±0.3	1.6±0.1	1.1±0.1
HOMA	31.1±4.4	17.3±1.7	9.9±1.2	18.5±2.6	7.2±1.0	6.1±0.9	17.7±2.3	6.7±1.0	5.6±0.7
NLR	49.2±4.3	31.2±3.4	23.1±1.5	41.4±4.9	16.9±2.0	12.5±1.6	46.6±3.9	19.5±2.6	12.8±1.1

Table 22: Aggregate wMAPE (%) averaged across 8 templates with bootstrap SE. Budget $B = (3k + 1) \cdot \varepsilon$. Best mean per row in **bold**.

ε	$\bar{B}$	Exponential			Bounded Laplace			Staircase		
		All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
5.0	44.38	0.6±0.0	0.4±0.0	0.4±0.0	0.5±0.0	0.4±0.0	0.4±0.0	0.4±0.0	0.4±0.0	0.4±0.0
2.0	17.75	1.5±0.1	0.5±0.0	0.4±0.0	0.8±0.0	0.4±0.0	0.4±0.0	0.8±0.1	0.4±0.0	0.4±0.0
1.0	8.88	3.0±0.2	0.9±0.1	0.6±0.0	1.6±0.1	0.6±0.0	0.5±0.0	1.5±0.1	0.4±0.0	0.4±0.0
0.5	4.44	5.9±0.3	1.8±0.1	1.2±0.1	3.0±0.2	1.0±0.1	0.7±0.0	3.0±0.2	0.9±0.0	0.6±0.0
0.2	1.78	12.2±0.5	4.6±0.3	3.3±0.2	7.3±0.4	2.2±0.1	1.5±0.1	7.3±0.4	2.3±0.2	1.6±0.1
0.1	0.89	21.5±1.0	8.7±0.5	5.6±0.3	15.9±0.9	4.3±0.2	2.8±0.1	13.8±0.7	4.1±0.2	3.1±0.2
0.05	0.44	33.7±1.8	14.3±0.7	11.2±0.6	25.9±1.1	8.7±0.6	5.6±0.3	26.2±1.2	8.4±0.5	6.2±0.3
0.02	0.18	72.3±5.1	27.9±1.3	21.9±1.0	50.0±2.1	19.4±1.0	14.5±0.7	48.1±2.2	19.1±0.9	14.8±0.8
0.01	0.09	129±9.8	47.3±2.6	37.3±1.6	94.2±9.2	35.7±1.7	27.1±1.2	84.6±6.1	34.9±1.5	30.1±2.9
0.005	0.04	235±26.4	81.0±5.3	76.6±5.1	193±26.2	53.3±2.4	45.4±2.0	176±20.1	54.3±2.4	50.6±3.8

Table 23: Aggregate Risk Class Error (%) averaged across 8 templates with bootstrap SE. Budget $B = (3k + 1) \cdot \varepsilon$. Best mean per row in **bold**.

ε	$\bar{B}$	Exponential			Bounded Laplace			Staircase		
		All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
5.0	44.38	1.0±0.2	0.4±0.1	0.5±0.2	0.5±0.2	0.3±0.1	0.4±0.2	0.6±0.2	0.4±0.2	0.4±0.2
2.0	17.75	1.8±0.3	0.6±0.2	0.8±0.2	0.8±0.2	0.4±0.2	0.6±0.2	1.0±0.2	0.5±0.2	0.4±0.2
1.0	8.88	2.8±0.4	1.1±0.3	0.6±0.2	1.8±0.3	0.9±0.2	0.7±0.2	1.8±0.3	0.8±0.2	0.5±0.2
0.5	4.44	3.9±0.4	1.8±0.3	1.8±0.3	2.5±0.4	1.1±0.3	1.0±0.2	2.3±0.4	1.2±0.2	0.9±0.2
0.2	1.78	10.8±0.7	4.2±0.5	2.9±0.4	6.4±0.6	2.4±0.4	2.0±0.3	5.7±0.5	1.8±0.3	1.2±0.3
0.1	0.89	17.5±0.9	6.5±0.6	5.3±0.5	12.0±0.8	4.1±0.5	2.8±0.4	11.0±0.7	3.7±0.4	2.8±0.4
0.05	0.44	22.1±1.0	12.3±0.8	9.4±0.7	17.3±0.9	7.9±0.6	5.3±0.5	16.6±0.9	6.2±0.6	5.2±0.5
0.02	0.18	30.8±1.1	19.0±0.9	16.2±0.9	30.8±1.1	14.0±0.8	11.2±0.7	30.3±1.1	13.9±0.8	11.9±0.8
0.01	0.09	36.2±1.1	26.5±1.0	24.6±1.0	36.0±1.1	23.0±1.0	19.0±0.9	41.0±1.2	23.7±1.0	18.3±0.9
0.005	0.04	38.8±1.1	32.4±1.1	34.2±1.1	46.3±1.3	30.8±1.1	26.8±1.1	45.8±1.2	33.9±1.1	27.8±1.1

Table 24: Per-template wMAPE (%) with bootstrap SE at $\varepsilon = 0.1$ ($\bar{B} = 0.89$). Budget $B = (3k + 1) \cdot \varepsilon$. Best per row in **bold**.

Template	Exponential			Bounded Laplace			Staircase		
	All	Roots	Opt	All	Roots	Opt	All	Roots	Opt
ANEMIA	2.6±0.2	0.7±0.0	0.5±0.0	1.4±0.1	0.4±0.0	0.3±0.0	1.3±0.1	0.4±0.0	0.2±0.0
FIB4	26.1±2.1	9.3±0.9	5.9±0.4	12.7±1.3	4.5±0.4	3.2±0.2	13.2±1.0	3.9±0.3	3.9±0.5
AIP	52.9±4.8	20.4±2.3	10.3±1.2	32.1±3.5	10.6±1.3	5.6±0.6	30.3±3.2	9.6±1.1	5.5±0.6
CONICITY	2.7±0.2	0.8±0.1	0.7±0.0	1.6±0.1	0.5±0.0	0.4±0.0	1.4±0.1	0.4±0.0	0.4±0.0
VASCULAR	6.0±0.4	2.0±0.1	1.6±0.1	3.5±0.2	1.0±0.1	0.9±0.1	3.0±0.2	0.9±0.1	1.0±0.1
TYG	4.4±0.3	2.0±0.2	1.4±0.1	3.1±0.2	1.1±0.1	0.7±0.1	3.3±0.3	1.0±0.1	0.8±0.1
HOMA	30.7±3.7	10.6±1.2	7.9±0.8	18.8±2.5	5.4±0.8	3.5±0.5	19.6±2.7	5.4±0.8	4.5±0.4
NLR	46.4±4.1	23.8±2.6	16.5±1.5	54.1±5.7	10.8±1.0	8.2±0.6	38.5±3.8	11.1±0.9	8.5±0.9