

I am Bilingual - Python and R

Priyanga Dilini Talagala Thiyanga S. Talagala

2021-04-26

Contents

Preface	5
1 Introduction to R and Python	7
1.1 About R and Python	7
1.2 History of R and Python	7
1.3 Story behind their names	8
1.4 Logo	8
1.5 Worldwide Google Trends	9
1.6 Installation	9
1.7 Ranked:15Python packages	10
2 Variables, expressions, and statements	11
2.1 Basic Exmample	11
3 Conditional execution	13
4 Functions	15
5 Iteration	17
6 Import	19
7 Tidy	21
8 Transform	23

9 Data Visualization	25
9.1 Data	25
9.2 R	25
9.3 Python	30
10 Model	35
11 Communicate	37
12 Advanced R and Python	39
12.1 Time Series Forecasting	39

Preface

WIP!!

This book is still in progress in various draft forms.

Chapter 1

Introduction to R and Python

WIP

1.1 About R and Python

1.1.1 R

R is an object oriented, open source programming **language** and **environment** for statistical computing and graphics. R is not a statistics system but an environment within which statistical techniques are implemented. Further, R gains more capabilities via packages, its fundamental shareable units that bundle together R functions, code, data, documentation, and tests etc. (R Core Team, 2020).

1.1.2 Python

Python is an object-oriented, interpreted, and interactive programming language. The motto of Python language is “Batteries included” as the functionality of the language can be performed via its comprehensive standard in built Libraries (Wikipedia contributors, 2020a).

1.2 History of R and Python

1.2.1 R

R is an implementation of the S programming language which was created by John Chambers in 1976. In 1991, an alternative implementation of the basic S language was developed by Ross Ihaka and Robert Gentleman, University of Auckland, New Zealand. It was published in 1993 (Wikipedia contributors, 2020b).

1.2.2 Python

In 1989, Guido van Rossum at Centrum Wiskunde & Informatica (CWI) in the Netherlands started the implementation of Python as a successor to ABC programming language. Python 2.0 was released in 2000. Python 3.0, a major revision of the language that is not completely backward-compatible was released in 2008 (Wikipedia contributors, 2020a) . Today many developers create libraries strictly for the use with Python 3.

1.3 Story behind their names

1.3.1 R

R was introduced by **R**oss Ihaka and **R**obert Gentleman and it was named after the first names of the two authors. The name of the “S” language also had some influence on the selection of its name and it was selected partly as a play on the name of S (Wikipedia contributors, 2020b).

1.3.2 Python

Python was named after a famous TV show ‘Monty Python’s Flying Circus’. Guido van Rossum, the creator of Python was a big fan of the TV show. He wanted to name his invention with a short, unique and slightly mysterious name and chose Python as a working title for his ongoing project.

1.4 Logo

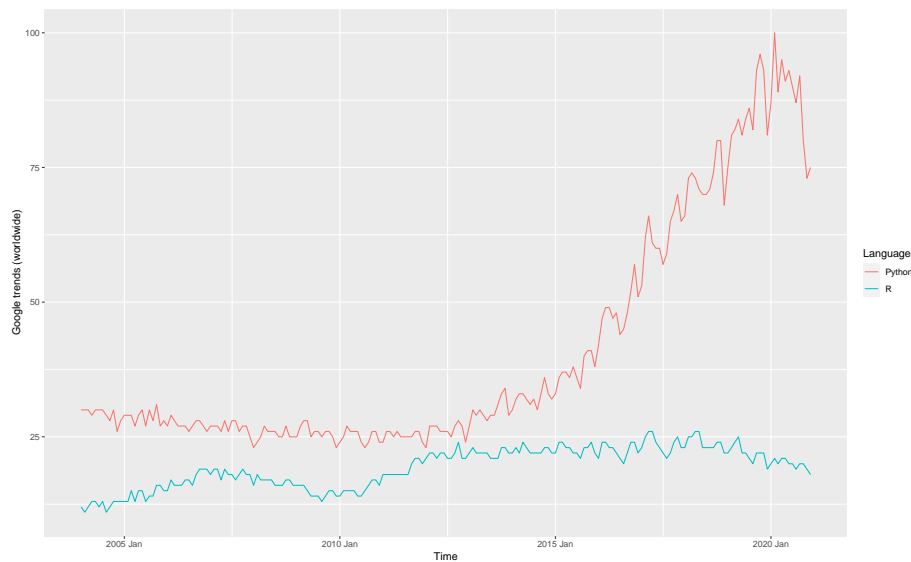


Figure 1.1: Retrieved from: <https://www.r-project.org/logo/>



Figure 1.2: Retrieved from: <https://www.python.org/community/logos/>

1.5 Worldwide Google Trends



1.6 Installation

1.6.1 Python

Ref: https://www.w3schools.com/python/python_getstarted.asp

Many PCs and Macs will have python already installed.

To check if you have python installed on a Windows PC, search in the start bar for Python or run the following on the Command Line (cmd.exe):

```
C:\Users\Your Name>python --version
```

To check if you have python installed on a Linux or Mac, then on linux open the command line or on Mac open the Terminal and type:

```
python --version
```

If you find that you do not have python installed on your computer, then you can download it for free from the following website: <https://www.python.org/>

1.6.2 R

You can download it for free from the following websites:

- R (<https://cran.r-project.org/>)
- RStudio (<https://www.rstudio.com/products/rstudio/download/#download>).

1.7 Ranked:15Python packages

for Data Science

<http://blog.thedataincubator.com/wp-content/uploads/2017/04/Ranked-15-Python-Packages-for-Data-Science.pdf>

Chapter 2

Variables, expressions, and statements

2.1 Basic Exmaple

This is a test code

2.1.1 R code

```
# This is an R code  
x <- 1  
y <- 3  
print(x+y)
```

```
## [1] 4
```

2.1.2 Python Code

The ‘python’ engine in knitr requires the `reticulate` package.

```
library(reticulate)
```

```
# This is a Python code  
x = 1  
y = 3  
print(x+y)
```

4

Chapter 3

Conditional execution

WIP

Chapter 4

Functions

WIP

Chapter 5

Iteration

WIP

Chapter 6

Import

WIP

Chapter 7

Tidy

WIP

Chapter 8

Transform

WIP

Chapter 9

Data Visualization

9.1 Data

The Palmer penguins dataset was introduced by Allison Horst, Alison Hill, and Kristen Gorman provide a great dataset for data exploration and visualization, as an alternative to iris. It was first introduced as an R package. The released version of palmerpenguins can be installed from CRAN with:

R Installation `install.packages("palmerpenguins")`

Using `palmerpenguins` python package you can easily load the Palmer penguins into your python environment.

Python Installation `pip install palmerpenguins`

The `palmerpenguins` package contains two datasets : `penguins` and `penguins_raw`. `penguins` is a simplified version of the `penguins_raw` data.

9.2 R

Load data

```
# Load Palmer Archipelago (Antarctica) Penguin Data
library(palmerpenguins)
# Return the first part of the dataset
head(penguins)
```

```
## # A tibble: 6 x 8
##   species island bill_length_mm bill_depth_mm flipper_length_~ body_mass_g sex
```

```
##   <fct>   <fct>           <dbl>           <dbl>           <int>           <int> <fct>
## 1 Adelie  Torge~         39.1           18.7           181           3750 male
## 2 Adelie  Torge~         39.5           17.4           186           3800 fema~
## 3 Adelie  Torge~         40.3           18            195           3250 fema~
## 4 Adelie  Torge~         NA            NA            NA            NA <NA>
## 5 Adelie  Torge~         36.7           19.3           193           3450 fema~
## 6 Adelie  Torge~         39.3           20.6           190           3650 male
## # ... with 1 more variable: year <int>
```

```
# Retrieve column names
colnames(penguins)
```


```
## [1] "species"           "island"             "bill_length_mm"
## [4] "bill_depth_mm"     "flipper_length_mm"  "body_mass_g"
## [7] "sex"               "year"
```

9.2.1 base R package

```
# Define color for each of the 3 penguin species
colors <- c("#00AFBB", "#E7B800", "#FC4E07")
colors <- colors[as.numeric(penguins$species)]

# Define shapes
shapes = c(16, 17, 18)
shapes <- shapes[as.numeric(penguins$species)]

plot(x = penguins$flipper_length_mm,
     y = penguins$body_mass_g,
     col = colors,
     pch = shapes,
     xlab = "Flipper Length",
     ylab = "Body Mass" )
```

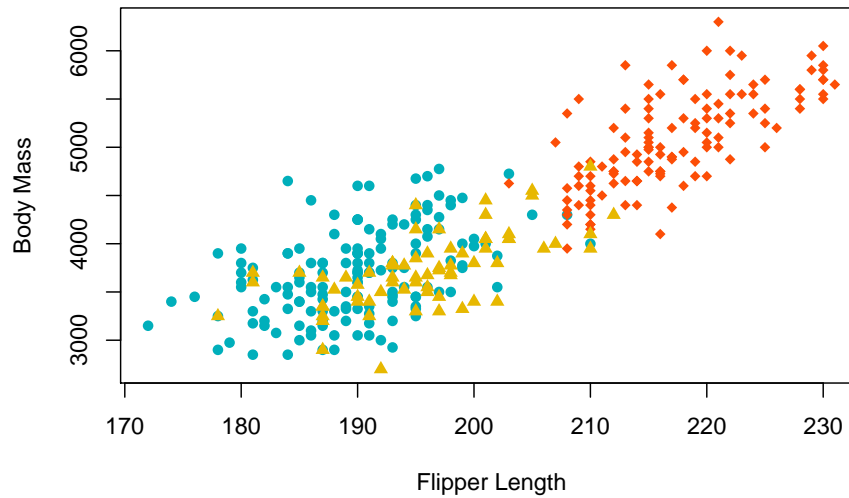


9.2.2 ggplot2 Package

`ggplot2` is an R package dedicated to data visualization which is based on The Grammar of Graphics (Wilkinson, 2012).

```
#load ggplot2 package to make statistical graphics
library(ggplot2)
p <- ggplot(penguins) +
  geom_point( aes(x = flipper_length_mm,
                  y = body_mass_g,
                  color = species,
                  shape = species)) +
  xlab("Flipper Length")+
  ylab("Body Mass")

print(p)
```

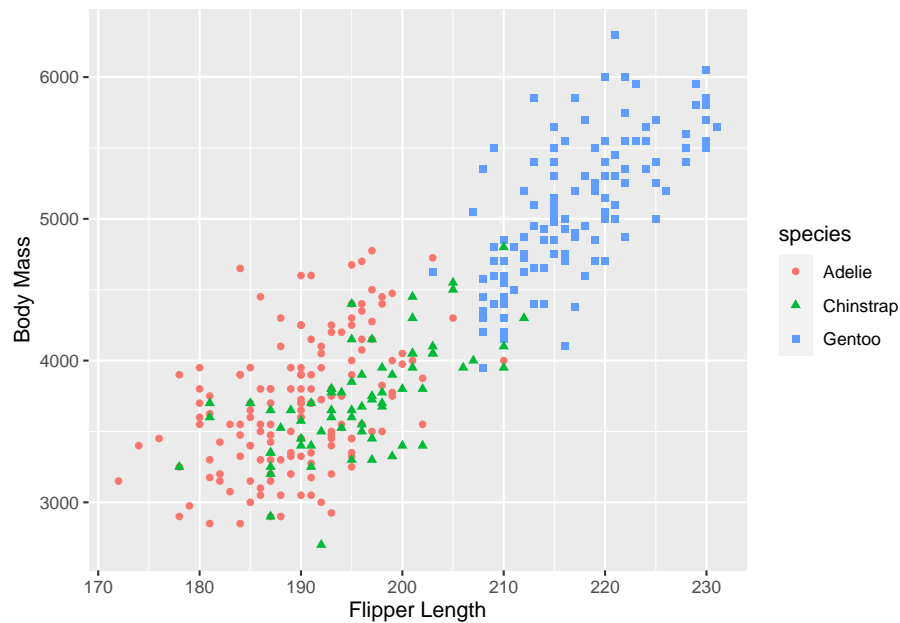


9.2.3 plotly R package for interactive data visualization

Interactive visualization focuses on graphic representations of data that improve the way we interact with information

plotly is an R package for creating interactive web-based graphs via the open source JavaScript graphing library plotly.js.


```
library(plotly)
p <- ggplot(penguins) +
  geom_point(aes(x = flipper_length_mm,
                 y = body_mass_g,
                 color = species,
                 shape = species)) +
  xlab("Flipper Length") +
  ylab("Body Mass")

# The function ggplotly converts a ggplot2::ggplot() object to a plotly object.
plotly::ggplotly(p)
```

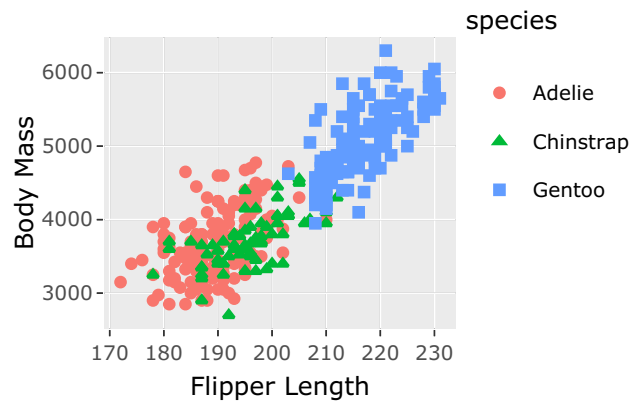

Method 2

```
library(plotly)
fig <- plot_ly(penguins,
               x = ~flipper_length_mm,
               y = ~body_mass_g,
               color = ~species,
               symbol = ~species,
               type = "scatter")
fig
```

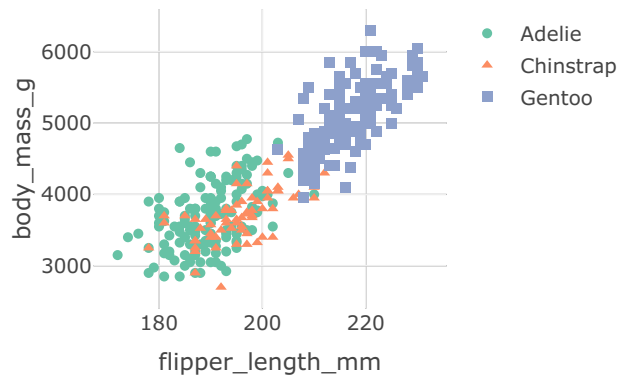

9.3 Python

Load data


```
#load functions in palmerpenguins package
from palmerpenguins import load_penguins
penguins = load_penguins()
# Return the first part of the dataset
penguins.head()
# Retrieve column names
list(penguins.columns)
```

9.3.1 Matplotlib package

Matplotlib is mainly deployed for basic plotting. Visualization using Matplotlib generally consists of bars, pies, lines, scatter plots and so on.

```
# Import matplotlib to make statistical graphics.
# By convention, it is imported with the shorthand sns.
import matplotlib.pyplot as plt
```

```
colors = {'Adelie':'blue', 'Gentoo':'orange', 'Chinstrap':'green'}
plt.scatter(penguins.flipper_length_mm,
            penguins.body_mass_g,
            c= penguins.species.apply(lambda x: colors[x]))
plt.xlabel('Flipper Length')
plt.ylabel('Body Mass')
```

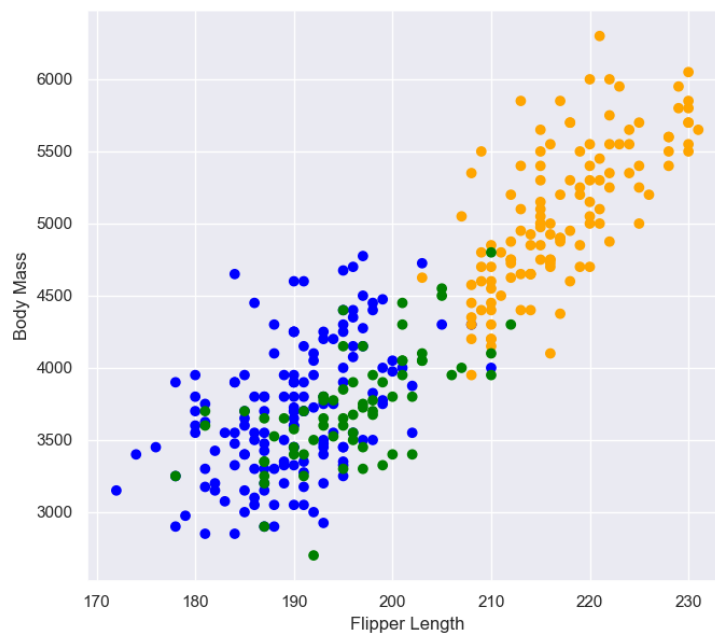

9.3.2 seaborn Package

Seaborn provides a variety of visualization patterns. It uses fewer syntax and has easily interesting default themes.

```
# Import seaborn to make statistical graphics.
# By convention, it is imported with the shorthand sns.
import seaborn as sns
#load functions in palmerpenguins package
from palmerpenguins import load_penguins
penguins = load_penguins()
```

```
# Apply the default theme
sns.set_theme()
# sns.set_style('whitegrid')
p = sns.relplot(x = 'flipper_length_mm',
                y = 'body_mass_g',
                hue = 'species',
                style = 'species',
                data = penguins)
p.set_xlabels('Flipper Length')
p.set_ylabels('Body Mass')
```



The function `relplot()` is named that way because it is designed to visualize many different statistical relationships. The `relplot()` function has a convenient `kind` parameter that lets you easily switch to this alternate representation: `scatterplot()` with `kind="scatter"`; the default and `lineplot()` with `kind="line"`.

9.3.3 plotnine package

<https://pypi.org/project/plotnine/>

plotnine is an implementation of a grammar of graphics in Python, it is based on ggplot2. The grammar allows users to compose plots by explicitly mapping


data to the visual objects that make up the plot.

Plotting with a grammar is powerful, it makes custom (and otherwise complex) plots are easy to think about and then create, while the simple plots remain simple.

NOTE: R vs Python Syntax

Unlike in R, now all the variables must be enclosed by single quotes

```
from plotnine import *
# unlike in R, now all the variables must be enclosed by single quotes
(ggplot(penguins) +
  geom_point(aes(x = 'flipper_length_mm',
                 y = 'body_mass_g',
                 color = 'species',
                 shape = 'species')) +
  xlab("Flipper Length")+
  ylab("Body Mass"))
```

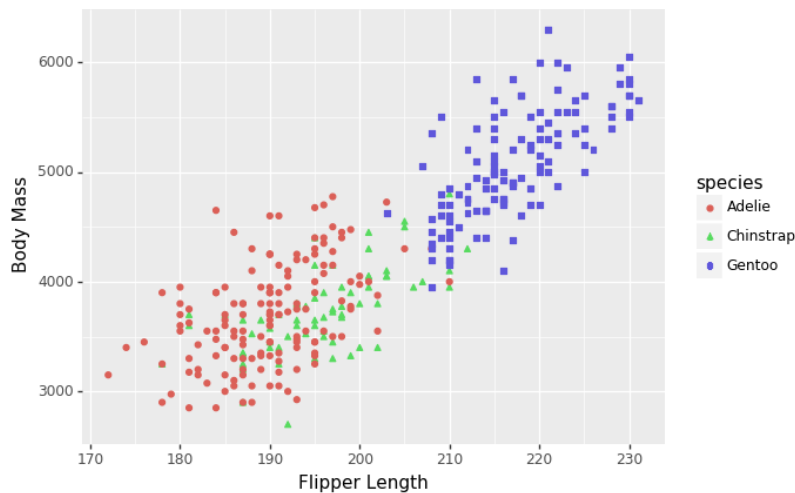

9.3.4 plotly Python library for interactive data visualization

The `plotly.express` (Plotly Express or PX) module contains functions that can create entire figures at once. It is usually imported as `px`. Plotly Express is a built-in part of the `plotly` library.

```
import plotly.express as px  
  
fig = px.scatter(penguins,  
                 x="flipper_length_mm",  
                 y="body_mass_g",  
                 color= "species",  
                 symbol= "species",  
                 labels=dict(flipper_length_mm="Flipper Length",  
                             body_mass_g="Body Mass"))  
  
fig.show()
```

Chapter 10

Model

WIP

Chapter 11

Communicate

WIP

Chapter 12

Advanced R and Python

WIP

12.1 Time Series Forecasting

R	Python
fable-Forecasting Models for Tidy Time Series	statsmodels- Statistics based models
forecast- Forecasting Functions for Time Series and Linear Models	sktime- A unified framework for machine learning with time series GluonTS- Deep learning-based models.

Bibliography

R Core Team (2020). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria.

Wikipedia contributors (2020a). Python (programming language) — Wikipedia, the free encyclopedia. [Online; accessed 25-December-2020].

Wikipedia contributors (2020b). R (programming language) — Wikipedia, the free encyclopedia. [Online; accessed 25-December-2020].

Wilkinson, L. (2012). The grammar of graphics. In *Handbook of computational statistics*, pages 375–414. Springer.