


# Cilium-Agent Lifecycle Sequence Diagrams

Web-sequence (Mermaid) diagrams for three core cilium-agent flows: **FQDN/DNS-proxy**, **Endpoint lifecycle**, and **Load-balancer lifecycle**.


## 1. FQDN / DNS Proxy flow

How `toFQDN` policy is enforced and how name→IP mappings are learned. Source references: [ServeDNS](#), [CheckAllowed](#), [UpdateAllowed](#).

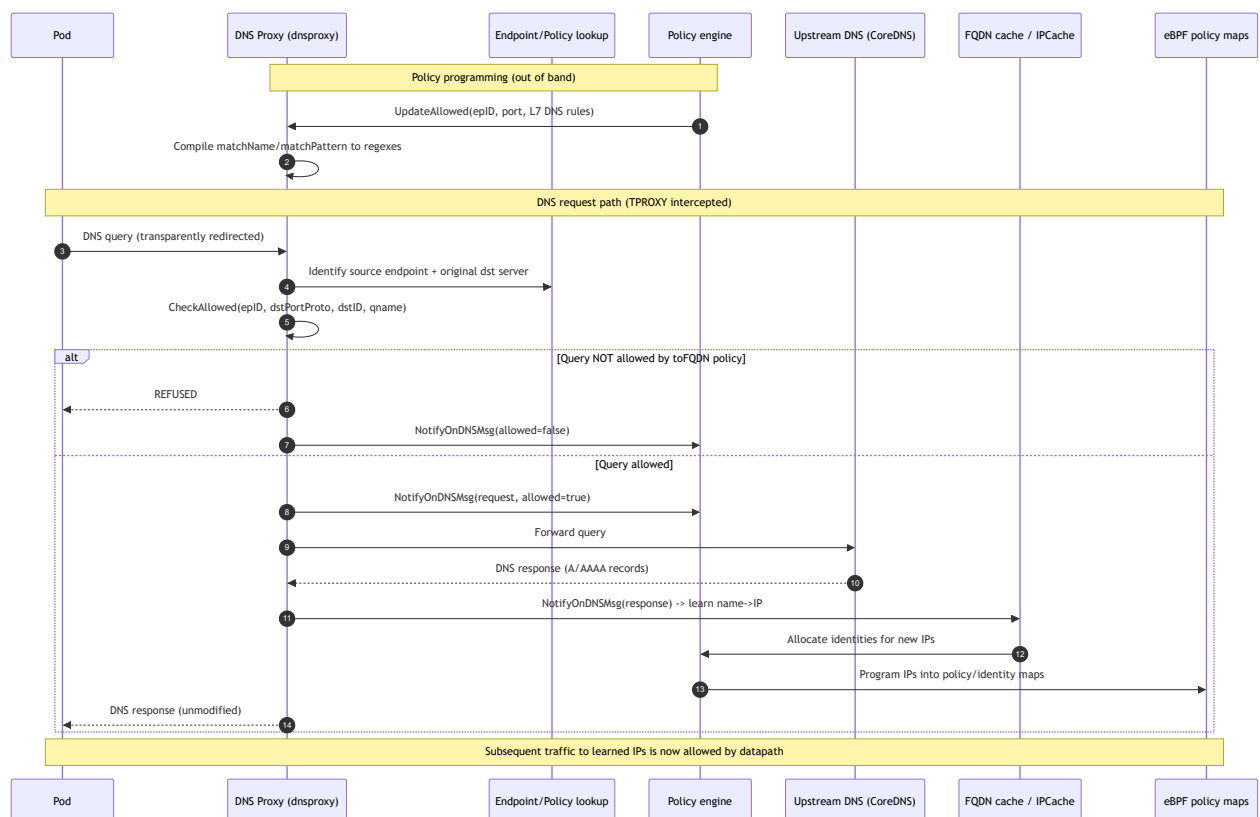


## 2. Endpoint lifecycle

From CN I pod creation through identity allocation, regeneration, and deletion. Driven via the agent REST API ( `PutEndpointID` / `DeleteEndpointID` ) and the `endpoint` + `endpointmanager` cells.

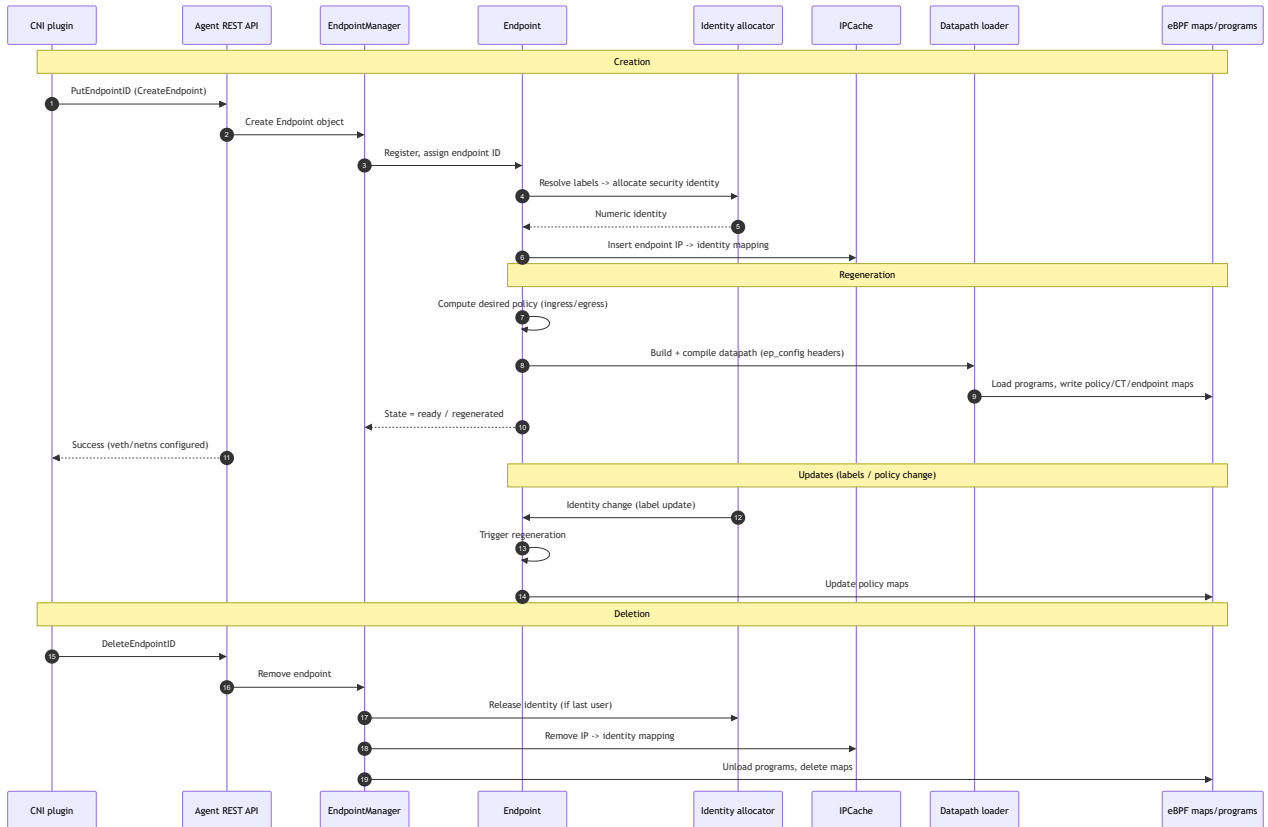


### 3. Load-balancer lifecycle

How a Kubernetes Service becomes eBPF LB-map entries via reflectors, StateDB tables, and the BPF reconciler. Source references: [loadbalancer reconciler Cell](#), [BPFops](#), [id allocator](#).

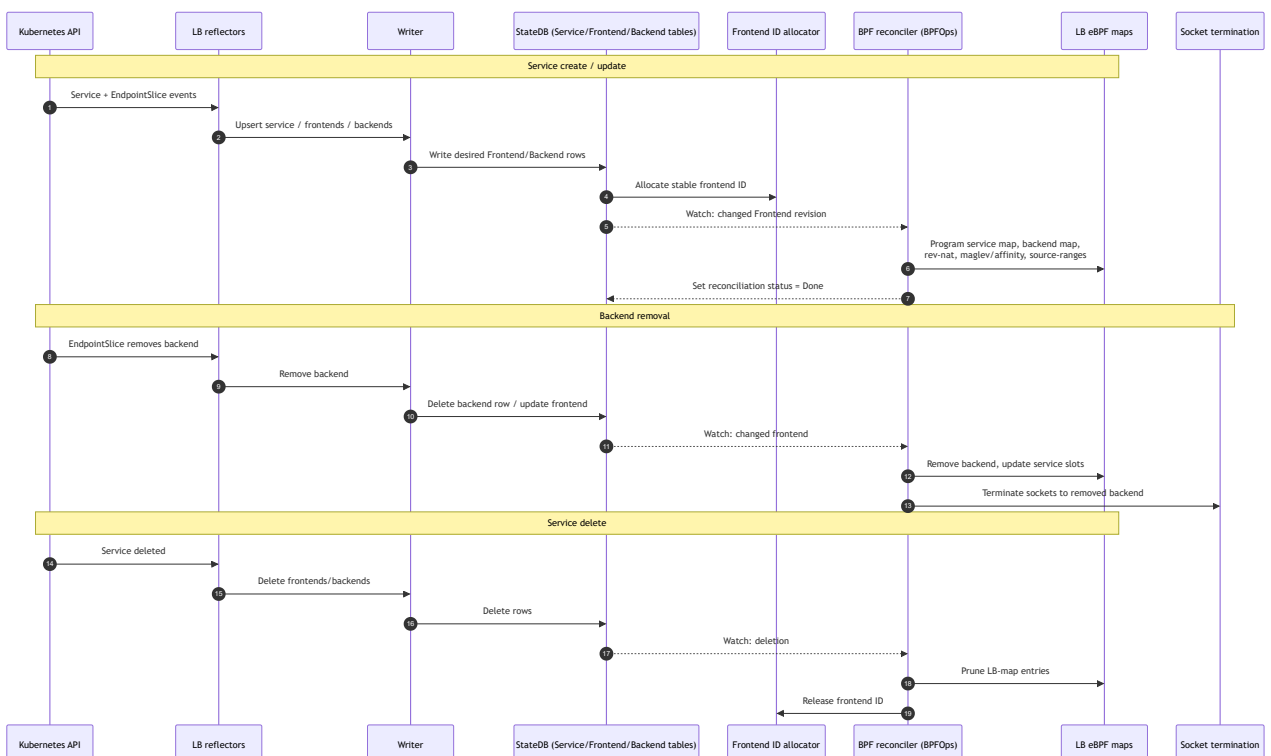

## How the three connect

---

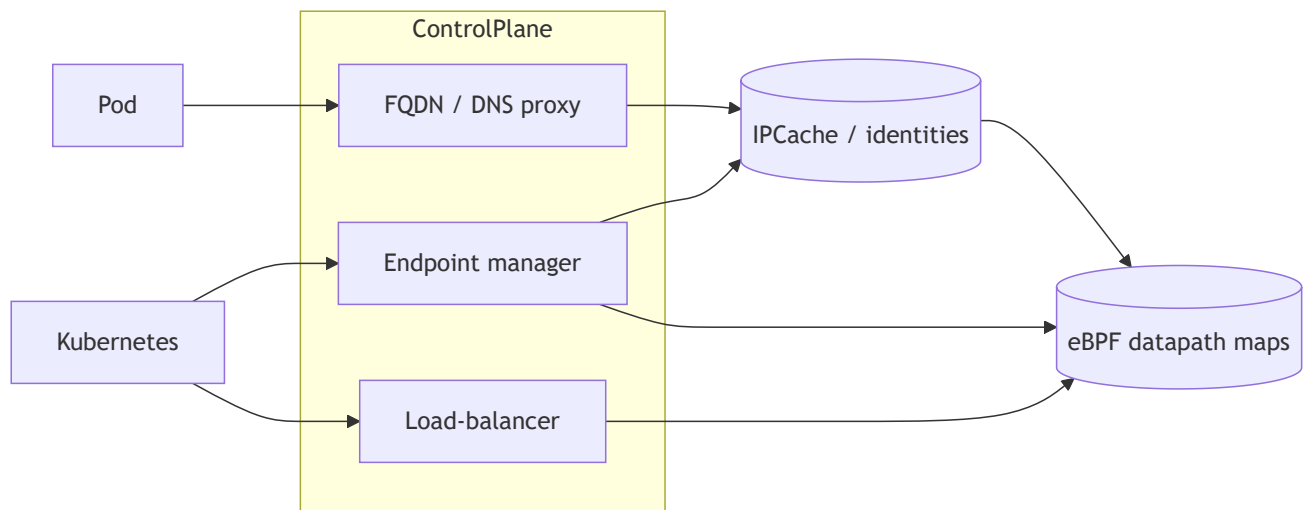

- **FQDN** learns IPs and feeds identities into IPCache.
- **Endpoint lifecycle** allocates identities and programs per-pod policy.
- **Load-balancer** programs service→backend translation.

All three ultimately converge on the **eBPF datapath maps** that enforce traffic decisions.