

Server with MySQL2 TS.

Gregorio Israel Amador.

5 C

08/10/2026



Evidencia de entrega:

- Consulta general y consulta por ID de un producto activo:

The image displays two screenshots of the Thunder Client application, demonstrating REST API interactions with a local server at `localhost:3000`.

Top Screenshot: General Product Query

- Request:** A GET request to `http://localhost:3000/api/v1/products/getAll`.
- Status:** 200 OK, Size: 155 Bytes, Time: 9 ms.
- Response:** A JSON array containing one product object:

```
1 [
2   {
3     "id": 1,
4     "name": "Laptop Gamer",
5     "price": "1500.50",
6     "stock": 10,
7     "description": "Laptop de alto rendimiento",
8     "brand": "Asus",
9     "img": "url_de_la_imagen",
10    "active": 1
11  }
12 ]
```


Bottom Screenshot: Product Query by ID

- Request:** A GET request to `http://localhost:3000/api/v1/products/getById/1`.
- Status:** 200 OK, Size: 153 Bytes, Time: 8 ms.
- Response:** A JSON object representing a single product:

```
1 {
2   "id": 1,
3   "name": "Laptop Gamer",
4   "price": "1500.50",
5   "stock": 10,
6   "description": "Laptop de alto rendimiento",
7   "brand": "Asus",
8   "img": "url_de_la_imagen",
9   "active": 1
10 }
```

Both screenshots include a terminal window at the bottom showing the command `npm run dev` and the server status: `Servidor corriendo en el puerto 3000`.

- Creación de un producto:

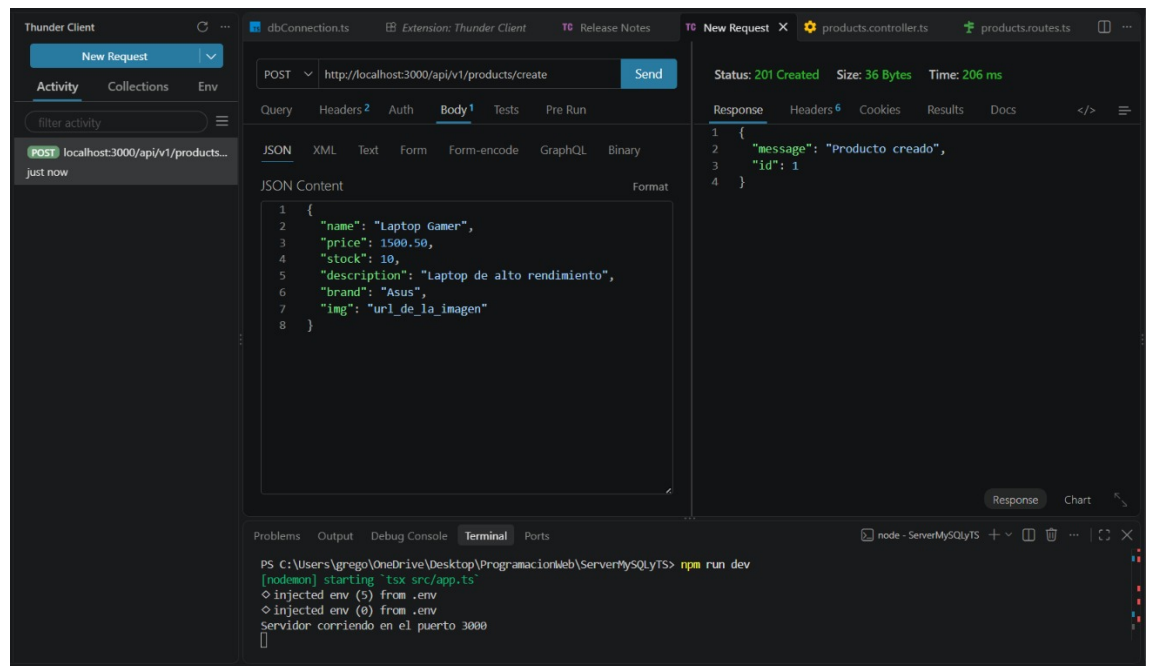

- Actualización completa y cambio de precio del producto creado:

The image displays two screenshots of the Thunder Client application, illustrating the process of updating a product and its price.

Top Screenshot:

- Request:** A PUT request to `http://localhost:3000/api/v1/products/update/1` with a JSON body:

```
{
  "name": "Laptop Gamer Victus",
  "price": 1600.00,
  "stock": 19,
  "description": "Modelo de alto rendimiento",
  "brand": "HP",
  "img": "url_nueva_imagen_victus"
}
```
- Response:** Status 200 OK, Size: 48 Bytes, Time: 21 ms. The response body is:

```
{
  "message": "Producto actualizado correctamente"
}
```
- Terminal:** Shows the command `npm run dev` being executed, indicating the server is running on port 3000.

Bottom Screenshot:

- Request:** A PATCH request to `http://localhost:3000/api/v1/products/change-price/1` with a JSON body:

```
{
  "price": 1799.99
}
```
- Response:** Status 200 OK, Size: 46 Bytes, Time: 17 ms. The response body is:

```
{
  "message": "Precio actualizado correctamente"
}
```
- Terminal:** Shows the command `npm run dev` being executed, indicating the server is running on port 3000.

- Baja lógica del producto:

The screenshot displays the Thunder Client interface. The top bar shows the current request is a DELETE method to the URL `http://localhost:3000/api/v1/products/delete/1`. The left sidebar lists recent requests, including two DELETE requests and one POST request. The main panel shows the 'Query' tab with 'Query Parameters' and a table with columns 'parameter' and 'value'. The right panel shows the 'Response' tab with a status of '200 OK', size of '34 Bytes', and time of '6 ms'. The response body is a JSON object: `{ "message": "Baja lógica exitosa" }`. The bottom panel shows the 'Terminal' tab with the command `npm run dev` and its output, indicating that the server is running on port 3000.

```
PS C:\Users\lgrego\OneDrive\Desktop\ProgramacionWeb\ServerMySQLTS> npm run dev
[nodemon] starting 'tsx src/app.ts'
◇ injected env (5) from .env
◇ injected env (0) from .env
Servidor corriendo en el puerto 3000
```

- Comprobación de que el producto dado de baja ya no aparece en getAll ni en getByid/:id:

The image displays two screenshots of the Thunder Client application, demonstrating API requests and responses for a product management system.

Top Screenshot:

- Request:** GET `http://localhost:3000/api/v1/products/getById/1`
- Status:** 200 OK, Size: 47 Bytes, Time: 7 ms
- Response:**

```
{
  "message": "Producto no encontrado o inactivo"
}
```


Bottom Screenshot:

- Request:** GET `http://localhost:3000/api/v1/products/getById/10000`
- Status:** 200 OK, Size: 47 Bytes, Time: 8 ms
- Response:**

```
{
  "message": "Producto no encontrado o inactivo"
}
```

Both screenshots show the Thunder Client interface with the 'Activity' tab selected, displaying a list of requests. The 'Terminal' tab at the bottom shows the command `npm run dev` being executed, indicating the application is running on port 3000.

- Un caso de ID inexistente y un caso de datos inválidos:

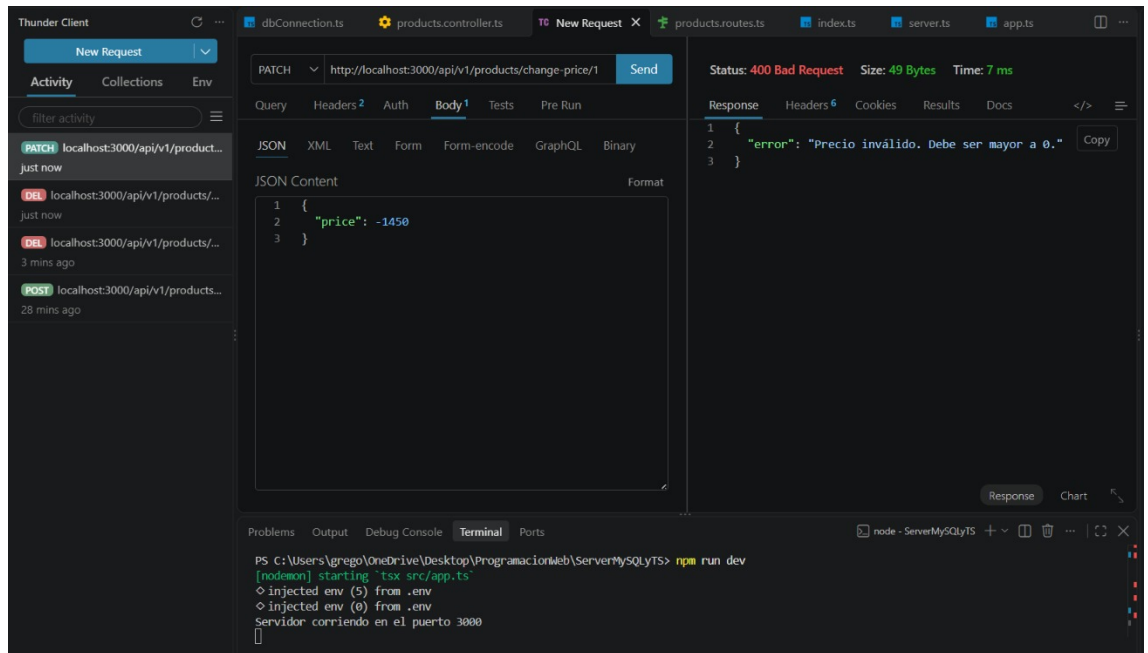

lo quiero mucho profe.