



Capturas de pantalla NODE.JS

Crear Contacto POST

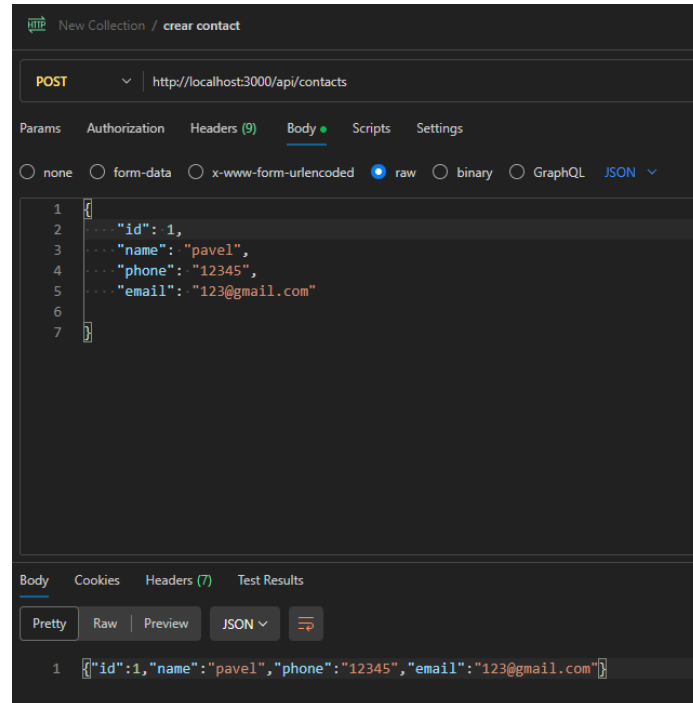

Mirar todos los contactos GET

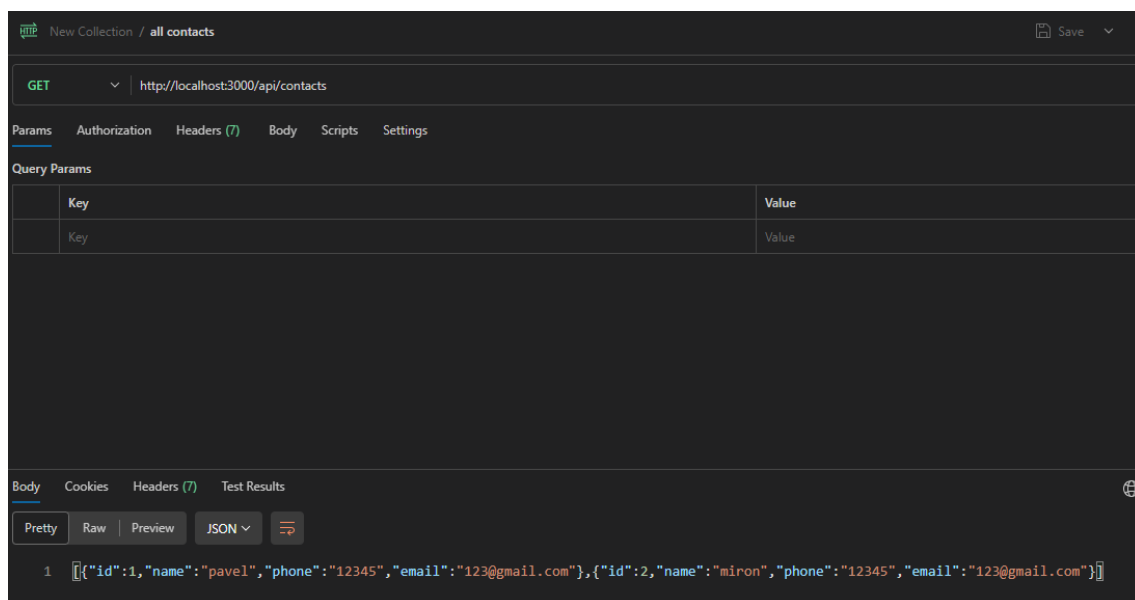

Actualizar id PUT

The screenshot shows a REST client interface with a PUT request to `http://localhost:3000/api/contacts/1`. The request body is a JSON object with the following structure:

```
1 {
2   ... "name": "Pavel Miron 2222",
3   ... "phone": "12345546564",
4   ... "email": "pavel@gmail.com"
5 }
```

The response is displayed in the bottom panel, showing the same JSON object with the `id` field added:

```
1 [{"id":1,"name":"Pavel Miron 2222","phone":"12345546564","email":"pavel@gmail.com"}]
```


Comprobar

The screenshot shows a REST client interface with a GET request to `http://localhost:3000/api/contacts`. The response is displayed in the bottom panel, showing a JSON array of two contact objects:

```
1 [{"id":1,"name":"Pavel Miron 2222","phone":"12345546564","email":"pavel@gmail.com"}, {"id":2,"name":"miron","phone":"12345","email":"123@gmail.com"}]
```

The status bar at the bottom right indicates a successful response: `Status: 200 OK Time: 1`.

Borrar contacto DELETE

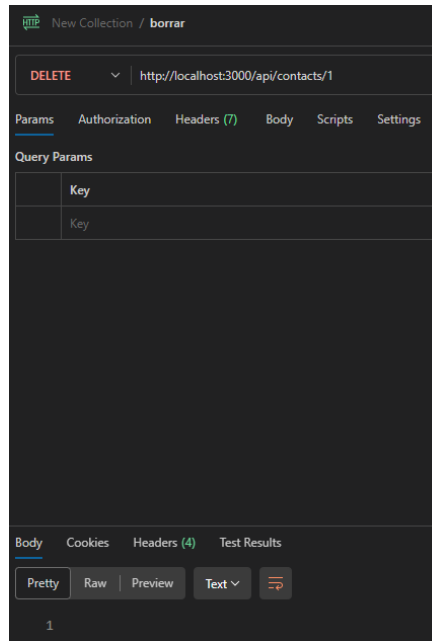

Comprobar

