

MAR ATHANASIOS COLLEGE FOR ADVANCED STUDIES, TIRUVALLA
(MACFAST)

(Affiliated to Mahatma Gandhi University, Kottayam)



MACFAST (AUTONOMOUS)

MCACP206 SOFTWARE DEVELOPMENT LAB-II (PHP)

Department of Computer Applications

Mar Athanasios College for Advanced Studies, Tiruvalla

(MACFAST) AUTONOMOUS

Kerala, India, Pin-689101

www.macfast.org

www.macfast.ac.in

MAR ATHANASIOS COLLEGE FOR ADVANCED STUDIES, TIRUVALLA
(MACFAST)

(Affiliated to Mahatma Gandhi University, Kottayam)



MACFAST (AUTONOMOUS)

MCACP206 SOFTWARE DEVELOPMENT LAB-II (PHP)

Name : **PRINTO MATHEW**
Register No : **253242210258**
Semester : **2**
Subject : **SOFTWARE DEVELOPMENT LAB-II (PHP)**

*Certified that this is a bonafide record of the practical work done by
Mr. PRINTO MATHEW Reg.No: 253242210258 in the Department of Computer Applications
during 2025-2027 at Mar Athanasios College for Advanced Studies, Tiruvalla ((MACFAST)
Autonomous).*

Faculty in Charge

Head of the Department

Examiners

1.....



2.....

INDEX

SL.NO	DATE	NAME OF PROGRAM	PAGE NO
1	17/02/2026	Check Odd or Even	6
2	17/02/2026	Maximum of 3 numbers	8
3	17/02/2026	Switch/Case Statement	10
4	17/02/2026	Fibonacci Series	14
5	25/02/2026	Student Grade Using if...else Statement	16
6	25/02/2026	Factorial of a number using function	20
7	25/02/2026	Check whether a year is Leap Year or Not	22
8	04/03/2026	Demonstrate Class & Object	24
9	04/03/2026	Demonstrate Interfaces	26
10	04/03/2026	Demonstrate Constructor & Destructor	28
11	11/03/2026	Demonstrate Access Specifiers	30
12	11/03/2026	Demonstrate Inheritance	34
13	11/03/2026	Associative Array Sorting	38
14	17/03/2026	File Handling	42
15	17/03/2026	String Handling Functions	48

16	24/03/2026	Registration form and demonstrate the server side validation.	52
17	24/03/2026	Registration form and demonstrate the server side validation for name.	58
18	08/05/2026	Registration form and demonstrate the server side validation for email & URL.	64
19	08/05/2026	Timestamp information using cookies.	70
20	19/05/2026	Page count using session.	72
21	19/05/2026	Create a database.	74
22	19/05/2026	Create table.	76
23	20/05/2026	Value insertion in table.	80
24	20/05/2026	View the records of the table.	84
25	25/05/2026	Value updation in table.	88
26	25/05/2026	Value deletion in table.	94
27	26/05/2026	Laravel Project	100

OUTPUT

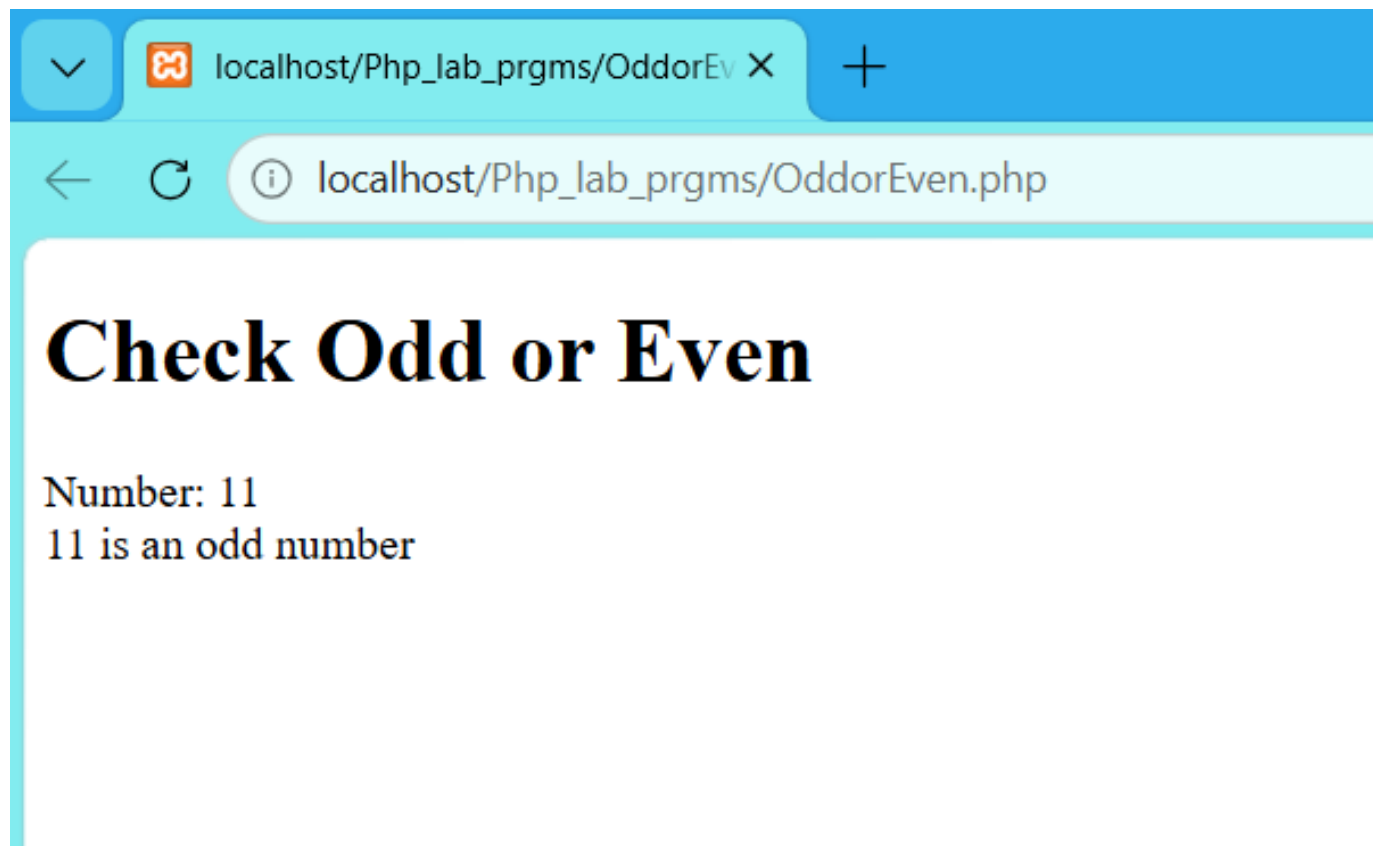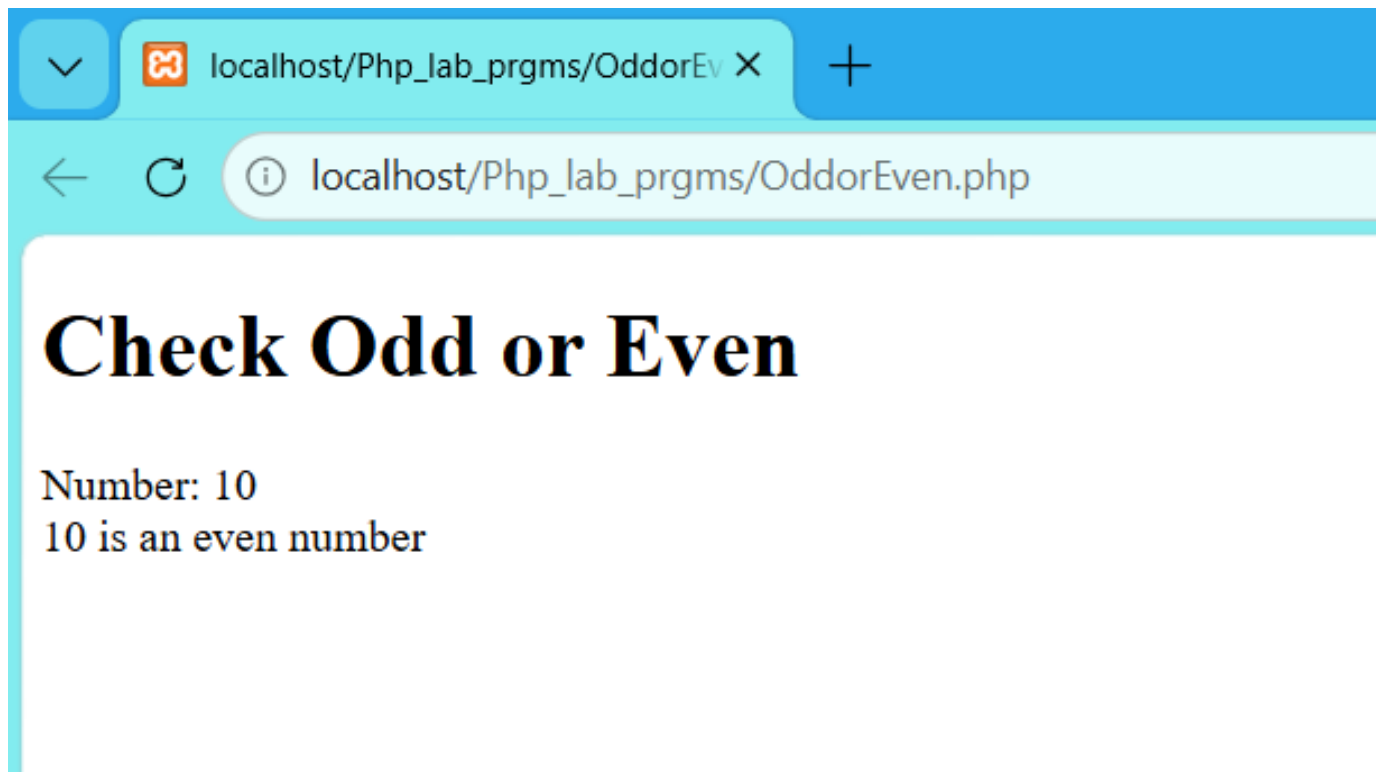

PROGRAM – 1

AIM : Write a PHP program to check whether the given number is odd or even.


SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title>odd or even</title>
  </head>
  <body>
    <h1> Check Odd or Even </h1>
    <?php

        $number= 11;
        echo "Number: $number <br>";

        if($number % 2 == 0)
        {
            echo "$number is an even number";
        }
        else{
            echo "$number is an odd number";
        }
    ?>
  </body>
</html>
```

OUTPUT

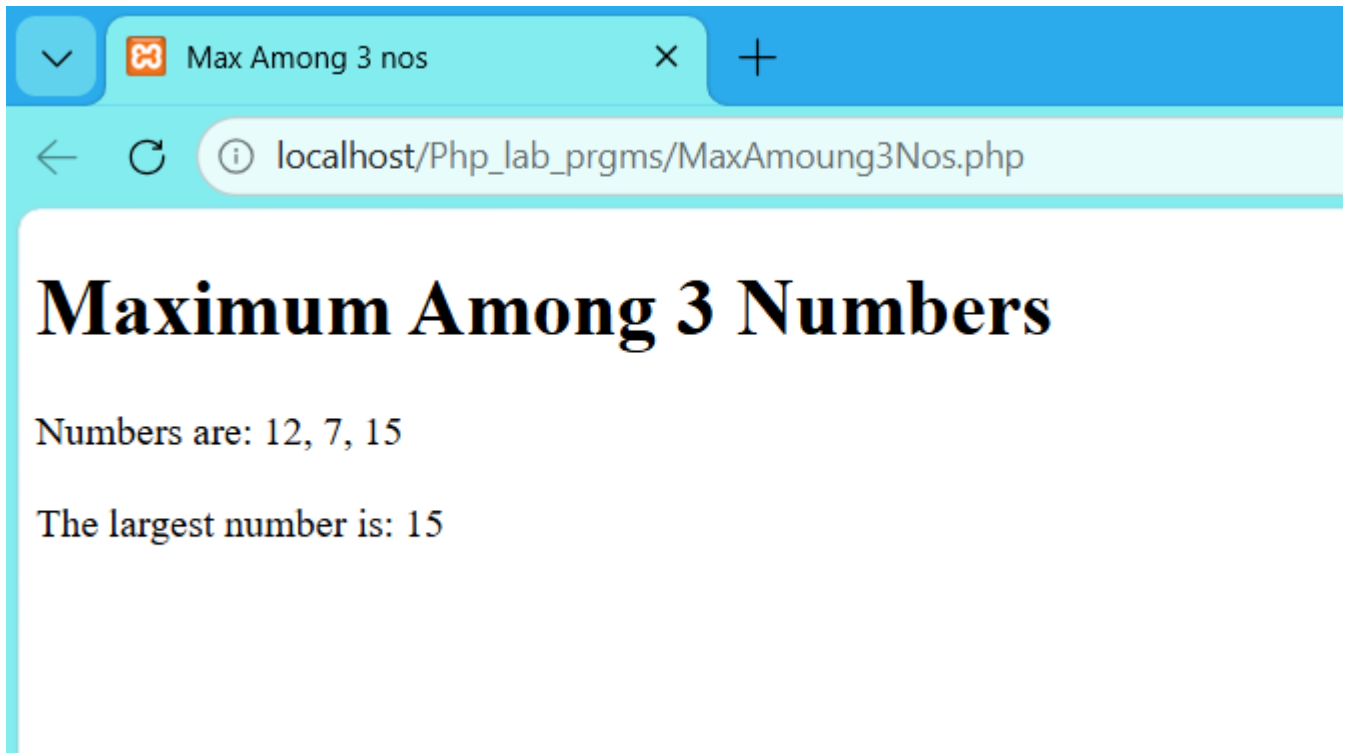

PROGRAM – 2

AIM : Write a PHP program to find maximum of three numbers.


SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title>Max Among 3 nos </title>
  </head>
  <body>
    <h1> Maximum Among 3 Numbers </h1>
    <?php
      $number1 = 12;
      $number2 = 7;
      $number3 = 15;

      echo "Numbers are: $number1, $number2, $number3 <br><br>";

      if ($number1 > $number2 && $number1 > $number3) {
        echo "The largest number is: $number1\n";
      } elseif ($number2 > $number1 && $number2 > $number3) {
        echo "The largest number is: $number2\n";
      } else {
        echo "The largest number is: $number3\n";
      }
    ?>
  </body>
</html>
```


OUTPUT

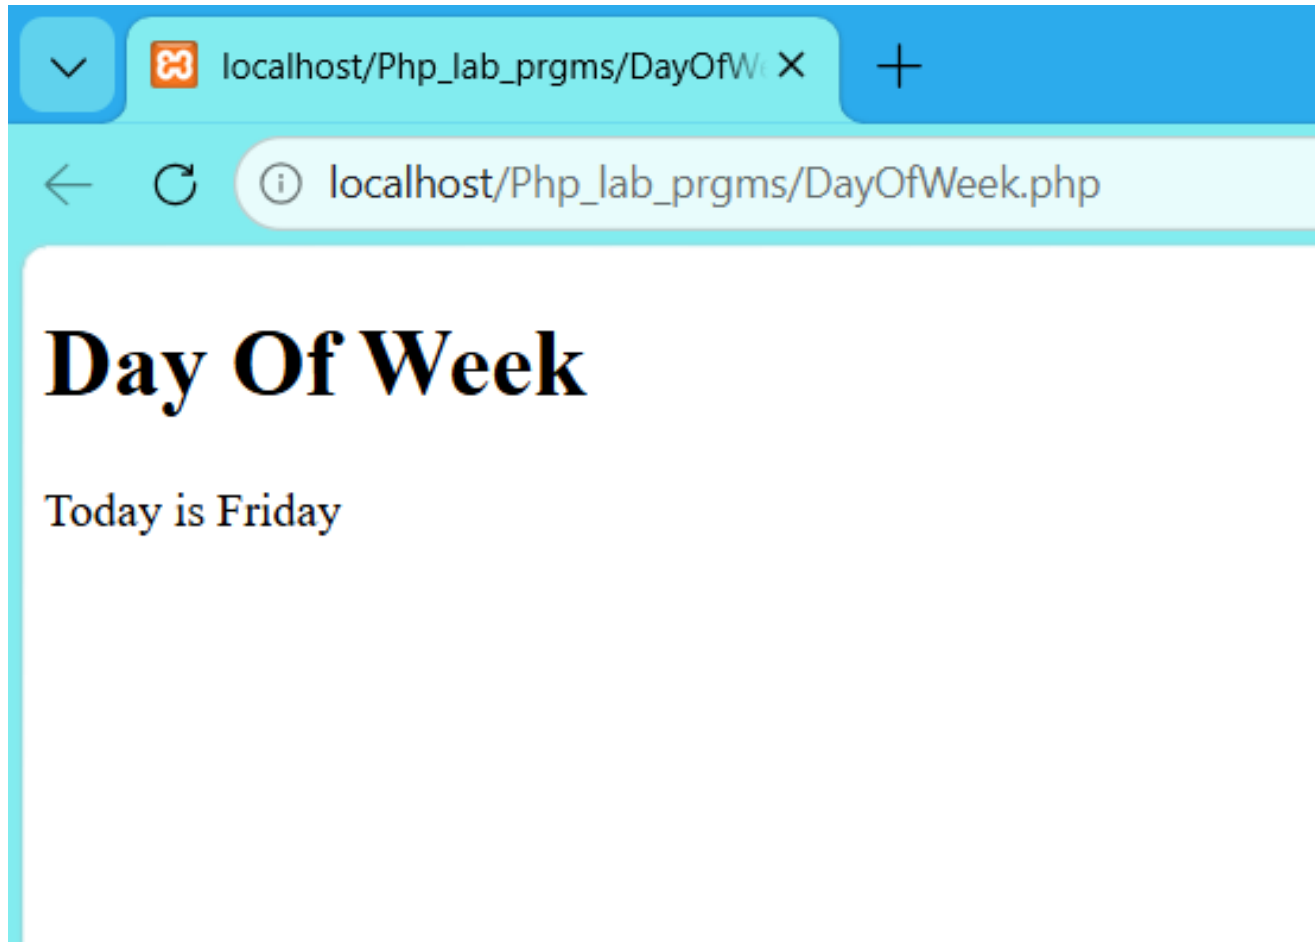

PROGRAM – 3

AIM : Write a PHP program to show day of the week using switch/case statements.

SOURCE CODE:

```
<!DOCTYPE html>

<html>

    <head>

        <meta charset="UTF-8">

        <title></title>

    </head>

    <body>

        <h1> Day Of Week </h1>

        <?php

            $day = date("N"); // Get the current day number (1 for Monday through 7 for Sunday)

            switch ($day) {

                case 1:

                    echo "Today is Monday";

                    break;

                case 2:

                    echo "Today is Tuesday";

                    break;

                case 3:

                    echo "Today is Wednesday";

                    break;
```



```
case 4:

    echo "Today is Thursday";

    break;

case 5:

    echo "Today is Friday";

    break;

case 6:

    echo "Today is Saturday";

    break;

case 7:

    echo "Today is Sunday";

    break;

default:

    echo "Invalid day number";

    break;


}

?>

</body>

</html>
```

OUTPUT

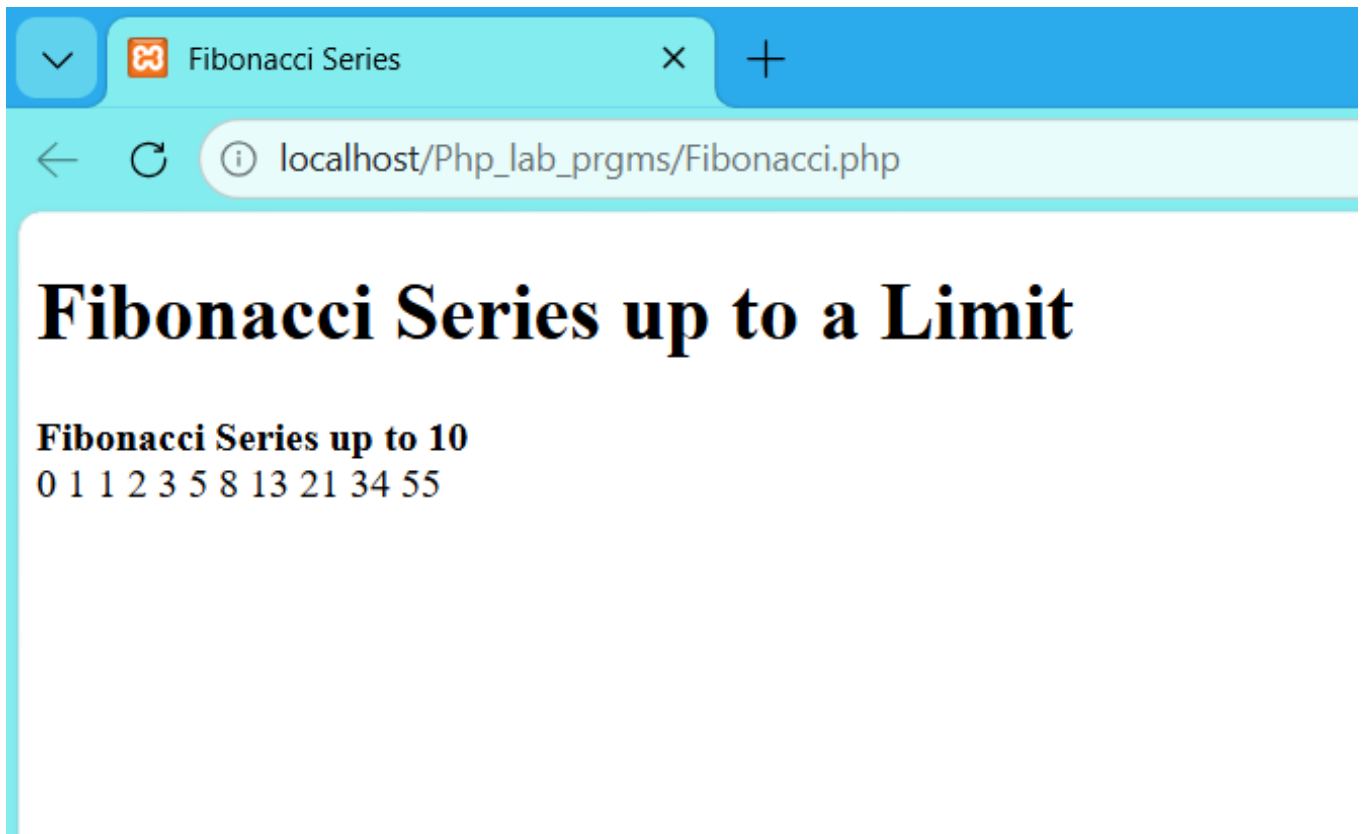

PROGRAM – 4

AIM : Write a PHP program to display Fibonacci series up to a particular count using for loop.

SOURCE CODE:

```
<!DOCTYPE html>

<html>

  <head>

    <meta charset="UTF-8">

    <title>Fibonacci Series</title>

  </head>

  <body>

    <h1> Fibonacci Series up to a Limit </h1>

    <?php

      $first = 0;

      $second = 1;

      $limit = 10;

      echo "<b> Fibonacci Series up to $limit <br></b>";

      for($i=0;$i<=$limit;$i++)

      {

        echo "$first ";

        $next = $first + $second;

        $first = $second;

        $second = $next;


      }

    ?>

  </body>

</html>
```

OUTPUT

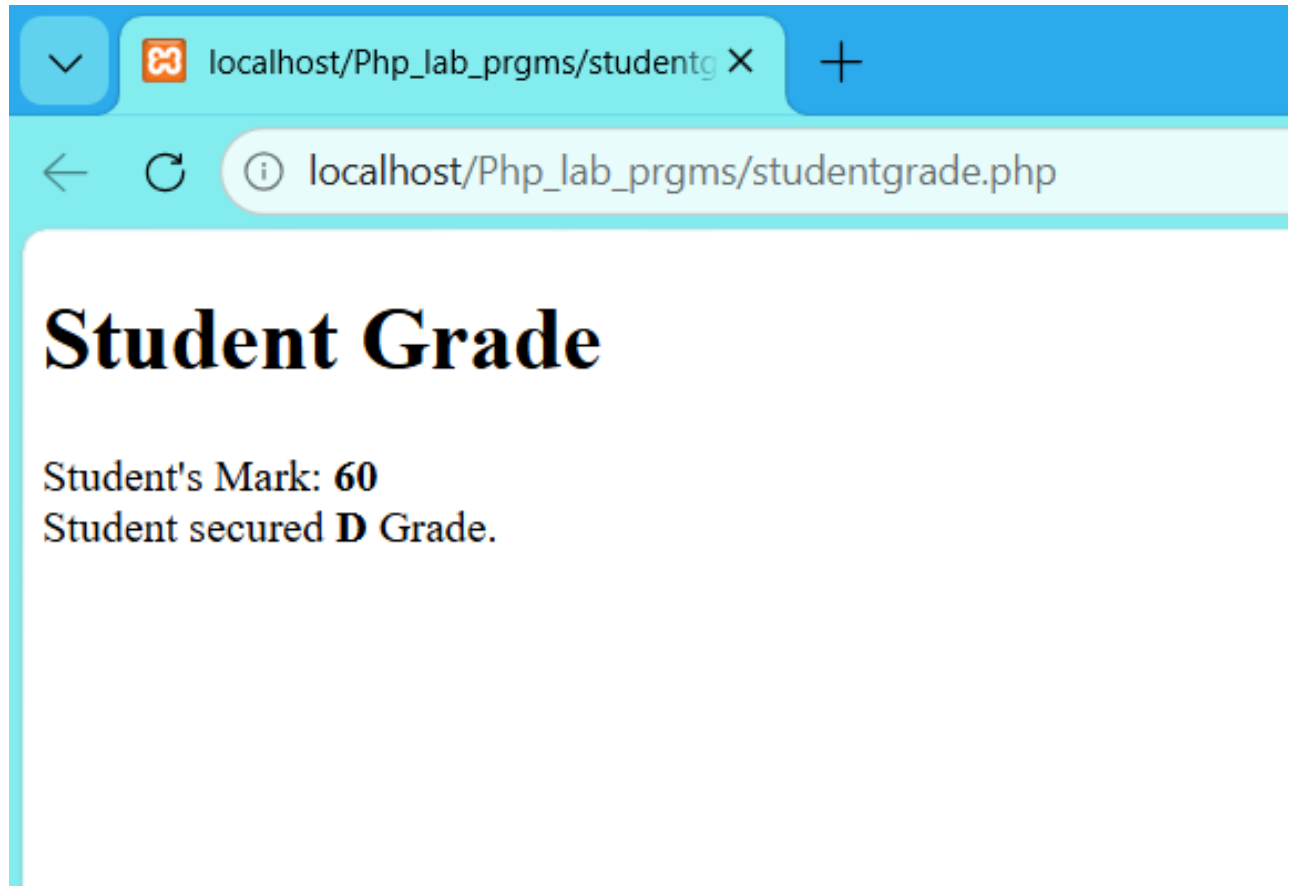

PROGRAM – 5

AIM : Write a program to check student grade based on the marks using if-else statement.

Conditions:

- If marks are 60% or more, grade will be First Division.
- If marks between 45% to 59%, grade will be Second Division.
- If marks between 33% to 44%, grade will be Third Division.
- If marks are less than 33%, student will be Fail.

SOURCE CODE:

```
<!DOCTYPE html>

<html>

    <head>

        <meta charset="UTF-8">

        <title></title>

    </head>

    <body>

        <h1> Student Grade </h1>

        <?php

            $mark = 60;

            echo "Student's Mark: <b>$mark</b> <br>";

            if($mark > 90)

            {

                echo "Student secured <b>A</b> Grade.";

            }

            elseif($mark > 80 && $mark <= 90)

            {
```



```
    echo "Student secured <b>B</b> Grade.";
}

elseif($mark > 70 && $mark <= 80)

{

    echo "Student secured <b>C</b> Grade.";

}

elseif($mark >= 50 && $mark <= 70)

{

    echo "Student secured <b>D</b> Grade.";

}

elseif($mark < 50)

{

    echo "Student <b>Failed</b> in the exam.";

}

?>

</body>

</html>
```

OUTPUT



PROGRAM – 6

AIM : Write a PHP program to find factorial of a number using function.

SOURCE CODE:



```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title></title>
  </head>
  <body>
    <h1> Factorial of a Number </h1>
    <?php
      $i;
      $n=5;
      $f=1;

      function factorial($x,$y)
      {

          for($i=1;$i<=$x;$i++)
          {
              $y = $y * $i;
          }
          return $y;
      }

      $k = factorial($n,$f);
      echo "Factorial of $n is: <b>$k </b>";
    ?>
  </body>
</html>
```

OUTPUT

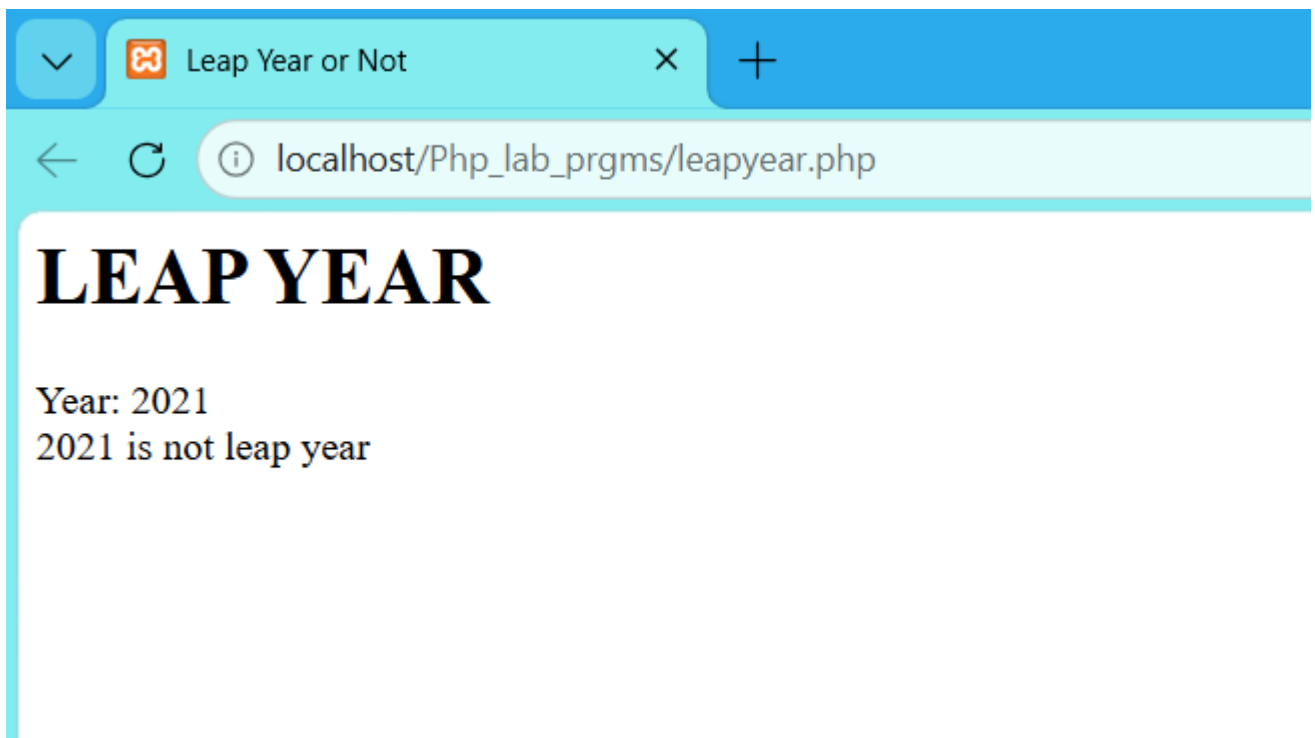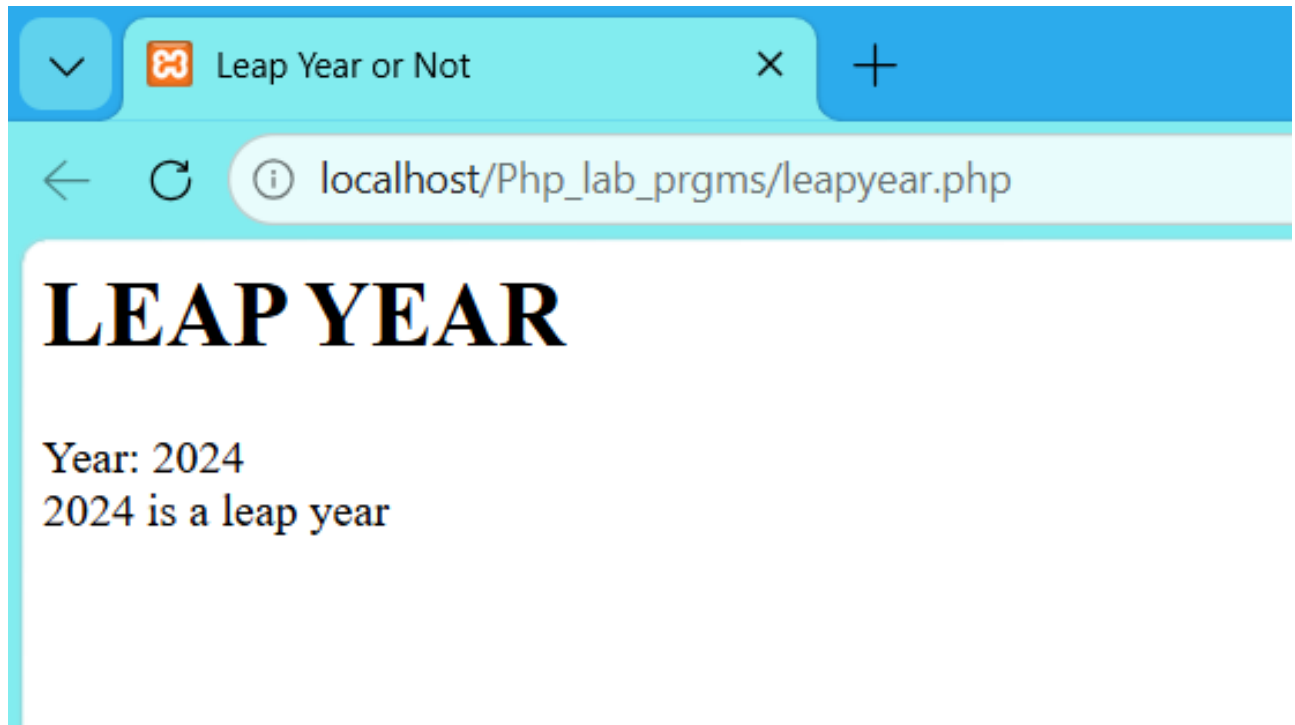


PROGRAM – 7

AIM : Write a PHP program to find whether an entered year is leap year or not using function.

SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title>Leap Year or Not </title>
  </head>
  <body>
    <h1> LEAP YEAR </h1>
    <?php
      $year = 2021;
      if(($year%400 == 0) || ($year%4 == 0) && ($year%100 != 0 ))
      {
        echo "$year is a leap year";
      }
      else{
        echo "$year is not leap year";
      }
    ?>
  </body>
</html>
```

OUTPUT

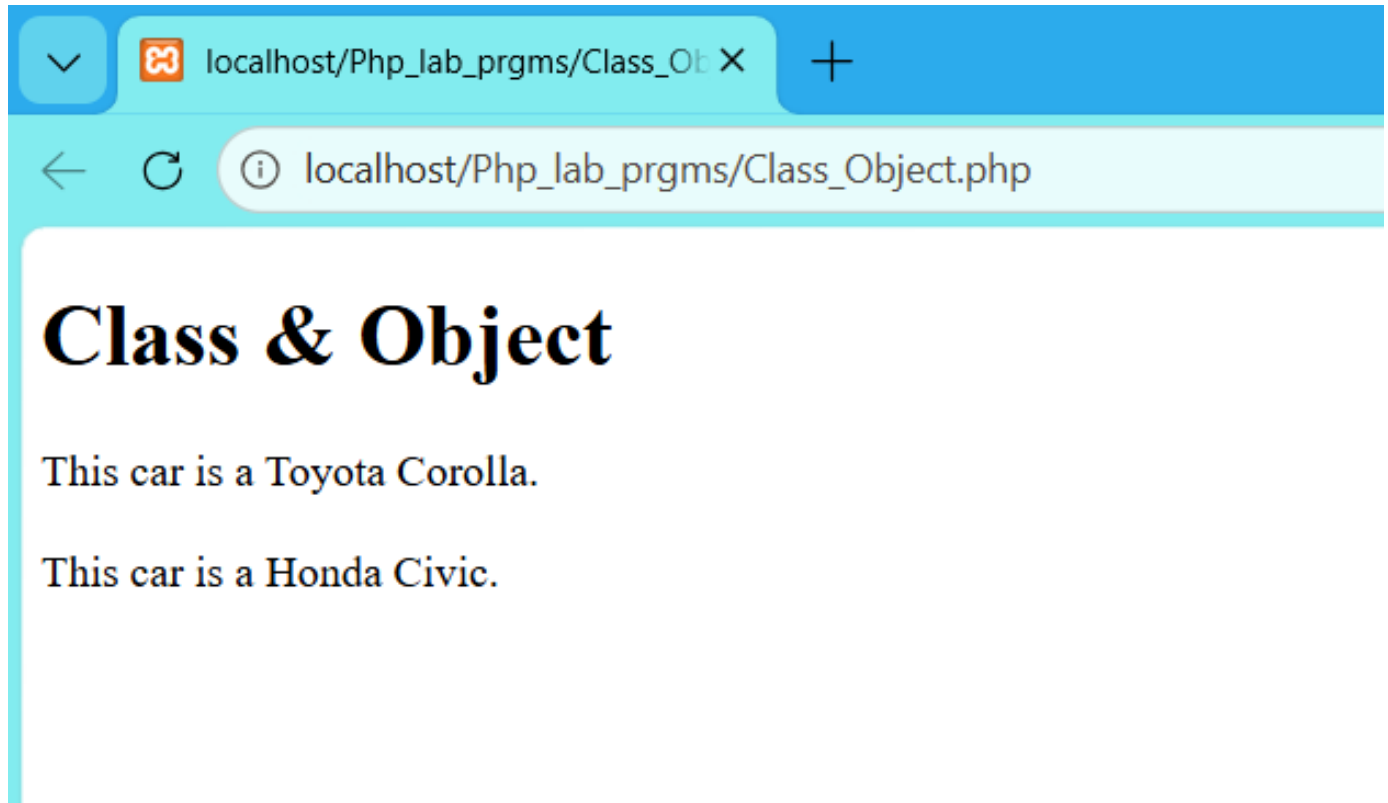

PROGRAM – 8


AIM : Write a PHP program to demonstrate Class & Object.

SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title></title>
  </head>
  <body>
    <h1> Class & Object </h1>
    <?php
class Car {
    public $brand;
    public $model;

    public function __construct($brand, $model) {
        $this->brand = $brand;
        $this->model = $model;
    }
    public function display() {
        return "This car is a " . $this->brand . " " . $this->model . ". <br><br>";
    }
}
$myCar = new Car("Toyota", "Corolla");
$anotherCar = new Car("Honda", "Civic");
echo $myCar->display();
echo "\n";
echo $anotherCar->display();
?>
</body>
</html>
```


OUTPUT

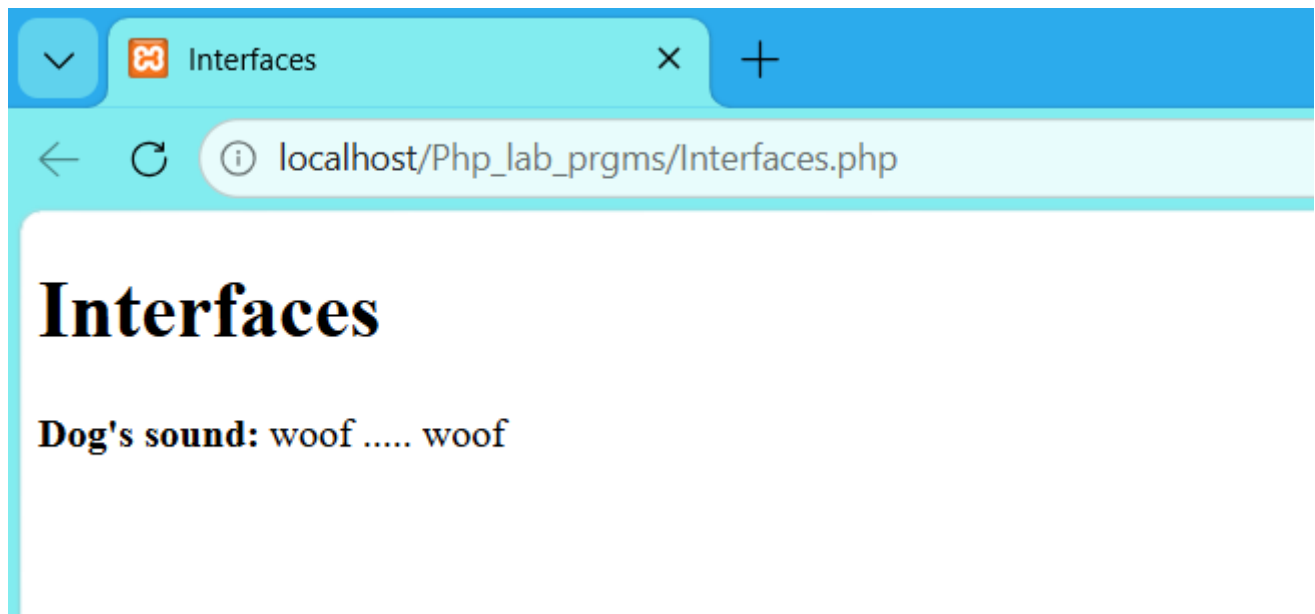


PROGRAM – 9

AIM : Write a PHP program to demonstrate Interfaces.

SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title>Interfaces</title>
  </head>
  <body>
    <h1> Interfaces </h1>
    <?php
interface Animal{
    public function sound();
}
class Dog implements Animal{
    public function sound()
    {
        echo "woof ..... woof";
    }
}
$myDog = new Dog();
echo "<strong>Dog's sound: </strong>";
$myDog->sound();
?>
  </body>
</html>
```

OUTPUT

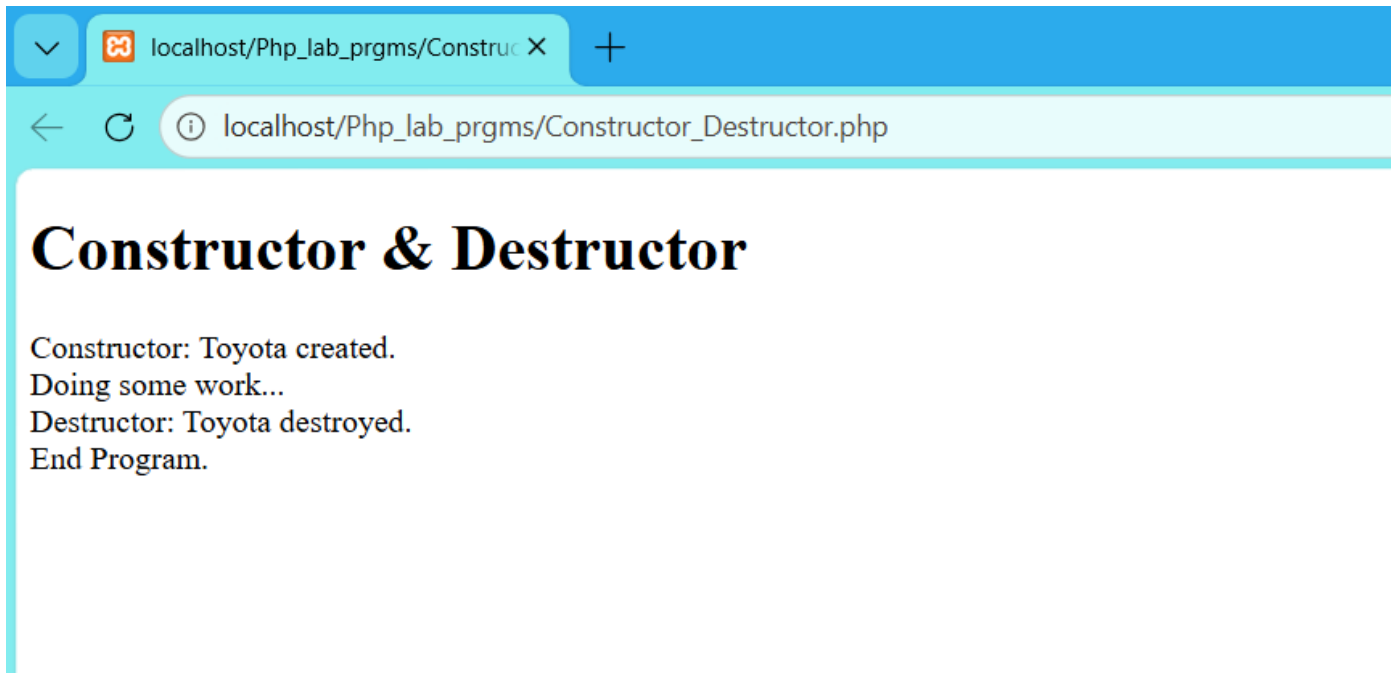

PROGRAM – 10

AIM : Write a PHP program to implement Constructor & Destructor

SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title></title>
  </head>
  <body>
    <h1> Constructor & Destructor </h1>
    <?php
      class Car {
        public $name;

        public function __construct($name) {
          $this->name = $name;
          echo "Constructor: " . $this->name . " created. <br>";
        }

        public function __destruct() {
          echo "Destructor: " . $this->name . " destroyed. <br>";
        }
      }

      $car = new Car("Toyota");
      echo "Doing some work... <br>";
      unset($car);
      echo "End Program. <br>";
    ?>
  </body>
</html>
```

OUTPUT



PROGRAM – 11

AIM : Write a PHP program to demonstrate Access Specifiers.

SOURCE CODE:

```
<html>
  <head>
    <title> Access Specifier </title>
  </head>
  <body>
    <h1>Access Specifier - Public, Private, Protected</h1>
    <?php
class Fruits
{
    public $name;
    protected $color;
    private $weight;

    function setName($n)
    {
        echo "Name: $n <br>";
    }


    function setColor($c)
    {
        echo "Color: $c <br>";
    }

    function setWeight($w)
    {
        echo "Weight: $w (Access Restricted) <br>";
    }
}
```



```
$fruit = new Fruits();  
$fruit->setName("Apple");  
$fruit->setColor("Red");  
$fruit->setWeight("200");  
?>  
</body>  
</html>
```


OUTPUT

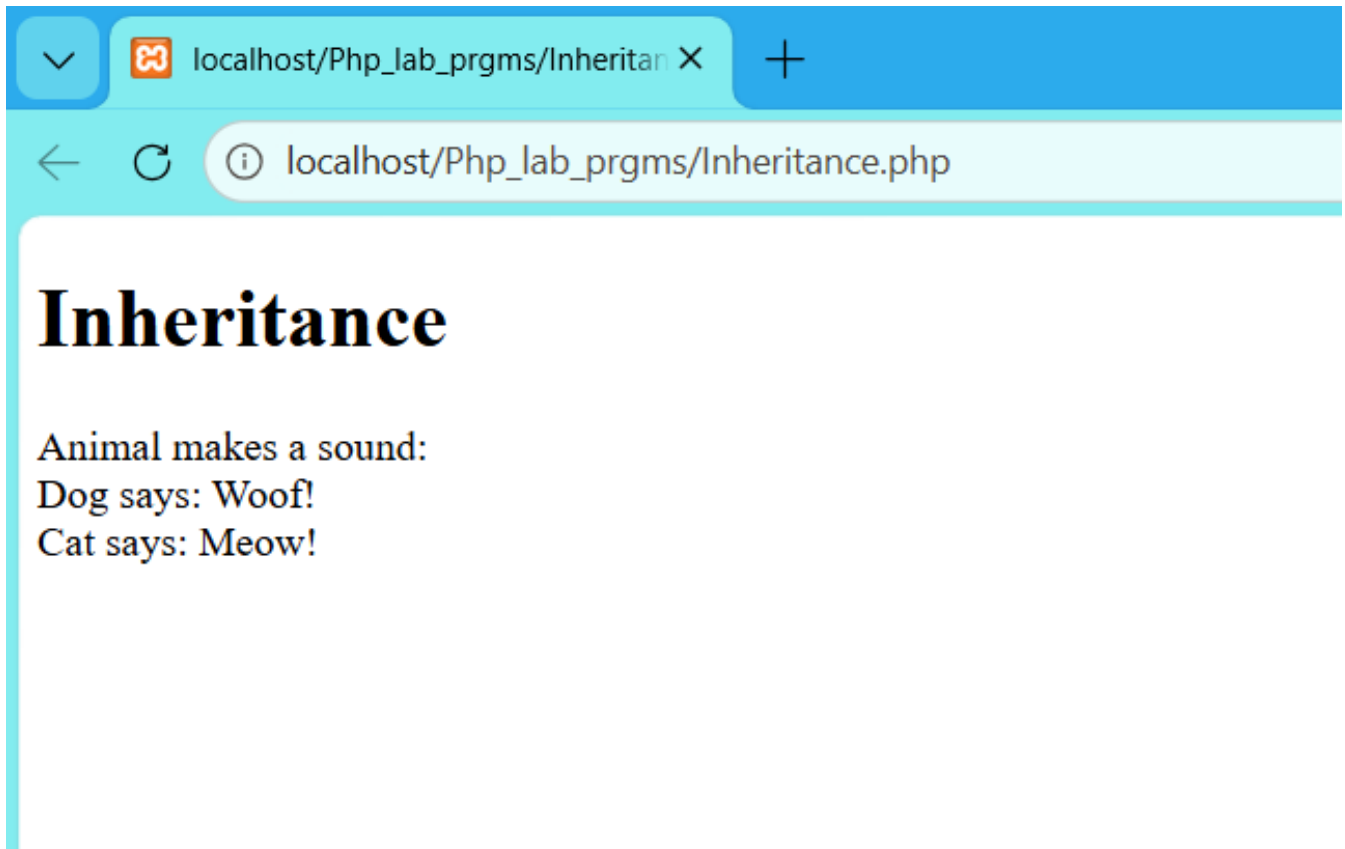

PROGRAM – 12

AIM : Write a PHP program to demonstrate Inheritance.

SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title></title>
  </head>
  <body>
    <h1> Inheritance </h1>
    <?php

class Animal {
    public string $name;

    public function __construct(string $name) {
        $this->name = $name;
    }


    public function speak(): string {
        return "{$this->name} makes a sound:<br>";
    }
}

class Dog extends Animal {
    public function speak(): string {
        return "{$this->name} says: Woof!<br>";
    }
}
```



```
class Cat extends Animal {  
    public function speak(): string {  
        return "{$this->name} says: Meow!<br>";  
    }  
}  
  
$animal = new Animal("Animal");  
$dog    = new Dog("Dog");  
$cat    = new Cat("Cat");  
  
echo $animal->speak();  
echo $dog->speak();  
echo $cat->speak();  
?>  
</body>  
</html>
```

OUTPUT

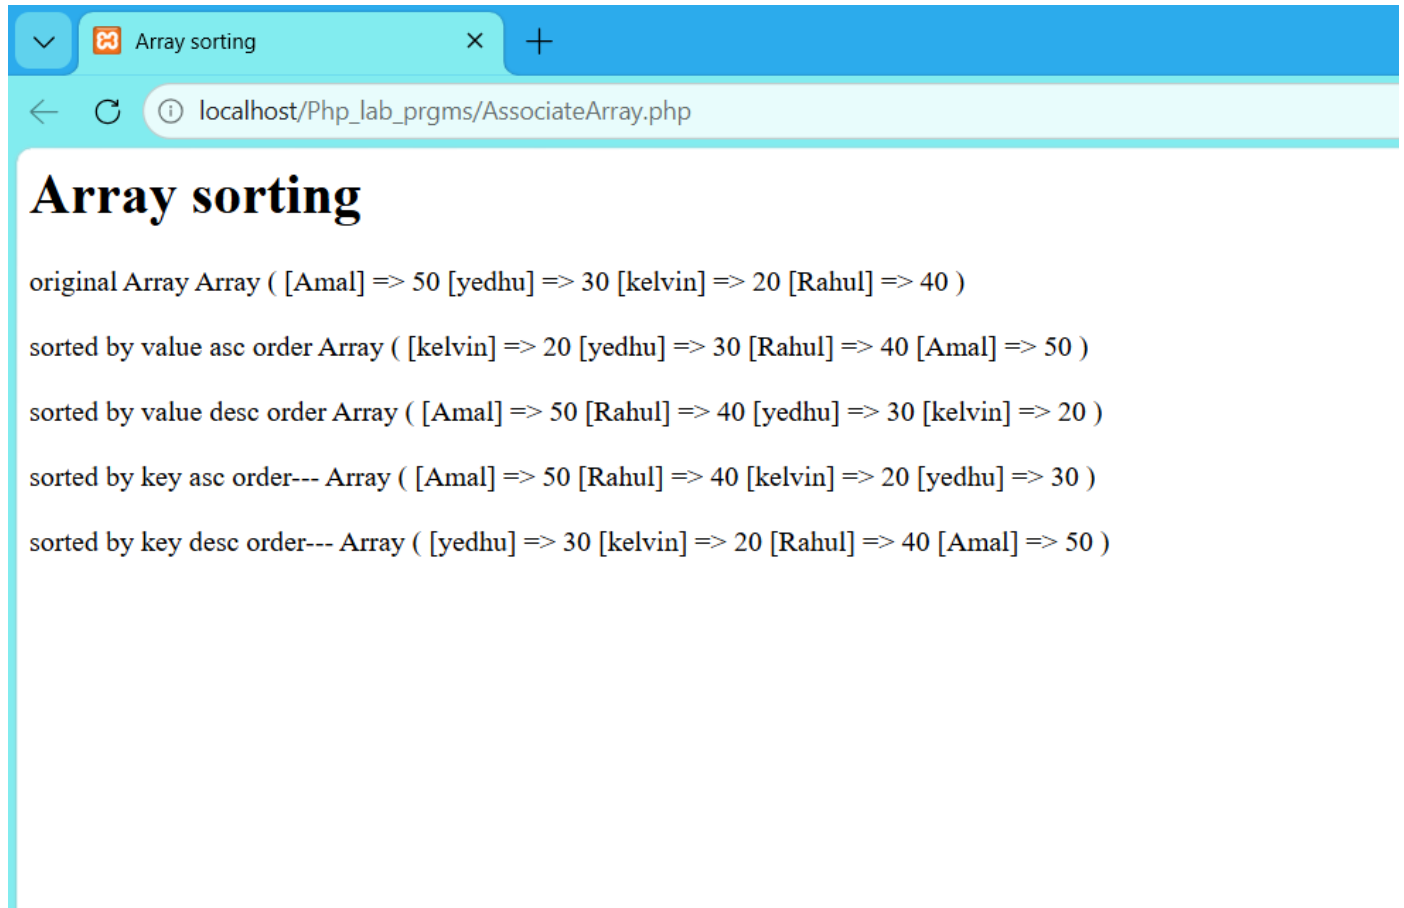

The screenshot shows a web browser window with a single tab titled "Array sorting". The address bar displays "localhost/Php_lab_prgms/AssociateArray.php". The main content area has a heading "Array sorting" followed by five lines of PHP array output. The arrays are associative arrays with keys 'Amal', 'yedhu', 'kelvin', and 'Rahul' and corresponding values. The output shows the original array, sorting by value in ascending order, sorting by value in descending order, sorting by key in ascending order, and sorting by key in descending order.

```
original Array Array ( [Amal] => 50 [yedhu] => 30 [kelvin] => 20 [Rahul] => 40 )
sorted by value asc order Array ( [kelvin] => 20 [yedhu] => 30 [Rahul] => 40 [Amal] => 50 )
sorted by value desc order Array ( [Amal] => 50 [Rahul] => 40 [yedhu] => 30 [kelvin] => 20 )
sorted by key asc order--- Array ( [Amal] => 50 [Rahul] => 40 [kelvin] => 20 [yedhu] => 30 )
sorted by key desc order--- Array ( [yedhu] => 30 [kelvin] => 20 [Rahul] => 40 [Amal] => 50 )
```

PROGRAM – 13

AIM : Write a program to create an association array and sort in ascending and descending order w. r. t key & values.

SOURCE CODE:

```
<html>
  <head>
    <title> Array sorting </title>
  </head>
  <body>
    <h1> Array sorting </h1>
    <?php
      $assocArray = array("Amal" => 50,
        "yedhu" => 30,
        "kelvin" => 20,
        "Rahul" => 40,
      );
      echo "original Array\n";
      print_r($assocArray);
      echo "<br>";
      echo "<br>";

      asort($assocArray);
      echo "sorted by value asc order \n";
      print_r($assocArray);
      echo "<br>";
      echo "<br>";

      arsort($assocArray);
      echo "sorted by value desc order \n";
      print_r($assocArray);
      echo "<br>";
      echo "<br>";
```





```
ksort($assocArray);
echo "sorted by key asc order--- \n";
print_r($assocArray);
echo "<br>";
echo "<br>";

krsort($assocArray);
echo "sorted by key desc order--- \n";
print_r($assocArray);
echo "<br>";
echo "<br>";

?>
</body>
</html>
```


OUTPUT

Prior to execution

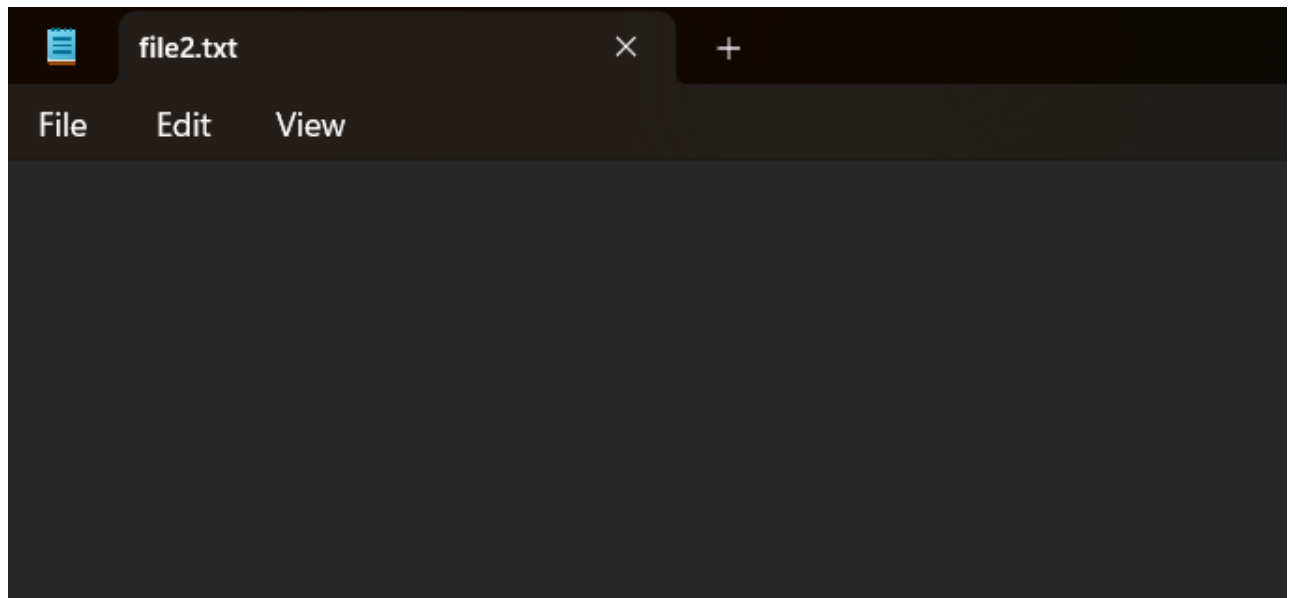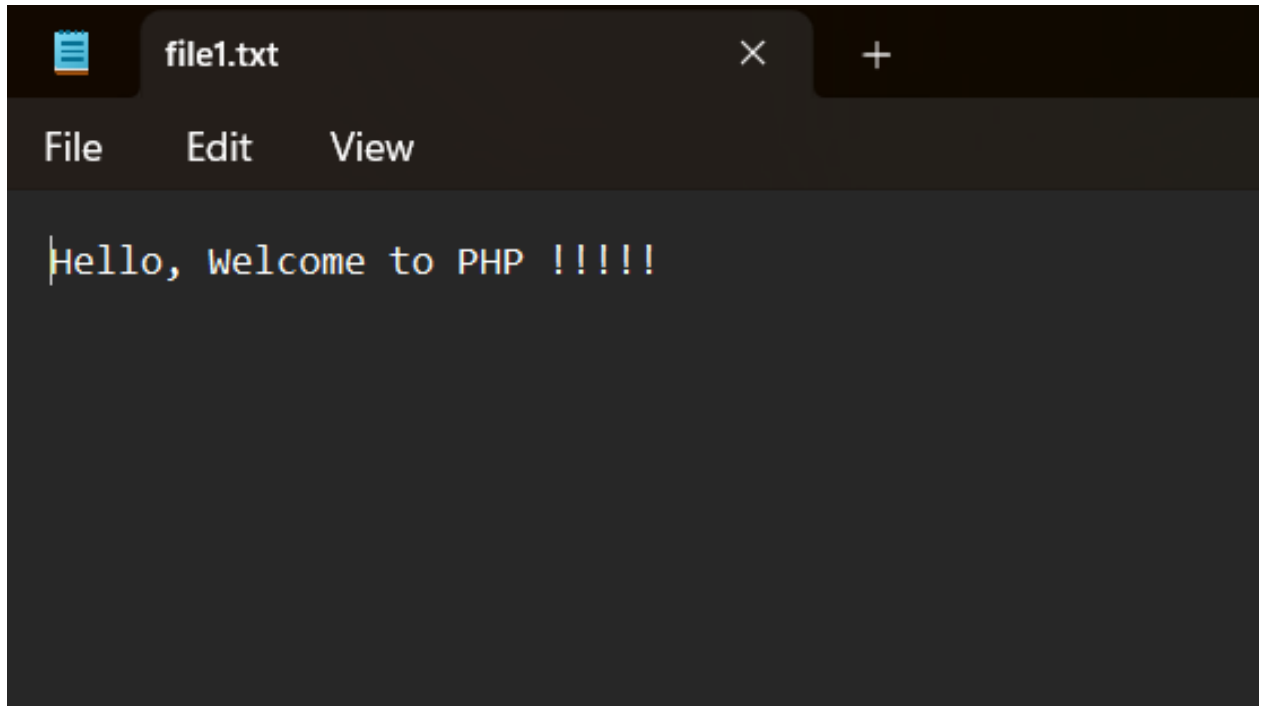

PROGRAM – 14

AIM : Write a PHP program to show the use of file handling functions.

SOURCE CODE:

```
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>File Handling Functions </title>
</head>
<body>
<h1> File Handling Functions </h1>
<?php
echo "<br><b> Read data from file1 </b>";
$filename = "file1.txt";
$fileread = fopen($filename,"r");


if($fileread == false){
    echo "File cannot open";
}
else{

    $filesize = filesize($filename);
    echo "<br> File Size: $filesize bytes <br>";

    $filecontent = fread($fileread,$filesize);
    echo "File Content: ".$filecontent."<br>";
    fclose($fileread);
}
```

OUTPUT

After executing the PHP file...

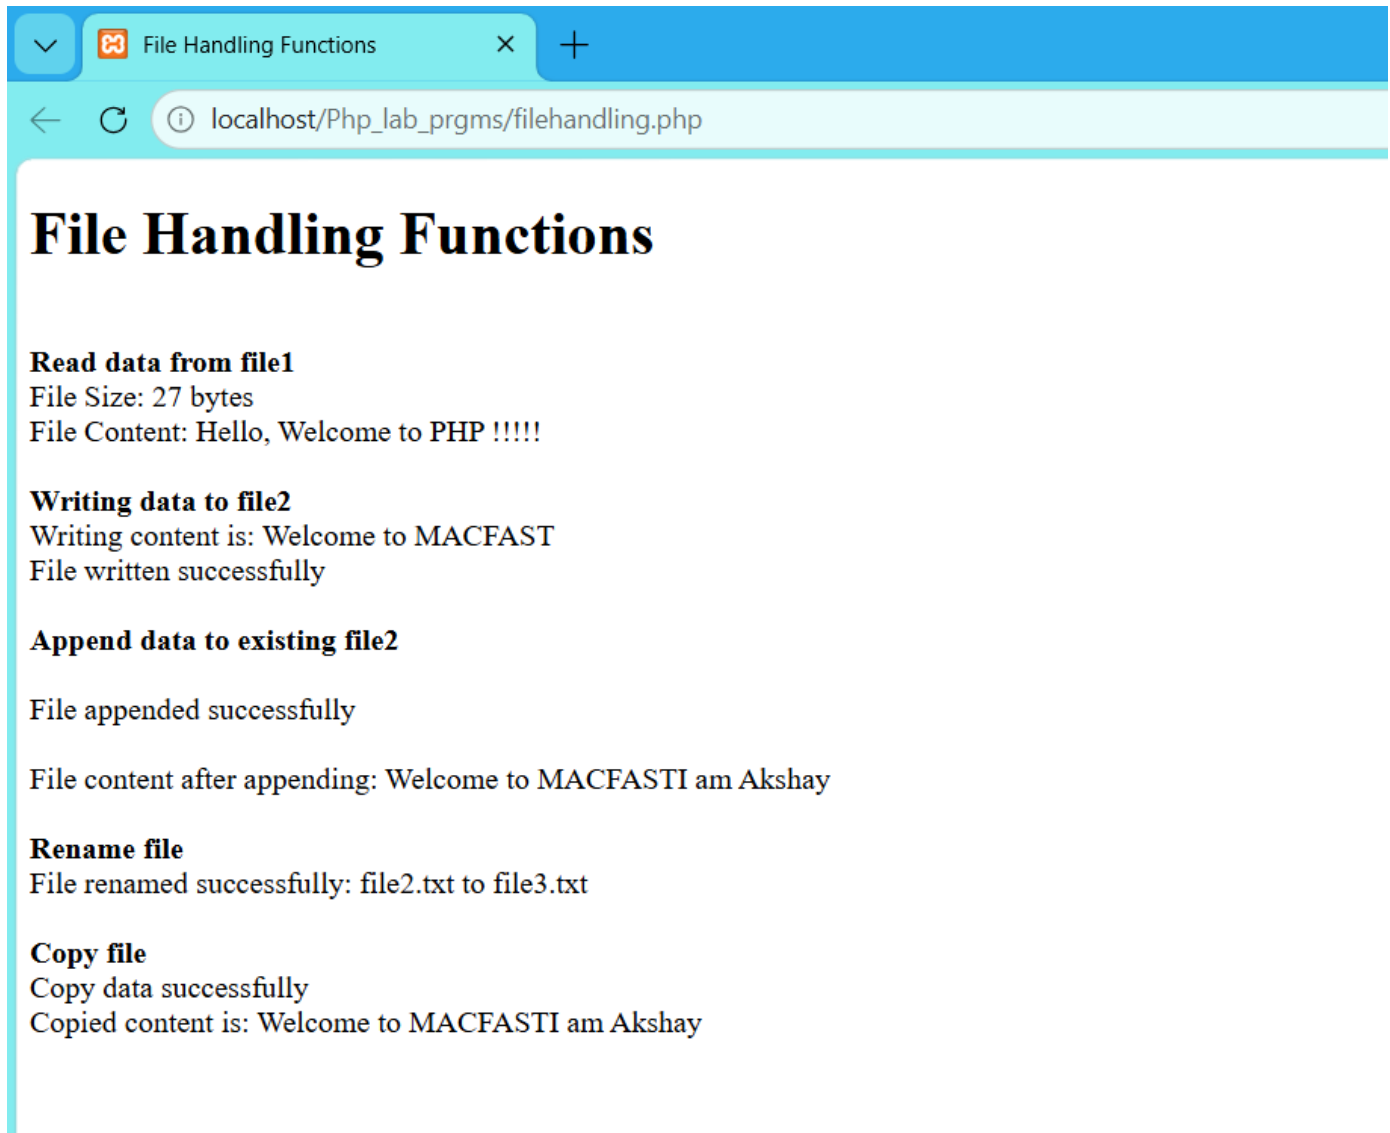

```


echo "<br><b> Writing data to file2 </b>";
$filename = "file2.txt";
$filewrite = fopen($filename,"w+");

if($filewrite == false){
    echo "File cannot be open for writing";
}
else{
    $content = "Welcome to MACFAST";
    fwrite($filewrite,$content);
    fclose($filewrite);
    echo "<br> Writing content is: Welcome to MACFAST <br>";
    echo "File written successfully <br>";
}


echo "<br><b> Append data to existing file2 </b><br>";
$fileappend = fopen("file2.txt","a+");
if($fileappend == false){
    echo "File cannot open";
}
else{
    $appcontent = "I am Akshay";
    fwrite($fileappend,$appcontent);
    fclose($fileappend);
    $getcontent = file_get_contents("file2.txt");
    echo "<br> File appended successfully <br>";
    echo "<br> File content after appending: $getcontent <br>";
}

```

OUTPUT

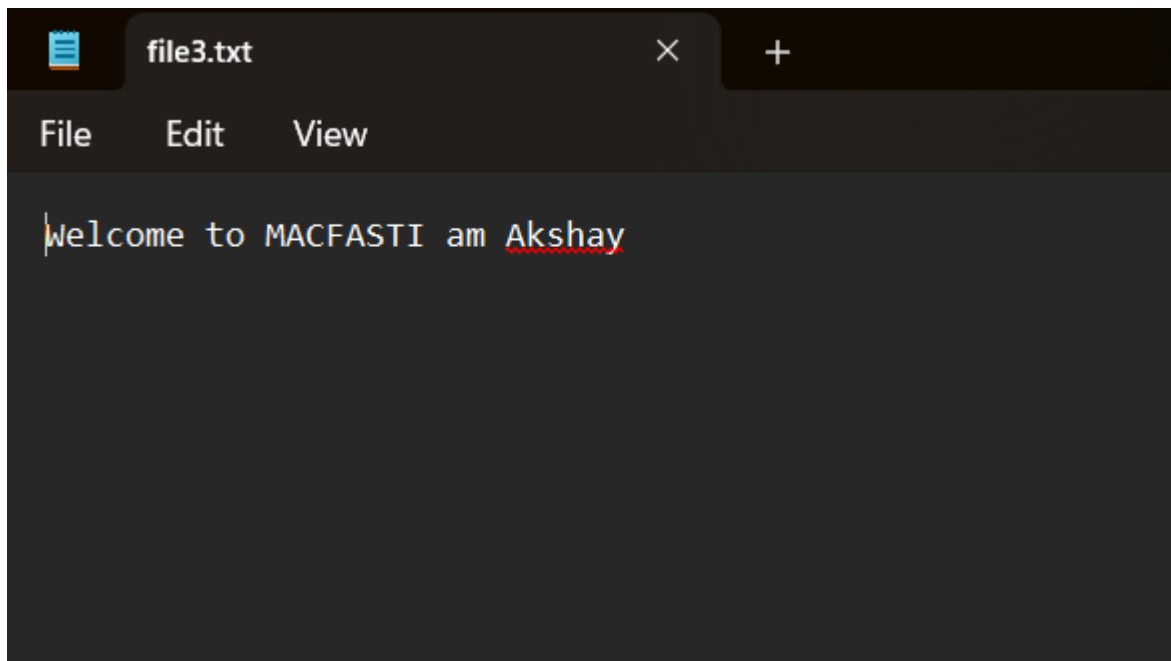

file2.txt renamed to file3.txt

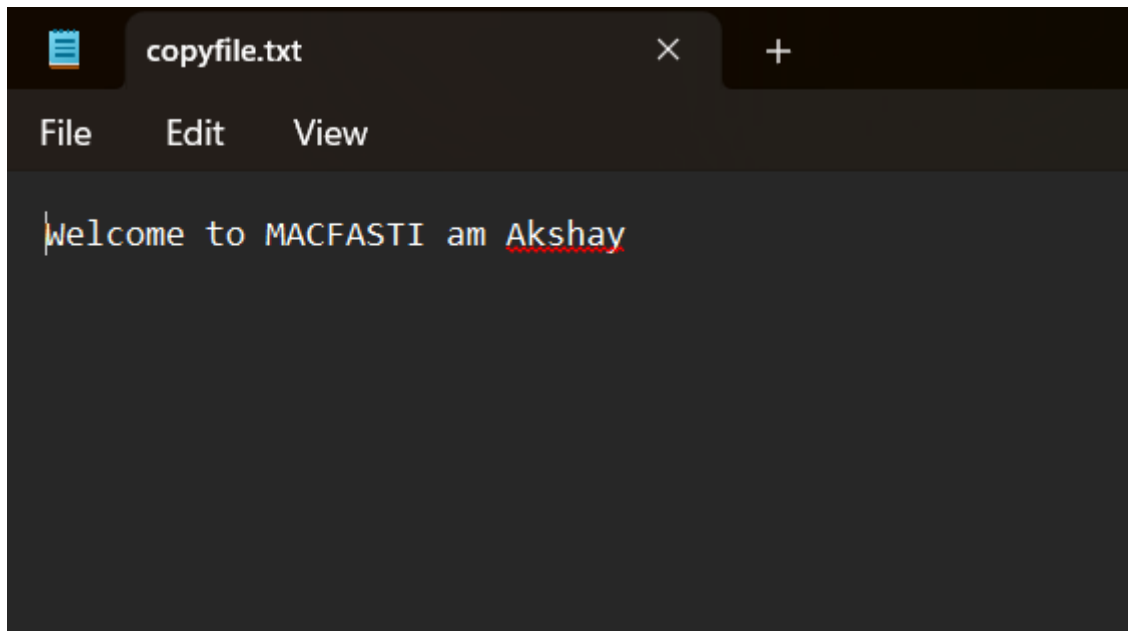


A new file is created “copyfile.txt”, containing the contents of “file3.txt”

```
echo "<br><b> Rename file </b>";
rename("file2.txt","file3.txt");
echo "<br> File renamed successfully: file2.txt to file3.txt <br>";
echo "<br><b> Copy file </b>";

copy("file3.txt","copyfile.txt");
echo "<br> Copy data successfully <br>";

echo "Copied content is: ".file_get_contents("copyfile.txt");
?>
</body>
</html>
```

OUTPUT

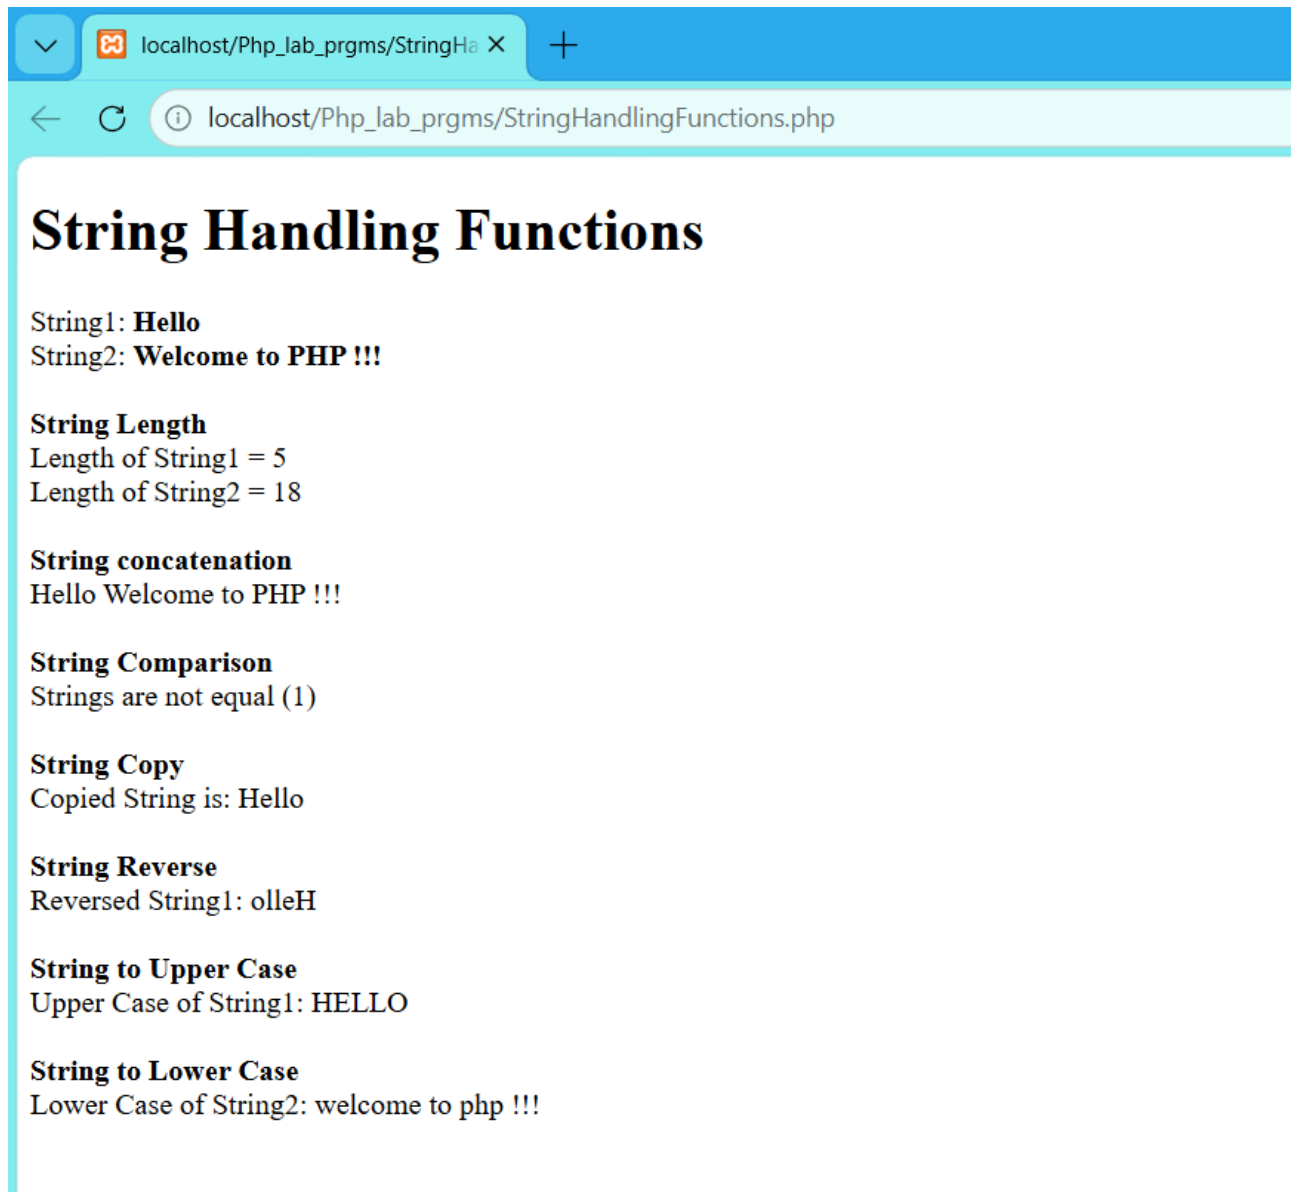

PROGRAM – 15

AIM : Write a PHP program to show string functions

SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title></title>
  </head>
  <body>
    <h1> String Handling Functions </h1>
    <?php
      $str1 = "Hello";
      $str2 = "Welcome to PHP !!!";
      echo "String1: ." . "<b> $str1 </b><br>";
      echo "String2: ." . "<b> $str2 </b><br>";
      echo "<br>";

      // String Length
      echo "<b>String Length</b><br>";
      echo "Length of String1 = ".strlen($str1)."<br>";
      echo "Length of String2 = ".strlen($str2)."<br>";
      echo "<br>";

      // String Concatenation
      echo "<b>String concatenation </b><br>";
      $concat = $str1." ".$str2;
      echo "$concat <br>";
      echo "<br>";
```



```


// String Comparison
echo "<b>String Comparison</b><br>";
$cmp = strcmp($str1, $str2);
if ($cmp == 0)
{
    echo "Strings are Equal (0)<br>";
}
else{
    echo "Strings are not equal (1)<br>";
}
echo "<br>";

// String Copy
echo "<b>String Copy </b><br>";
$strcopy = $str1;
echo "Copied String is: $strcopy <br>";
echo "<br>";

// String Reverse
echo "<b>String Reverse </b><br>";
echo "Reversed String1: ". strrev($str1) . "<br>";
echo "<br>";
// String to Upper Case
echo "<b>String to Upper Case </b><br>";
echo "Upper Case of String1: ". strtoupper($str1) . "<br>";
echo "<br>";
// String to Lower Case
echo "<b>String to Lower Case </b><br>";
echo "Lower Case of String2: ". strtolower($str2) . "<br>";
echo "<br>";
?>
</body>
</html>

```

OUTPUT

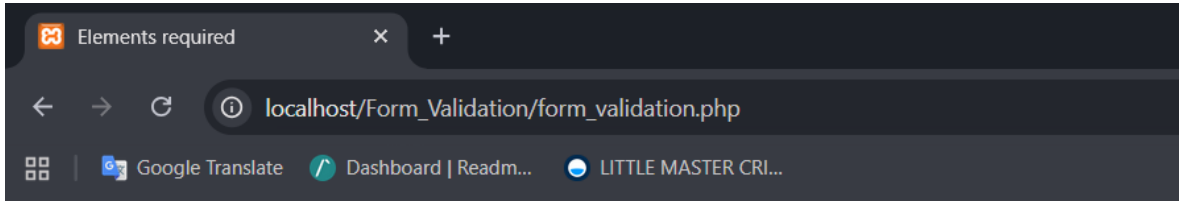

PHP Form Validation

* required field

Name: * Name is required

E-mail: * Email is required

Website:

Comment:

Gender: ☐ Female ☐ Male ☐ Other *

Your Input:

macfast.org
Hello World !!
female

PROGRAM – 16

AIM : Write a PHP program to create a registration form and demonstrate the server-side validation process of form elements required.

SOURCE CODE:

```
<html>
<head>
<title>Elements required</title>
<style>
.error {color:red;}
</style>
</head>
<body>
<?php
$nameErr = $emailErr = $genderErr = "";
$name = $email = $gender = $comment = $website = "";

if ($_SERVER["REQUEST_METHOD"] == "POST")
{
    if (empty($_POST["name"]))
    {
        $nameErr = "Name is required";
    }
    else
    {
        $name = test_input($_POST["name"]);
    }

    if (empty($_POST["email"]))
    {
        $emailErr = "Email is required";
    }
}
```



```
else
{
    $email = test_input($_POST["email"]);
}

if (empty($_POST["website"]))
{
    $website = "";
}
else
{
    $website = test_input($_POST["website"]);
}

if (empty($_POST["comment"]))
{
    $comment = "";
}
else
{
    $comment = test_input($_POST["comment"]);
}

if (empty($_POST["gender"]))
{
    $genderErr = "Gender is required";
}
else
{
    $gender = test_input($_POST["gender"]);
}
}
```




```

function test_input($data)
{
    $data = trim($data);
    $data = stripslashes($data);
    $data = htmlspecialchars($data);
    return $data;
}
?>
<h2>PHP Form Validation</h2>
<p><span class="error">* required field</span></p>
<form method="post" action="<?php echo htmlspecialchars($_SERVER["PHP_SELF"]);?>">
Name: <input type="text" name="name">
<span class="error">* <?php echo $nameErr;?></span><br><br>
E-mail: <input type="text" name="email">
<span class="error">* <?php echo $emailErr;?></span><br><br>
Website: <input type="text" name="website"><br><br>
Comment: <textarea name="comment" rows="5" cols="40"></textarea><br><br>
Gender:
<input type="radio" name="gender" value="female">Female
<input type="radio" name="gender" value="male">Male
<input type="radio" name="gender" value="other">Other
<span class="error">* <?php echo $genderErr;?></span><br><br>
<input type="submit" name="submit" value="Submit">
</form>
<?php
echo "<h2>Your Input:</h2>";
echo $name . "<br>";
echo $email . "<br>";
echo $website . "<br>";
echo $comment . "<br>";
echo $gender . "<br>";
?>
</body>
</html>

```


OUTPUT

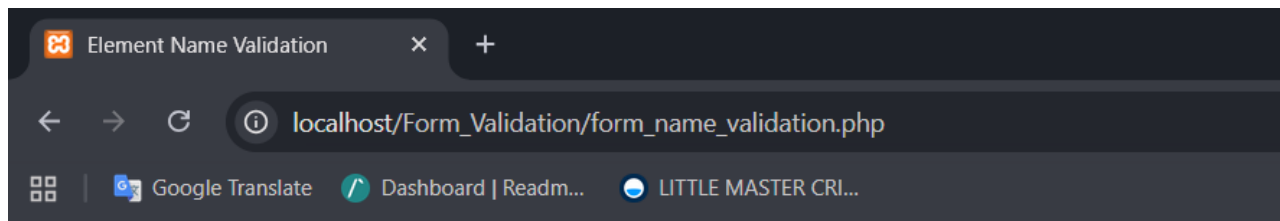

PHP Form Name Field Validation

* required field

Name: * Only letters and white space allowed

E-mail: *

Website:

Comment:

Gender: ☐ Female ☐ Male ☐ Other *

Your Input:

Email: abcd@gmail.com

Website: macfast.org

Comment: Hello,macfast

Gender: male

PROGRAM – 17

AIM : Write a PHP program to create a registration form and demonstrate the server-side validation process for name exclusively.

SOURCE CODE:

```
<html>
<head>
    <title>Element Name Validation</title>
    <style>
        .error {color: red;}
    </style>
</head>
<body>
<?php
// Define variables and set to empty values
$nameErr = $emailErr = $genderErr = "";
$name = $email = $gender = $comment = $website = "";
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    if (empty($_POST["name"])) {
        $nameErr = "Name is required";
    } else {
        $temp_name = test_input($_POST["name"]);
        // check if name only contains letters and whitespace
        if (!preg_match("/^[a-zA-Z ]*$/", $temp_name)) {
            $nameErr = "Only letters and white space allowed";
        } else {
            $name = $temp_name;
        }
    }
}
if (empty($_POST["email"])) {
    $emailErr = "Email is required";
} else {
```



```

$email = $_POST["email"];
if(!filter_var($email, FILTER_VALIDATE_EMAIL))
{
    $emailErr = "Invalid email found";
}
}
if (empty($_POST["website"])) {
    $websiteErr = "url is required";
} else {
    $website = $_POST["website"];
    if(!filter_var($website, FILTER_VALIDATE_URL))
    {
        $websiteErr = "Invlaid url";
    }
}
if (empty($_POST["comment"])) {
    $comment = "";
} else {
    $comment = test_input($_POST["comment"]);
}
if (empty($_POST["gender"])) {
    $genderErr = "Gender is required";
} else {
    $gender = test_input($_POST["gender"]);
}
}
function test_input($data) {
    $data = trim($data);
    $data = stripslashes($data);
    $data = htmlspecialchars($data);
    return $data;
}
?>

```


<h2>PHP Form Name Field Validation</h2>

<p>* required field</p>

<form method="post" action="<?php echo htmlspecialchars(\$_SERVER["PHP_SELF"]);?>">

Name: <input type="text" name="name">

* <?php echo \$nameErr;?>

E-mail: <input type="text" name="email">

* <?php echo \$emailErr;?>

Website: <input type="text" name="website">

Comment: <textarea name="comment" rows="5" cols="40"></textarea>

Gender:

<input type="radio" name="gender" value="female">Female

<input type="radio" name="gender" value="male">Male

<input type="radio" name="gender" value="other">Other

* <?php echo \$genderErr;?>

<input type="submit" name="submit" value="Submit">

</form>

<?php

if (\$_SERVER["REQUEST_METHOD"] == "POST") {

echo "<h2>Your Input:</h2>";

if (empty(\$nameErr)) {

echo "Name: " . \$name . "
";

}

echo "Email: " . \$email . "
";

echo "Website: " . \$website . "
";

echo "Comment: " . \$comment . "
";

echo "Gender: " . \$gender . "
";


}

?>

</body>

</html>

OUTPUT

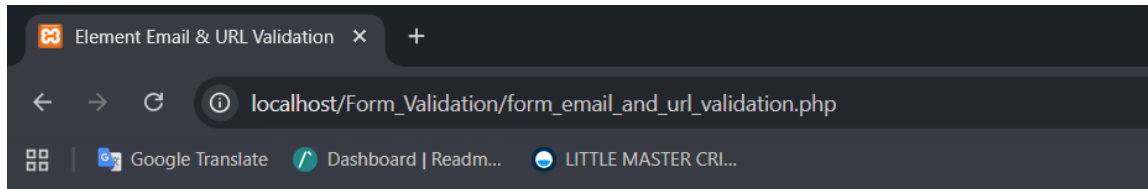

PHP Form Validation Example

* required field

Name: *

E-mail: * Invalid email format

Website: *Invalid URL

Comment:

Gender: ☐ Female ☐ Male ☐ Other *

Your Input:

Name: ABC

Comment:

Gender: male

PROGRAM – 18

AIM : Write a PHP program to create a registration form and demonstrate the server-side validation process for email & URL exclusively.

SOURCE CODE:

```
<html>
<head>
    <title>Element Email & URL Validation</title>
</style>
    .error {color:red;}
</style>
</head>
<body>
<?php
$nameErr = $emailErr = $genderErr = $websiteErr = "";
$name = $email = $gender = $comment = $website = "";
if ($_SERVER["REQUEST_METHOD"] == "POST")
{
    if (empty($_POST["name"])) {
        $nameErr = "Name is required";
    } else {
        $name = test_input($_POST["name"]);
    }
    if (empty($_POST["email"])) {
        $emailErr = "Email is required";
    } else {
        $email = $_POST["email"];
        if (!filter_var($email, FILTER_VALIDATE_EMAIL))
        {
            $emailErr = "Invalid email format";
        }
    }
}
```



```

if (empty($_POST["website"])) {
    $websiteErr = "URL is required";
} else {
    $website = $_POST["website"];
    if (!filter_var($website, FILTER_VALIDATE_URL))
    {
        $websiteErr = "Invalid URL";
    }
}

if (empty($_POST["comment"])) {
    $comment = "";
} else {
    $comment = test_input($_POST["comment"]);
}

if (empty($_POST["gender"])) {
    $genderErr = "Gender is required";
} else {
    $gender = test_input($_POST["gender"]);
}
}

function test_input($data)
{
    $data = trim($data);
    $data = stripslashes($data);
    $data = htmlspecialchars($data);
    return $data;
}
?>

<h2>PHP Form Validation Example</h2>
<p><span class="error">* required field</span></p>
<form method="post" action="<?php echo
htmlspecialchars($_SERVER["PHP_SELF"]);?>">
Name: <input type="text" name="name">
<span class="error">* <?php echo $nameErr;?></span><br><br>

```




```

E-mail: <input type="text" name="email">
<span class="error">* <?php echo $emailErr;?></span><br><br>
Website: <input type="text" name="website">
<span class="error">* <?php echo $websiteErr;?></span><br><br>
Comment: <textarea name="comment" rows="5" cols="40"></textarea><br><br>
Gender:
<input type="radio" name="gender" value="female">Female
<input type="radio" name="gender" value="male">Male
<input type="radio" name="gender" value="other">Other
<span class="error">* <?php echo $genderErr;?></span>
<br><br>
<input type="submit" name="submit" value="Submit">
</form>
<?php
if ($_SERVER["REQUEST_METHOD"] == "POST")
{
    echo "<h2>Your Input:</h2>";
    if (empty($nameErr)) {
        echo "Name: " . $name . "<br>";
    }
    if (empty($emailErr)){
        echo "Email: " . $email . "<br>";
    }
    if (empty($websiteErr)){
        echo "Website: " . $website . "<br>";
    }
    echo "Comment: " . $comment . "<br>";
    echo "Gender: " . $gender . "<br>";
}
?>
</body>
</html>

```

OUTPUT

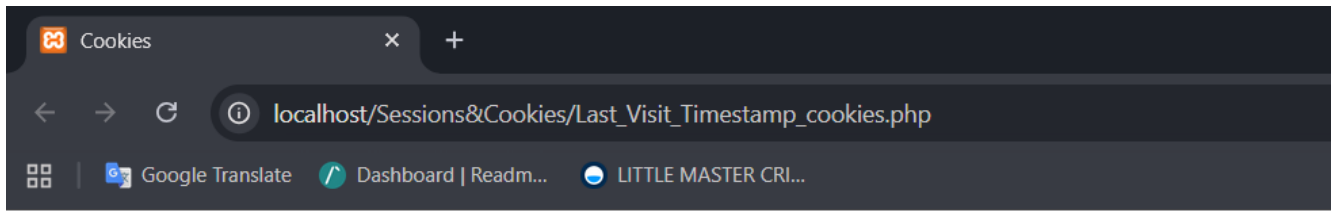

Last Visit Timestamp Information

your last visit was 05/22/26 08:07:04


PROGRAM – 19

AIM : Write a PHP program to display the timestamp information of the last visit of a page using cookies.

SOURCE CODE:

```
<html>
<head>
    <title>Cookies</title>
</head>
<body>
    <h1>Last Visit Timestamp Information<br></h1>
<?php
setcookie("lastdate",date("m/d/y H:i:s"),time()+(30*24*60*60));
if(isset($_COOKIE["lastdate"]))
{
    $var=$_COOKIE["lastdate"];
    echo"your last visit was $var";
}
else
    echo"Welcome"."<br/>";
?>
</body>
</html>
```

OUTPUT

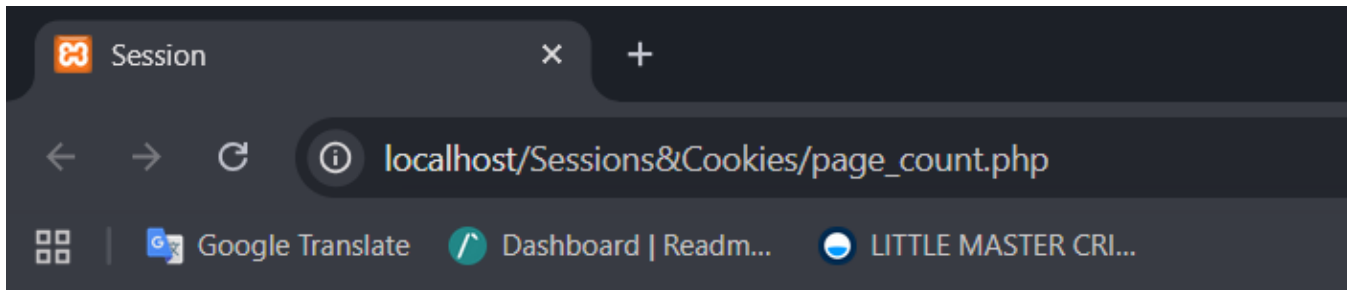

Page Visit Counter

You have visited this page 6 times in this session.


PROGRAM – 20

AIM : Write a PHP program to display the page count using session.

SOURCE CODE:

```
<html>
<head>
    <title>Session</title>
</head>
<body>
    <h1>Page Visit Counter</h1>
<?php
session_start();
if(isset($_SESSION['count']))
    $_SESSION['count']+=1;
else
    $_SESSION['count']=1;
    $msg="You have visited this page ".$_SESSION['count']." times in this session.";
echo $msg;
?>
</body>
</html>
```


OUTPUT

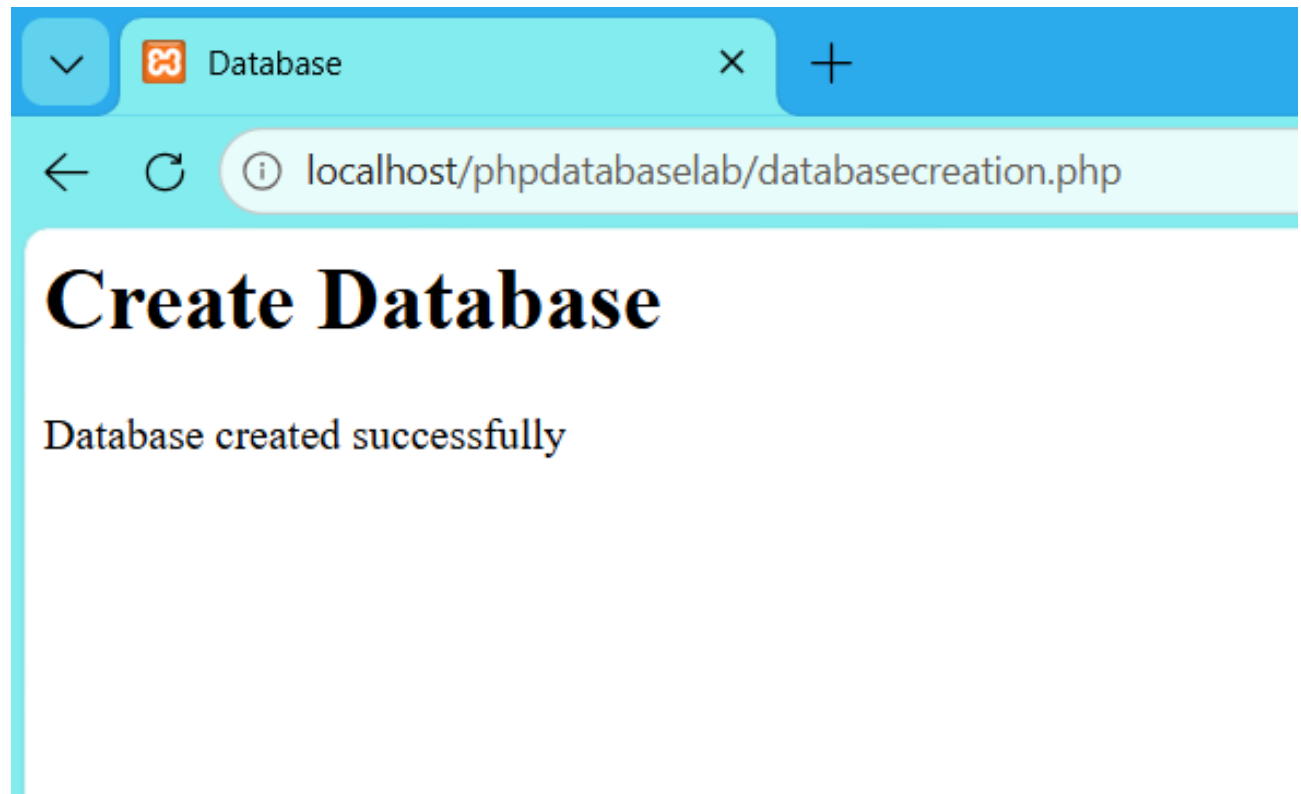


PROGRAM – 21

AIM : Develop PHP program to create a database.

SOURCE CODE:

```
<html>
<head>
    <title>Database</title>
</head>
<body>
    <h1>Create Database<br></h1>
<?php
$servername = "localhost";
$username = "root";
$password = "";
$conn = mysqli_connect($servername, $username, $password);
if (!$conn){
    die("Connection failed: " . mysqli_connect_error());
}
$sql = "CREATE DATABASE databasei";
if (mysqli_query($conn, $sql)){
    echo "Database created successfully";
}
else{
    echo "Error creating database: " . mysqli_error($conn);
}
mysqli_close($conn);
?>
</body>
</html>
```

OUTPUT

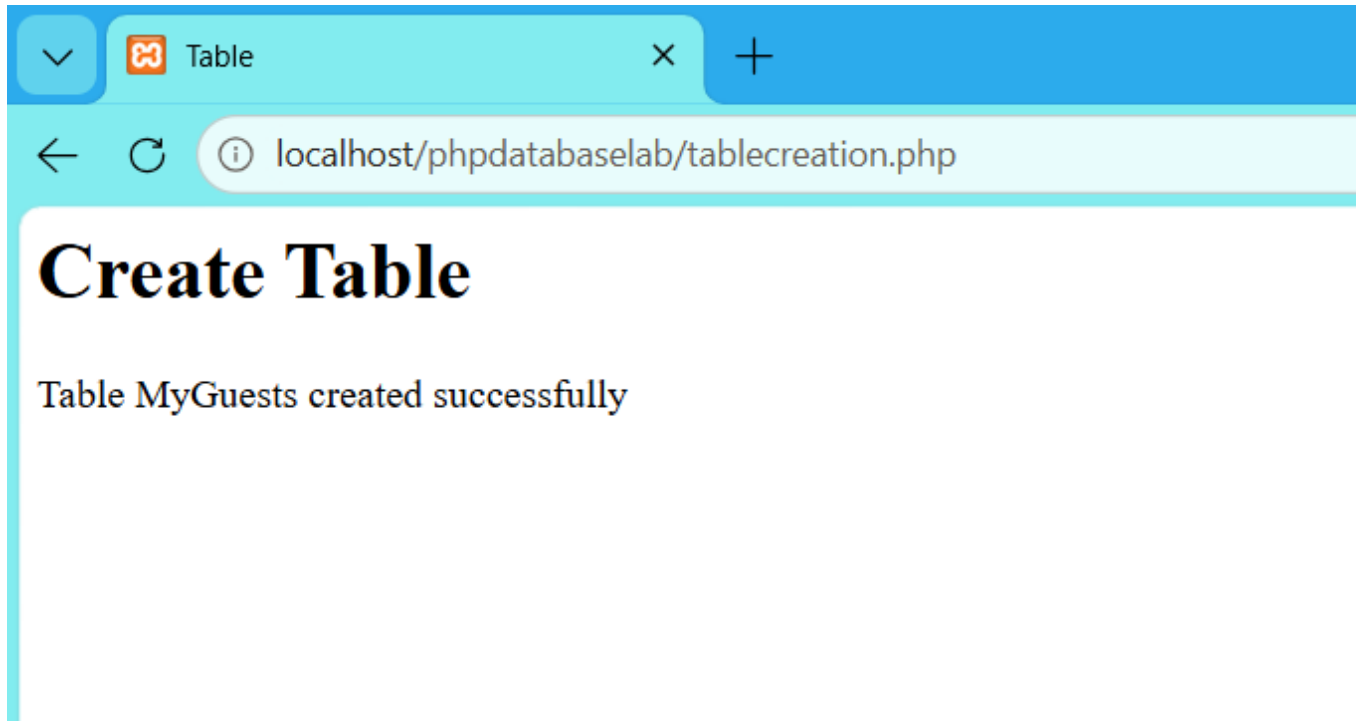

PROGRAM – 22

AIM : Develop a PHP program to create table.

SOURCE CODE:

```
<html>
<head>
    <title>Table</title>
</head>
<body>
    <h1>Create Table<br></h1>
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "mydatabase";
$conn = mysqli_connect($servername, $username, $password, $dbname);


if (!$conn)
{
    die("Connection failed: " . mysqli_connect_error());
}

$sql = "CREATE TABLE MyGuest
(
id INT(6) UNSIGNED AUTO_INCREMENT PRIMARY KEY,
firstname VARCHAR(30) NOT NULL,
lastname VARCHAR(30) NOT NULL,
email VARCHAR(50),
reg_date TIMESTAMP DEFAULT CURRENT_TIMESTAMP ON UPDATE
CURRENT_TIMESTAMP
)";
```



```
if (mysqli_query($conn, $sql))
{
    echo "Table MyGuests created successfully";
}
else
{
    echo "Error creating table: " . mysqli_error($conn);
}
mysqli_close($conn);
?>
</body>
</html>
```

OUTPUT

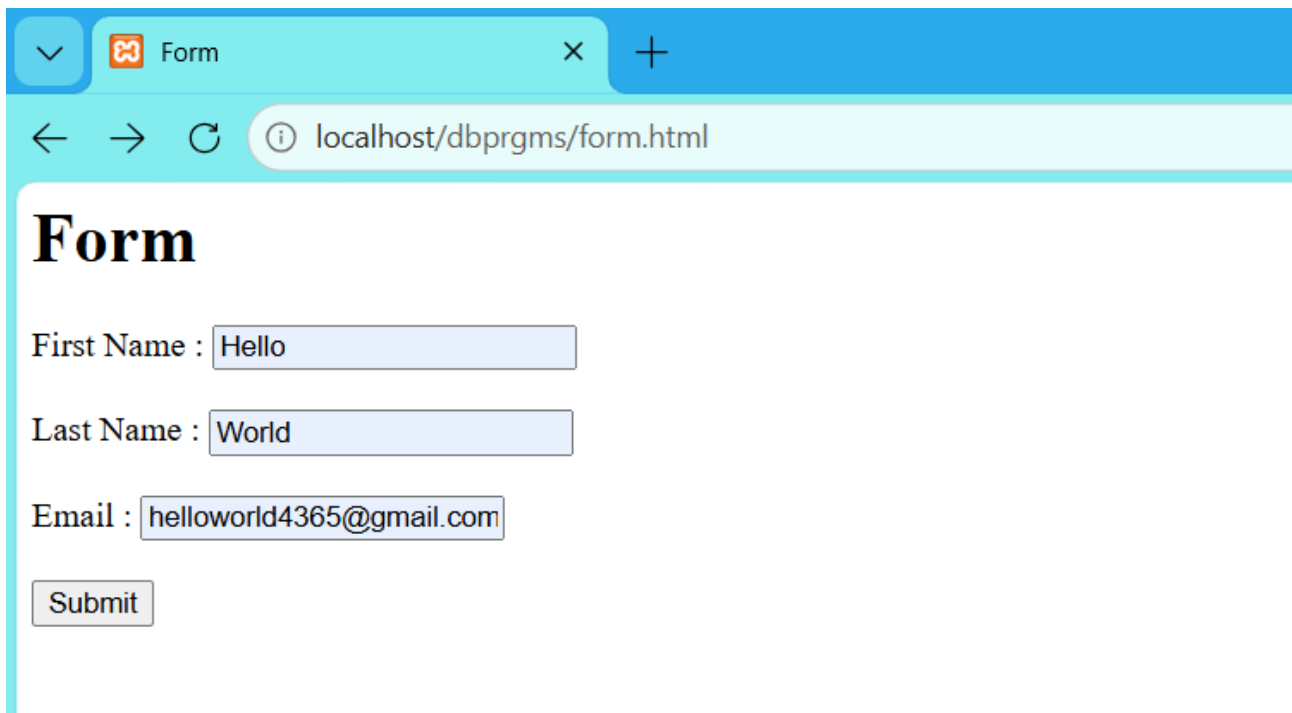


Form

First Name :

Last Name :

Email :

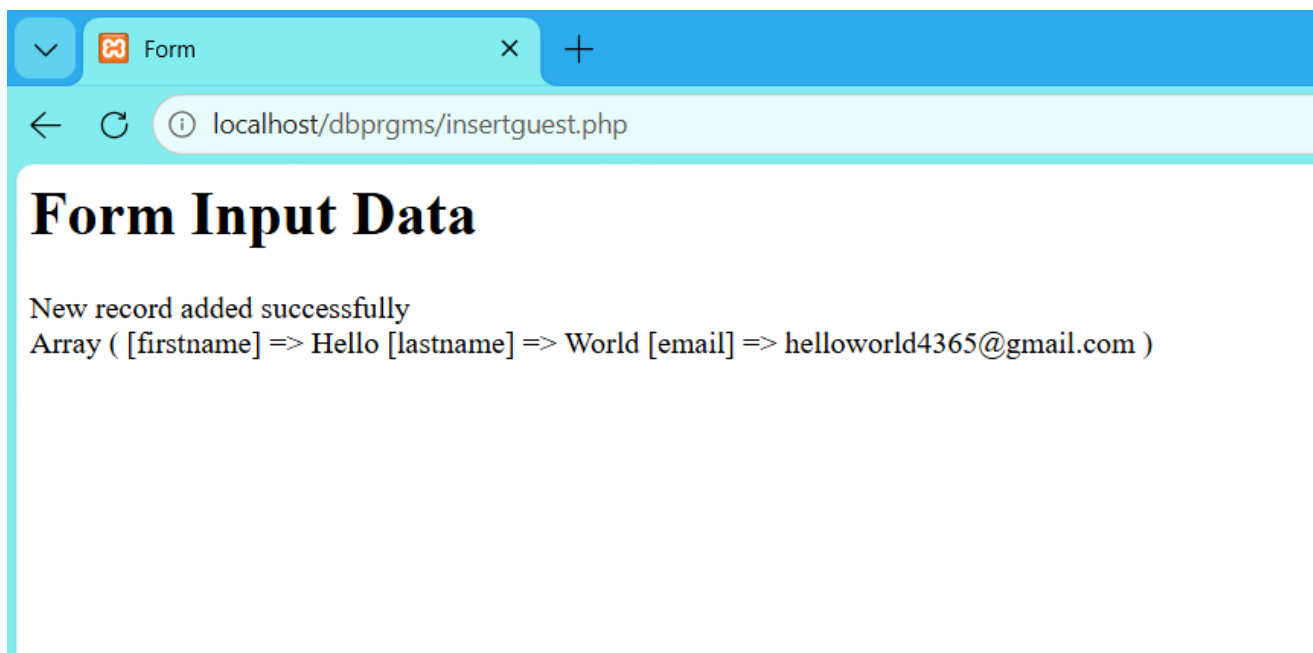

Form Input Data

New record added successfully
Array ([firstname] => Hello [lastname] => World [email] => helloworld4365@gmail.com)

PROGRAM – 23

AIM : Develop a PHP program to insert values into the table.

SOURCE CODE:

form.html

```
<html>
  <head>
    <title>Form</title>
  </head>
  <body>
    <h1>Form</h1>
    <form action="insertguest.php" method="POST">
      First Name : <input type="text" name="firstname" /><br><br>
      Last Name : <input type="text" name="lastname" /><br><br>
      Email : <input type="email" name="email" /><br><br>
      <input type="submit" value="Submit" />
    </form>
  </body>
</html>
```

insertguest.php

```
<html>
<head>
  <title>Form</title>
</head>
<body>
  <h1>Form Input Data<br></h1>
  <?php
    $servername = "localhost";
    $username = "root";
    $password = "";
    $dbname = "mydatabase";
```




```

$conn = mysqli_connect($servername, $username, $password, $dbname);
if (!$conn)
{
    die("Connection failed: ".mysqli_connect_error());
}
$sql="INSERT INTO
MyGuest(firstname,lastname,email)VALUES('$_POST[firstname]',$_POST[lastname],'$_POST[email]')";
if (mysqli_query($conn, $sql))
{
    echo "New record added successfully". "<br>";
}
else
{
    echo "Error:". $sql. "<br>".mysqli_error($conn);
}
print_r($_POST);
mysqli_close($conn)
?>
</body>
</html>

```

OUTPUT

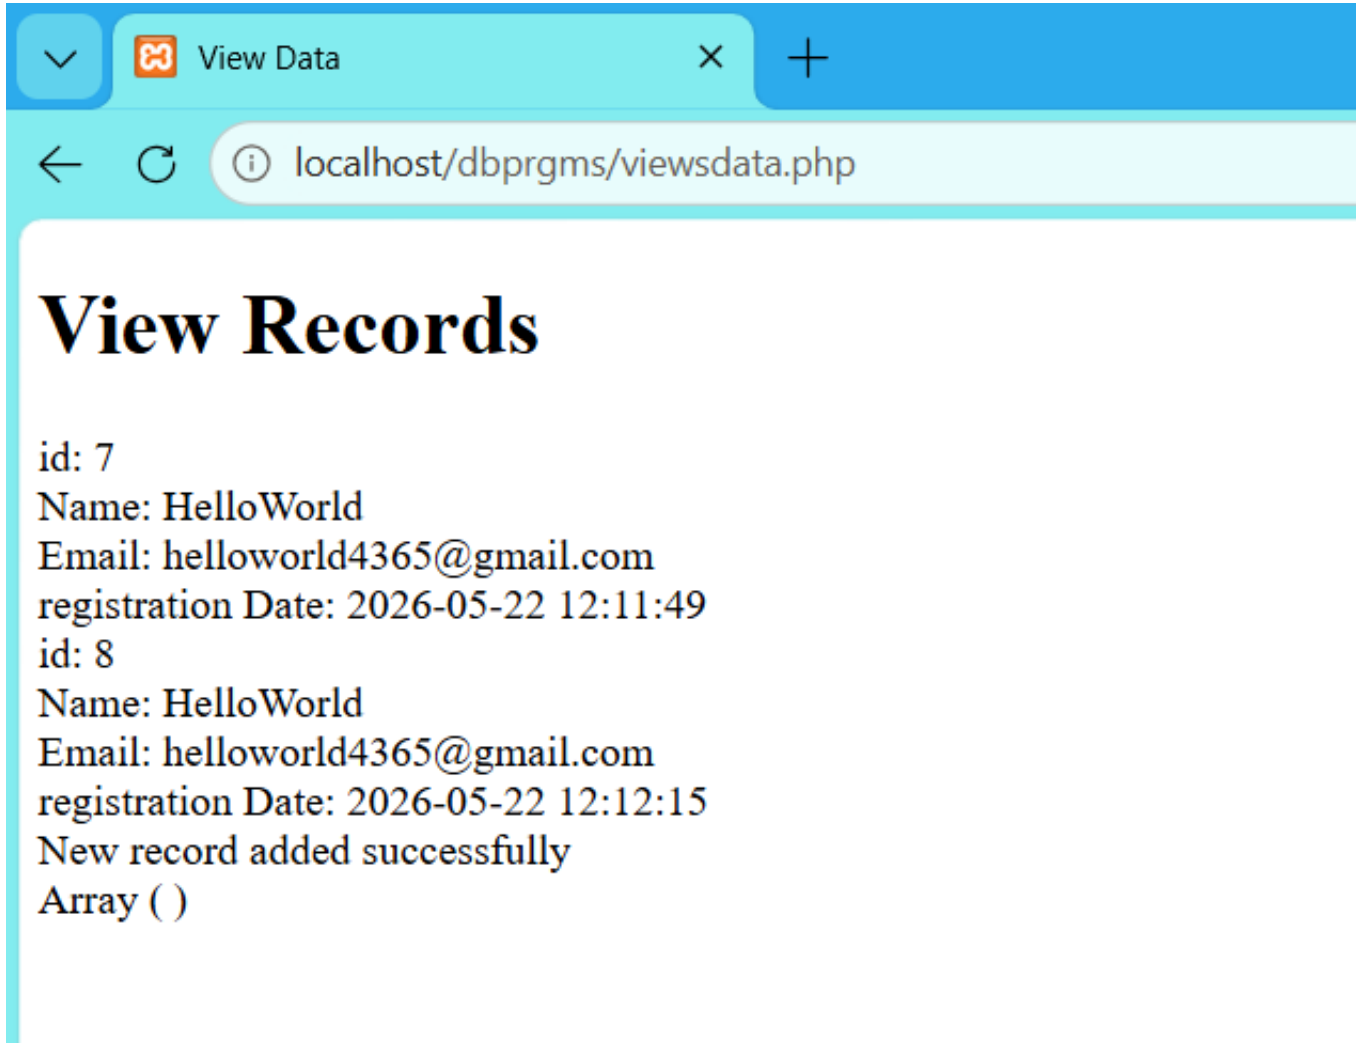

PROGRAM – 24

AIM : Develop a PHP program to view the records from the table.

SOURCE CODE:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <title>View Data</title>
  </head>
  <body>
    <h1>View Records <br> </h1>
    <?php
      $servername = "localhost";
      $username = "root";
      $password = "";
      $dbname = "mydatabase";
      $conn = mysqli_connect($servername,$username,$password,$dbname);
      if(!$conn)
      {
        die("Connection failed:" .mysqli_connect_error());
      }
      $sql = "SELECT * FROM MyGuest";
      $result = mysqli_query($conn, $sql);
      if (mysqli_num_rows($result) > 0)
      {
        while($row = mysqli_fetch_assoc($result))
        {
          echo "id: ".$row["id"]."<br> Name: ".$row["firstname"]."."
            $row["lastname"]."<br>". "Email: ".$row["email"]."<br>
            registration Date: ".$row["reg_date"]."<br>";
        }
      }
    }
```



```
if(mysqli_query($conn, $sql)){  
    echo 'New record added successfully'.<br>;  
}  
else{  
    echo 'Error:'. $sql.<br>.mysqli_error($conn);  
}  
print_r($_POST);  
mysqli_close($conn);  
?>  
</body>  
</html>
```

OUTPUT

Update form page

localhost/dbprgms/updateform.php

Data Before Updation

id: 7
Name: Hello World
Email:helloworld4365@gmail.com
Registration Date:2026-05-22 12:11:49

id: 8
Name: Hello World
Email:helloworld4365@gmail.com
Registration Date:2026-05-22 12:12:15

Form

Data to be updated

First Name:

id:

PROGRAM – 25


AIM : Develop a PHP program to update a particular value in the table.

SOURCE CODE:

updateform.php

```
<html>
<head>
<title>Update form page</title>
</head>
<body>
<h1>Data Before Updation<br></h1>
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "mydatabase";
$conn = mysqli_connect($servername, $username, $password, $dbname);
if (!$conn)
{
die("Connection failed: " . mysqli_connect_error());
}
$sql = "SELECT * FROM MyGuest";
$result = mysqli_query($conn, $sql);
if (mysqli_num_rows($result) > 0)
{
while($row = mysqli_fetch_assoc($result))
{
echo "id: " . $row["id"]. "<br> Name: " . $row["firstname"]. " " .
$row["lastname"]. "<br>". " Email:". $row["email"]. "<br> Registration
Date:". $row["reg_date"]. " <br>";
}
}
else{
echo "0 results";
```


OUTPUT

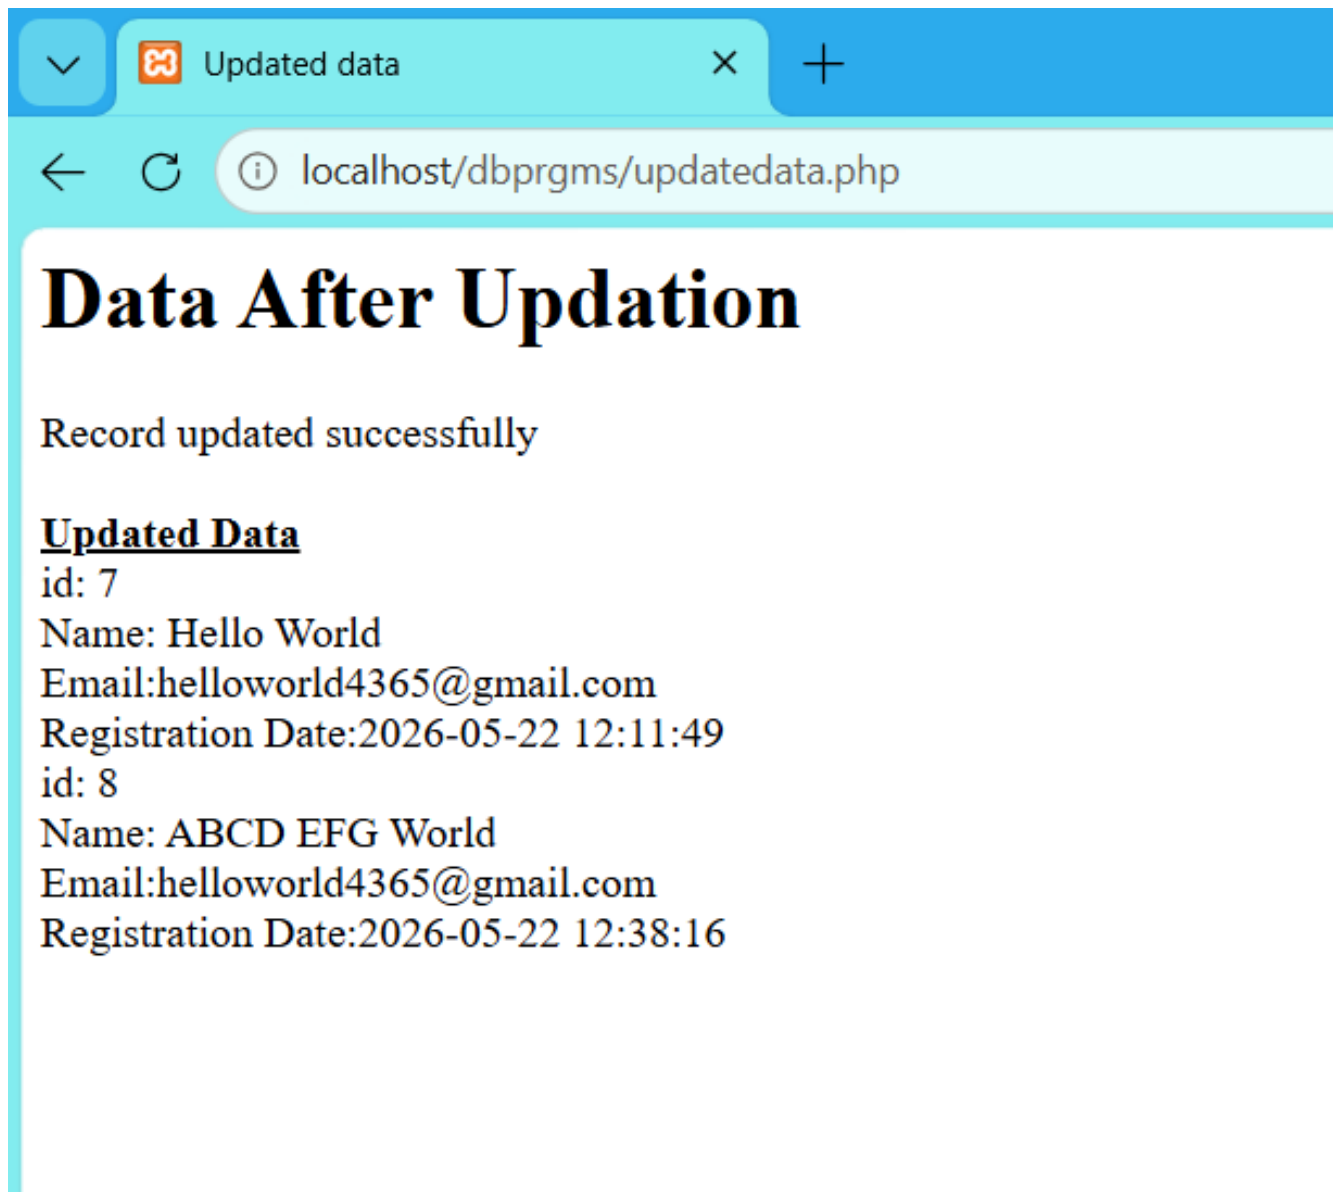

```

}
echo "<html>
<head>
<title>Form</title>
<body>
<h1>Form</h1>
<h2>Data to be updated</h2>
<form action='updatedata.php' method='POST'>
First Name:<input type='text' name='firstname' /><br><br>
id:<input type='text' name='id' /><br><br>
<input type='submit' value='Submit' />
</form>
</body>
</html>
";
mysqli_close($conn);
?>
</body>
</html>

```

updatedata.php

```

<html>
<head>
<title>Updated data</title>
</head>
<body>
<h1>Data After Updation <br></h1>
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "mydatabase";
$conn = mysqli_connect($servername, $username, $password, $dbname);

```




```

if (!$conn)
{
die("Connection failed: " . mysqli_connect_error());
}
$sql = "UPDATE MyGuest SET firstname='$_POST[firstname]' WHERE
id='$_POST[id]'";
if (mysqli_query($conn, $sql))
{
echo "Record updated successfully";
echo "<br><br>";
echo "<b><u>Updated Data</u></b>";
echo "<br>";
$sql = "SELECT * FROM MyGuest";
$result = mysqli_query($conn, $sql);
if (mysqli_num_rows($result) > 0)
{
while($row = mysqli_fetch_assoc($result))
{
echo "id: " . $row["id"]. "<br> Name: " . $row["firstname"]. " " .
$row["lastname"]. "<br>." Email:". $row["email"]. "<br> Registration
Date:". $row["reg_date"]. "<br>";
}
}
else{
echo "0 results";
}
}
else{
echo "Error updating record: " . mysqli_error($conn);
}
mysqli_close($conn);
?>
</body>
</html>

```

OUTPUT

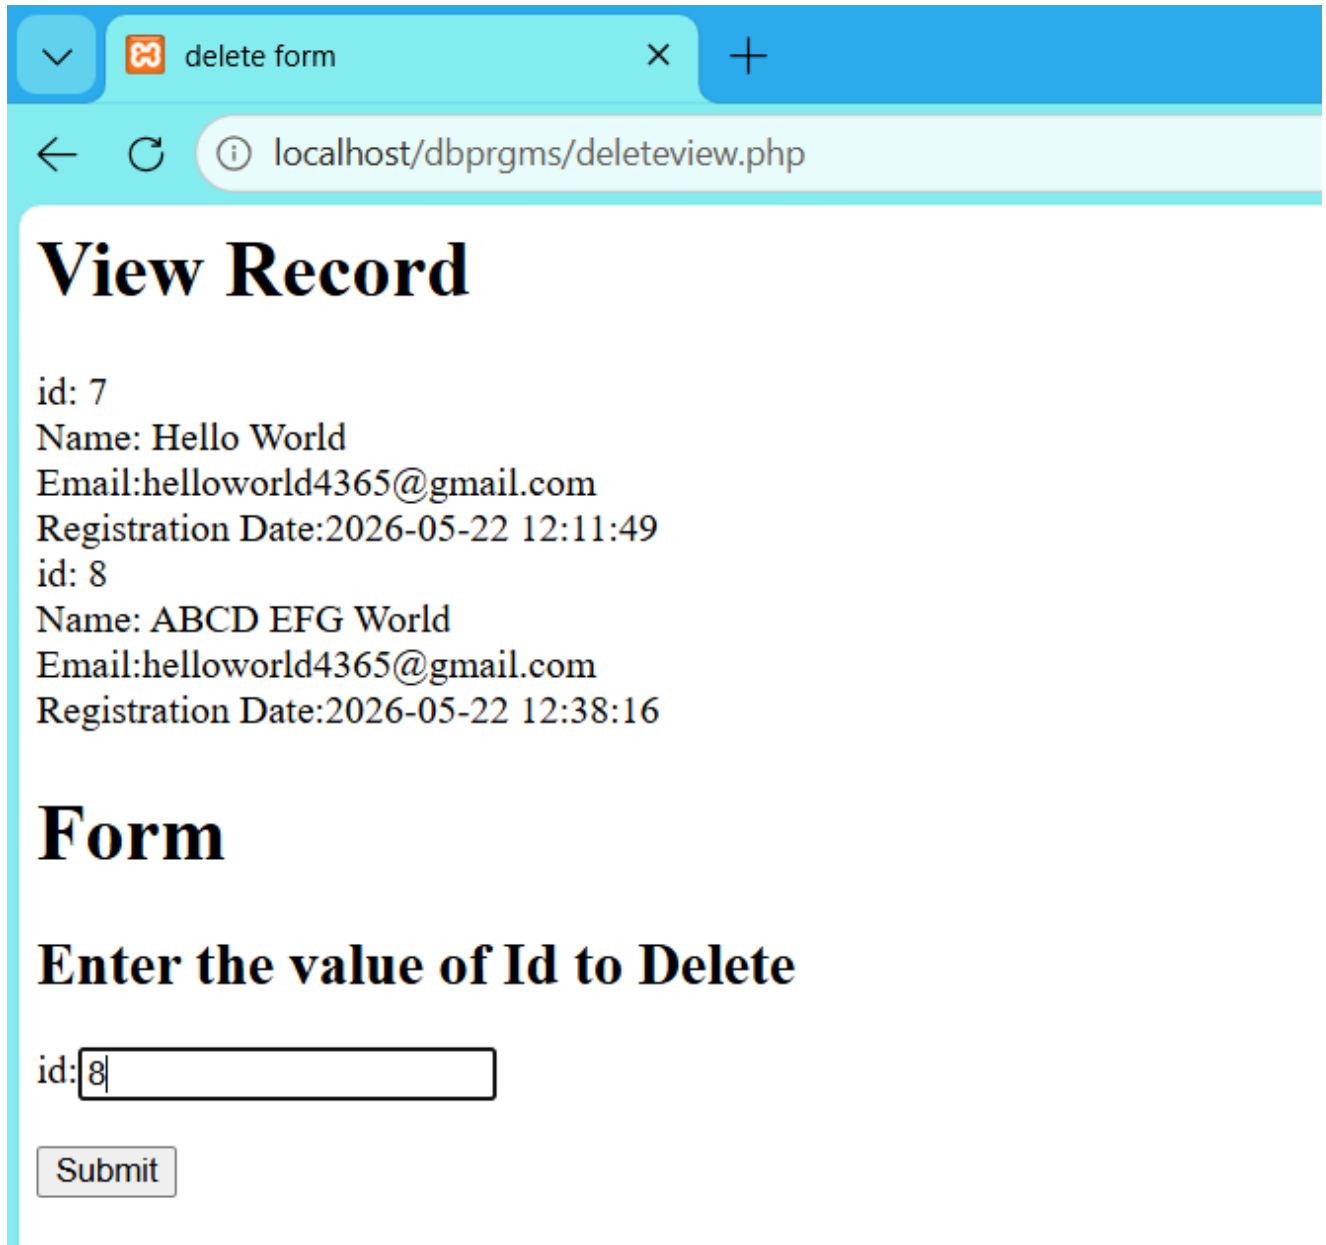

delete form

localhost/dbprgms/deleteview.php

View Record

id: 7
Name: Hello World
Email:helloworld4365@gmail.com
Registration Date:2026-05-22 12:11:49

id: 8
Name: ABCD EFG World
Email:helloworld4365@gmail.com
Registration Date:2026-05-22 12:38:16

Form

Enter the value of Id to Delete

id:

PROGRAM – 26


AIM : Develop a PHP program to delete a particular value in the table.

SOURCE CODE:

deleteview.php

```
<html>
<head>
<title>delete form</title>
</head>
<body>
<h1>View Record<br></h1>
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "mydatabase";
$conn = mysqli_connect($servername, $username, $password, $dbname);
if (!$conn)
{
die("Connection failed: " . mysqli_connect_error());
}
$sql = "SELECT * FROM MyGuest";
$result = mysqli_query($conn, $sql);
if (mysqli_num_rows($result) > 0)
{
while($row = mysqli_fetch_assoc($result))
{
echo "id: " . $row["id"]. " <br> Name: " . $row["firstname"]. " " .
$row["lastname"]. " <br> " . " Email: " . $row["email"]. " <br> Registration
Date: " . $row["reg_date"]. " <br>";
}
}
else{
echo "0 results";
}
```

OUTPUT

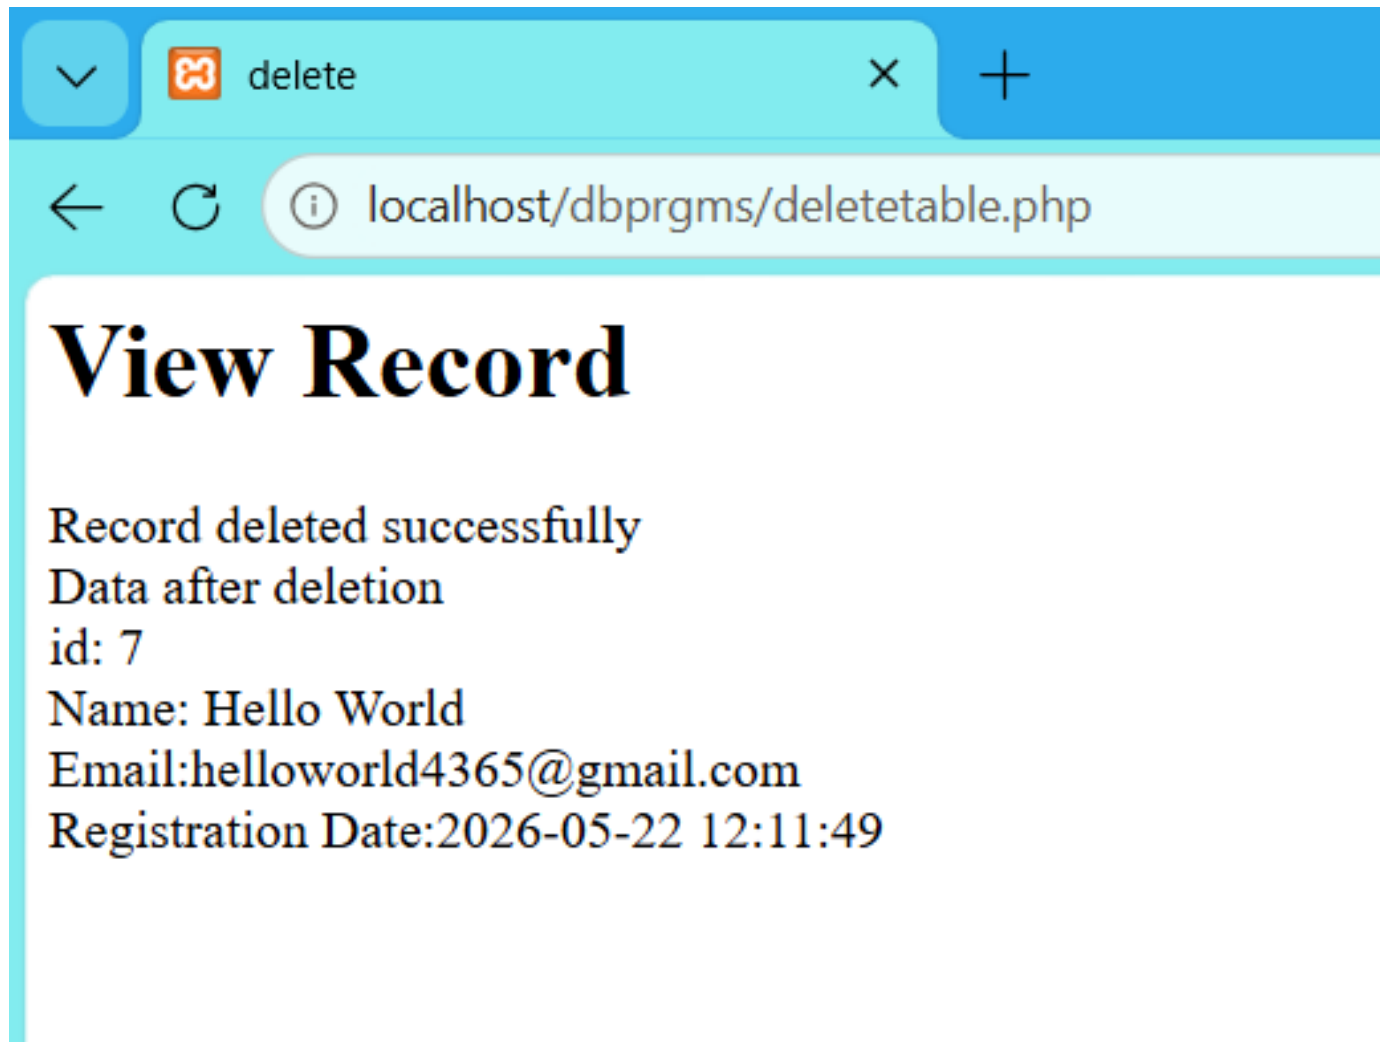

```

}
echo "<html>
<head>
<title>Form</title>
<body>
<h1>Form</h1>
<h2>Enter the value of Id to Delete </h2>
<form action='deletetable.php' method='POST'>
id:<input type='text' name='id' /><br><br>
<input type='submit' value='Submit' />
</form>
</body>
</html>";
mysqli_close($conn);
?>
</body>
</html>

```

deletetable.php

```

<html>
<head>
<title>delete</title>
</head>
<body>
<h1>View Record<br></h1>
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "mydatabase";
$conn = mysqli_connect($servername, $username, $password, $dbname);
if (!$conn)

```



```

{
die("Connection failed: " . mysqli_connect_error());
}
$sql = "DELETE FROM MyGuest WHERE id='$_POST[id]'";
if (mysqli_query($conn, $sql))
{
echo "Record deleted successfully";
echo "<br>";
echo "Data after deletion";
echo "<br>";
$sql = "SELECT * FROM MyGuest";
$result = mysqli_query($conn, $sql);
if (mysqli_num_rows($result) > 0)
{
while($row = mysqli_fetch_assoc($result))
{
echo "id: " . $row["id"]. "<br> Name: " . $row["firstname"]. " " .
$row["lastname"]. "<br>". " Email:". $row["email"]. "<br> Registration
Date:". $row["reg_date"]. "<br>";
}
}
else{
echo "0 results";
}}
else{
echo "Error deleting record: " . mysqli_error($conn);
}
mysqli_close($conn);
?>
</body>
</html>

```

OUTPUT

Create:

Success! Article created ×

Create Article

Title

War of the Worlds

Description

The War of the Worlds is a science fiction novel by English author H. G. Wells about killer aliens.

Save

Back to Articles

Show:

Show Article

Title

War of the Worlds

Description

The War of the Worlds is a science fiction novel by English author H. G. Wells about killer aliens.

Back to Articles

PROGRAM – 27

LARAVEL PROJECT

SOURCE CODE:

index.blade.php

```
@extends("master")
@section("title") Articles @endsection
@section("content")
<div class="row mb-4">
<div class="col-xl-6">
@if(Session::has('success'))
<div class="alert alert-success alert-dismissible">
<button type="button" class="close" data-dismiss="alert">× </button>
{{Session::get('success')}}
</div>
@else
<div class="alert alert-danger alert-dismissible">
<button type="button" class="close" data-dismiss="alert">× </button>
{{Session::get('failed')}}
</div>
@endif
</div>
<div class="col-xl-6 text-right">
<a href="{{route('articles.create')}}" class="btn btn-success "> Add New </a> </div>
</div>
<table class="table table-striped">
<thead>
<th> Id </th> <th> Title </th> <th> Description </th> <th> Action </th>
</thead>
<tbody>
@if(count($articles) > 0)
@foreach($articles as $article)
<tr>
<td> {{ $article->id }} </td>
<td> {{ $article->title }} </td>
<td> {{ $article->description }} </td>
<td>
<form action="{{route('articles.destroy', $article->id)}}" method="POST">
@csrf
@method('DELETE')
<a href="{{route('articles.show', $article->id)}}" class="btn btn-sm btn-info"> View </a>

```

OUTPUT

Index:

Add New

Id	Title	Description	Action
3	War of the Worlds	The War of the Worlds is a science fiction novel by English author H. G. Wells about killer aliens!	View Edit Delete
2	Alien	ALIEN is the first of a trilogy by Alan Dean Foster, and a book about killer aliens.	View Edit Delete
1	The Thing	"The Thing," by John W. Campbell Jr. (1938), it is a book about Killer aliens.	View Edit Delete

Update:

Back to Articles

Success! Article updated

Update Article

Title

War of the Worlds

Description

The War of the Worlds is a science fiction novel by English author H. G. Wells about killer aliens!

Update

```

<a href="{{route('articles.edit', $article->id)}}" class="btn btn-sm btn-success"> Edit </a>
<button type="submit" class="btn btn-sm btn-danger"> Delete </button>
</form>
</td>
</tr>
</tbody>
</table>
{!! $articles->links() !!}
@endsection

```

create-article.blade.php

```

@extends("master")

@section("title") Create Article @endsection

@section("content")

<div class="container">

<div class="row">

<div class="col-xl-12 col-lg-12 text-right">

<a href="{{route('articles.index')}}" class="btn btn-danger"> Back to Articles </a> </div>

</div>

<div class="row">

<div class="col-xl-6 col-lg-6 col-md-6 col-sm-12 col-12 m-auto">

<form action="{{route('articles.store')}}" method="POST"> @csrf

<div class="card shadow">

@if(Session::has('success'))

<div class="alert alert-success alert-dismissible">

<button type="button" class="close" data-dismiss="alert">×</button>

{{Session::get('success')}}

</div>

@elseif(Session::has('failed'))

<div class="alert alert-danger alert-dismissible">

<button type="button" class="close" data-dismiss="alert">×</button> {{Session::get('failed')}} </div>

@endif

<div class="card-header">

<h4 class="card-title"> Create Article </h4>

```

OUTPUT

Delete:

Success! Article deleted

×

Add New

Id	Title	Description	Action
2	Alien	ALIEN is the first of a trilogy by Alan Dean Foster, and a book about killer aliens.	ViewEditDelete
1	The Thing	"The Thing," by John W. Campbell Jr. (1938), it is a book about Killer aliens.	ViewEditDelete

```

</div>
<div class="card-body">
<div class="form-group">
<label for="title"> Title </label> <input type="text" name="title" class="form-control" id="title"
value="{{old('title')}}"> {!!$errors->first("title", "<span class='text-danger':message </span>")!!} </div>
<div class="form-group">
<label for="description"> Description </label> <textarea class="form-control" name="description"
id="description">{{old('description')}}</textarea>
{!!$errors->first("description", "<span class='text-danger':message </span>")!!}
</div> </div>
<div class="card-footer">
<button type="submit" class="btn btn-success"> Save</button>
</div> </div> </form> </div> </div> </div>
@endsection

```

show-article.blade.php

```

@extends("master")
@section("title") Show Article @endsection
@section("content")
<div class="container">
<div class="row">
<div class="col-xl-12 col-lg-12 text-right">
<a href="{{route('articles.index')}}" class="btn btn-danger"> Back to Articles </a> </div>
</div>
<div class="row">
<div class="col-xl-6 col-lg-6 col-md-6 col-sm-12 col-12 m-auto">
<div class="card shadow">
<div class="card-header">
<h4 class="card-title"> Show Article </h4>
</div>
<div class="card-body">
<div class="form-group">
<label for="title"> Title </label> <input type="text" readonly name="title" class="form-control" id="title"

```



```

value="@if(!empty($article)) {{ $article->title }} @endif"> </div>
<div class="form-group">
<label for="description"> Description </label>
<textarea class="form-control" readonly name="description" id="description">@if(!empty($article))
{{ $article->description }} @endif</textarea>
</div> </div> </div> </div> </div> </div>
@endsection

```

edit-article.blade.php

```

@extends("master")
@section("title") Update Article @endsection
@section("content")
<div class="container">
<div class="row">
<div class="col-xl-12 col-lg-12 text-right">
<a href="{{ route('articles.index') }}" class="btn btn-danger"> Back to Articles </a> </div>
</div>
<div class="row">
<div class="col-xl-6 col-lg-6 col-md-6 col-sm-12 col-12 m-auto">
<form action="{{ route('articles.update', $article->id) }}" method="POST">
@csrf
@method('PUT')
<div class="card shadow">
@if(Session::has('success'))
<div class="alert alert-success alert-dismissible">
<button type="button" class="close" data-dismiss="alert">× </button>
{{ Session::get('success') }}
</div>
@elseif(Session::has('failed'))
<div class="alert alert-danger alert-dismissible">
<button type="button" class="close" data-dismiss="alert">× </button>
{{ Session::get('failed') }}
</div>

```



```

@endif
<div class="card-header">
<h4 class="card-title"> Update Article </h4>
</div>
<div class="card-body">
<div class="form-group">
<label for="title"> Title </label>
<input type="text" name="title" class="form-control" id="title" value="@if(!empty($article)) {{$article->title}} @endif">
{!!$errors->first("title", "<span class='text-danger':message </span>")!!}
</div>
<div class="form-group">
<label for="description"> Description </label> <textarea class="form-control" name="description"
id="description">@if(!empty($article)){{$article->description}}@endif</textarea>
{!!$errors->first("description", "<span class='text-danger':message </span>") !!}
</div> </div>
<div class="card-footer">
<button type="submit" class="btn btn-success"> Update </button>
</div> </div>
</form> </div> </div> </div>
@endsection

```

master.blade.php

```

<!doctype html>
<html lang="en">
<head>
<title> Laravel 8 CRUD - @yield('title') - Programming Fields</title>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
<link rel="stylesheet" href="https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/css/bootstrap.min.css"
integrity="sha384-ggOyR0iXCbMQv3Xipma34MD+dH/1fQ784/j6cY/iJTQUOhcWr7x9JvoRxT2MZw1T"
crossorigin="anonymous">
</head>

```



```

<body>
<div class="container mt-5"> @yield('content') </div>
<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js" integrity="sha384-
q8i/X+965DzO0rT7abK41JStQIAqVgRVzpbzo5smXKp4YfRvH+8abtTE1Pi6jizo"
crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.14.7/umd/popper.min.js"
integrity="sha384-UO2eT0CpHqdSJQ6hJty5KVphtPhzWj9WO1clHTMGa3JDZwrnQq4sF86dIHNDz0W1"
crossorigin="anonymous"></script>
</body>
</html>

```

Article.php

```

<?php
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Article extends Model {
    use HasFactory; protected
    $fillable = [ "title", "description" ];
}

```

Web.php

```

<?php
use App\Http\Controllers\ArticleController;
use Illuminate\Support\Facades\Route;
/*
|-----
| Web Routes
|-----
| Here is where you can register web routes for your application. These | routes are loaded by the
RouteServiceProvider within a group which | contains the "web" middleware group. Now create something
great! |
*/

```



```
Route::get('/', function () {
    return view('welcome');
});

Route::resource('articles', ArticleController::class);
```

ArticleController.php

```
<?php
namespace App\Http\Controllers;
use App\Models\Article;
use Illuminate\Http\Request;
class ArticleController extends Controller
{
    /** Display a listing of the resource.
     * @return \Illuminate\Http\Response
     */
    public function index() {
        $articles = Article::latest()->paginate(5);
        return view("index", compact('articles'));
    }

    /** Show the form for creating a new resource.
     * @return \Illuminate\Http\Response
     */
    public function create() {
        return view('create-article');
    }

    /** Store a newly created resource in storage.
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(Request $request){
        $request->validate( [ "title" => "required", "description" => "required" ] );
        $article = Article::create($request->all());
        if(!is_null($article)) {
```



```

return back()->with("success", "Success! Article created");
} else {
return back()->with("failed", "Alert! Article not created");
} }

/** Display the specified resource.
 * @param int $id
 * @return \Illuminate\Http\Response */
public function show(Article $article) {
return view('show-article', compact('article'));
}

/** Show the form for editing the specified resource.
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit(Article $article) {
return view('edit-article', compact('article'));
}

public function update(Request $request, Article $article) {
$request->validate([ "title" => "required", "description" => "required"]);
$article = $article->update($request->all()); if(!is_null($article)) {
return back()->with("success", "Success! Article updated");
} else {
return back()->with("failed", "Alert! Article not updated");
} }

public function destroy(Article $article) {
$article = $article->delete();
if(!is_null($article)) {
return back()->with("success", "Success! Article deleted");
} else {
return back()->with("failed", "Alert! Article not deleted");
}
}
}
}

```

