

Experiment no-3

Q To implement GitFlow workflow for a team Project.

```
dyp@dyp-OptiPlex-3000:~/224$ git clone https://github.com/ShrutikaLohar2003/experiment_1.git
Cloning into 'experiment_1'...
remote: Enumerating objects: 35, done.
remote: Counting objects: 100% (35/35), done.
remote: Compressing objects: 100% (31/31), done.
remote: Total 35 (delta 8), reused 8 (delta 1), pack-reused 0 (from 0)
Unpacking objects: 100% (35/35), 10.80 KiB | 553.00 KiB/s, done.
dyp@dyp-OptiPlex-3000:~/224$ git branch
dyp@dyp-OptiPlex-3000:~/224$ cd Experiment_1
bash: cd: Experiment_1: No such file or directory
dyp@dyp-OptiPlex-3000:~/224$ cd experiment_1
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git branch
* main
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git checkout -b developer
Switched to a new branch 'developer'
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git branch
* developer
  main
```

```
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git pull origin developer
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 6 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.83 KiB | 1.83 MiB/s, done.
From https://github.com/ShrutikaLohar2003/experiment_1
   * branch                developer    -> FETCH_HEAD
   774197e..a4a8b64  developer    -> origin/developer
Updating 774197e..a4a8b64
Fast-forward
 pr_2.py | 4 ++--
 1 file changed, 2 insertions(+), 2 deletions(-)
```

```
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git branch feature
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git branch
* developer
  feature
  main
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git checkout -b feature
fatal: A branch named 'feature' already exists.
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git push origin feature
Username for 'https://github.com': ShrutikaLohar2003
Password for 'https://ShrutikaLohar2003@github.com':
Total 0 (delta 0), reused 0 (delta 0)
remote:
remote: Create a pull request for 'feature' on GitHub by visiting:
remote:   https://github.com/ShrutikaLohar2003/experiment_1/pull/new/feature
remote:
To https://github.com/ShrutikaLohar2003/experiment_1.git
 * [new branch]    feature -> feature
dyp@dyp-OptiPlex-3000:~/224/experiment_1$
```


```
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git push origin developer
Username for 'https://github.com': ShrutikaLohar2003
Password for 'https://ShrutikaLohar2003@github.com':
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 327 bytes | 327.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'developer' on GitHub by visiting:
remote:   https://github.com/ShrutikaLohar2003/experiment_1/pull/new/developer
remote:
To https://github.com/ShrutikaLohar2003/experiment_1.git
 * [new branch]      developer -> developer
```

```
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git status
On branch developer
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    pr_2.py

nothing added to commit but untracked files present (use "git add" to track)
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git add.
git: 'add.' is not a git command. See 'git --help'.

The most similar command is
  add
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git add
Nothing specified, nothing added.
Maybe you wanted to say 'git add .'
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git add .
dyp@dyp-OptiPlex-3000:~/224/experiment_1$ git commit -m "commit"
[developer 774197e] commit
 1 file changed, 3 insertions(+)
 create mode 100644 pr_2.py
```

Create Pull request

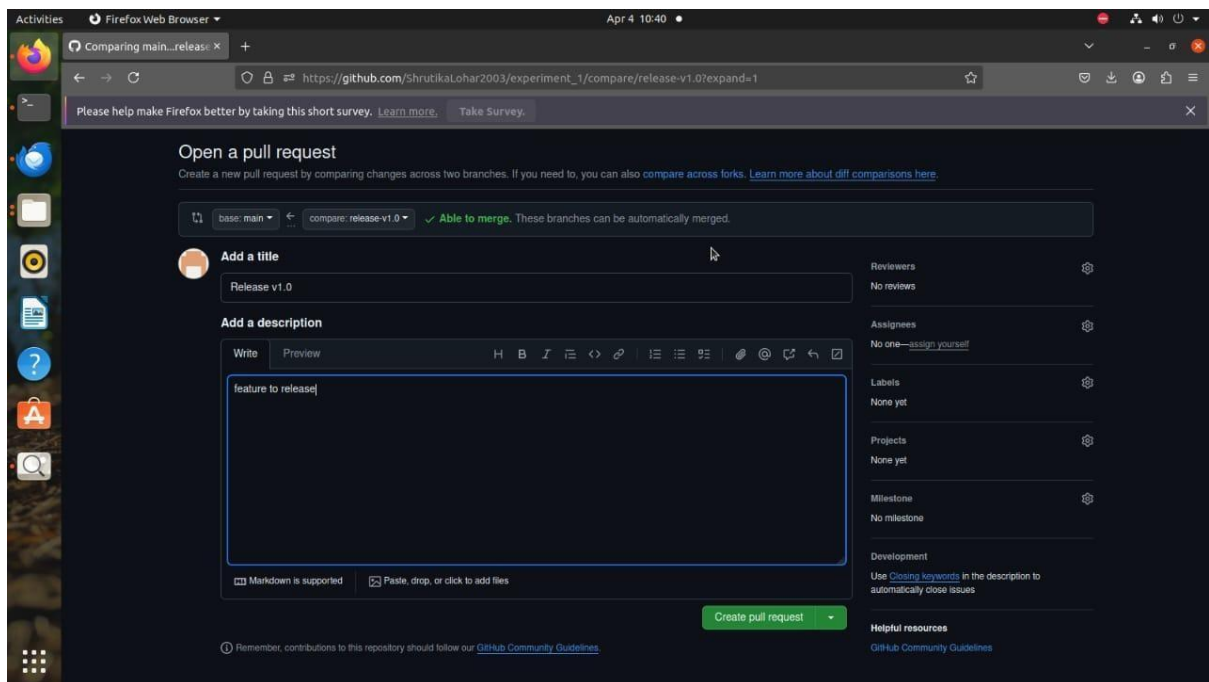

Commit Changes-

