

Test Case Report

Offer Name: test recent
Tested URL: <https://www.savesspottopmarket.com/kohlertrashcan/?affid=1&state=AL>
Test Date: 2026-05-16 20:22:31
Tested By: Automated Order Flow Runner
Overall Result: **PASS**
Report ID: ofr_20260516_145026_7c0bbc7c

Credentials

Browser: chrome
Execution Type: Order Flow Automation
Browser Mode: Headed
Total Rows: 1

Product Map

Primary Offer: test recent
Landing URL: <https://www.savesspottopmarket.com/kohlertrashcan/?affid=1&state=AL>
Report Artifact: HTML

Client Requirements

Checkout should load correctly, card information should be entered successfully, and each row should record the final order outcome.
Required output fields retained in this report: Order ID, Result, Status, Card Type, Card Last 4, and Notes.

Desktop and Mobile

This report captures automated checkout execution results. Mobile-specific layout validation is not part of this order-flow run unless separately configured.

Usability

Checkout readiness, popup interruption handling, and form completion behavior were evaluated during the automated run.

Tested Rows

Row	Email	Order ID	Result	Status	Card Type	Card Last 4	Notes
1	pritam.bhar+000020000@codeclouds.com	7079155	PASS	PLACED	VISA	4442	Order placed successfully.

Issues Found

No issues found.

Execution Details

Order no. 1

Email: pritam.bhar+000020000@codeclouds.com

Order ID: 7079155

Result: **PASS**

Status: PLACED

Browser: chrome


Card Type: VISA

Card Last 4: 4442

Expectation: prepaid

Notes: Order placed successfully.

Screenshot:

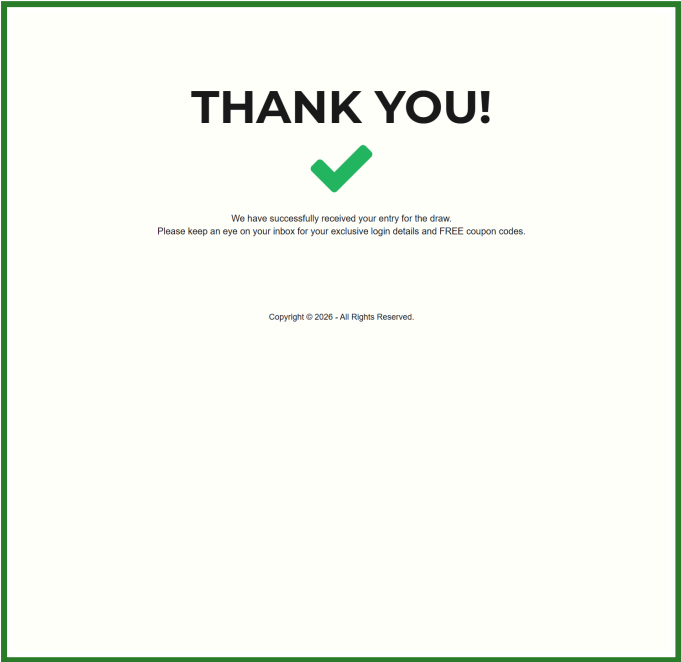

Security and Performance

Summary: Total Rows: 1 | Placed Orders: 1 | Failed Orders: 0

CHECK POINT

Security report mode

STATUS

MANUAL

Mode=balanced, budget=180s, selected=6, skipped=3.

CHECK POINT

1. HTTP2 Report Link

STATUS

MANUAL

REPORT LINK

[KeyCDN HTTP2 Test](#)

SCREEN SHOT

The screenshot shows the KeyCDN website's 'Tools' section. The 'HTTP/2 Test' tool is active, displaying a URL input field with 'https://www.savesspottopmarket.com/kohlertrashcan/?affid=1&state=AL' and a 'Test' button. Below the input, a green banner indicates 'ALPN extension is supported.' and another green banner states 'KeyCDN uses cookies to make its website easier to use. Learn more about cookies.' The 'HTTP/2 Test FAQ' section is visible, explaining the benefits of HTTP/2 and providing a list of browsers that support it. The footer includes the KeyCDN logo, copyright information, and links to Product, Company, and Support pages.

Tools
Troubleshoot website, network, and CDN issues for fast resolutions.

Web
Website Speed Test
Performance Test
HTTP Header Checker
HTTP/2 Test
Brotli Test

Network
Security
Other

HTTP/2 Test
VERIFY HTTP/2 SUPPORT

URL
 Test

www.savesspottopmarket.com

HTTP/2
KeyCDN uses cookies to make its website easier to use. Learn more about cookies. X

ALPN extension is supported.

HTTP/2 Test FAQ

What is HTTP/2?
HTTP/2 is the first major HTTP protocol update since 1997 when HTTP/1.1 was first published by the IETF. The new HTTP protocol is needed to keep up with the exponential growth of the web. The successor of HTTP/1.1 brings significant improvement in efficiency, speed and security and is supported by most modern web browsers. A list of [browsers that support HTTP/2](#) can be found on caniuse.com.

- HTTP/2 is binary, instead of textual.
- It is fully multiplexed, sending multiple requests in parallel over a single TCP connection.
- It uses header compression HPACK to reduce overhead.
- It allows servers to "push" responses proactively into client caches instead of waiting for a new request for each resource
- It uses the new **ALPN** extension which allows for faster-encrypted connections since the application protocol is determined during the initial connection.
- It reduces additional round trip times (RTT), making your website load faster without any optimization.
- Domain sharding and asset concatenation is no longer needed with HTTP/2.

HTTP/2 introduces other improvements, more details: [HTTP/2 RFC7540](#)

This test can check HTTP and HTTPS but most browsers only support HTTP/2 for HTTPS, which means you must migrate to HTTPS if you want to take advantage of the performance benefits.

Does this test also verify SPDY?
Not directly, but it tests which TLS extension is supported to negotiate the protocols. The tested TLS extensions are either **NPN** or **ALPN**. Next Protocol Negotiation (NPN) appeared as part of the SPDY protocol but it has been deprecated. Application Layer Protocol Negotiation (ALPN) is the successor of NPN and is approved by the IETF ([RFC7301](#)). However, NPN advertises the supported protocols from the server to the client and this test will show the advertised protocols if HTTP/2 is not supported. The protocol advertising has been reversed in ALPN (client to server). The first phase of this HTTP/2 check runs the ALPN test with only H2 in the protocol list.

How to test HTTP/2 via command line?
Get the latest [curl](#) release and use this command:
`curl ->http2`

Get started for free
Try KeyCDN with a free 14 day trial, no credit card required.

Get started **Pricing**

keycdn
© 2026 prony LLC
Made in Switzerland

PRODUCT
Features
Network
Pricing
API

COMPANY
About
Blog
Contact
Referrals
Careers

SUPPORT
Knowledge Base
Network Status
Open Source
FAQ
Tools

HTTP2 test executed and results captured on screen.

CHECK POINT

2. HTTPS Redirection Report Link

SCREEN SHOT

HTTPS redirection trace captured.

CHECK POINT

5. Robots.txt Report Link

STATUS

MANUAL

REPORT LINK

[robots.txt](#)

SCREEN SHOT

```
# As a condition of accessing this website, you agree to abide by the following
# content signals:
#
# (a) If a Content-Signal = yes, you may collect content for the corresponding
# use.
# (b) If a Content-Signal = no, you may not collect content for the
# corresponding use.
# (c) If the website operator does not include a Content-Signal for a
# corresponding use, the website operator neither grants nor revokes
# permission via Content-Signal with respect to the corresponding use.
#
# The content signals and their meanings are:
#
# search: building a search index and providing search results (e.g., returning
# hyperlinks and short excerpts from your website's contents). Search does not
# include providing AI-generated search summaries.
#
# ai-input: ingesting content into one or more AI models (e.g., retrieval
# augmented generation, grounding, or other real-time taking of content for
# generative AI search answers).
#
# ai-train: training or fine-tuning AI models.
#
# ANY RESTRICTIONS EXPRESSED VIA CONTENT SIGNALS ARE EXPRESS RESERVATIONS OF
# RIGHTS UNDER ARTICLE 17 OF THE EUROPEAN UNION DIRECTIVE 2019/790 ON COPYRIGHT
# AND RELATED RIGHTS IN THE DIGITAL SINGLE MARKET.
#
# BEGIN Cloudflare Managed content
User-agent: *
Content-Signal: search=yes,ai-train=no
Allow: /
User-agent: Amazonbot
Disallow: /
User-agent: Applebot-Extended
Disallow: /
User-agent: Bypassider
Disallow: /
User-agent: CCBot
Disallow: /
User-agent: ClaudeBot
Disallow: /
User-agent: CloudflareBrowserRenderingCrawler
Disallow: /
User-agent: Google-Extended
Disallow: /
User-agent: GPTBot
Disallow: /
User-agent: Meta-externalagent
Disallow: /
# END Cloudflare Managed Content
User-agent: *
Disallow: /
User-agent: Googlebot-Image
Disallow: /*.gif
User-agent: Googlebot-Image
Disallow: /*.jpg
User-agent: Googlebot-Image
Disallow: /*.png
User-agent: Googlebot-Image
Disallow: /*.svg
User-agent: Googlebot-Image
Disallow: /*.tiff
User-agent: Googlebot-Image
Disallow: /*.webp
```

robots.txt snippet: # As a condition of accessing this website, you agree to abide by the following # content signals: # (a) If a Content-Signal = yes, you may collect content for the corresponding # use. # (b) I

CHECK POINT

4. Safe Browsing Site Status Report Link


STATUS

MANUAL

REPORT LINK

[Google Transparency Report](#)

SCREEN SHOT

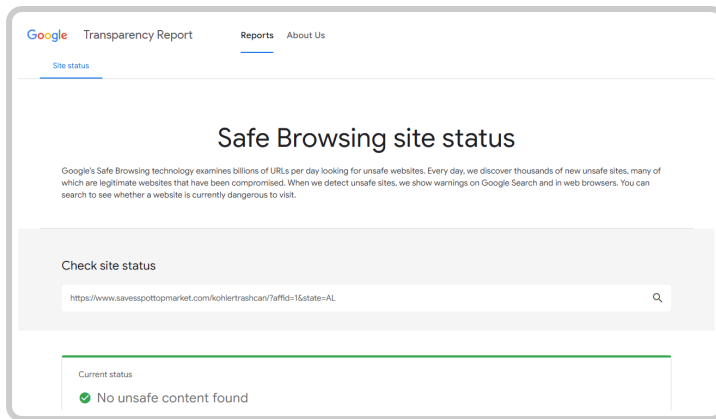

Safe Browsing lookup queued on Google Transparency Report.

CHECK POINT

6. Domain Expiry check Report Link


STATUS

FAIL

REPORT LINK

[Digicert Help](#)

SCREEN SHOT

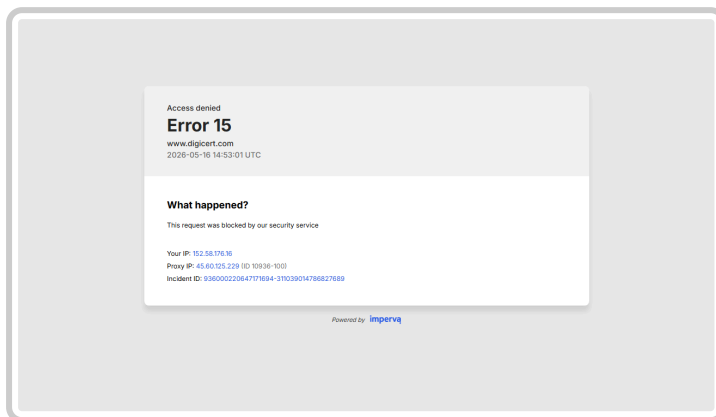

Security task failed: 6. Domain Expiry check Report Link timed out while collecting the report screenshot.

CHECK POINT

10. HTML Optimisation Report Link

STATUS

MANUAL

REPORT LINK

[W3C Validator](#)

SCREEN SHOT

Nu Html Checker

This tool is an ongoing experiment in better HTML checking, and its behavior remains subject to change.

Showing results for <https://www.savesspottopmarket.com/kohlertrashcan/?affid=1&state=AL> (checked with vnu 26.5.16)

Checker Input

Show ☐ source ☐ outline ☐ image report ☐ errors & warnings only

Check by address:

<https://www.savesspottopmarket.com/kohlertrashcan/?affid=1&state=AL>

Use the Message Filtering button below to hide/show particular messages, and to see total counts of errors and warnings.

1. **Error** Start tag seen without seeing a doctype first. Expected `<!DOCTYPE html>`.

From line 1, column 1, to line 1, column 16

```
<html lang="en"> +><div>
```

2. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 4, column 5, to line 4, column 28

```
<meta charset="utf-8" /> <
```

3. **Error** A document must not include more than one `meta` element with a `charset` attribute.

From line 6, column 5, to line 6, column 27

```
> <meta charset="utf-8"/><title>
```

4. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 6, column 5, to line 6, column 27

```
> <meta charset="utf-8"/><html>
```

5. **Error** Element `title` not allowed as child of element `head` in this context. (Suppressing further errors from this subtree.)

From line 6, column 1, to line 6, column 7

```
<title></html><title>
```

Contexts in which element `title` may be used:

In a `head` element containing no other `title` elements.

Content model for element `title`:

If the document is [an HTML document](#) or if the information is available from a higher-level protocol. Zero or more elements of [metadatat content](#), of which no more than one is a `title` element and no more than one is a `base` element.

Otherwise: One or more elements of [metadatat content](#), of which exactly one is a `title` element and no more than one is a `base` element.

6. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 10, column 1, to line 10, column 53

```
</title><meta name="description" content="Kohler Trashcan" /></html>
```

7. **Error** A `meta` element with an `http-equiv` attribute whose value is `X-UA-Compatible` must have a `content` attribute with the value `IE=edge`.

From line 13, column 1, to line 13, column 64

```
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1" /><meta
```

8. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 13, column 1, to line 13, column 64

```
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1" /><meta
```

9. **Error** A document must not include both a `meta` element with an `http-equiv` attribute whose value is `content-type`, and a `meta` element with a `charset` attribute.

From line 14, column 1, to line 14, column 68

```
<meta http-equiv="content-type" content="text/html; charset=utf-8" /><meta
```

10. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 14, column 1, to line 14, column 68

```
<meta http-equiv="content-type" content="text/html; charset=utf-8" /><meta
```

11. **Error** Using the `meta` element to specify the document-wide default language is obsolete. Consider specifying the language on the root element instead.

From line 15, column 1, to line 15, column 54

```
<html lang="en" /><meta http-equiv="content-language" content="en-us" /><div>
```

12. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 15, column 1, to line 15, column 54

```
<html lang="en" /><meta http-equiv="content-language" content="en-us" /><div>
```

13. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 17, column 1, to line 17, column 57

```
<!-- /><meta name="apple-mobile-web-app-capable" content="yes" /><meta
```

14. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 18, column 1, to line 18, column 68

```
<!-- /><meta name="apple-mobile-web-app-status-bar-style" content="black" /><meta
```

15. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 19, column 1, to line 19, column 46

```
<!-- /><meta name="mobile-friendly" content="true" /><meta
```

16. **Warning** Consider avoiding viewport values that prevent users from resizing documents.

From line 20, column 1, to line 20, column 105

```
<!-- /><meta name="viewport" content="width=device-width, initial-scale=1.0, maximum-scale=1.0, user-scalable=no" /><link
```

17. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 20, column 1, to line 20, column 105

```
<!-- /><meta name="viewport" content="width=device-width, initial-scale=1.0, maximum-scale=1.0, user-scalable=no" /><link
```

18. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 22, column 1, to line 22, column 105

```
<img src="" /><link rel="stylesheet" type="text/css" href="/kohlertrashcan/app/desktop/css/app_new.css?v=177893211" /><div>
```

19. **Error** A document must not include more than one `meta` element with its `name` attribute set to the value `description`.

From line 24, column 1, to line 24, column 36

```
<!-- /><meta name="description" content="" /><div>
```

20. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 45, column 9, to line 45, column 96

```
<!-- /><link rel="stylesheet" type="text/css" href="/kohlertrashcan/app/desktop/css/all.css" />
```

21. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 46, column 9, to line 46, column 100

```
<!-- /><link rel="stylesheet" type="text/css" href="/kohlertrashcan/app/desktop/css/animate.css" />
```

22. **Info** Trailing slash on void elements has no effect and interacts badly with unquoted attribute values.

From line 47, column 9, to line 47, column 99

```
<!-- /><link rel="stylesheet" type="text/css" href="/kohlertrashcan/app/desktop/css/custom.css" />
```

23. **Error** Element `style` not allowed as child of element `page-builder-block` in this context. (Suppressing further errors from this subtree.)

From line 57, column 9, to line 57, column 15

```
<!-- /><style>
```

Contexts in which element `style` may be used:

Where [metadatat content](#) is expected.

In a [script](#) element that is a child of a `head` element.

24. **Error** CSS: Parse Error.

From line 174, column 15, to line 175, column 8

```
<!-- /><style>
```

25. **Error** Stray end tag `head`.

From line 179, column 1, to line 179, column 7

```
</div></div></div></div>
```

26. **Error** Start tag `body` seen but an element of the same type was already open.

From line 181, column 1, to line 181, column 6

```
</div></div></div></div>
```

27. **Error** Element `img` is missing one or more of the following attributes: `src`, `srcset`.

From line 236, column 29, to line 236, column 179

```

```

Attributes for element `img`

Global attributes

`alt` — Replacement text for use when images are not available

`src` — Address of the resource

`srcset` — Images to use in different situations, e.g. high-resolution displays, small monitors, etc.

`sizes` — Image sizes for different page layouts

`crossorigin` — How the element handles cross-origin requests

#####

imagemap — Name of **imagemap** to use

imagemap — Whether the image is a server-side image map

controls — Show user agent controls

width — Horizontal dimension

height — Vertical dimension

referrerpolicy — [Referrer policy](#) for **fetches** initiated by the element

decoding — Decoding hint to use when processing this image for presentation

loading — Used when determining loading deferral

fetchpriority — Sets the **priority** for **fetches** initiated by the element

28. **Info** Trailing slash on void elements **has no effect** and **interacts badly with unquoted attribute values**.

From line 236, column 29, to line 236, column 179

```

```

29. **Error** Bad value 'application/x-www-form-urlencoded;charset=utf-8' for attribute 'enctype' on element 'form'.

From line 323, column 41, to line 325, column 117

```
<form method="post" action="ajax.php/method_new_prospect" name="prospect_form">
  <input checked="" type="checkbox"
  enctype="application/x-www-form-urlencoded;charset=utf-8"
  class="input">
```

30. **Error** Duplicate attribute 'value'.

At line 351, column 96

```
-control" value="" data-validate
```

31. **Error** An **img** element must have an **alt** attribute, except under certain conditions. For details, consult [guidance on providing text alternatives for images](#).

From line 460, column 45, to line 460, column 132

```

```

32. **Error** Element **img** is missing one or more of the following attributes: **src**, **srcset**.

From line 485, column 17, to line 486, column 98

```

```

Attributes for element **img**:

Global attributes

alt — Replacement text for use when images are not available

src — Address of the resource

srcset — Images to use in different situations, e.g. high-resolution displays, small monitors, etc.

sizes — Image sizes for different page layouts

crossorigin — How the element handles crossorigin requests

imagemap — Name of **imagemap** to use

imagemap — Whether the image is a server-side image map

controls — Show user agent controls

width — Horizontal dimension

height — Vertical dimension

referrerpolicy — [Referrer policy](#) for **fetches** initiated by the element

decoding — Decoding hint to use when processing this image for presentation

loading — Used when determining loading deferral

fetchpriority — Sets the **priority** for **fetches** initiated by the element

33. **Info** Trailing slash on void elements **has no effect** and **interacts badly with unquoted attribute values**.

From line 485, column 17, to line 486, column 98

```

```

34. **Error** Attribute **href** not allowed on element **a** at this point.

From line 509, column 13, to line 509, column 109

```
<a href="">JavaScript:void(0)</a> onclick="javascript:openNewWindow('page=terms.php', 'modal')</a>Terms"
```

Attributes for element **a**:

Global attributes

href — Address of the **hyperlink**

target — Navigable for **hyperlink navigation**

download — Whether to download the resource instead of navigating to it, and its filename if so

ping — URLs to ping

rel — Relationship between the location in the document containing the **hyperlink** and the destination resource

hreflang — Language of the linked resource

type — Hint for the type of the referenced resource

referrerpolicy — [Referrer policy](#) for **fetches** initiated by the element

35. **Error** Attribute **href** not allowed on element **a** at this point.

From line 511, column 13, to line 511, column 111

```
<a href="">JavaScript:void(0)</a> onclick="javascript:openNewWindow('page=privacy.php', 'modal')</a>Privacy"
```

Attributes for element **a**:

Global attributes

href — Address of the **hyperlink**

target — Navigable for **hyperlink navigation**

download — Whether to download the resource instead of navigating to it, and its filename if so

ping — URLs to ping

rel — Relationship between the location in the document containing the **hyperlink** and the destination resource

hreflang — Language of the linked resource

type — Hint for the type of the referenced resource

referrerpolicy — [Referrer policy](#) for **fetches** initiated by the element

36. **Error** Attribute **href** not allowed on element **a** at this point.

From line 513, column 13, to line 513, column 111

```
<a href="">JavaScript:void(0)</a> onclick="javascript:openNewWindow('page=contact.php', 'modal')</a>Contact"
```

Attributes for element **a**:

Global attributes

href — Address of the **hyperlink**

target — Navigable for **hyperlink navigation**

download — Whether to download the resource instead of navigating to it, and its filename if so

ping — URLs to ping

rel — Relationship between the location in the document containing the **hyperlink** and the destination resource

hreflang — Language of the linked resource

type — Hint for the type of the referenced resource

referrerpolicy — [Referrer policy](#) for **fetches** initiated by the element

37. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 520, column 9, to line 520, column 39

```
<script type="text/javascript">Ajax_p
```

38. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 520, column 2903, to line 520, column 2933

```
</script><script type="text/javascript">app_1a
```

39. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 520, column 4022, to line 520, column 4052

```
</script><script type="text/javascript">var cb
```

40. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 523, column 1, to line 523, column 78

```
</script><script src="/kohlertraashoon/assets/js/promise.min.js" type="text/javascript"></script>
```

41. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 524, column 1, to line 524, column 77

```
</script><script src="/kohlertraashoon/assets/js/jquery.min.js" type="text/javascript"></script>
```

42. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 525, column 1, to line 525, column 82

```
</script><script src="/kohlertraashoon/assets/js/jquery.nak.min.js" type="text/javascript"></script>
```

43. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 526, column 1, to line 526, column 76

```
</script><script src="/kohlertraashoon/assets/js/validator.js" type="text/javascript"></script>
```

44. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 527, column 1, to line 527, column 75

```
</script><script src="/kohlertraashoon/assets/js/codebase.js" type="text/javascript"></script>
```

45. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 528, column 1, to line 528, column 79

```
</script><script src="/kohlertraashoon/assets/js/form_handler.js" type="text/javascript"></script>
```

46. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 529, column 1, to line 529, column 70

```
</script><script src="/kohlertraashoon/assets/js/app.js" type="text/javascript"></script>
```

47. **Warning** The **type** attribute is unnecessary for JavaScript resources.

From line 530, column 1, to line 530, column 72

</script><script src="/shilctrashoon/assets/js/output.js" type="text/javascript"></script>

48.

Warning

The type attribute is unnecessary for JavaScript resources.

From line 531, column 1, to line 531, column 99

</script><script src="/shilctrashoon/extensions/CDUtilityPackage/js/db-util-pkg.js" type="text/javascript"></script>

49.

Warning

The type attribute is unnecessary for JavaScript resources.

From line 532, column 1, to line 532, column 108

</script><script src="/shilctrashoon/extensions/InputMask/js/jquery.inputmask.bundle.min.js" type="text/javascript"></script>

50.

Warning

The type attribute is unnecessary for JavaScript resources.

From line 533, column 1, to line 533, column 91

</script><script src="/shilctrashoon/extensions/InputMask/js/input-mask.js" type="text/javascript"></script>

51.

Warning

The type attribute is unnecessary for JavaScript resources.

From line 533, column 214, to line 533, column 244

script type="text/javascript">

52.

Warning

Consider using the h1 element as a top-level heading only — or else use the headingOffset attribute (otherwise, all h1 elements are treated as top-level headings by many screen readers and other tools).

From line 247, column 33, to line 247, column 47

h1 id="vcs3">

53.

Error

The heading h4 (with computed level 4) follows the heading h1 (with computed level 1), skipping 2 heading levels.

From line 188, column 17, to line 188, column 31

h4 id="lrv3">specia

54.

Error

The heading h3 (with computed level 3) follows the heading h1 (with computed level 1), skipping 1 heading level.

From line 255, column 33, to line 255, column 86

h3 class="orangeText" style="color: red !important">open

Document checking completed.

Used the HTML parser: Externally specified character encoding was UTF-8.

Total execution time 439 milliseconds.

W3C HTML validator report queued.