Query

```sql
-- Determine the top 3 most ordered pizza types based on revenue for each pizza category.
select *  from
(select category, pizza_type_id,revenue,DENSE_RANK() OVER(
               PARTITION BY category
               ORDER BY revenue DESC
          ) AS rnk
from
(select pizzas.pizza_type_id,category,round(sum(order_details.quantity*pizzas.price),2) as revenue
from order_details
join pizzas on order_details.pizza_id=pizzas.pizza_id
join pizza_types on pizza_types.pizza_type_id=pizzas.pizza_type_id
group by pizza_type_id,category) as P) as ranked
where rnk<=3;
```

Result Grid | Filter Rows:

category	pizza_type_id	revenue	rnk
Chicken	thai_ckn	43434.25	1
Chicken	bbq_ckn	42768	2
Chicken	cali_ckn	41409.5	3
Classic	classic_dlx	38180.5	1
Classic	hawaiian	32273.25	2
Classic	pepperoni	30161.75	3
Supreme	spicy_ital	34831.25	1
Supreme	ital_supr	33476.75	2
Supreme	sicilian	30940.5	3
Veggie	four_cheese	32265.7	1
Veggie	mexicana	26780.75	2
Veggie	five_cheese	26066.5	3

Query


```sql
-- Calculate the percentage contribution of each pizza type to total revenue.
select category,
round(sum(price*quantity)/(select sum(quantity*price) FROM pizzas p
         JOIN order_details o
             ON o.pizza_id = p.pizza_id)*100,2)as total_sales_percent
from pizza_types pt
join pizzas p on p.pizza_type_id=pt.pizza_type_id
join order_details o on o.pizza_id=p.pizza_id
group by category;
```

Result Grid | Filter Rows:

category	total_sales_percent
Classic	26.91
Veggie	23.68
Supreme	25.46
Chicken	23.96

Query

```sql
--     Determine the top 3 most ordered pizza types based on revenue.
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

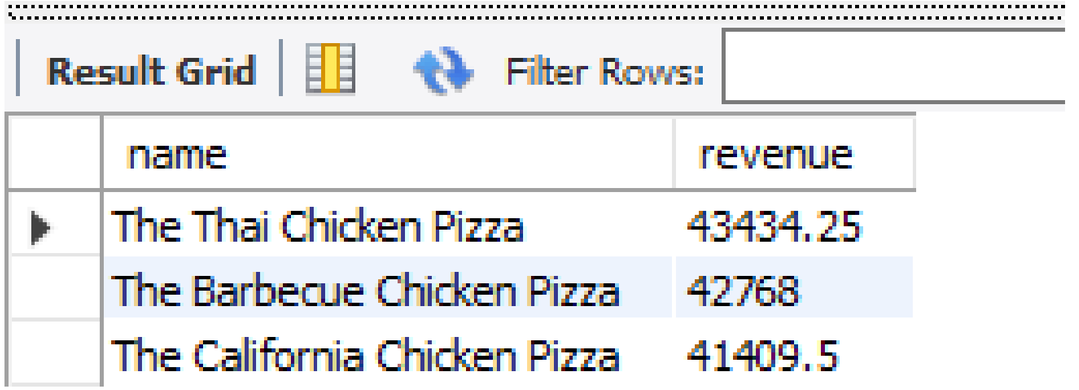

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

Query

```sql
-- Group the orders by date and
-- calculate the average number of pizzas ordered per day.
SELECT
    ROUND(AVG(quantity), 0)
FROM
    (SELECT
        orders.dates, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.dates) AS order_quantity;
```

