Name: Sahil Rawat

Course: BCA 5A

Roll No: 51

Univ No: 1921152

Solub

2) Activity main

< Text View

android: layout_width = "wrop-content"

android: layout-height = "wrop-content"

android: text = "Hello World!"

android: text Size = "2456"

android: text Style = "bold"


android: text Style = "bold"

app: layout-constraint left-toleft Of = "parent"

app: layout-constownt Right-to Right of = "parent" app: layout - constraint Top-toTopOf = "parent"/> / androidx. constaint layout. widget. (onstraint Layout) Main Activity package com example act-activity cycle; import androidsc.app compat.appApplompat Activity; import android-os. Bundle; import android util log; public class Main Activity extends Applombat Activity public static final Storing status = Main Activity. class.get cononical Name (); @Override protected void on (seate (Bundle saved Instance State) 1 super · on l'aeate (saved Instance State); set content View (R. Layout-activity - main); log.i (status, "In method on (seate"); 3

1 solut

```
@ Override
     protected void on Start () 2 super. on Start();
     Log. i (status, "In method start");
 ( Override
    protected void on Resume () ( super on Resume ();
     log-i (status, "In method Resume");
 @ Override
   protected vord on Pause () { super.onPause (),
   Log. i [status, "In method Pause");
@ Override
 protected void on Stop () (super-on Stop ();
   log. i (status, "In method Stop");
```

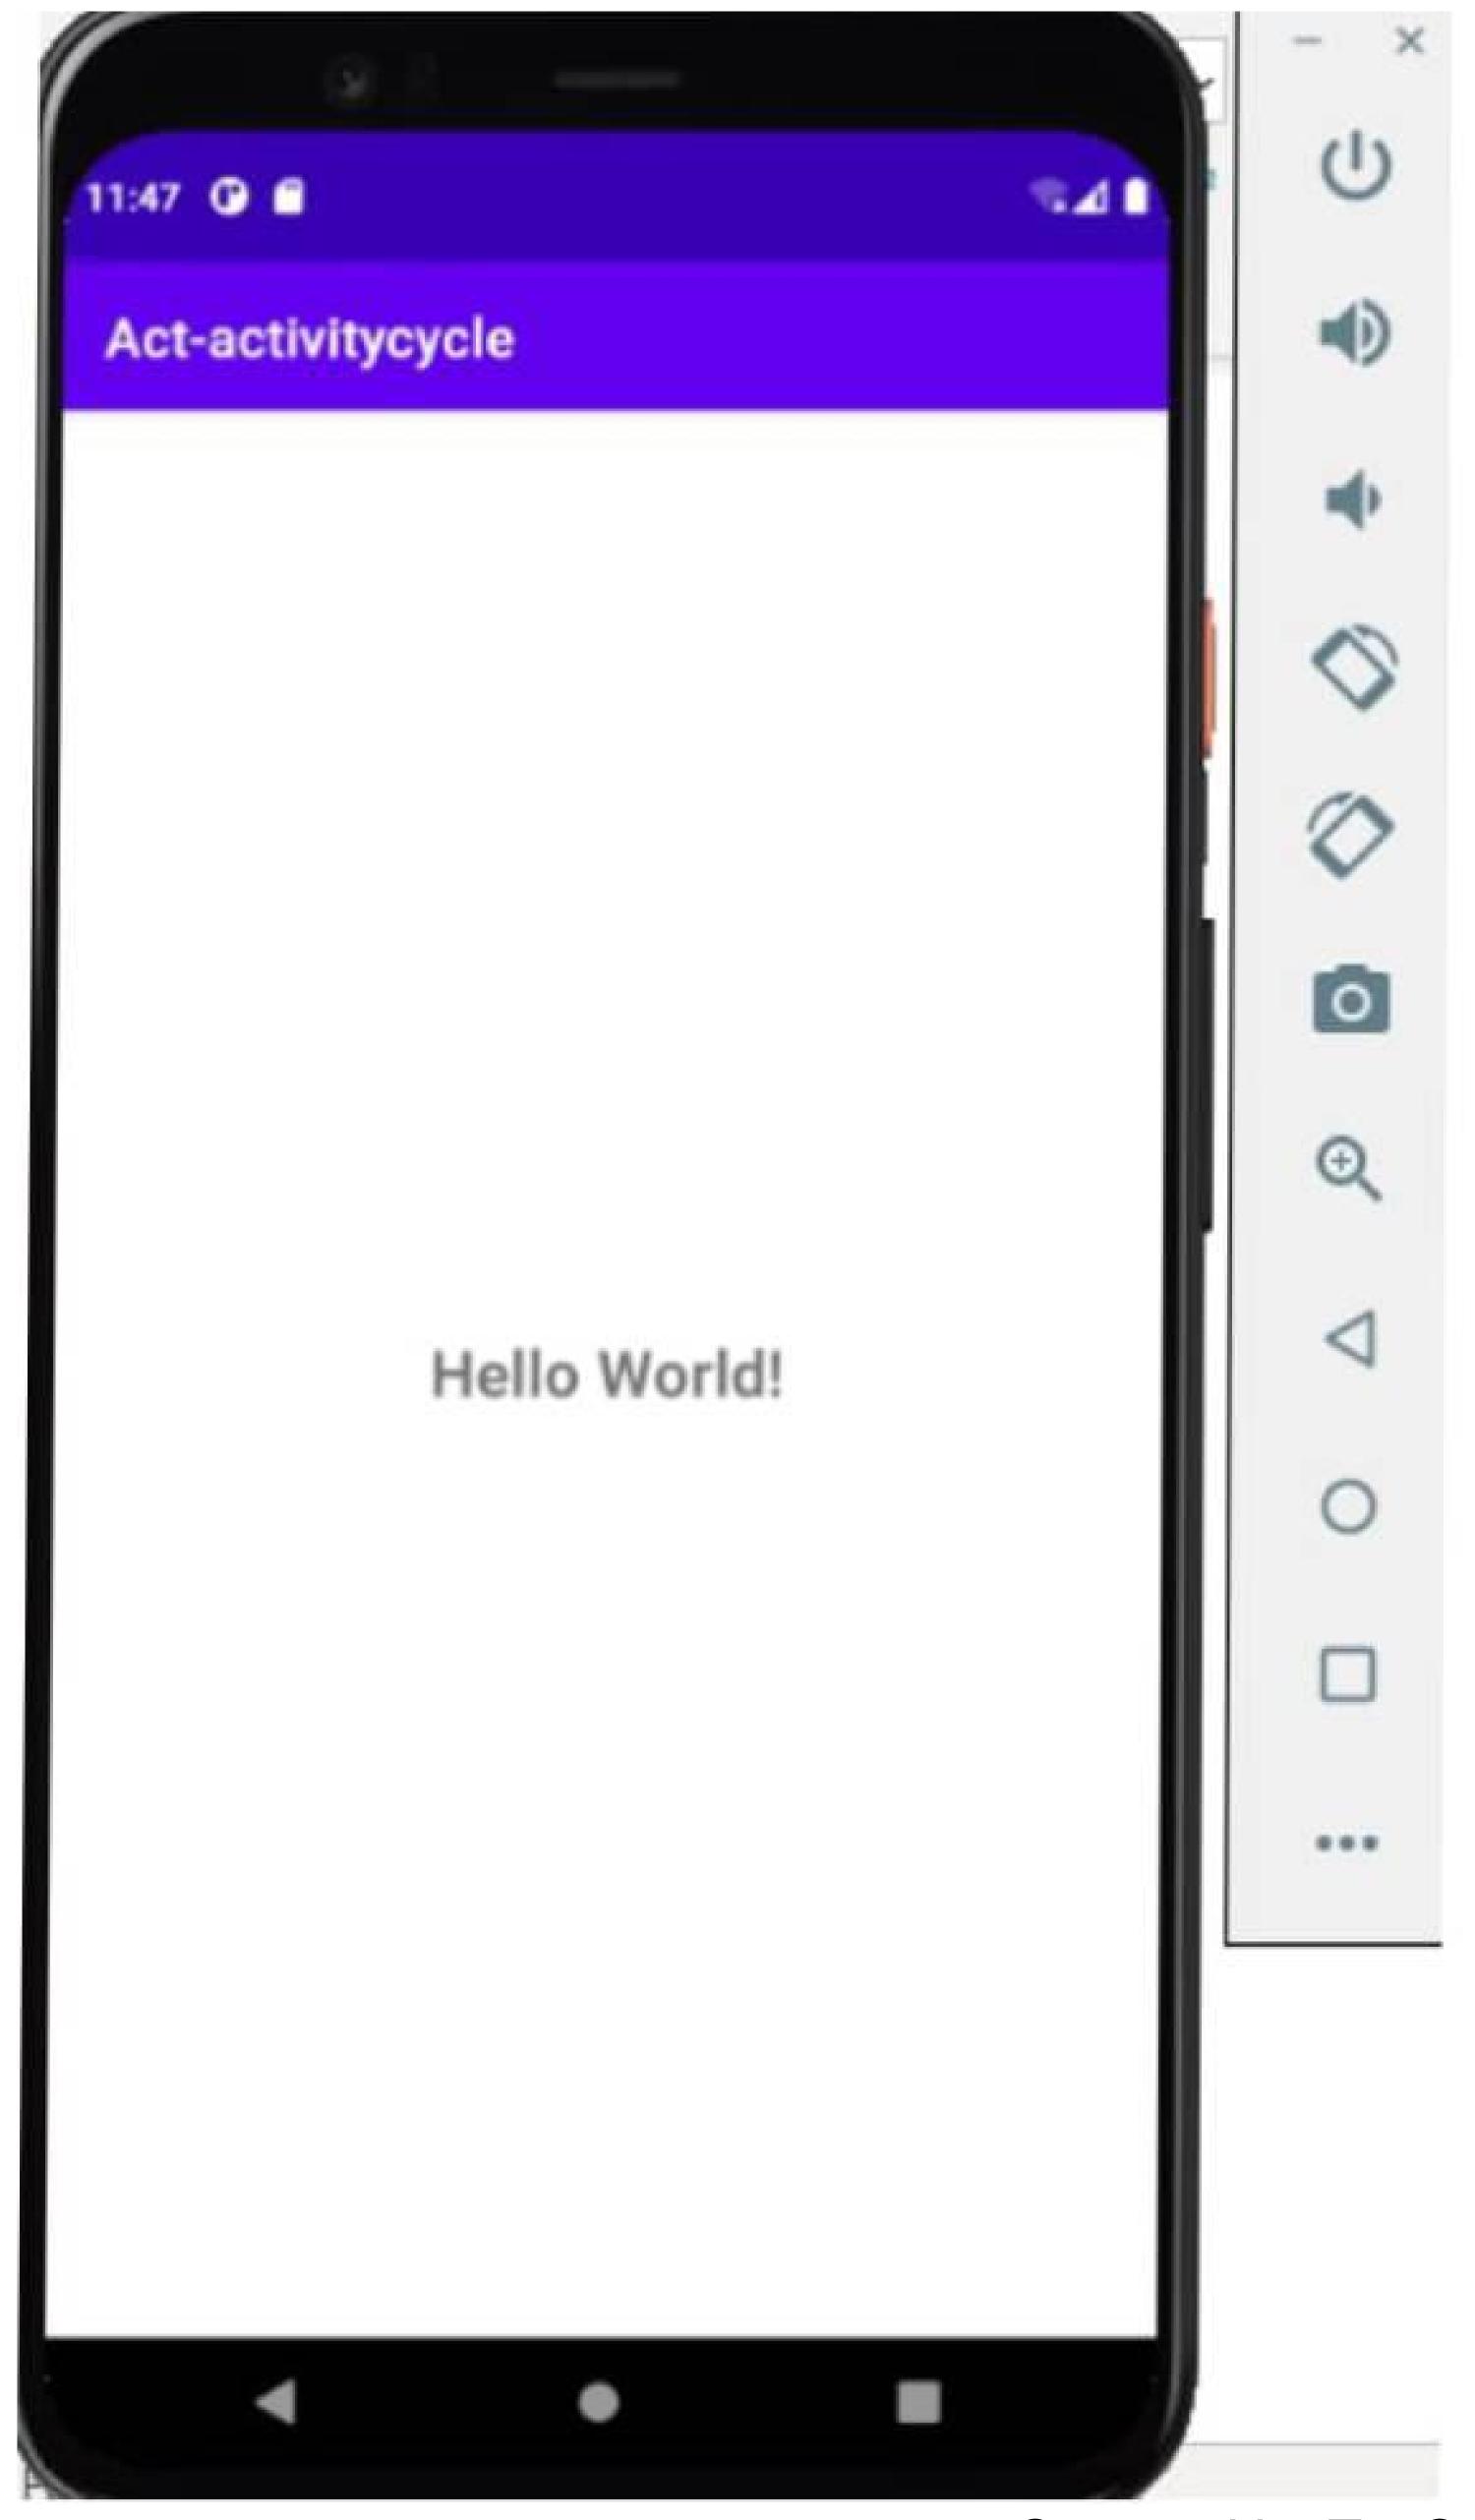

Scanned by TapScanner