

EX. NO : 03

CLASSES AND OBJECTS

AIM

To understand the concept of classes and objects in Kotlin, including creating classes, defining properties and methods, and using objects to access class members in an Android application.

PROCEDURE

1. Open **Android Studio**.
2. Open **activity_main.xml** and ensure a **TextView** and **Button** are present.
3. Create a new Kotlin class named **Student**.
4. Define properties and a method inside the class.
5. Open **MainActivity.kt**.
6. Create an object of the class inside **onCreate()**.
7. Call the class method and display output using **TextView**.
8. Run the application and click the button to view output.

CODE

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical">
    <Button
        android:id="@+id/btnShow"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Show Student Details" />
```

```
<TextView
    android:id="@+id/txtOutput"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Output will appear here"
    android:textSize="18sp" />
</LinearLayout>
```

Student.kt

```
package com.example.kotlinbasics

class Student(
    val name: String,
    val rollNo: Int
) {
    fun displayDetails(): String {
        return "Name: $name\nRoll No: $rollNo"
    }
}
```

MainActivity.kt


```
package com.example.kotlinbasics

import android.os.Bundle
import android.widget.Button
import android.widget.TextView
import androidx.appcompat.app.AppCompatActivity

class MainActivity : AppCompatActivity() {
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContentView(R.layout.activity_main)
        val btn = findViewById<Button>(R.id.btnShow)
        val txt = findViewById<TextView>(R.id.txtOutput)
        btn.setOnClickListener {
            val student = Student("Priyanga", 101)
            txt.text = student.displayDetails()
        }
    }
}
```

```
}  
  
}  
  
}
```

OUTPUT

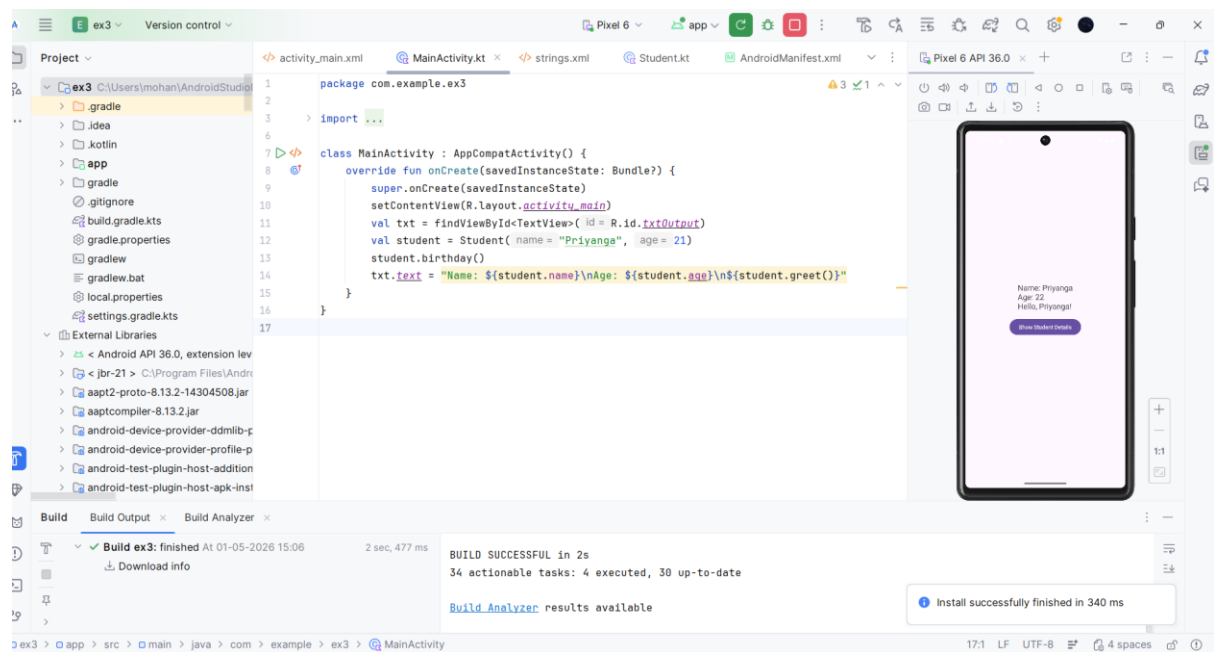

RESULT

Thus, classes and objects in Kotlin were successfully implemented, and class properties and methods were accessed using an object, with output displayed in an Android application.