A multi-track RNA-seq browser for visualization of Arabidopsis thaliana transcription patterns from different growth states and conditions.

Priyank K. Purohit, Nicholas Provart. University of Toronto, CSB498H1Y, 2015-2016.

Table of Contents

1.	Network analysis of local vs. iPlant BAM files.	October 16, 2015
2.	Network analysis of UCSC BAM files.	October 21, 2015
3.	To-do list	October 23, 2015
4.	Update BAM Locator with the new vision links	October 25, 2015
5.	Colour the BAM Locator, and update it with the Amazon links	October 29, 2015
6.	Get mpileups for default gene (AT1G01010)	November 1, 2015
7.	Early α of multi track viewer	November 5, 2015
8.	Clean up BAM Locator CGI + Add horizontal line	November 12, 2015
9.	Getting number of mapped reads from BAM files	November 12, 2015
10.	Front-end of the multi track RNA-Seq	November 25, 2015
11.	Getting mpileups for four more genes	November 26, 2015
12.	Getting mapped reads counts for all genes of interest	November 28, 2015
13.	Comparing results of both methods' mapped reads counts	November 28, 2015
14.	UI Updates, Sorting table with hidden value	January 19, 2016
15.	UI Information Update	<u>January 24, 2016</u>
16.	Data return consistency on AWS	February 1, 2016
17.	ISON Object design for returning info from AWSS	<u>February 2, 2016</u>
18.	AWSS updates to return JSON + Load Testing + FPKM + SVG	<u>February 3, 2016</u>
19.	Thoughts + To Do List	<u>February 4, 2016</u>
20.	Araport GET Calls	<u>February 5, 2016</u>
21.	Meeting topics and Plan	February 10, 2016
22.	Testing the New BAR Gene Structure Service	February 17, 2016

Date: October 16, 2015

Agenda:

1. Check if having local BAM files can speed up data retrieval using samtools' mpileup () call.

Protocol:

- 1. Check if local BAM files can speed up data retrieval using samtools' mpileup () call.
 - a. Downloaded the BAM file for experiment SRR547531 using wget ().
 - b. Executed mpileup () through SSH.
 - i. Used local BAM file and compare to iPlant BAM file
 - c. Ran the output.cgi script with the two BAM files (local vs. iPlant).
 - i. Used Chrome Dev Tools to analyze the TTFB (time to first byte).

Results:

- 1. Check if local BAM files can speed up data retrieval using samtools' mpileup () call.
 - a. Done, file size = 662MB.
 - b. Local BAM file mpileup call returns data very quickly (< 1 second), iPlant BAM file takes 10-20 seconds.
 - c. Local BAM file returns data in ~600ms! The iPlant BAM file takes ~60 seconds!
 - i. Only calling the generate_rnaseq_graph() function once to produce a single image.

Notes/Questions:

- Figure out why a URL to the BAM file doesn't work. Currently it works with a relative path..!
- See if BAM files hosted on Drop box result in data retrieval that is just as fast as local BAM files. This might implicate the iPlant server as the bottleneck and prove the HTTP request's innocence.

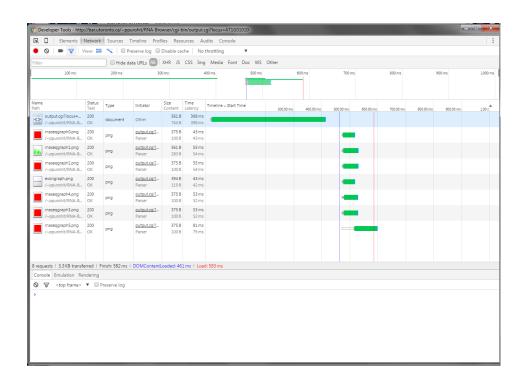


Figure 1: ~600ms for local BAM file.

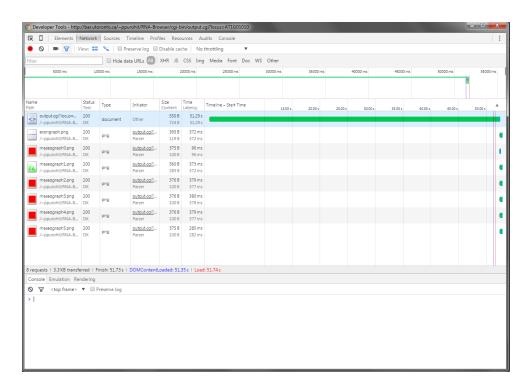


Figure 2: ~60 seconds for iPlant BAM file.

Date: October 21, 2015

Agenda:

1. Check if BAM files stored on other servers are just as fast as local BAM for the mpileup() call.

Protocol:

- 1. Executed 3 mpileup () commands through SSH.
 - a. time samtools mpileup -r chr2:8032000-10329941
 http://hgdownload.cse.ucsc.edu/goldenPath/hg19/encodeDCC/wgEncodeSydhRnaSeq/wgEn
 codeSydhRnaSeqK562Ifna6hPolyaAln.bam > ucsc.txt
 - b. time samtools mpileup -r Chr2:10327050-10329941
 http://vision.iplantcollaborative.org/iplant/home/araport/rnaseq_bam/aerial/SRR5
 47531/accepted_hits.bam > iplant.txt
 - c. time samtools mpileup -r Chr2:10327050-10329941
 http://bar.utoronto.ca/~ppurohit/RNA-Browser/cgibin/data/iplant/home/araport/rnaseq_bam/aerial/SRR547531/accepted_hits.bam >
 bar.txt

Results:

- 1. Done.
- 2. Executed mpileup () through SSH.
 - a. UCSC.edu BAM file:
 - i. 1.322 s for 6 260 175 bytes
 - b. iPlant BAM file:
 - i. 15.294 s for 1 248 931 bytes
 - c. bar.utoronto.ca BAM file:
 - i. 0.060 s for 1 248 931 bytes

Notes/Questions:

- The UCSC BAM file returned only ~1500 bytes for the Chr2:10327050-10329941 region. This smaller size could be the reason why the command is fast. The query region was therefore increased to get 6x more data.
 - o ... and it's still fast!

Date: October 23, 2015

To-do List:

- 1. Research proposal (Oct 29)
- 2. XML File Updates
 - a. Change the Newland links to their new Vision links
 - b. Add colours as discussed in Oct 22 meeting w/ NP
 - i. Try to make them web safe colours without changing the shade too much
 - c. Add the missing information in the XML file (some pictures missing)
- 3. Download the mpileup data for the default locus from all of the BAM files on iPlant
 - a. Spread this out over 3-4 days
- 4. RNA Browser:
 - a. Start working with locally stored mpileup data
 - b. Change the image dimensions for RNA-Seq graph to \sim 250 x 50.
 - c. Make the exon graph slim and add a horizontal line through the middle
 - d. Start making dynamic requests for RNA-Seq graphs
 - i. Sample flow:
 - 1. User comes on our app
 - 2. The RNA-Seq graphs of the default gene are pre-made and loaded on page load
 - 3. When the user enters a particular locus, the app will load 3 graphs, the rest are dynamically generated after page load ...
 - e. Image read map heights:
 - i. Start with default height of 1000 reads
 - ii. Have a button that allows the user to re-generate all images such that the max height is the maximum read for any base pair
 - f. FPKM calculations:
 - Genie is doing this, make sure to have the information she needs for these calculations

Date: October 25, 2015

Agenda:

1. Get Richard's new BAM Locator XML file and update the newland links to vision links.

2. Change the displayxml.cgi to account for changes made in the attribute names.

Protocol:

- 1. Got Richard's new BAM Locator XML file and updated the newland links to vision links.
 - a. Wrote a <u>Java program</u> to go through an XML file, find the correct new link and replace it.
- 2. The attribute name changed to sygname from subunitname (correct name is there now).
 - a. Changed the correct IF statement in displayxml.cgi to look for svgname as opposed to subunitname.

- 1. Success. The code replaced all files correctly.
- 2. Success. The displayxml.cgi script works correctly with the new BAM locator XML file.

Date: October 29, 2015

Agenda:

- 1. Add colours picked out by Dr. Provart to the BAM locator XML file's foreground column.
- 2. Update the BAM file links to the new Amazon S3 links.

Protocol:

- 1. Add colours picked out ...
 - a. Manually copy-pasted the new HEX colour codes.
 - b. Fixed cases where the colour attribute was missing.
- 2. Update BAM file links to Amazon ...
 - a. Ran the Java code from Oct 25, 2015 w/ Amazon S3 prefix instead of the iPlant prefix

Results:

- 1. Add colours picked out...
 - a. Successful.
 - b. Live on BAR @ http://bar.utoronto.ca/~ppurohit/RNA-Browser/cgibin/displayxml.cgi
- 2. Update BAM file links to Amazon
 - a. Success. It is live on BAR at the link shown above.

Notes:

- 1. The images still look incorrect for some of the experiments (i.e. the image should be root but is not)
 - a. Look into this and fix it.

Date: November 1, 2015

Agenda:

- 1. Get the mpileup for a default gene of interest from all BAM files.
 - a. Investigate the issue of remote BAMs not returning data but same local files would (reported by Vivek)

Protocol:

- 1. Get the mpileup for default gene of interest from all BAM files.
 - a. Wrote a shell script to iterate over the BAM files in the iplant_path_to_rnaseq_bam_files.txt file.
 - b. Each time, it executes the samtools mpileup call on the BAM file and outputs it to a smaller BAM file.
 - i. Getting the mpileup for the first locus only (Chr1:3631-5899).
- 2. Based on the result for #1, the questions arise: are these files not returning data because there is no data? Or is it because there is some issue with the remote vs. local file?
 - a. Executed mpileup through command line on a single BAM file that did not return data.
 - i. samtools mpileup -r Chr1:3631-5899
 http://s3.amazonaws.com/iplant cdn/iplant/home/araport/rnaseq bam/leaf/SRR446034/accepted hit
 s.bam
 - b. To see if the issue was resolved in the latest version of samtools, downloaded and installed the latest v1.2.1 of SAM Tools.
 - i. Downloaded the source code
 - ii. Executed the makefile
 - iii. Installed by: make -prefix=/path_to/install_folder/ install.
 - iv. Executed the call from 2(a)(i) with the new samtools exe (be sure to specify with a relative path to the new executable).
 - ./samtools-1.2/exe/bin/samtools mpileup http://s3.amazonaws.com/iplant-

```
cdn/iplant/home/araport/rnaseq_bam/leaf/SRR446034/accept
ed_hits.bam -r Chr1:3631-5899 -d 8000
```


- c. To see if BamView can show anything, the SRR446034 BAM file's Amazon link was used to see if there is any data in the file.
- d. Tried to redo 2(b)(iv) but when I'm in the directory of the newly installed BAM file
 - i. ./samtools mpileup http://s3.amazonaws.com/iplant cdn/iplant/home/araport/rnaseq_bam/leaf/SRR446034/accepted_hit
 s.bam -r Chr1:3631-5899 -d 8000
- 3. Rerun the shell script from the same directory as the latest SAM Tools ... (repeat #1)

- 1. Get the mpileup for default gene of interest from all BAMs.
 - a. Got back data from the following BAM files (increase text size/zoom in to read):

```
i. dank_SBR1019426_accepted_plat.ham
iii. dank_SBR1019427_accepted_plat.ham
iii. dank_SBR1019427_accepted_plat.ham
iii. dank_SBR1019427_accepted_plat.ham
iv. dank_SBR101328_accepted_plat.ham
iv. dank_SBR101328_accepted_plat.ham
vi. receptade_SBR101416_accepted_plat.ham
viii. receptade_SBR101416_accepted_plat.ham
viii. receptade_SBR101416_accepted_plat.ham
viii. receptade_SBR101416_accepted_plat.ham
viii. receptade_SBR1011412_accepted_plat.ham
viii. receptade_SBR1011414_accepted_plat.ham
viiii. receptade_SBR1011414_accepted_plat.ham
viiii. receptade_SBR10110141_accepted_plat.ham
viiii. receptade_BBR10110141_accepted_plat.ham
viiii. receptade_BBR10110141_accepted_plat.ham
viiiii. receptade_BBR10110141_accepted_plat.ham
viiiii. receptade
```

- 2. Try to get mpileup from a BAM that did not return data in 1(a)
 - a. Command line mpileup call with SAM Tools v0.1.18
 - i. open: No such file or directory
 - ii. Segmentation fault
 - b. Command line mpileup call with SAM Tools v1.2.1
 - i. [knet seek] SEEK END is not supported for HTTP. Offset is unchanged.
 - ii. [mpileup] 1 samples in 1 input files
 - c. Checking the file with BamView program

i. Figure 3: SRR446034 BAM file's first locus in BamView program.



- d. GOT BACK DATA! For some reason this works and returns data from that same BAM file.
 - i. But doesn't work for another experiment, SRR949989's BAM file...
- 3. Rerun the shell script from the same directory as the latest SAM Tools ...
 - a. Got even less number of BAM files returning data

Date: November 5, 2015

Agenda:

1. Put together a rough version of the multi-track viewer.

Protocol:

- 1. Combined the relevant code from output.cgi and displayxml.cgi to read the mini-BAM files from the mpileups directory and output to files in the /img/ directory where all the image files are...
 - a. The img files were generated using a shell script that generates blank images and chmods them to 766.

Results:

1. Works well, but the mpileups are local. Doesn't tell is anything about what the end product will be like.

Date: November 12, 2015

Agenda:

- 1. Fix up the displayxml.cgi file and email a link to NP.
- 2. Add a horizontal line to the exon graph.

Protocol:

- 1. Cleaned up code, minor programming changes.
 - a. Added missing parts as outlined by NP.
 - b. Added colours as outlined by NP.
- 2. Added the horizontal line w/ another filledRectangle() call.

- 1. http://bar.utoronto.ca/~ppurohit/RNA-Browser/cgi-bin/displayxml.cgi
- 2.

Date: November 12, 2015

Agenda:

1. Produce the total number of mapped reads from a BAM file.

Protocol/Thought Process:

- 1. Information on total number of mapped reads should be available in the index file.
 - a. Search the samtools manual for a convenient command to find this number
 - i. Found and executed two potential commands to get this information on SRR547531 (the BAM file on BAR server):
 - 1. samtools idxstats <bam file>
 - a. OUTPUT (tab delimited): seq name, seq length, # of mapped reads, # of unmapped reads
 - 2. samtools view -c -F 4 <bam file>
 - a. Σ of all mapped reads in the BAM file from all sequence names...
 - b. This produces a single number that is the Σ of all mapped reads from 1(a)(i)(1).

Result:

samtools idxstats accepted_hits.bam

Chr1	30427671	1892640	0
Chr2	19698289	2015247	0
Chr3	23459830	2539031	0
Chr4	18585056	1181593	0
Chr5	26975502	1580658	0
ChrC	154478	1792538	0
ChrM	366924	68400	0
*	0	0	0

samtools view -c -F 4 accepted_hits.bam

11070107

- Note that the Σ of mapped reads = 11070107.

Date: November 18, 2015

Agenda:

1. Get the number of mapped reads for a given region rather than the whole file.

Protocol:

- The number of lines returned by the samtools view command is correlated with the number of reads. Therefore, samtools view Chr1:3631-5899 | wc -l produces the number of reads mapped for that region.
 - a. **NEED TO VERIFY THIS ASSUMPTION**.
- 2. Ran the following:
 - a. Samtools view accepted_hits.bam Chr1:3631-5899 | wc -l
 - b. Samtools view accepted_hits.bam | wc -1
 - c. Samtools view -c -F 4 accepted_hits.bam

- 1. VERIFY, TO DO.
- 2.
- a. 120
- b. 11070107
- c. 11070107

Date: November 25, 2015


Agenda:

1. Create the front end of multitrack-rnaseq.html.

- 2. Display exon image by having the cgi script return a base64 image string. This image should be changing based on locus.
- 3. Display the RNA-Seq coverage images (not base64 for now, rather just the images generated by the CGI script). These images will have to be for the first locus since mpileups exist for that locus only.

Protocol:

- 1. Done, see November 25 and 26's commits to GitHub.
- 2. Done, see November 25 and 26's commits to GitHub.
- 3. Done, see November 25 and 26's commits to GitHub.

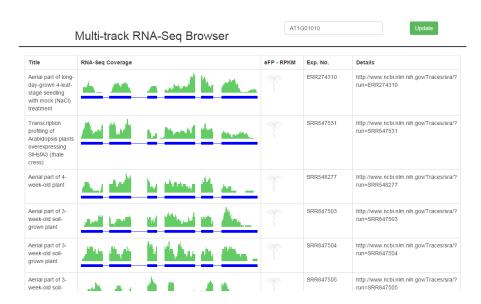

Date: November 26, 2015

Agenda:

1. Get mpileups for 4 more genes.

Protocol:

- 1. Get mpileups for 4 more genes
 - a. Re-wrote the shell script (mpileup_download_by_region.sh) to download each BAM file and get mpileups for 4 more genes.
 - i. Gene list:
 - 1. AT1G01010
 - 2. AT2G24270
 - 3. AT3G24650
 - 4. AT3G24660
 - 5. AT5G66460
 - b. Added way to get mapped reads by counting samtools view <region>.

Results:

- Did not run the newly written script yet because to do next is: adding a way to get mapped reads by bedtools method; and to save both methods' mapped reads output.

Date: November 28, 2015

Agenda:

1. Get mapped reads counts for each of the 5 genes of interest from each of the 113 bam files by two methods.

2. Download mpileups and the read counts for 5 genes by running the shell script.

Protocol:

- 1. Two methods exist for getting read counts from a BAM file: word count method and using bedtools' multicov.
 - a. Word count method:
 - i. Code: samtools view <bam file> -r <region> -d 8000 | wc -l
 - b. Bedtools method:
 - i. Code: ./bedtools multicov -bams <bam file> -bed <bed file>
 - ii. BED file generated by: echo -e "Chr1\t3631\t5899\tinterval1" > mybed.bed
- 2. Ran the shell script mpileup_download_by_region.sh after giving it 755 permission.

Results:

- 1. Running both commands one at a time on shell shows a general pattern that both methods give the same number. However it is not conclusive that they will always produce the same number.
 - a. For each mpileup call, get the mapped reads by both methods and save them to compare later.
- 2. Worked. For 5 genes, mpileups and the mapped reads count was obtained.

Next Steps:

1. Check if both methods of counting mapped reads produce the same answer...

Date: November 28, 2015

Agenda:

1. Confirm that both methods of getting mapped reads give the same number of mapped reads.

Protocol:

- 1. A python script was written to read in the file contents and compare the two numbers.
 - a. Script = mpileups/reads_mapped_methods_comparison.cgi

Results:

1. Both methods of getting mapped reads counts provided the same answer in each instance.

Date: January 19, 2016

Agenda:

- 1. Work on the UI to hide URLs
- 2. Set up a demo of sorting on images (work with the eFP image for now)
- 3. Read up about Y1H

Protocol:

- 1. UI changes:
 - a. Detail column now has the experiment number, the publication link, and the total number of reads
- 2. Sort on image
 - a. In front of an image, the number to sort on was made hidden using tags.
 - b. The table was then sorted using the tablesorter.js script.

Results:

- 1. UI changes were successfully implemented.
- 2. Sort on image by hiding a number in front of it works as expected!
 - a. When Genie provides the R and P values, hide these values in front of their respective images and then let tablesorter.js sort the column.
 - b. This may require an entire column to be hidden that will show the user the R and P values if the user wants to...

Notes:

Y1H = investigate DNA-protein interactions, allows us to find DNA-binding proteins. Falls under reverse genetics domain...

Date: January 24, 2016

Agenda:

- 1. Update the UI with columns and information NP suggested during the 20/01/2016 weekly meeting.
 - a. "Column 1 from XML, groupings w/ grey shading, and controls"
- 2. Work on showing the exon/intron information (will have to modify the exongraph.png file).

Protocol:

- 1. Update the UI:
 - a. Change the title of the column to "Description and Details" from "Details"
 - b. Add NCBI SRA and PubMed links
 - c. With a "More Details" button, allow user to expand a <div> with information about the number of reads and the controls information.
- 2. About exon-intro variants:
 - a. Read more about the variants... from the biological point of view.
 - b. Read today's latest email by Vivek and try out those services.

Results:

1. Update the UI



- 2. Exon-Intron variants
 - a. Brushed up by reading the Wikipedia page and reading a paper...
 - b. Tried out the service described by Vivek, it works perfectly as advertized

Date: February 1, 2016

Agenda:

1. Check if data is consistently returned from the new AWS hosting w/ mounted BAMs.

2. Play around with and understand webservice.cgi on AWS.

Protocol & Results:

- 1. Check if data is consistently returned from new AWS hosting:
 - a. Download and compile the latest version of samtools on AWS server.
 - i. Asher has already installed samtools v0.1.19.
 - b. Write a script to find out whether data is consistently returned from each BAM file in mnt directory.
 - i. Wrote data_return_consistency.sh script that will output the mpileups into a folder...
 - ii. WORKED for two loci without any issues, safe to say that the original issue is solved because it would have returned data from ~15 BAMs as opposed to 113/113 (perfect result).
- 2. Understand webservice.cgi on AWS:
 - a. Get rid of the pysam in favour of subprocess library to initiate a samtools call directly without going through pysam

Date: February 2, 2016

Agenda:

- 1. Figure out the components of the JSON object AWSS will return.
- 2. Integrate Gini's code ...

Protocol:

- 1. JSON object design:
 - a. The front end will make AJAX calls to the AWSS for RNA-Seq image and the related statistical (FPKM and PCC) and quantifying numbers (i.e. the number of mapped reads for that locus in the BAM file, and PERHAPS include SVG colouring details).
- 2. Gini's Code:
 - a. Will she provide a web service for the FPKM and PCC values?

a. Error codes:

- i. Invalid locus = 1001
- ii. Invalid record = 1002
- iii. Invalid tissue = 1003
- iv. BAM file not found =1004

Date: February 3, 2016

Agenda:

- 1. Update the AWSS to return data in the format described in the February 2, 2016 entry.
 - a. Edit the JSON object above if more information should be returned...
- 2. Do load testing to see how long does it take for the AWSS to return RNA-seq images for all 113 BAM files **IF the front end makes 113 AJAX requests**.
- 3. Integrate FPKM calculation steps in the AWSS.
- 4. Perform a sample test for SVG colouring.

Protocol:

- 1. Return JSON object from AWSS:
 - a. Updated the output to match Feb 2 design by adding the missing attributes
 - b. The code used by Asher is not the latest iteration, the Y-axis scaling is not present
 - i. Fixed that code ... but it's probably a good idea to get rid of all the extra code and make one file with the latest code
- 2. Load testing:
 - a. Tried to do locust load test ... but you need a Linux environment for that.
 - b. Did two quick online tests
- 3. FPKM calculations integration:
 - a. <pushed off until Gini's code is ready>
- 4. SVG Colouring Test:
 - a. <PUSHED OFF, TO DO>

- 1. Return JSON object from AWSS:
 - a. Successful, works fine but the code is old, so the output image back to the premultitrack stage (i.e. the colours are constant etc.).
 - b. The scaling issue was fixed pretty easily but copying over the one line code for that
- 2. Load testing:

- a. While the results are "positive," nothing can be inferred because they were very small scale trial version tests...
- b. <TO DO> Repeat with Locust.

Date: February 4, 2016

Status update: Everything seems all over the place at the moment, taking half an hour to put in writing a project update entry...

Thoughts:

- Target: multi track RNA-seq viewer "with exon-intron variants support"
- MOST of the code is done, but there is a lot of testing that needs to be done
- There is too much code, and it's all over the place. Although everything is *clearly labelled*, there are too many *clearly labelled pieces of code*!

Want:

- 1. UI with all the details (can get this from the XML file)
- 2. Web service that returns all the supported gene structure variants as base64 images
- 3. Web service that returns appropriately coloured, scaled, and axis-labelled RNA-seq image for a given locus, BAM file, and tissue type.

Specific features that are not the obvious features that one needs...

- 1. UI:
 - a. Need a button that allows the user to rescale the RNA-seq image to the highest Y-axis scaling required.
 - b. The button in (a) will also scale the eFP images' colours to highest being red and lowest being yellow...
- 2. Gene structure web service:
 - a. Need a token from Araport people that does not expire
- 3. RNA-Seq web service:
 - a. Should return all values required on the front end for SVG colouring and for FPKM calculations...

To Do List:

1. Clean up the BAR account, consolidate all the relevant code in one folder.

Date: February 5, 2016

Agenda:

1. Get an Araport token to make GET calls.

Protocol:

- 1. Get an Araport token to make GET calls.
 - a. Followed the instructions here with AWS open in PuTTY.

- 1. Getting Araport Token:
 - a. curl call to get API Keys: successful return output saved to a local file called 'public_keys_for_araport.json'
 - b. curl call to get an authentication token: successful return output saved to a local file called 'authentication_token_for_araport.json'
 - c. UPDATE:
 - i. Asher is working on a BAR service to do the same; therefore, this has been put off until that service is ready.

Date: February 10, 2016

Meeting topics:

What I did in the past week:

1. Designed the JSON object that will be returned by AWSS

- 2. The AWSS returns correct images now
 - a. There is a small code issue that took up a lot of the time. Sometimes a blank image is returned... This happens when the mpileup call takes longer due to large amount of data returned.
 - i. In C language I just put a wait statement on the pipes BUT I'm still learning how to do that in Python...
- 3. Did small scale load tests on the AWSS and the results were promising ... but I need a Linux environment to do a more extensive load test with Locust framework.
- 4. Cleaned up the BAR account.
- 5. Then spent ~2 days to make the Araport calls but now we're using the BAR service to get the data.

Next up:

- 1. Reading week + lots of midterms coming up. Will have to take a small hiatus from this project.
- 2. I plan to complete the webservice's RNA-Seq graph return portion by this weekend.
- 3. Then I will modify the front-end to make the AJAX calls & see how it works.
 - a. This will be a prelim version that will not be user friendly (yet!).
- 4. I expect most of the kink to be worked out by mid-March to the point where one can ask someone to use the tool and give feedback.
 - a. Leaves ~20 days to improve before the end of year!!

Date: February 17, 2016

Agenda:

1. Test out the new BAR-based gene structure web service written by Asher.

2. Work out a plan to avoid what happened between February 5 and today. Not much work was done at a level that would warrant a lab notebook entry (mostly admin stuff).

Protocol:

1. BAR Gene Structure Web Service Test:

- a. Understand what it outputs and the structure of the JSON object. How is it different from the previous version?
 - i. Want a service that sends back all gene structure variants instead of just one
 - Old (and current) service returns only one variant. New BAR service returns all different variants but they are all mixed together under one JSON group (refer to the email sent to AP and NP on Feb 17 for more details).
- b. Implement a stand-alone HTML page that calls the web service and shows the different gene structure variants in a single page.
- 2. Plan

- 1. BAR Gene Structure Web Service Test:
 - a. The Araport service (araport11_gene_structure_by_locus v1.1) returns 6 unique splice variant structures for locus AT1G07350. Each variant's features are grouped under one JSON group.
 - b. The BAR service returns all features of all 6 variants in one JSON group. This means that we can't figure out which feature belongs to which splice variant.
 - c. Asked Asher to update the service to resolve this issue.
- 2. <See Trello>