
```
EXPLORER
                               App.js M X Child1 js M Child2 js M
V SOURCE CONTROL REPOSITORIES
                                src > M Appis >.
 practic... & B V U ... 19
                                  4
                                      const App = () => {
> SOURCE CONTROL
                                        let [count, setCount] = useState(θ);
                                  5
V PRACTICE1
                                  6
 > node_modules
                                        let increment = () => {
 > D public
                                        setCount(count + 1);
                                  9
                                        };
 V To STC
                                 10
                                        var data = {
    About.js
                          M
                                 11
                                        value: count,
    3 App.css
                                 12
                                        };
    M App.js
                                 13
                          M
                                        return (
    App.test.js
                                 14
                                          <div className="main">
                                 15
                                            <button onClick={increment}>Increment</button>
    M Child1.js
                          M
                                 16
                                             App Count : {count} 
    Child2.js
                          M
                                 17
                                            <button onClick={() => setCount(count - 1)}>Decrement/button>
    ∃ index.css
                                 18
                                           <Child1 value={count} />
    m index.js
                                 19
                                          </div>
    MyComponent.js
                                 20
                                        );
                                 21
                                      };
    NextComponent.js
                                 22
                                                                                  I
    setupTests.js
                                 23
                                      export default App;
    M
                                 24
OUTLINE
> TIMELINE
```

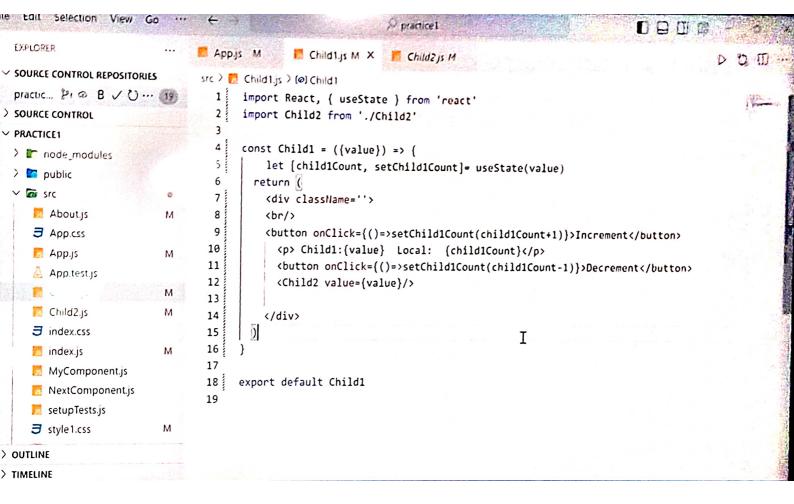

```
O practice1
                                                                                                        EXPLORER
                                 App.js M
                                                 Child1.js M
ee source control repositories
                                                                 Child2.js M X
                                                                                                                     D th II ...
                                 src > 📙 Child2.js > (@) Child2
 practic... $1 → B ✓ ひ ··· 19
                                   1 import Keact, { useState } from react
> SOURCE CONTROL
                                    3
                                        const Child2 = ({value}) => {

→ PRACTICE1

                                            let [child2Count, setChild2Count]= useState(value)
 > 🖿 node_modules
                                          return (
                                    5
 > 🐚 public
                                    6
                                            <div>
 ∨ 🖙 src
                                    7
                                             <div className=''>
     About.is
                                    8
                                             (br/>
                            M
                                    9
                                              <button onClick={()=>setChild2Count(child2Count+1)}>Increment</button>
     ∃ App.css
                                   10
                                               Child2: {value}
     App.js
                           Μ
                                              <button onClick={()=>setChild2Count(child2Count-1)}>Decrement
                                   11
     App.test.js
                                   12
                                            </div>
                           M
                                   13
                                                                               Ι
     Child2,js
                                   14
                                            </div>
                                   15
     ∃ index.css
                                   16
     🛅 index.js
                           M
                                   17
     MyComponent.js
                                   18
                                        export default Child2
     MextComponent.js
                                   19
     setupTests.js
     ∃ style1.css
                           М
> OUTLINE
> TIMELINE
```