


WatchMan API Design & Backend

FastAPI routes, services and documented URLs

Backend architecture

WatchMan uses FastAPI routers, services/repositories, PostgreSQL, Redis, TMDB integration and Celery tasks. The browser communicates with WatchMan rather than receiving TMDB secrets.

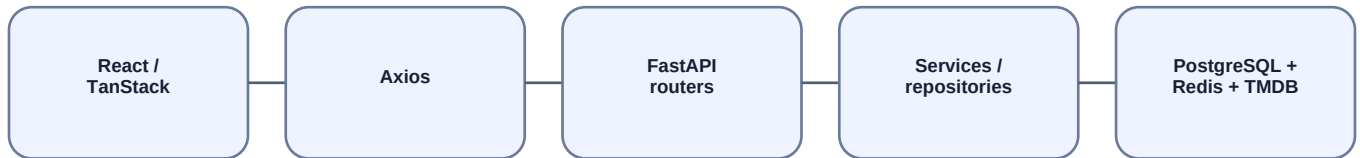

Documented route surface

Area	URL / prefix	Purpose
Movies	/api/movies	DB-backed movie catalog.
Web Series	/api/web-series	DB-backed TV/web-series catalog.
Trending	/api/trending	Trending content.
Search	/api/search	Paginated search.
Recommendations	/api/recommendations	Personalized recommendations.
Recommendation refresh	/api/recommendations/refresh	Refresh recommendations.
Saved/Favorites	/api/saved and /api/favorites	Saved/favorite content.
Ratings	/api/ratings/*	User ratings.
Reviews	/api/reviews/*	User reviews.
Watch history	/api/watch-history/*	Watch history/progress.
Ops status	/api/ops/status	Protected operational status.
Health	/health	Health check.
Readiness	/ready	Dependency readiness.

Representative requests

```
GET /api/movies?page=1&limit;=18&language;=hi&year;=2026
GET /api/search?q=dark&type;=movie&page;=1&limit;=16
GET /api/recommendations
POST /api/recommendations/refresh
```

These examples document the audited route structure; individual filter parameter names should follow the current schemas.

TMDB boundary

TMDB is accessed through the backend service layer; Redis can cache external/catalog data; credentials remain server-side. Optional enrichment should fail gracefully.