
Rapid software development

Objectives

- To explain how an iterative, incremental development process leads to faster delivery of more useful software
- To discuss the essence of agile development methods
- To explain the principles and practices of extreme programming
- To explain the roles of prototyping in the software process

Topics covered

- Agile methods
- Extreme programming
- Rapid application development
- Software prototyping

Rapid software development

- Because of rapidly changing business environments, businesses have to respond to new opportunities and competition.
- This requires software and rapid development and delivery is not often the most critical requirement for software systems.
- Businesses may be willing to accept lower quality software if rapid delivery of essential functionality is possible.


Requirements

- Because of the changing environment, it is often impossible to arrive at a stable, consistent set of system requirements.
- Therefore a waterfall model of development is impractical and an approach to development based on iterative specification and delivery is the only way to deliver software quickly.

Characteristics of RAD processes

- The processes of specification, design and implementation are concurrent. There is no detailed specification and design documentation is minimised.
- The system is developed in a series of increments. End users evaluate each increment and make proposals for later increments.
- System user interfaces are usually developed using an interactive development system.

An iterative development process

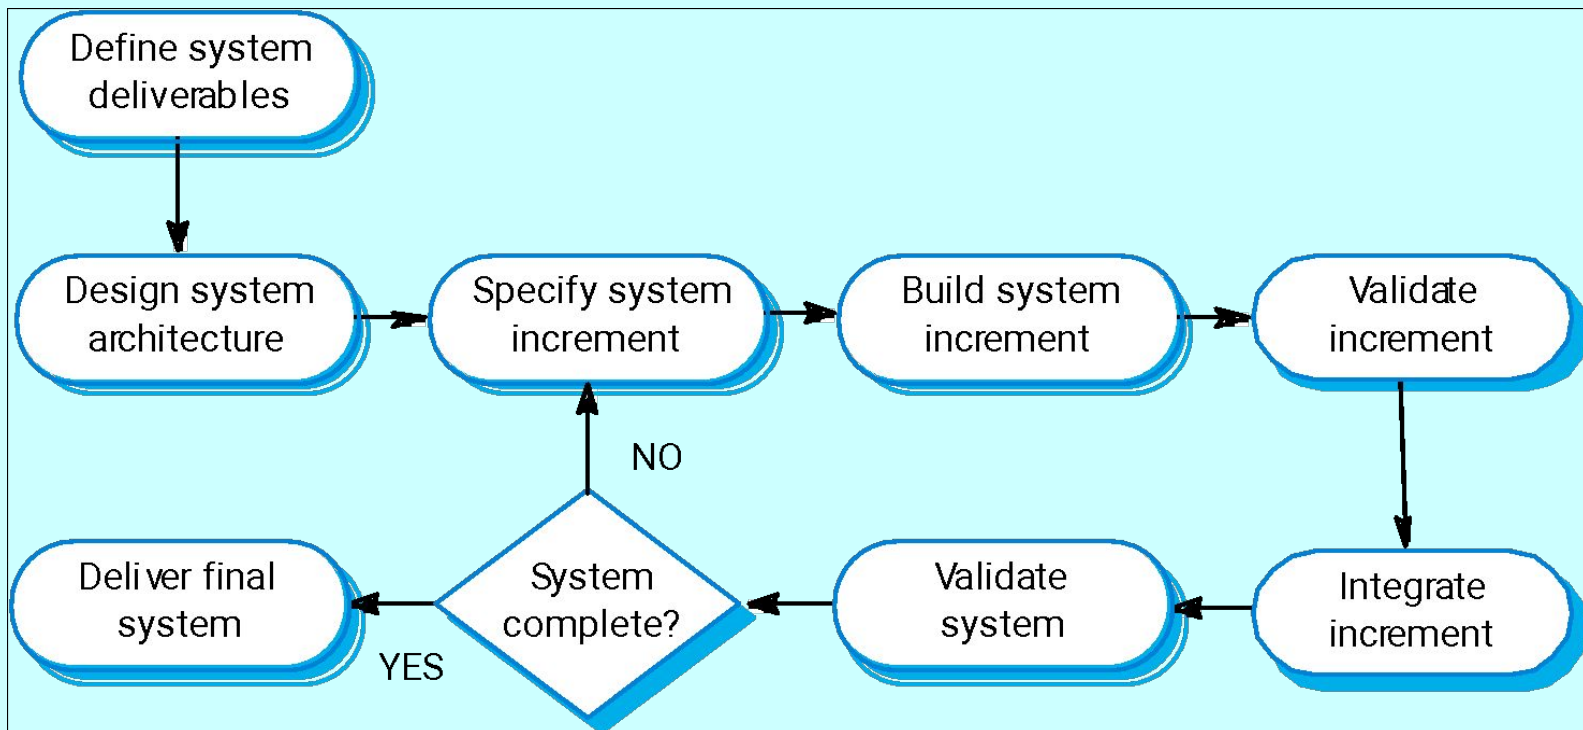

Advantages of incremental development

- **Accelerated delivery of customer services.** Each increment delivers the highest priority functionality to the customer.
- **User engagement with the system.** Users have to be involved in the development which means the system is more likely to meet their requirements and the users are more committed to the system.

Problems with incremental development


- **Management problems**
 - Progress can be hard to judge and problems hard to find because there is no documentation to demonstrate what has been done.
- **Contractual problems**
 - The normal contract may include a specification; without a specification, different forms of contract have to be used.
- **Validation problems**
 - Without a specification, what is the system being tested against?
- **Maintenance problems**
 - Continual change tends to corrupt software structure making it more expensive to change and evolve to meet new requirements.

-
- In computer programming and software design, code refactoring is the process of restructuring existing computer code—changing the factoring—without changing its external behavior. Refactoring is intended to improve the design, structure, and/or implementation of the software, while preserving its functionality

Prototyping

- For some large systems, incremental iterative development and delivery may be impractical; this is especially true when multiple teams are working on different sites.
- Prototyping, where an experimental system is developed as a basis for formulating the requirements may be used. This system is thrown away when the system specification has been agreed.

Incremental development and prototyping

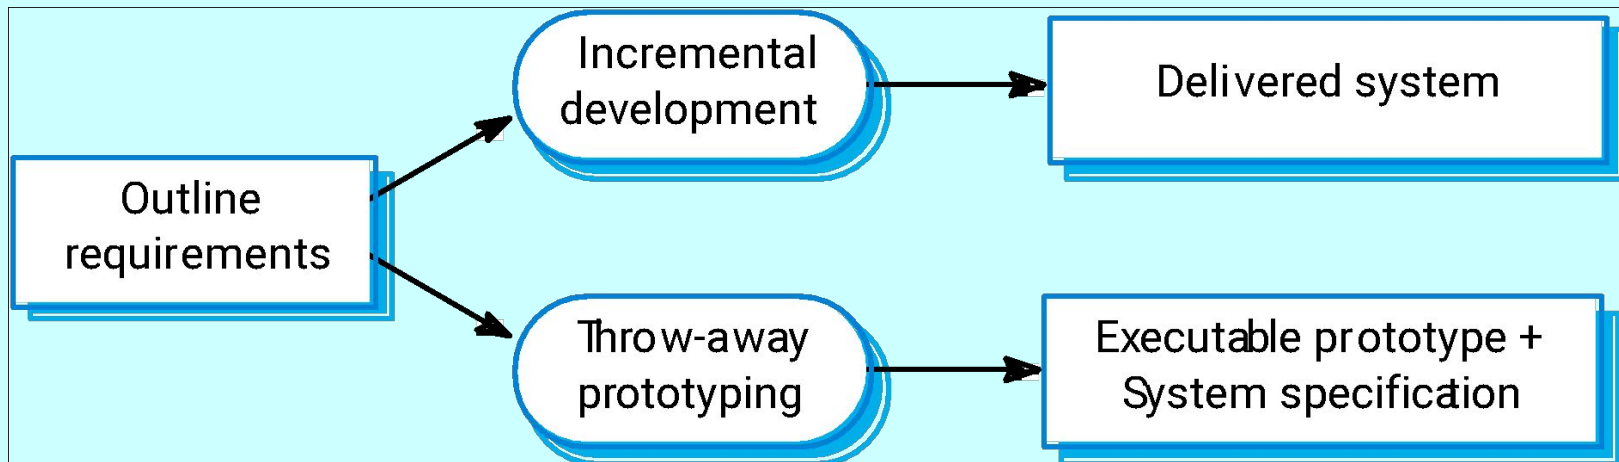

Conflicting objectives

- The objective of **incremental development** is to deliver a working system to end-users. The development starts with those requirements which are best understood.
- The objective of **throw-away prototyping** is to validate or derive the system requirements. The prototyping process starts with those requirements which are poorly understood.

Agile methods

- Dissatisfaction with the overheads involved in design methods led to the creation of agile methods. These methods:
 - Focus on the code rather than the design;
 - Are based on an iterative approach to software development;
 - Are intended to deliver working software quickly and evolve this quickly to meet changing requirements.
- Agile methods are probably best suited to small/medium-sized business systems or PC products.

Principles of agile methods

Principle	Description
Customer involvement	The customer should be closely involved throughout the development process. Their role is provide and prioritise new system requirements and to evaluate the iterations of the system.
Incremental delivery	The software is developed in increments with the customer specifying the requirements to be included in each increment.
People not process	The skills of the development team should be recognised and exploited. The team should be left to develop their own ways of working without prescriptive processes.
Embrace change	Expect the system requirements to change and design the system so that it can accommodate these changes.
Maintain simplicity	Focus on simplicity in both the software being developed and in the development process used. Wherever possible, actively work to eliminate complexity from the system.


Problems with agile methods

1. It can be difficult to keep the interest of customers who are involved in the process.
2. Team members may be unsuited to the intense involvement that characterises agile methods.
3. Prioritising changes can be difficult where there are multiple stakeholders.
4. Maintaining simplicity requires extra work.
5. Contracts may be a problem as with other approaches to iterative development.

Extreme programming

- Perhaps the best-known and most widely used agile method.
- Extreme Programming (XP) takes an 'extreme' approach to iterative development.
 - New versions may be built several times per day;
 - Increments are delivered to customers every 2 weeks;
 - All tests must be run for every build and the build is only accepted if tests run successfully.

The XP release cycle

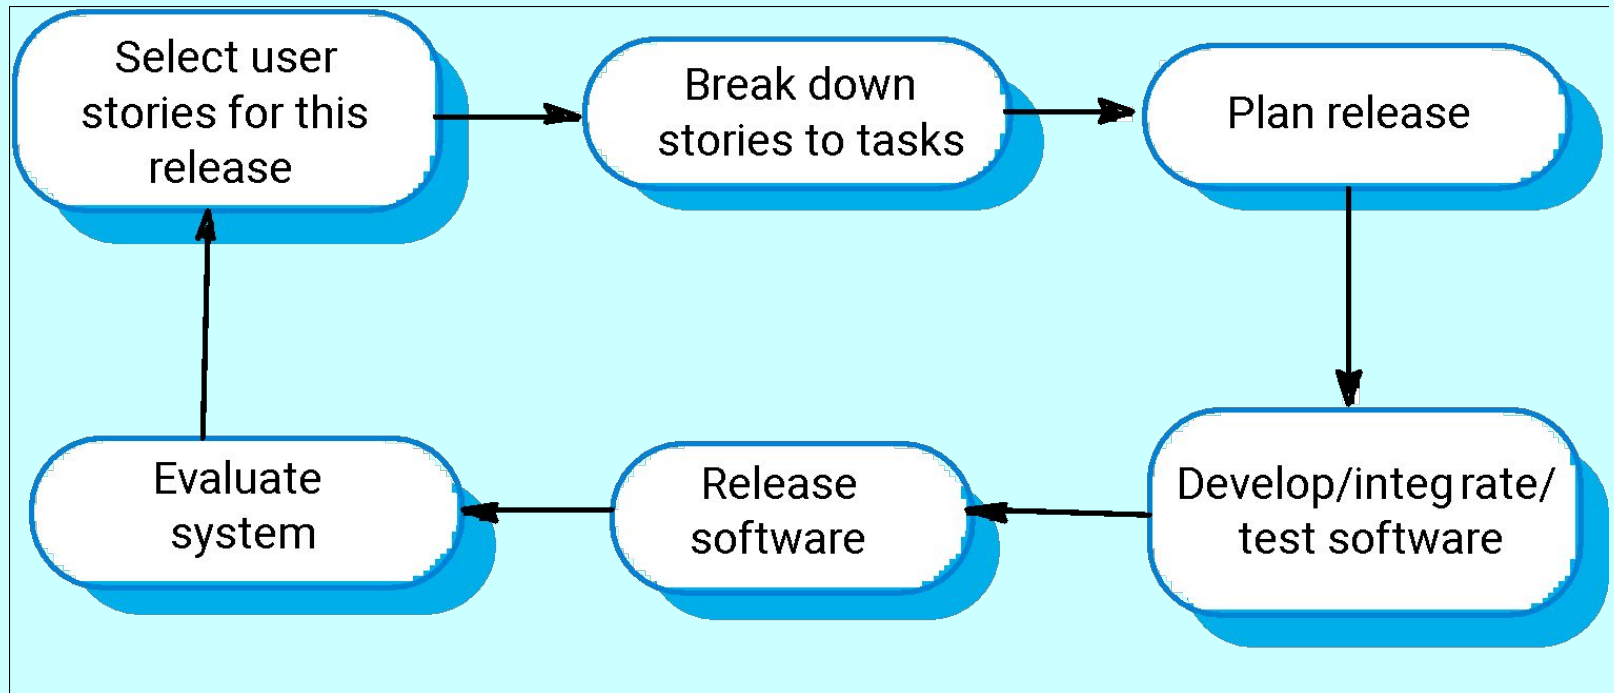

Extreme programming practices 1

Incremental planning	Requirements are recorded on Story Cards and the Stories to be included in a release are determined by the time available and their relative priority. The developers break these Stories into development "Tasks"
Small Releases	The minimal useful set of functionality that provides business value is developed first. Releases of the system are frequent and incrementally add functionality to the first release.
Simple Design	Enough design is carried out to meet the current requirements and no more.
Test first development	An automated unit test framework is used to write tests for a new piece of functionality before that functionality itself is implemented.
Refactoring	All developers are expected to refactor the code continuously as soon as possible code improvements are found. This keeps the code simple and maintainable.

Extreme programming practices 2

Pair Programming	Developers work in pairs, checking each other's work and providing the support to always do a good job.
Collective Ownership	The pairs of developers work on all areas of the system, so that no islands of expertise develop and all the developers own all the code. Anyone can change anything.
Continuous Integration	As soon as work on a task is complete it is integrated into the whole system. After any such integration, all the unit tests in the system must pass.
Sustainable pace	Large amounts of over-time are not considered acceptable as the net effect is often to reduce code quality and medium term productivity
On-site Customer	A representative of the end -user of the system (the Customer) should be available full time for the use of the XP team. In an extreme programming process, the customer is a member of the development team and is responsible for bringing system requirements to the team for implementation.

XP and agile principles

- Incremental development is supported through small, frequent system releases.
- Customer involvement means full-time customer engagement with the team.
- People not process through pair programming, collective ownership and a process that avoids long working hours.
- Change supported through regular system releases.
- Maintaining simplicity through constant refactoring of code.

Requirements scenarios

- In XP, user requirements are expressed as scenarios or user stories.
- These are written on cards and the development team break them down into implementation tasks. These tasks are the basis of schedule and cost estimates.
- The customer chooses the stories for inclusion in the next release based on their priorities and the schedule estimates.

Story card for document downloading

Downloading and printing an article

First, you select the article that you want from a displayed list. You then have to tell the system how you will pay for it - this can either be through a subscription, through a company account or by credit card.

After this, you get a copyright form from the system to fill in and, when you have submitted this, the article you want is downloaded onto your computer.

You then choose a printer and a copy of the article is printed. You tell the system if printing has been successful.

If the article is a print-only article, you can't keep the PDF version so it is automatically deleted from your computer.

XP and change

- Conventional wisdom in software engineering is to design for change. It is worth spending time and effort anticipating changes as this reduces costs later in the life cycle.
- XP, however, maintains that this is not worthwhile as changes cannot be reliably anticipated.
- Rather, it proposes constant code improvement (refactoring) to make changes easier when they have to be implemented.

Testing in XP

- Test-first development.
- Incremental test development from scenarios.
- User involvement in test development and validation.
- Automated test harnesses are used to run all component tests each time that a new release is built.

Task cards for document downloading

Task 1: Implement principal workflow

Task 2: Implement article catalog and selection

Task 3: Implement payment collection

Payment may be made in 3 different ways. The user selects which way they wish to pay. If the user has a library subscription, then they can input the subscriber key which should be checked by the system. Alternatively, they can input an organisational account number. If this is valid, a debit of the cost of the article is posted to this account. Finally, they may input a 16 digit credit card number and expiry date. This should be checked for validity and, if valid a debit is posted to that credit card account.

Test case description

Test 4: Test credit card validity

Input:

A string representing the credit card number and two integers representing the month and year when the card expires

Tests:

Check that all bytes in the string are digits

Check that the month lies between 1 and 12 and the year is greater than or equal to the current year .

Using the first 4 digits of the credit card number , check that the card issuer is valid by looking up the card issuer table. Check credit card validity by submitting the card number and expiry date information to the card issuer

Output:

OK or error message indicating that the card is invalid

Test-first development

- Writing tests before code clarifies the requirements to be implemented.
- Tests are written as programs rather than data so that they can be executed automatically. The test includes a check that it has executed correctly.
- All previous and new tests are automatically run when new functionality is added. Thus checking that the new functionality has not introduced errors.

Pair programming

- In XP, programmers work in pairs, sitting together to develop code.
- This helps develop common ownership of code and spreads knowledge across the team.
- It serves as an informal review process as each line of code is looked at by more than 1 person.
- It encourages refactoring as the whole team can benefit from this.
- Measurements suggest that development productivity with pair programming is similar to that of two people working independently.

Rapid application development

- Agile methods have received a lot of attention but other approaches to rapid application development have been used for many years.
- These are designed to develop data-intensive business applications and rely on programming and presenting information from a database.

RAD environment tools

- Database programming language
- Interface generator
- Links to office applications
- Report generators


Interface generation

- Many applications are based around complex forms and developing these forms manually is a time-consuming activity.
- RAD environments include support for screen generation including:
 - Interactive form definition using drag and drop techniques;
 - Form linking where the sequence of forms to be presented is specified;
 - Form verification where allowed ranges in form fields is defined.

Visual programming

- Scripting languages such as Visual Basic support visual programming where the prototype is developed by creating a user interface from standard items and associating components with these items
- A large library of components exists to support this type of development
- These may be tailored to suit the specific application requirements

Visual programming with reuse

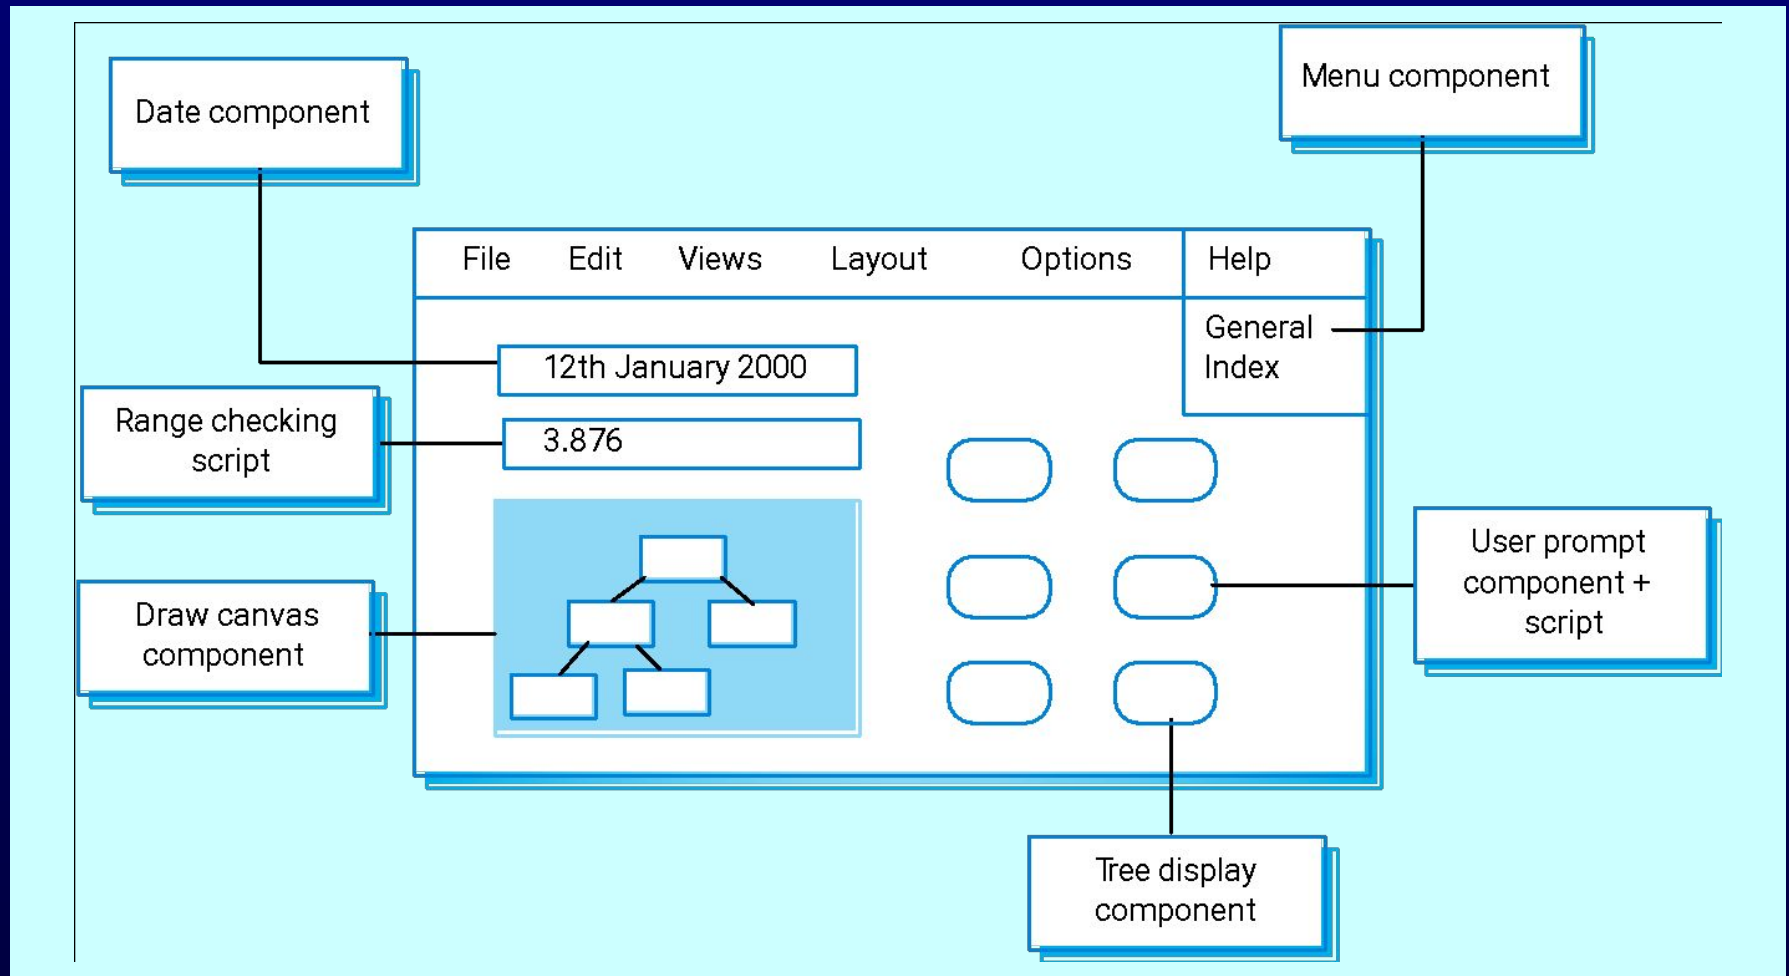

Problems with visual development

- Difficult to coordinate team-based development.
- No explicit system architecture.
- Complex dependencies between parts of the program can cause maintainability problems.


COTS reuse

- An effective approach to rapid development is to configure and link existing off the shelf systems.
- For example, a requirements management system could be built by using:
 - A database to store requirements;
 - A word processor to capture requirements and format reports;
 - A spreadsheet for traceability management;

Compound documents

- For some applications, a prototype can be created by developing a compound document.
- This is a document with active elements (such as a spreadsheet) that allow user computations.
- Each active element has an associated application which is invoked when that element is selected.
- The document itself is the integrator for the different applications.

Application linking

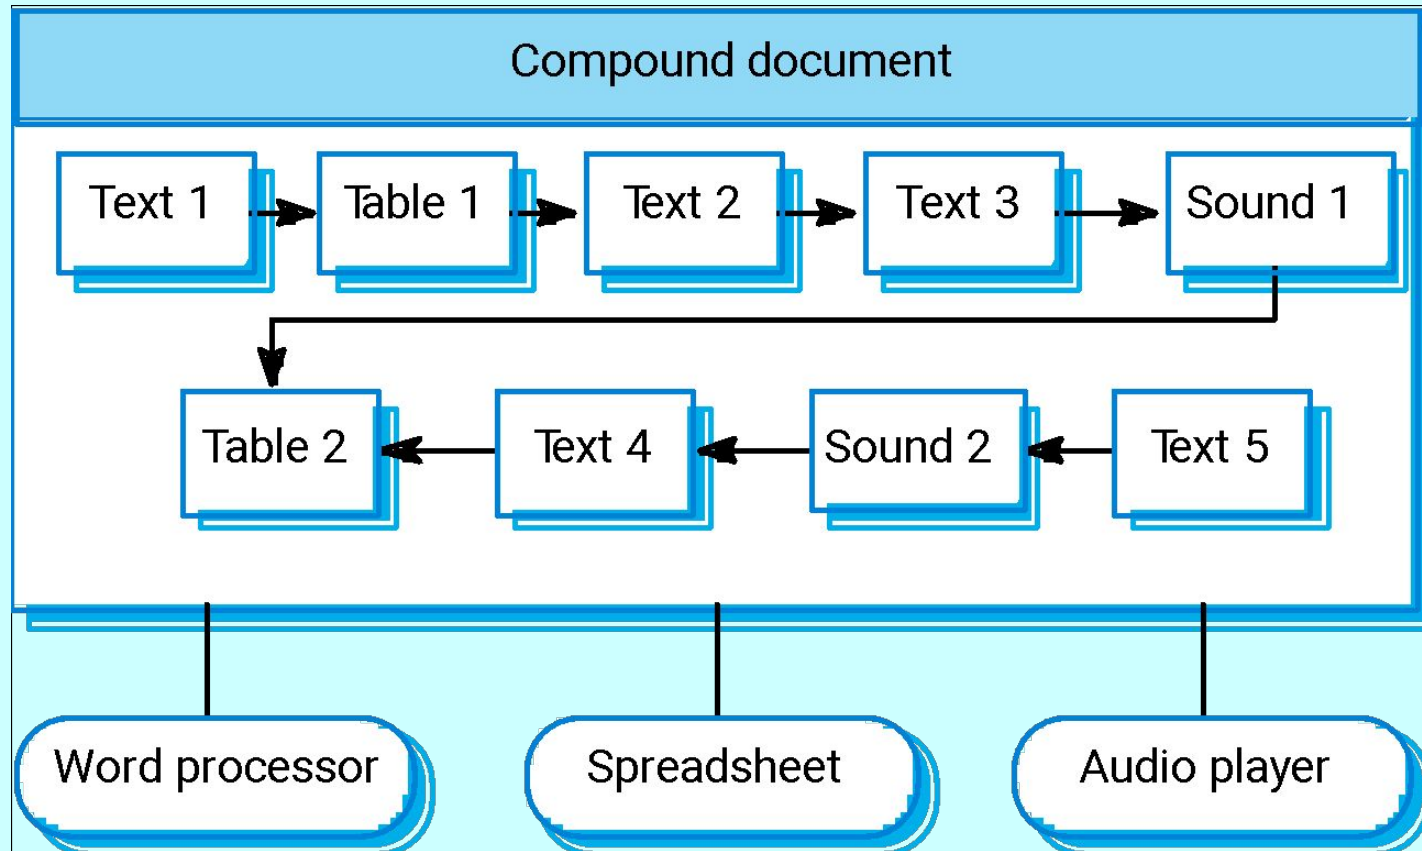


Software prototyping

- A prototype is an initial version of a system used to demonstrate concepts and try out design options.
- A prototype can be used in:
 - The requirements engineering process to help with requirements elicitation and validation;
 - In design processes to explore options and develop a UI design;
 - In the testing process to run back-to-back tests.


Benefits of prototyping

- Improved system usability.
- A closer match to users' real needs.
- Improved design quality.
- Improved maintainability.
- Reduced development effort.

Back to back testing

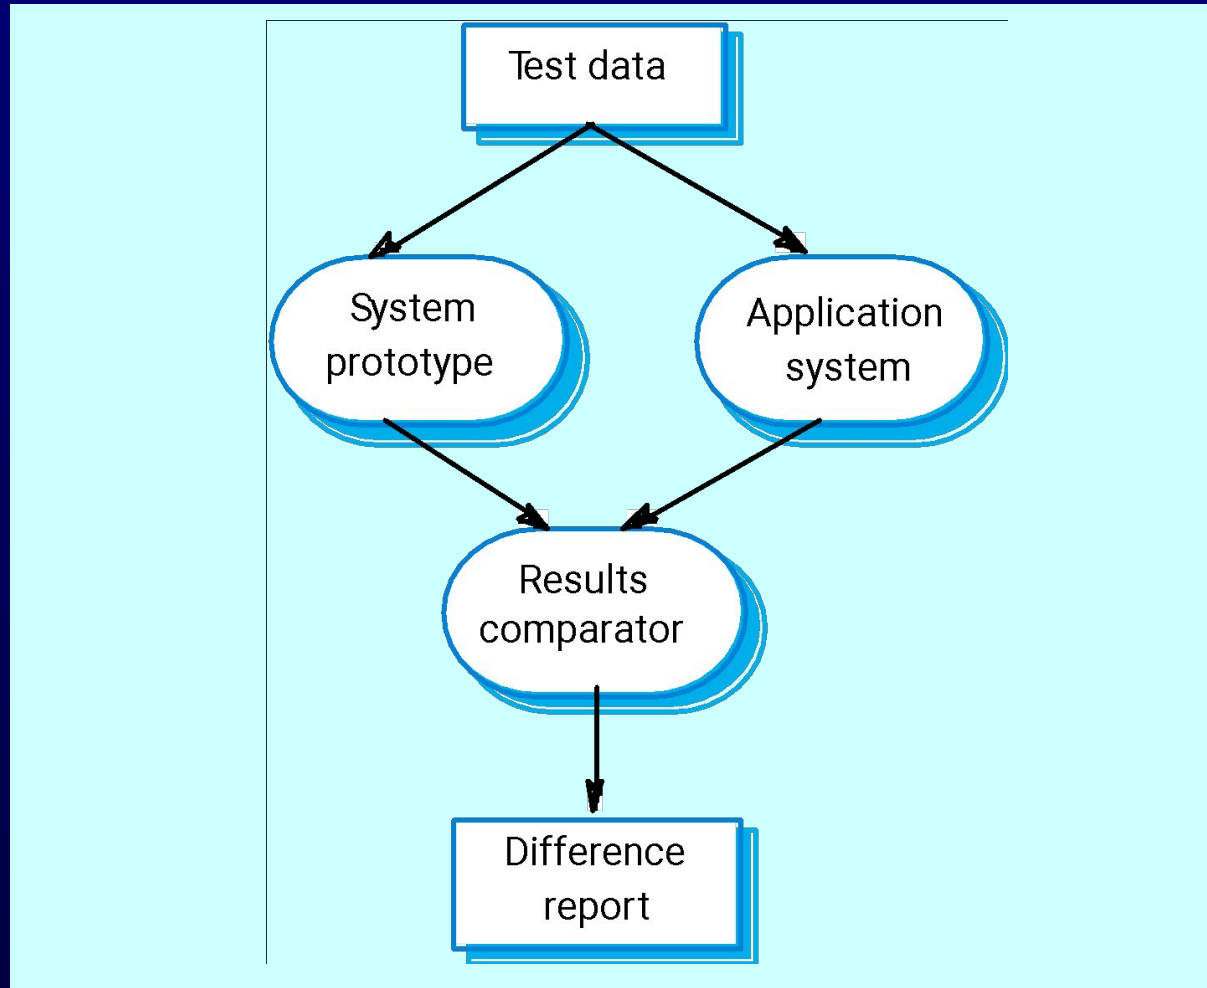

The prototyping process

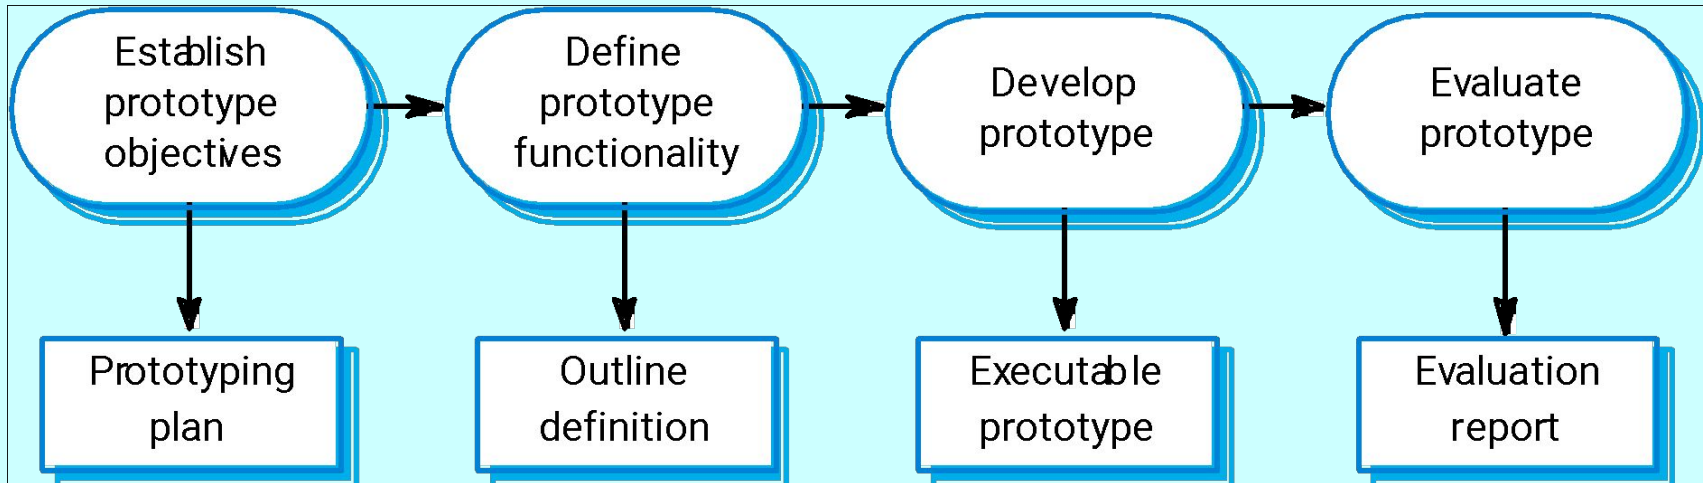

Throw-away prototypes

- Prototypes should be discarded after development as they are not a good basis for a production system:
 - It may be impossible to tune the system to meet non-functional requirements;
 - Prototypes are normally undocumented;
 - The prototype structure is usually degraded through rapid change;
 - The prototype probably will not meet normal organisational quality standards.

Key points

- An iterative approach to software development leads to faster delivery of software.
- Agile methods are iterative development methods that aim to reduce development overhead and so produce software faster.
- Extreme programming includes practices such as systematic testing, continuous improvement and customer involvement.
- The approach to testing in XP is a particular strength where executable tests are developed before the code is written.

Key points

- Rapid application development environments include database programming languages, form generation tools and links to office applications.
- A throw-away prototype is used to explore requirements and design options.
- When implementing a throw-away prototype, start with the requirements you least understand; in incremental development, start with the best-understood requirements.

Software evolution

Objectives

- To explain why change is inevitable if software systems are to remain useful
- To discuss software maintenance and maintenance cost factors
- To describe the processes involved in software evolution
- To discuss an approach to assessing evolution strategies for legacy systems

Topics covered

- Program evolution dynamics
- Software maintenance
- Evolution processes
- Legacy system evolution

Software change

- Software change is inevitable
 - New requirements emerge when the software is used;
 - The business environment changes;
 - Errors must be repaired;
 - New computers and equipment is added to the system;
 - The performance or reliability of the system may have to be improved.
- A key problem for organisations is implementing and managing change to their existing software systems.

Importance of evolution

- Organisations have huge investments in their software systems - they are critical business assets.
- To maintain the value of these assets to the business, they must be changed and updated.
- The majority of the software budget in large companies is devoted to evolving existing software rather than developing new software.


Spiral model of evolution



Program evolution dynamics

- **Program evolution dynamics** is the study of the processes of system change.
- After major empirical studies, Lehman and Belady proposed that there were a number of 'laws' which applied to all systems as they evolved.
- There are sensible observations rather than laws. They are applicable to large systems developed by large organisations. Perhaps less applicable in other cases.

Lehman's laws

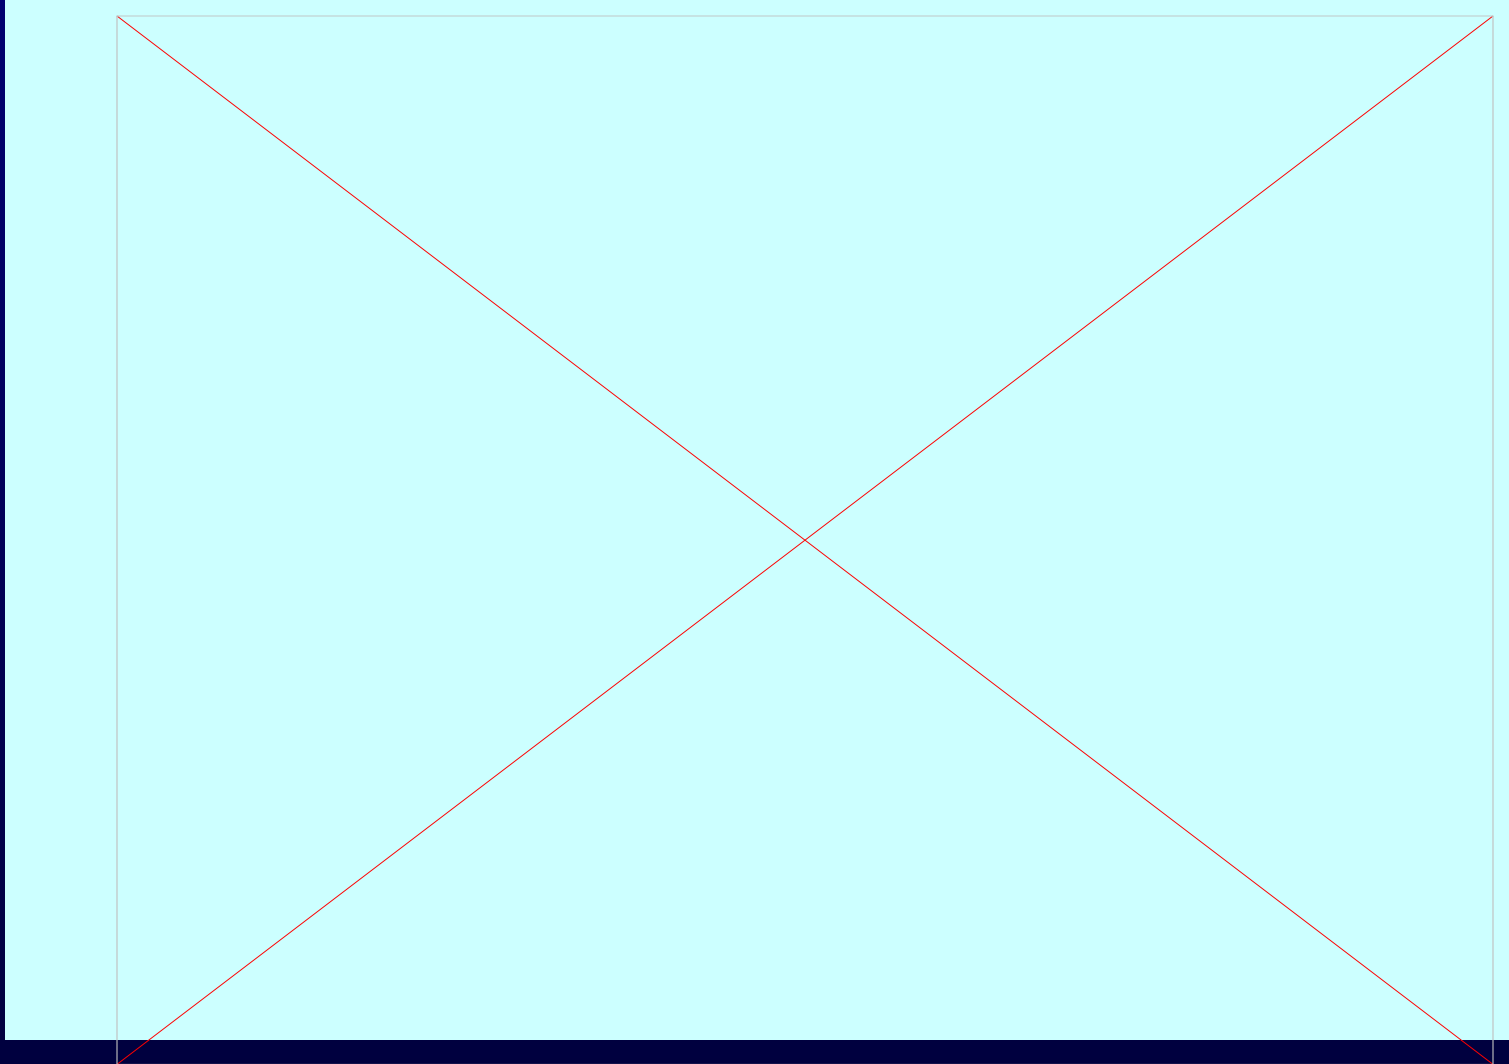

Applicability of Lehman's laws

- Lehman's laws seem to be generally applicable to large, tailored systems developed by large organisations.
 - Confirmed in more recent work by Lehman on the FEAST project (see further reading on book website).
- It is not clear how they should be modified for
 - Shrink-wrapped software products;
 - Systems that incorporate a significant number of COTS components;
 - Small organisations;
 - Medium sized systems.

Software maintenance

- Modifying a program after it has been put into use.
- Maintenance does not normally involve major changes to the system's architecture.
- Changes are implemented by modifying existing components and adding new components to the system.

Maintenance is inevitable

- The system requirements are likely to change while the system is being developed because the environment is changing. Therefore a delivered system won't meet its requirements!
- Systems are tightly coupled with their environment. When a system is installed in an environment it changes that environment and therefore changes the system requirements.
- Systems **MUST** be maintained therefore if they are to remain useful in an environment.

Types of maintenance

- Maintenance to repair software faults
 - Changing a system to correct deficiencies in the way meets its requirements.
- Maintenance to adapt software to a different operating environment
 - Changing a system so that it operates in a different environment (computer, OS, etc.) from its initial implementation.
- Maintenance to add to or modify the system's functionality
 - Modifying the system to satisfy new requirements.

Distribution of maintenance effort



Maintenance costs

- Usually greater than development costs (2* to 100* depending on the application).
- Affected by both technical and non-technical factors.
- Increases as software is maintained.
Maintenance corrupts the software structure so makes further maintenance more difficult.
- Ageing software can have high support costs (e.g. old languages, compilers etc.).

Development/maintenance costs



Maintenance cost factors

- Team stability
 - Maintenance costs are reduced if the same staff are involved with them for some time.
- Contractual responsibility
 - The developers of a system may have no contractual responsibility for maintenance so there is no incentive to design for future change.
- Staff skills
 - Maintenance staff are often inexperienced and have limited domain knowledge.
- Program age and structure
 - As programs age, their structure is degraded and they become harder to understand and change.

Maintenance prediction

- Maintenance prediction is concerned with assessing which parts of the system may cause problems and have high maintenance costs
 - Change acceptance depends on the maintainability of the components affected by the change;
 - Implementing changes degrades the system and reduces its maintainability;
 - Maintenance costs depend on the number of changes and costs of change depend on maintainability.

Maintenance prediction



Change prediction

- Predicting the number of changes requires and understanding of the relationships between a system and its environment.
- Tightly coupled systems require changes whenever the environment is changed.
- Factors influencing this relationship are
 - Number and complexity of system interfaces;
 - Number of inherently volatile system requirements;
 - The business processes where the system is used.

Complexity metrics

- Predictions of maintainability can be made by assessing the complexity of system components.
- Studies have shown that most maintenance effort is spent on a relatively small number of system components.
- Complexity depends on
 - Complexity of control structures;
 - Complexity of data structures;
 - Object, method (procedure) and module size.

Process metrics

- Process measurements may be used to assess maintainability
 - Number of requests for corrective maintenance;
 - Average time required for impact analysis;
 - Average time taken to implement a change request;
 - Number of outstanding change requests.
- If any or all of these is increasing, this may indicate a decline in maintainability.

Evolution processes

- Evolution processes depend on
 - The type of software being maintained;
 - The development processes used;
 - The skills and experience of the people involved.
- Proposals for change are the driver for system evolution. Change identification and evolution continue throughout the system lifetime.

Change identification and evolution



The system evolution process



Change implementation



Urgent change requests

- Urgent changes may have to be implemented without going through all stages of the software engineering process
 - If a serious system fault has to be repaired;
 - If changes to the system's environment (e.g. an OS upgrade) have unexpected effects;
 - If there are business changes that require a very rapid response (e.g. the release of a competing product).

Emergency repair



System re-engineering

- Re-structuring or re-writing part or all of a legacy system without changing its functionality.
- Applicable where some but not all sub-systems of a larger system require frequent maintenance.
- Re-engineering involves adding effort to make them easier to maintain. The system may be re-structured and re-documented.

Advantages of reengineering

- Reduced risk
 - There is a high risk in new software development. There may be development problems, staffing problems and specification problems.
- Reduced cost
 - The cost of re-engineering is often significantly less than the costs of developing new software.

Forward and re-engineering



The re-engineering process



Reengineering process activities

- Source code translation
 - Convert code to a new language.
- Reverse engineering
 - Analyse the program to understand it;
- Program structure improvement
 - Restructure automatically for understandability;
- Program modularisation
 - Reorganise the program structure;
- Data reengineering
 - Clean-up and restructure system data.

Re-engineering approaches




Reengineering cost factors

- The quality of the software to be reengineered.
- The tool support available for reengineering.
- The extent of the data conversion which is required.
- The availability of expert staff for reengineering.
 - This can be a problem with old systems based on technology that is no longer widely used.

Legacy system evolution

- Organisations that rely on legacy systems must choose a strategy for evolving these systems
 - Scrap the system completely and modify business processes so that it is no longer required;
 - Continue maintaining the system;
 - Transform the system by re-engineering to improve its maintainability;
 - Replace the system with a new system.
- The strategy chosen should depend on the system quality and its business value.

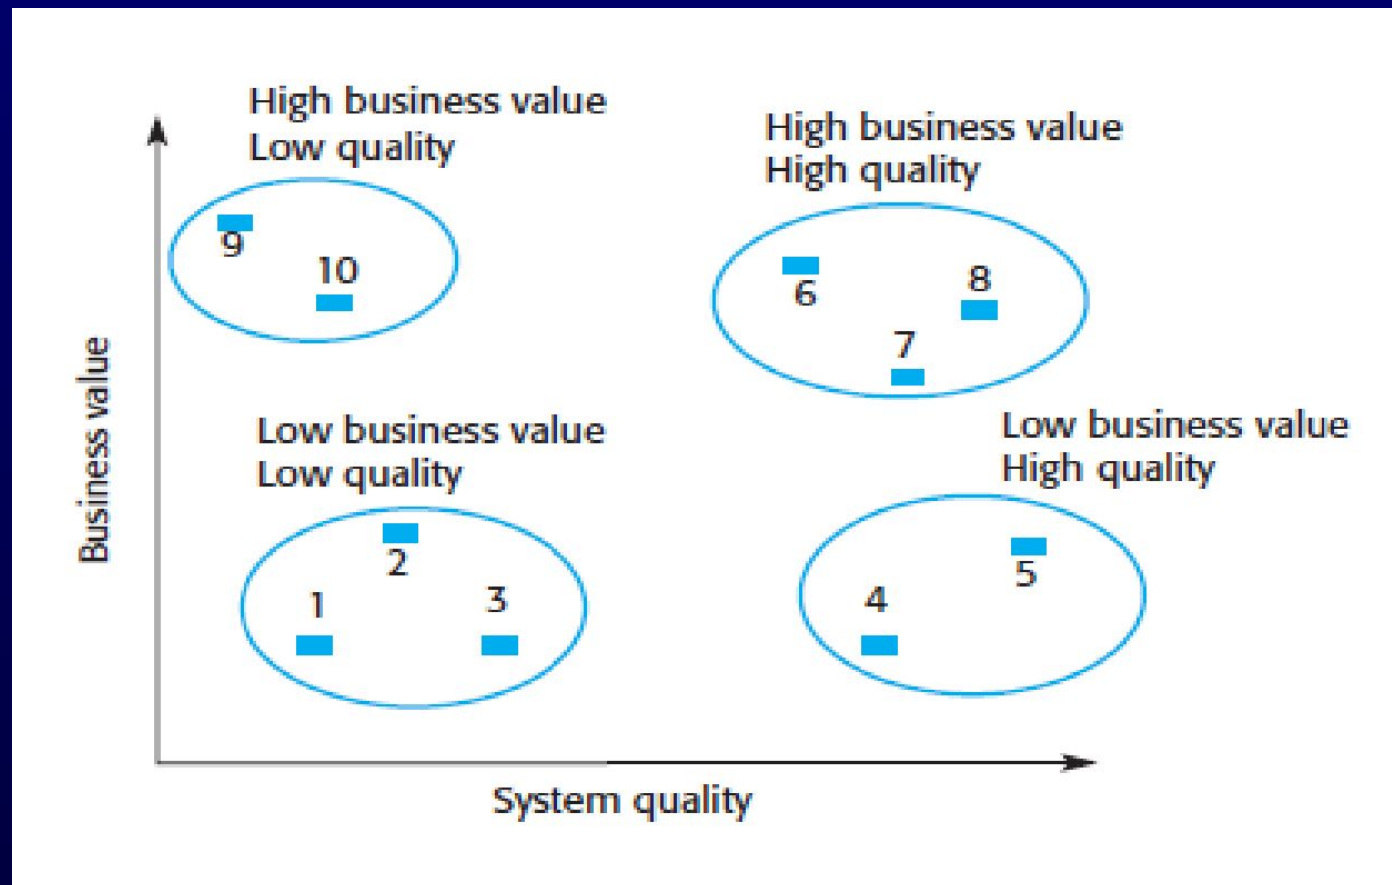

Legacy system categories

- Low quality, low business value
 - These systems should be scrapped.
- Low-quality, high-business value
 - These make an important business contribution but are expensive to maintain. Should be re-engineered or replaced if a suitable system is available.
- High-quality, low-business value
 - Replace with COTS, scrap completely or maintain.
- High-quality, high business value
 - Continue in operation using normal system maintenance.

Business value assessment

- Assessment should take different viewpoints into account
 - System end-users;
 - Business customers;
 - Line managers;
 - IT managers;
 - Senior managers.
- Interview different stakeholders and collate results.

System quality assessment

- Business process assessment
 - How well does the business process support the current goals of the business?
- Environment assessment
 - How effective is the system's environment and how expensive is it to maintain?
- Application assessment
 - What is the quality of the application software system?

Business process assessment

- Use a viewpoint-oriented approach and seek answers from system stakeholders
 - Is there a defined process model and is it followed?
 - Do different parts of the organisation use different processes for the same function?
 - How has the process been adapted?
 - What are the relationships with other business processes and are these necessary?
 - Is the process effectively supported by the legacy application software?
- Example - a travel ordering system may have a low business value because of the widespread use of web-based ordering.

Environment assessment

Factor	Questions
Supplier stability	Is the supplier is still in existence? Is the supplier financially stable and likely to continue in existence? If the supplier is no longer in business, does someone else maintain the systems?
Failure rate	Does the hardware have a high rate of reported failures? Does the support software crash and force system restarts?
Age	How old is the hardware and software? The older the hardware and support software, the more obsolete it will be. It may still function correctly but there could be significant economic and business benefits to moving to more modern systems.
Performance	Is the performance of the system adequate? Do performance problems have a significant effect on system users?
Support requirements	What local support is required by the hardware and software? If there are high costs associated with this support, it may be worth considering system replacement.
Maintenance costs	What are the costs of hardware maintenance and support software licences? Older hardware may have higher maintenance costs than modern systems. Support software may have high annual licensing costs.
Interoperability	Are there problems interfacing the system to other systems? Can compilers, for example, be used with current versions of the operating system? Is hardware emulation required?

Application assessment

Factor	Questions
Understandability	How difficult is it to understand the source code of the current system? How complex are the control structures that are used? Do variables have meaningful names that reflect their function?
Documentation	What system documentation is available? Is the documentation complete, consistent and current?
Data	Is there an explicit data model for the system? To what extent is data duplicated across files? Is the data used by the system up-to-date and consistent?
Performance	Is the performance of the application adequate? Do performance problems have a significant effect on system users?
Programming language	Are modern compilers available for the programming language used to develop the system? Is the programming language still used for new system development?
Configuration management	Are all versions of all parts of the system managed by a configuration management system? Is there an explicit description of the versions of components that are used in the current system?
Test data	Does test data for the system exist? Is there a record of regression tests carried out when new features have been added to the system?
Personnel skills	Are there people available who have the skills to maintain the application? Are there only a limited number of people who understand the system?

System measurement

- You may collect quantitative data to make an assessment of the quality of the application system
 - The number of system change requests;
 - The number of different user interfaces used by the system;
 - The volume of data used by the system.

Key points

- Software development and evolution should be a single iterative process.
- Lehman's Laws describe a number of insights into system evolution.
- Three types of maintenance are bug fixing, modifying software for a new environment and implementing new requirements.
- For custom systems, maintenance costs usually exceed development costs.

Key points

- The process of evolution is driven by requests for changes from system stakeholders.
- Software re-engineering is concerned with re-structuring and re-documenting software to make it easier to change.
- The business value of a legacy system and its quality should determine the evolution strategy that is used.

Verification and Validation

Objectives

- To introduce software verification and validation and to discuss the distinction between them
- To describe the program inspection process and its role in V & V
- To explain static analysis as a verification technique
- To describe the Cleanroom software development process

Topics covered

- Verification and validation planning
- Software inspections
- Automated static analysis
- Cleanroom software development

Verification vs validation

- **Verification:**
 - "Are we building the product right".
- The software should conform to its specification.
- **Validation:**
 - "Are we building the right product".
- The software should do what the user really requires.

The V & V process

- Is a whole life-cycle process - V & V must be applied at each stage in the software process.
- Has two principal objectives
 - The discovery of defects in a system;
 - The assessment of whether or not the system is useful and useable in an operational situation.

V& V goals

- Verification and validation should establish confidence that the software is fit for purpose.
- This does NOT mean completely free of defects.
- Rather, it must be good enough for its intended use and the type of use will determine the degree of confidence that is needed.


V & V confidence

- Depends on system's purpose, user expectations and marketing environment
 - **Software function**
 - The level of confidence depends on how critical the software is to an organisation.
 - **User expectations**
 - Users may have low expectations of certain kinds of software.
 - **Marketing environment**
 - Getting a product to market early may be more important than finding defects in the program.

Static and dynamic verification

- **Software inspections.** Concerned with analysis of the static system representation to discover problems (static verification)
 - May be supplemented by tool-based document and code analysis
- **Software testing.** Concerned with exercising and observing product behaviour (dynamic verification)
 - The system is executed with test data and its operational behaviour is observed

Static and dynamic verification

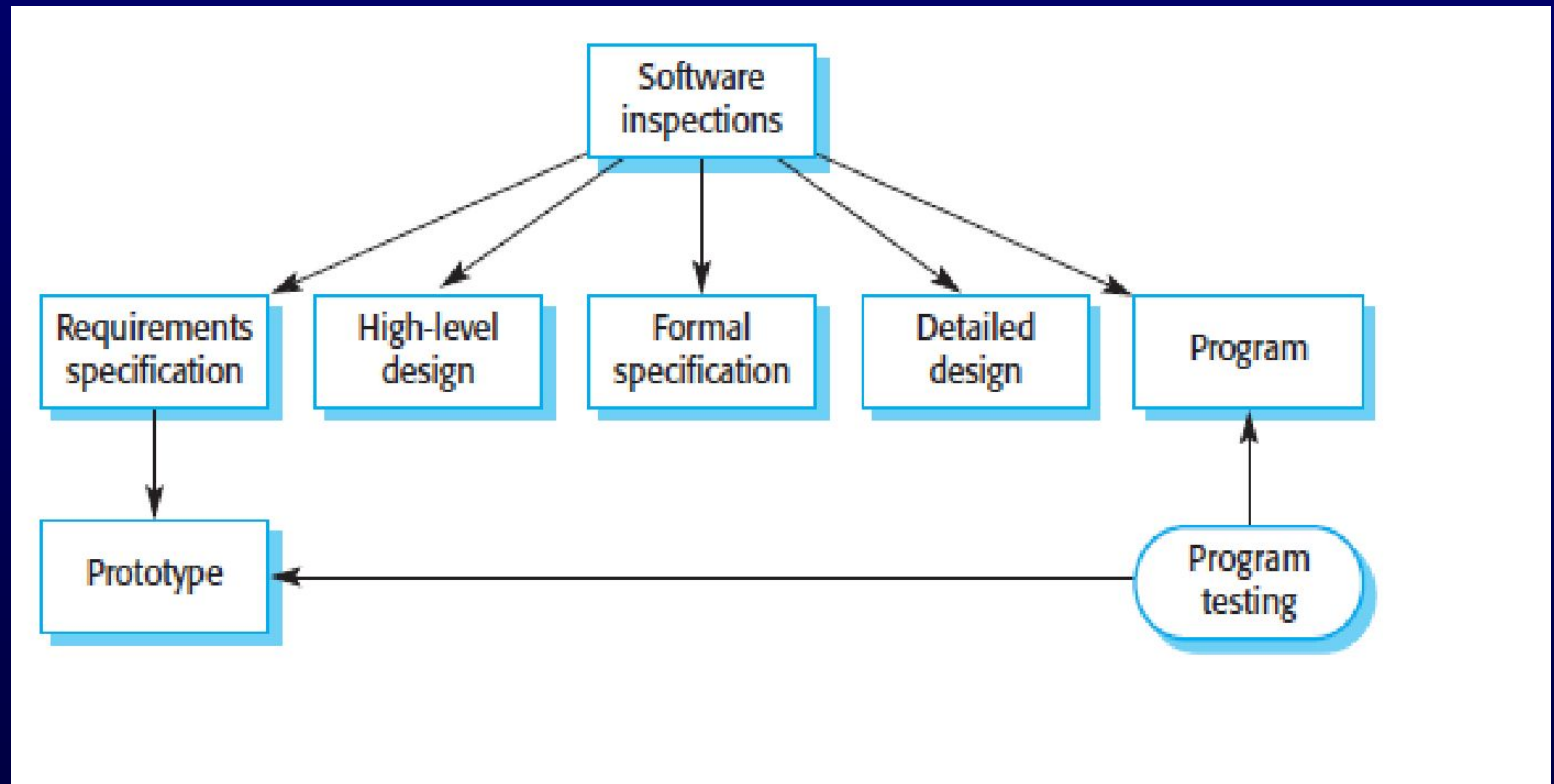

Program testing

- Can reveal the presence of errors NOT their absence.
- The only validation technique for non-functional requirements as the software has to be executed to see how it behaves.
- Should be used in conjunction with static verification to provide full V&V coverage.


Types of testing

- **Defect testing**
 - Tests designed to discover system defects.
 - A successful defect test is one which reveals the presence of defects in a system.
 - Covered in Chapter 23
- **Validation testing**
 - Intended to show that the software meets its requirements.
 - A successful test is one that shows that a requirements has been properly implemented.

Testing and debugging

- Defect testing and debugging are distinct processes.
- Verification and validation is concerned with establishing the existence of defects in a program.
- Debugging is concerned with locating and repairing these errors.
- Debugging involves formulating a hypothesis about program behaviour then testing these hypotheses to find the system error.

The debugging process

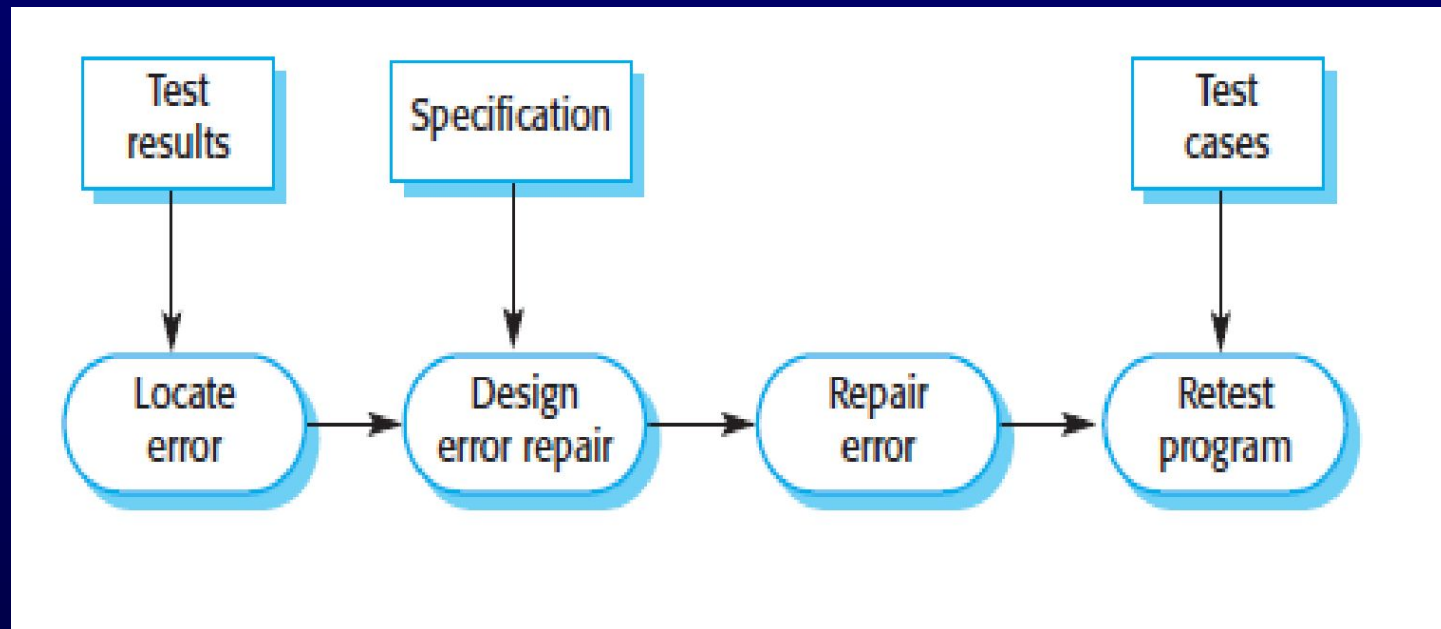


After a defect in the program has been discovered, you have to correct it and revalidate the system. This may involve re-inspecting the program or regression testing where existing tests are executed again. Regression testing is used to check that the changes made to a program have not introduced new faults. Experience has shown that a high proportion of fault 'repairs' are either incomplete or introduce new faults into the program.

V & V planning

- Careful planning is required to get the most out of testing and inspection processes.
- Planning should start early in the development process.
- The plan should identify the balance between static verification and testing.
- Test planning is about defining standards for the testing process rather than describing product tests.

The V-model of development

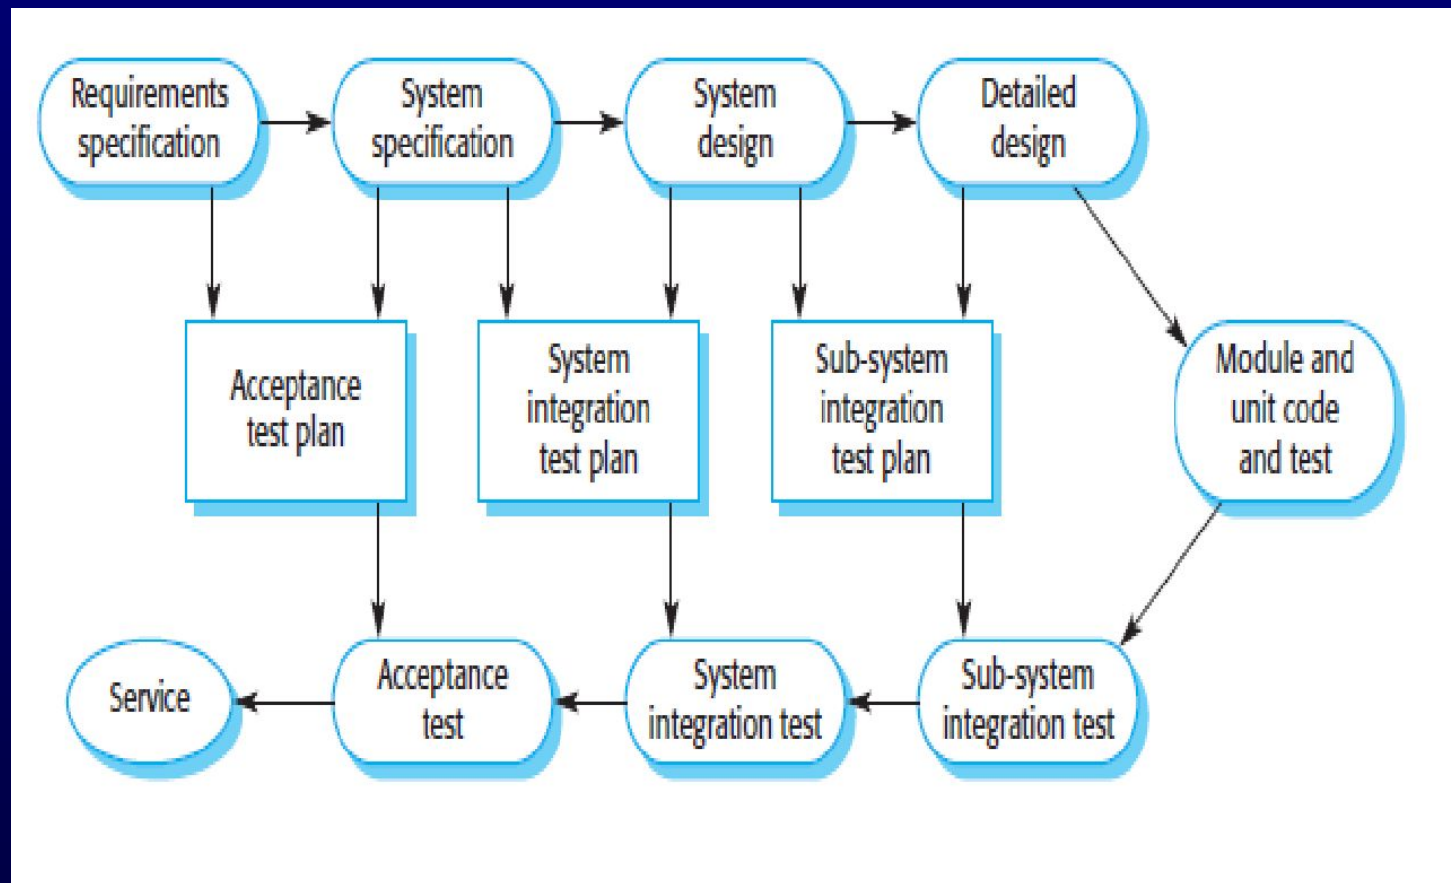

The structure of a software test plan

- The testing process.
- Requirements traceability.
- Tested items.
- Testing schedule.
- Test recording procedures.
- Hardware and software requirements.
- Constraints.

The software test plan

The testing process

A description of the major phases of the testing process. These might be as described earlier in this chapter.

Requirements traceability

Users are most interested in the system meeting its requirements and testing should be planned so that all requirements are individually tested.

Tested items

The products of the software process that are to be tested should be specified.

Testing schedule

An overall testing schedule and resource allocation for this schedule is, obviously, linked to the more general project development schedule.

Test recording procedures

It is not enough simply to run tests; the results of the tests must be systematically recorded. It must be possible to audit the testing process to check that it has been carried out correctly.

Hardware and software requirements

This section should set out the software tools required and estimated hardware utilisation.

Constraints

Constraints affecting the testing process such as staff shortages should be anticipated in this section.

Software inspections

- These involve people examining the source representation with the aim of discovering anomalies and defects.
- Inspections not require execution of a system so may be used before implementation.
- They may be applied to any representation of the system (requirements, design, configuration data, test data, etc.).
- They have been shown to be an effective technique for discovering program errors.

Inspection success

- Many different defects may be discovered in a single inspection.
- In testing, one defect ,may mask another so several executions are required.
- The reuse domain and programming knowledge so reviewers are likely to have seen the types of error that commonly arise.

Inspections and testing

- Inspections and testing are complementary and not opposing verification techniques.
- Both should be used during the V & V process.
- Inspections can check conformance with a specification but not conformance with the customer's real requirements.
- Inspections cannot check non-functional characteristics such as performance, usability, etc.


Program inspections

- Formalised approach to document reviews
- Intended explicitly for defect **detection** (not correction).
- **Defects may be logical errors, anomalies in the code that might indicate an erroneous condition (e.g. an uninitialised variable) or non-compliance with standards.**

Inspection pre-conditions

- A precise specification must be available.
- Team members must be familiar with the organisation standards.
- Syntactically correct code or other system representations must be available.
- An error checklist should be prepared.
- Management must accept that inspection will increase costs early in the software process.
- Management should not use inspections for staff appraisal ie finding out who makes mistakes.

The inspection process

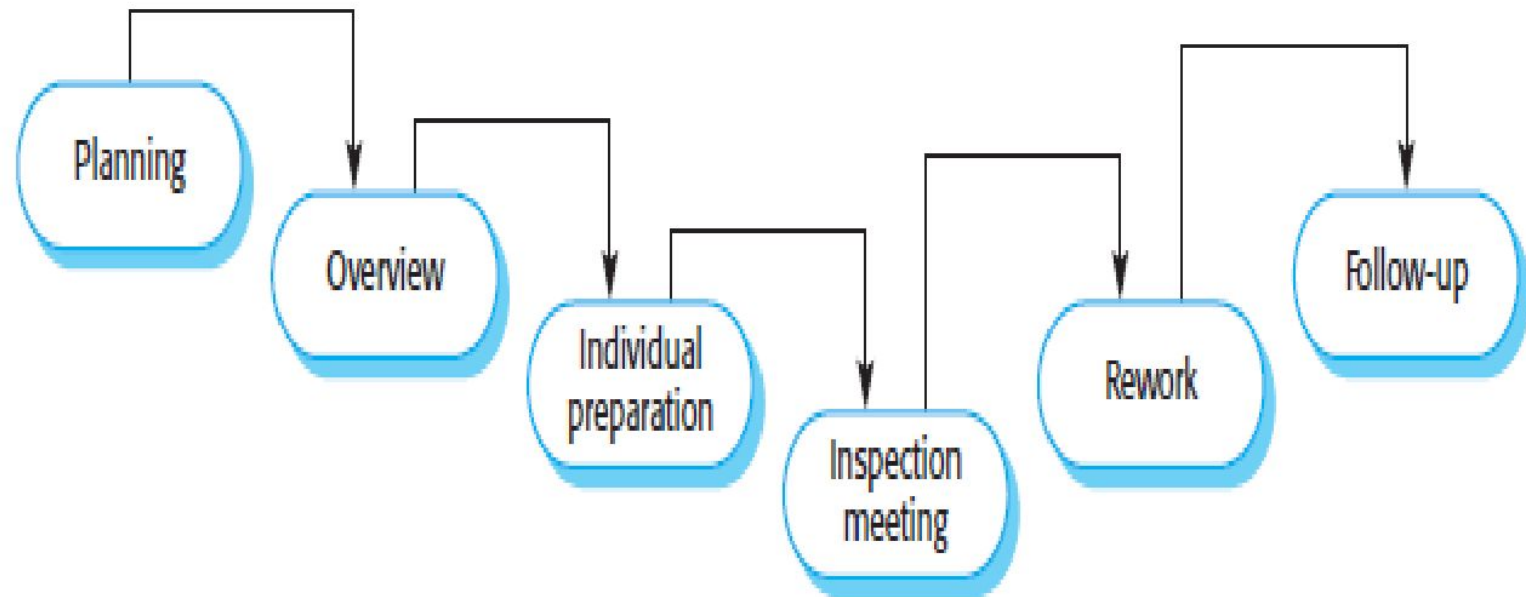

Inspection procedure

1. System overview is presented to inspection team.
2. Code and associated documents are distributed to inspection team in advance.
3. Inspection takes place and discovered errors are noted.
4. Modifications are made to repair discovered errors.
5. Re-inspection may or may not be required.

Inspection roles

Role	Description
Author or owner	The programmer or designer responsible for producing the program or document. Responsible for fixing defects discovered during the inspection process.
Inspector	Finds errors, omissions and inconsistencies in programs and documents. May also identify broader issues that are outside the scope of the inspection team.
Reader	Presents the code or document at an inspection meeting.
Scribe	Records the results of the inspection meeting.
Chairman or moderator	Manages the process and facilitates the inspection. Reports process results to the chief moderator.
Chief moderator	Responsible for inspection process improvements, checklist updating, standards development, etc.

Inspection checklists

- Checklist of common errors should be used to drive the inspection.
- Error checklists are programming language dependent and reflect the characteristic errors that are likely to arise in the language.
- In general, the 'weaker' the type checking, the larger the checklist.
- Examples: Initialisation, Constant naming, loop termination, array bounds, etc.

Inspection checks

Fault class	Inspection check
Data faults	Are all program variables initialised before their values are used? Have all constants been named? Should the upper bound of arrays be equal to the size of the array or Size -1? If character strings are used, is a delimiter explicitly assigned? Is there any possibility of buffer overflow?
Control faults	For each conditional statement, is the condition correct? Is each loop certain to terminate? Are compound statements correctly bracketed? In case statements, are all possible cases accounted for? If a break is required after each case in case statements, has it been included?
Input/output faults	Are all input variables used? Are all output variables assigned a value before they are output? Can unexpected inputs cause corruption?
Interface faults	Do all function and method calls have the correct number of parameters? Do formal and actual parameter types match? Are the parameters in the right order? If components access shared memory, do they have the same model of the shared memory structure?
Storage management faults	If a linked structure is modified, have all links been correctly reassigned? If dynamic storage is used, has space been allocated correctly? Is space explicitly de-allocated after it is no longer required?
Exception management faults	Have all possible error conditions been taken into account?

Inspection rate

- 500 statements/hour during overview.
- 125 source statement/hour during individual preparation.
- 90-125 statements/hour can be inspected.
- Inspection is therefore an expensive process.
- Inspecting 500 lines costs about 40 man/hours effort - about £2800 at UK rates.

Automated static analysis

- Static analysers are software tools for source text processing.
- They parse the program text and try to discover potentially erroneous conditions and bring these to the attention of the V & V team.
- They are very effective as an aid to inspections - they are a supplement to but not a replacement for inspections.

Static analysis checks

Fault class	Static analysis check
Data faults	Variables used before initialisation Variables declared but never used Variables assigned twice but never used between assignments Possible array bound violations Undeclared variables
Control faults	Unreachable code Unconditional branches into loops
Input/output faults	Variables output twice with no intervening assignment
Interface faults	Parameter type mismatches Parameter number mismatches Non-usage of the results of functions Uncalled functions and procedures
Storage management faults	Unassigned pointers Pointer arithmetic

Stages of static analysis

- **Control flow analysis.** Checks for loops with multiple exit or entry points, finds unreachable code, etc.
- **Data use analysis.** Detects uninitialised variables, variables written twice without an intervening assignment, variables which are declared but never used, etc.
- **Interface analysis.** Checks the consistency of routine and procedure declarations and their use

Stages of static analysis

- **Information flow analysis.** Identifies the dependencies of output variables. Does not detect anomalies itself but highlights information for code inspection or review
- **Path analysis.** Identifies paths through the program and sets out the statements executed in that path. Again, potentially useful in the review process
- Both these stages generate vast amounts of information. They must be used with care.

LINT static analysis

```
138% more lint_ex.c
```

```
#include <stdio.h>
printarray (Anarray)
int Anarray;
{
printf("%d",Anarray);
}
main ()
{
int Anarray[5]; int i; char c;
printarray (Anarray, i, c);
printarray (Anarray) ;
}
```

```
139% cc lint_ex.c
```

```
140% lint lint_ex.c
```

```
lint_ex.c(10): warning: c may be used before set
lint_ex.c(10): warning: i may be used before set
printarray: variable # of args. lint_ex.c(4) :: lint_ex.c(10)
printarray, arg. 1 used inconsistently lint_ex.c(4) :: lint_ex.c(10)
printarray, arg. 1 used inconsistently lint_ex.c(4) :: lint_ex.c(11)
printf returns value which is always ignored
```

Use of static analysis

- Particularly valuable when a language such as C is used which has weak typing and hence many errors are undetected by the compiler,
- Less cost-effective for languages like Java that have strong type checking and can therefore detect many errors during compilation.

Verification and formal methods

- Formal methods can be used when a mathematical specification of the system is produced.
- They are the ultimate static verification technique.
- They involve detailed mathematical analysis of the specification and may develop formal arguments that a program conforms to its mathematical specification.

Arguments for formal methods

- Producing a mathematical specification requires a detailed analysis of the requirements and this is likely to uncover errors.
- They can detect implementation errors before testing when the program is analysed alongside the specification.


Arguments against formal methods

1. Require specialised notations that cannot be understood by domain experts.
2. Very expensive to develop a specification and even more expensive to show that a program meets that specification.
3. It may be possible to reach the same level of confidence in a program more cheaply using other V & V techniques.

Cleanroom software development

- The name is derived from the 'Cleanroom' process in semiconductor fabrication. The philosophy is defect avoidance rather than defect removal.
- Goal is to develop a zero-defect software
- This software development process is based on:
 - Formal specification;
 - Incremental development
 - Structured programming
 - Static verification using correctness arguments;
 - Statistical testing to determine program reliability.

The Cleanroom process

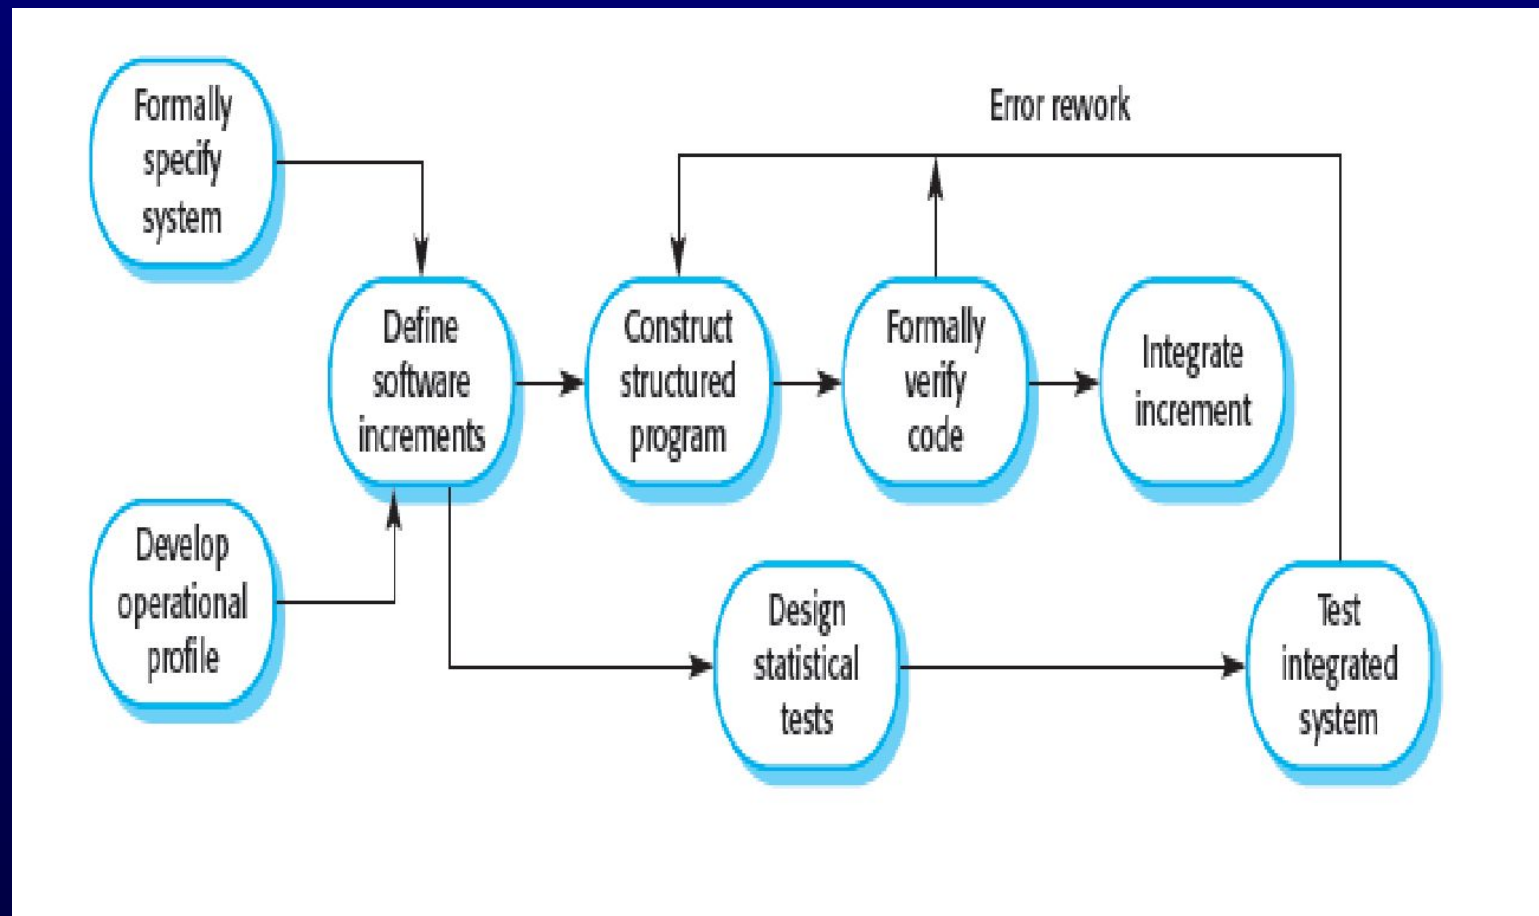

Cleanroom process characteristics

- Formal specification using a state transition model.
- Incremental development where the customer prioritises increments.
- Structured programming - limited control and abstraction constructs are used in the program.
- Static verification using rigorous inspections.
- Statistical testing of the system (covered in Ch. 24).

Formal specification and inspections

- The state based model is a system specification and the inspection process checks the program against this model
- The programming approach is defined so that the correspondence between the model and the system is clear.
- Mathematical arguments (not proofs) are used to increase confidence in the inspection process.

Cleanroom process teams

- **Specification team.** Responsible for developing and maintaining the system specification.
- **Development team.** Responsible for developing and verifying the software. The software is NOT executed or even compiled during this process.
- **Certification team.** Responsible for developing a set of statistical tests to exercise the software after development. Reliability growth models used to determine when reliability is acceptable.

Cleanroom process evaluation

- The results of using the Cleanroom process have been very impressive with few discovered faults in delivered systems.
- Independent assessment shows that the process is no more expensive than other approaches.
- There were fewer errors than in a 'traditional' development process.
- However, the process is not widely used. It is not clear how this approach can be transferred to an environment with less skilled or less motivated software engineers.

Key points

- Verification and validation are not the same thing. Verification shows conformance with specification; validation shows that the program meets the customer's needs.
- Test plans should be drawn up to guide the testing process.
- Static verification techniques involve examination and analysis of the program for error detection.

Key points

- Program inspections are very effective in discovering errors.
- Program code in inspections is systematically checked by a small team to locate software faults.
- Static analysis tools can discover program anomalies which may be an indication of faults in the code.
- The Cleanroom development process depends on incremental development, static verification and statistical testing.

Software testing

Objectives

- To discuss the distinctions between validation testing and defect testing
- To describe the principles of system and component testing
- To describe strategies for generating system test cases
- To understand the essential characteristics of tool used for test automation

Topics covered

- System testing
- Component testing
- Test case design
- Test automation

The testing process

- **Component testing**
 - Testing of individual program components;
 - Usually the responsibility of the component developer (except sometimes for critical systems);
 - Tests are derived from the developer's experience.
- **System testing**
 - Testing of groups of components integrated to create a system or sub-system;
 - The responsibility of an independent testing team;
 - Tests are based on a system specification.

Testing phases



Defect testing

- The goal of defect testing is to discover defects in programs
- A *successful* defect test is a test which causes a program to behave in an anomalous way
- Tests show the presence not the absence of defects

Testing process goals

- **Validation testing**
 - To demonstrate to the developer and the system customer that the software meets its requirements;
 - A successful test shows that the system operates as intended.
- **Defect testing**
 - To discover faults or defects in the software where its behaviour is incorrect or not in conformance with its specification;
 - A successful test is a test that makes the system perform incorrectly and so exposes a defect in the system.

The software testing process



Testing policies

- Only exhaustive testing can show a program is free from defects. However, exhaustive testing is impossible,
- Testing policies define the approach to be used in selecting system tests:
 - All functions accessed through menus should be tested;
 - Combinations of functions accessed through the same menu should be tested;
 - Where user input is required, all functions must be tested with correct and incorrect input.

System testing

- Involves integrating components to create a system or sub-system.
- May involve testing an increment to be delivered to the customer.
- Two phases:
 - **Integration testing** - the test team have access to the system source code. The system is tested as components are integrated.
 - **Release testing** - the test team test the complete system to be delivered as a black-box.

Integration testing

- Involves building a system from its components and testing it for problems that arise from component interactions.
- Top-down integration
 - Develop the skeleton of the system and populate it with components.
- Bottom-up integration
 - Integrate infrastructure components then add functional components.
- To simplify error localisation, systems should be incrementally integrated.

Incremental integration testing



Testing approaches

- Architectural validation
 - Top-down integration testing is better at discovering errors in the system architecture.
- System demonstration
 - Top-down integration testing allows a limited demonstration at an early stage in the development.
- Test implementation
 - Often easier with bottom-up integration testing.
- Test observation
 - Problems with both approaches. Extra code may be required to observe tests.

Release testing

- The process of testing a release of a system that will be distributed to customers.
- Primary goal is to increase the supplier's confidence that the system meets its requirements.
- Release testing is usually black-box or functional testing
 - Based on the system specification only;
 - Testers do not have knowledge of the system implementation.


Black-box testing




Testing guidelines

- Testing guidelines are hints for the testing team to help them choose tests that will reveal defects in the system
 - Choose inputs that force the system to generate all error messages;
 - Design inputs that cause buffers to overflow;
 - Repeat the same input or input series several times;
 - Force invalid outputs to be generated;
 - Force computation results to be too large or too small.

Testing scenario

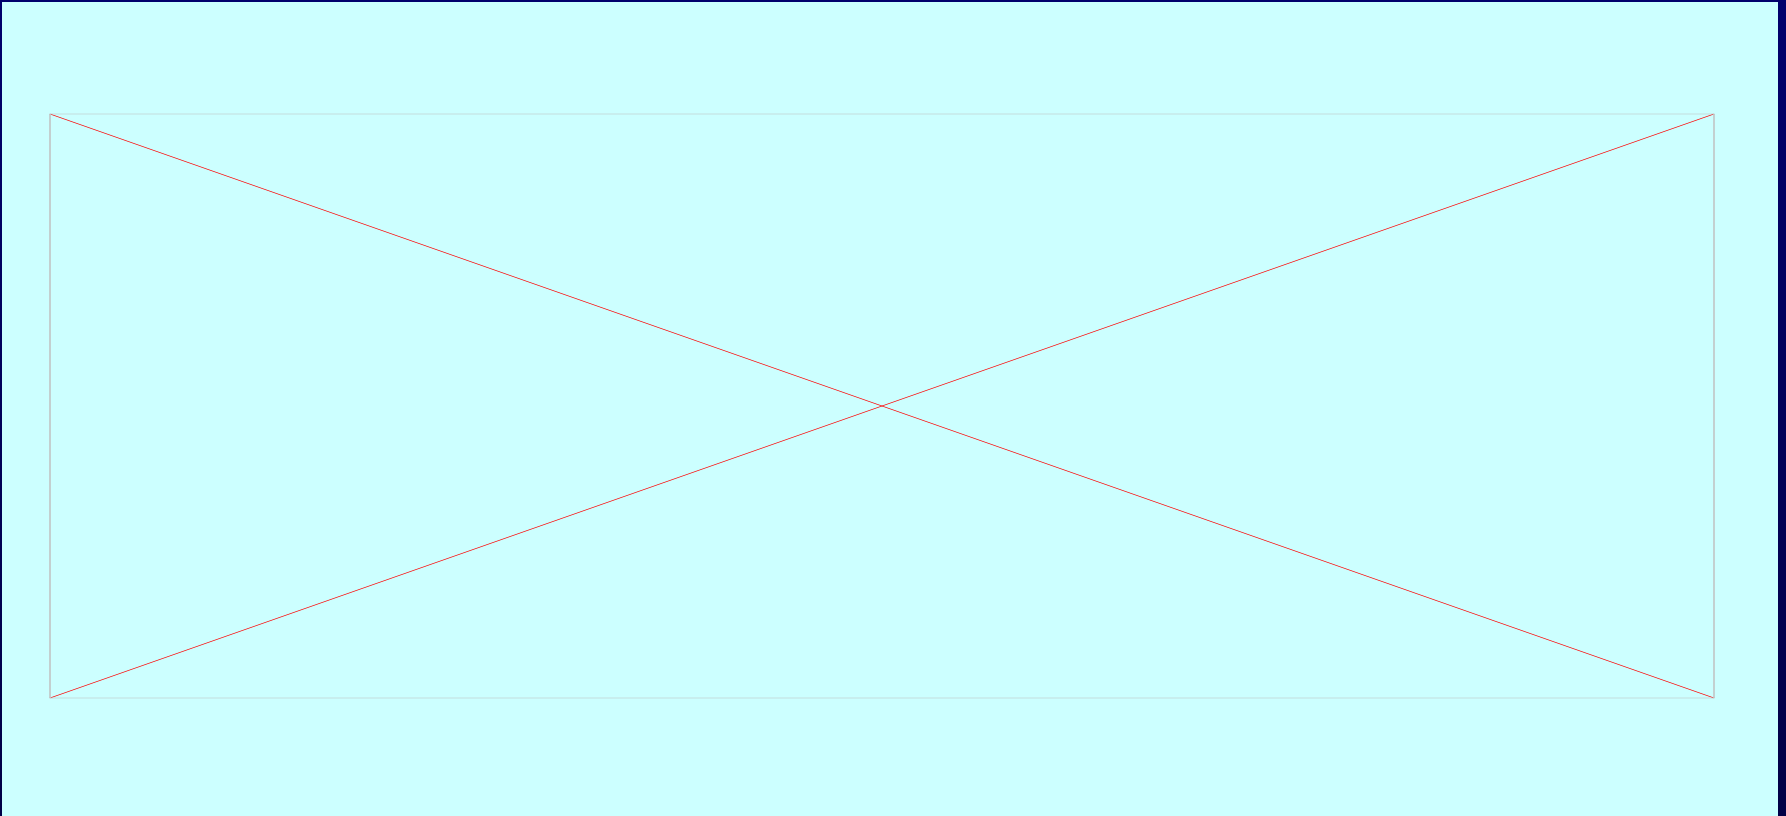

System tests

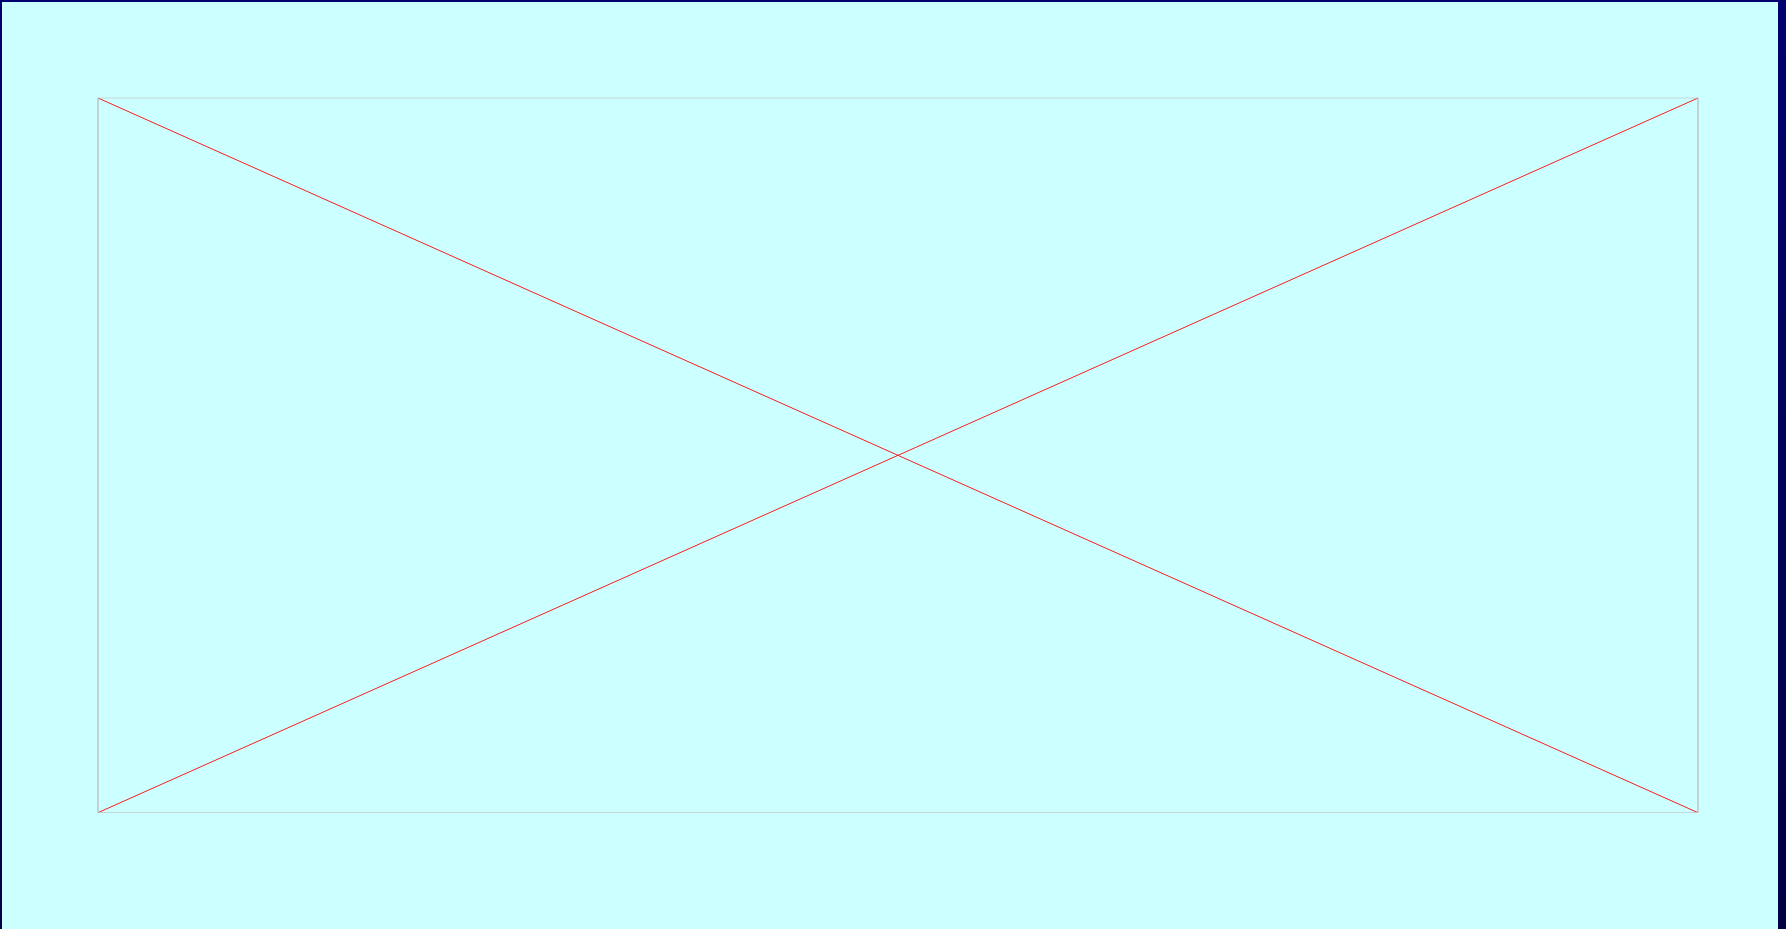

Use cases

- Use cases can be a basis for deriving the tests for a system. They help identify operations to be tested and help design the required test cases.
- From an associated sequence diagram, the inputs and outputs to be created for the tests can be identified.

Collect weather data sequence chart



Performance testing

- Part of release testing may involve testing the emergent properties of a system, such as performance and reliability.
- Performance tests usually involve planning a series of tests where the load is steadily increased until the system performance becomes unacceptable.

Stress testing

- Exercises the system beyond its maximum design load. Stressing the system often causes defects to come to light.
- Stressing the system test failure behaviour.. Systems should not fail catastrophically. Stress testing checks for unacceptable loss of service or data.
- Stress testing is particularly relevant to distributed systems that can exhibit severe degradation as a network becomes overloaded.

Component testing

- Component or unit testing is the process of testing individual components in isolation.
- It is a defect testing process.
- Components may be:
 - Individual functions or methods within an object;
 - Object classes with several attributes and methods;
 - Composite components with defined interfaces used to access their functionality.

Object class testing

- Complete test coverage of a class involves
 - Testing all operations associated with an object;
 - Setting and interrogating all object attributes;
 - Exercising the object in all possible states.
- Inheritance makes it more difficult to design object class tests as the information to be tested is not localised.

Weather station object interface



Weather station testing

- Need to define test cases for reportWeather, calibrate, test, startup and shutdown.
- Using a state model, identify sequences of state transitions to be tested and the event sequences to cause these transitions
- For example:
 - Waiting -> Calibrating -> Testing -> Transmitting -> Waiting

Interface testing

- Objectives are to detect faults due to interface errors or invalid assumptions about interfaces.
- Particularly important for object-oriented development as objects are defined by their interfaces.

Interface testing



Interface types

- Parameter interfaces
 - Data passed from one procedure to another.
- Shared memory interfaces
 - Block of memory is shared between procedures or functions.
- Procedural interfaces
 - Sub-system encapsulates a set of procedures to be called by other sub-systems.
- Message passing interfaces
 - Sub-systems request services from other sub-system.s

Interface errors

- Interface misuse
 - A calling component calls another component and makes an error in its use of its interface e.g. parameters in the wrong order.
- Interface misunderstanding
 - A calling component embeds assumptions about the behaviour of the called component which are incorrect.
- Timing errors
 - The called and the calling component operate at different speeds and out-of-date information is accessed.

Interface testing guidelines

- Design tests so that parameters to a called procedure are at the extreme ends of their ranges.
- Always test pointer parameters with null pointers.
- Design tests which cause the component to fail.
- Use stress testing in message passing systems.
- In shared memory systems, vary the order in which components are activated.


Test case design

- Involves designing the test cases (inputs and outputs) used to test the system.
- The goal of test case design is to create a set of tests that are effective in validation and defect testing.
- Design approaches:
 - Requirements-based testing;
 - Partition testing;
 - Structural testing.


Requirements based testing

- A general principle of requirements engineering is that requirements should be testable.
- Requirements-based testing is a validation testing technique where you consider each requirement and derive a set of tests for that requirement.

LIBSYS requirements

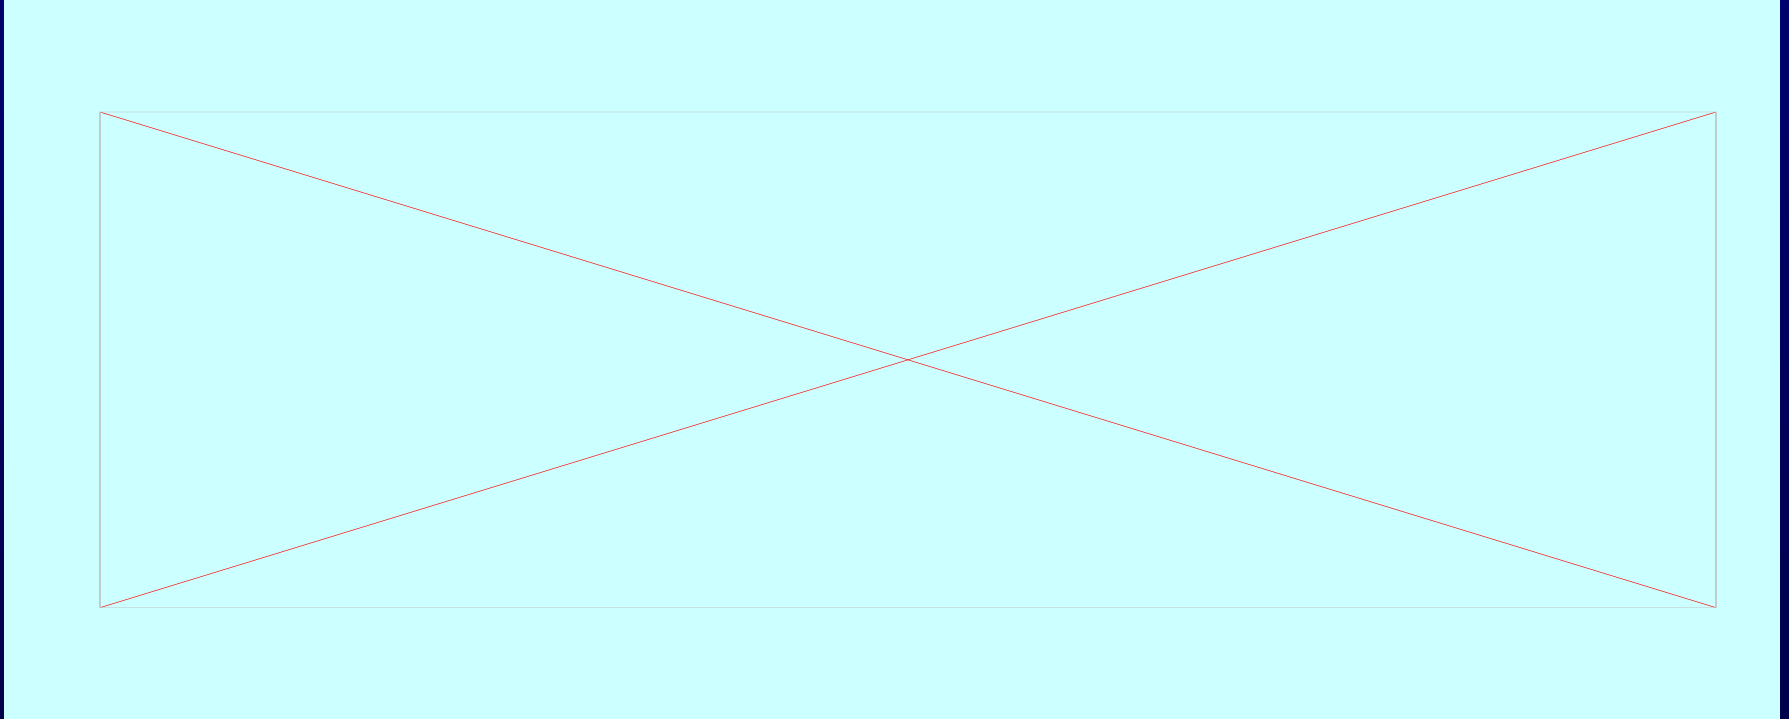

LIBSYS tests

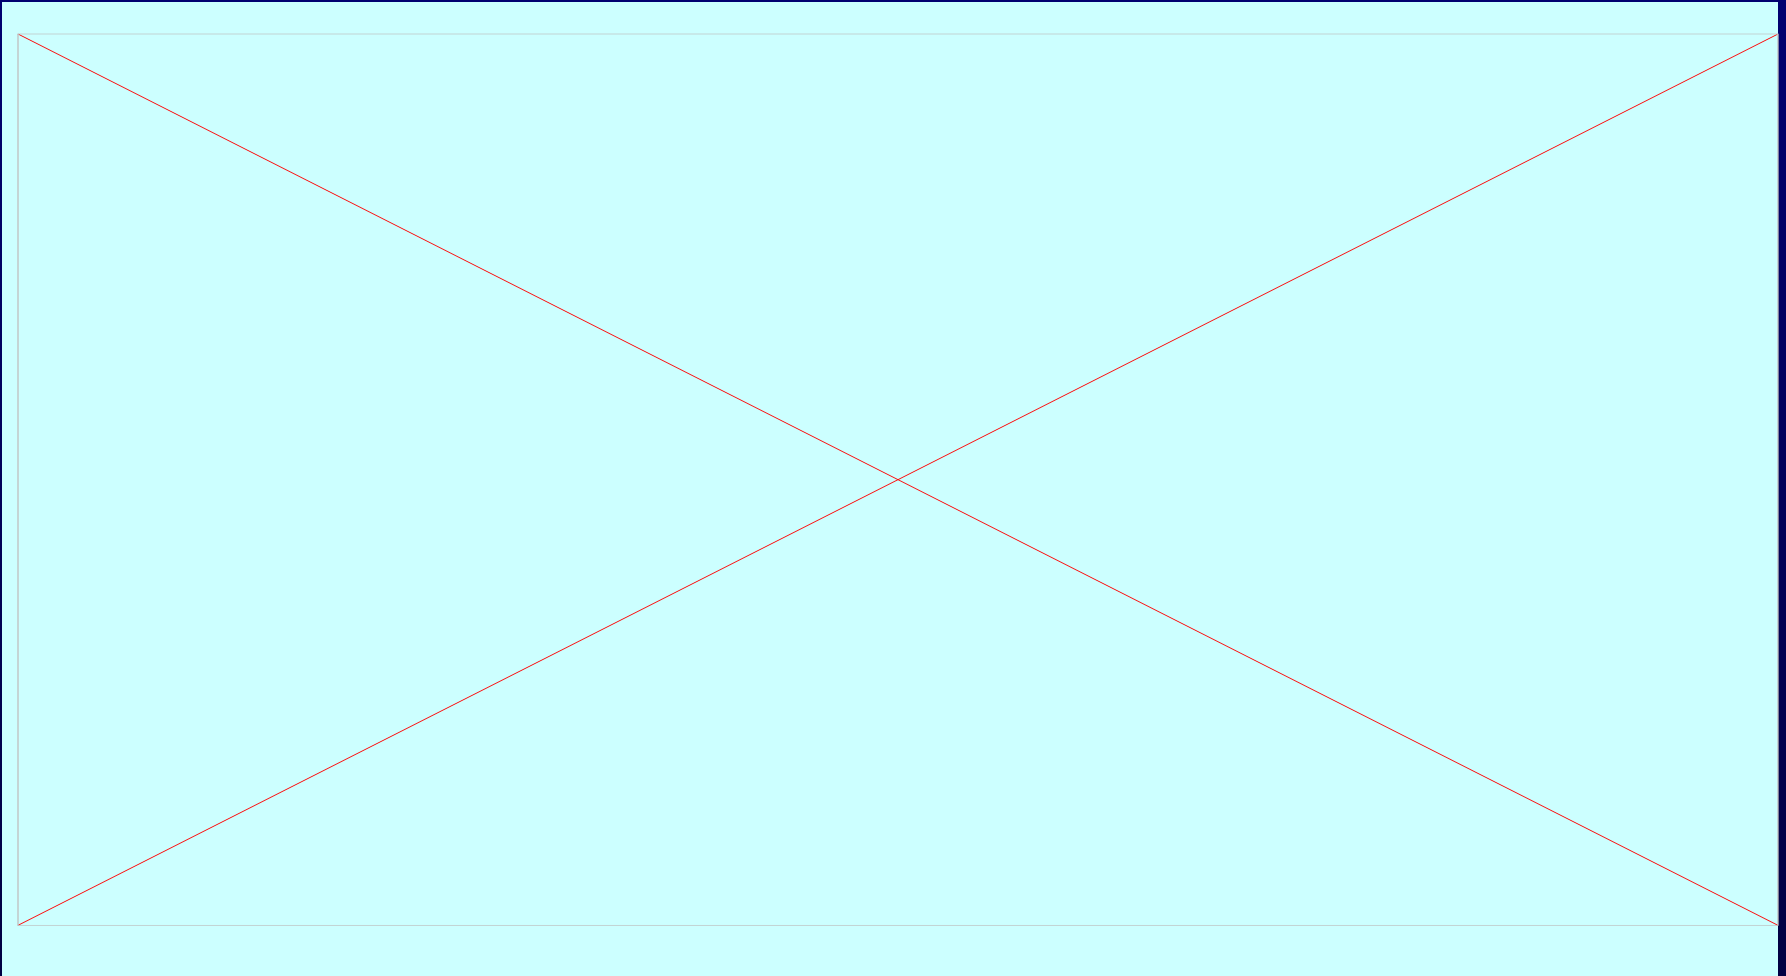

Partition testing

- Input data and output results often fall into different classes where all members of a class are related.
- Each of these classes is an **equivalence partition** or domain where the program behaves in an equivalent way for each class member.
- Test cases should be chosen from each partition.

Equivalence partitioning



Equivalence partitions



Search routine specification

procedure Search (Key : ELEM ; T: SEQ of ELEM;
Found : **in out** BOOLEAN; L: **in out** ELEM_INDEX) ;

Pre-condition

-- the sequence has at least one element
T'FIRST <= T'LAST

Post-condition

-- the element is found and is referenced by L
(Found and T (L) = Key)

or

-- the element is not in the array
(**not** Found **and**
not (exists i, T'FIRST >= i <= T'LAST, T (i) = Key))


Search routine - input partitions

- Inputs which conform to the pre-conditions.
- Inputs where a pre-condition does not hold.
- Inputs where the key element is a member of the array.
- Inputs where the key element is not a member of the array.

Testing guidelines (sequences)

- Test software with sequences which have only a single value.
- Use sequences of different sizes in different tests.
- Derive tests so that the first, middle and last elements of the sequence are accessed.
- Test with sequences of zero length.

Search routine - input partitions

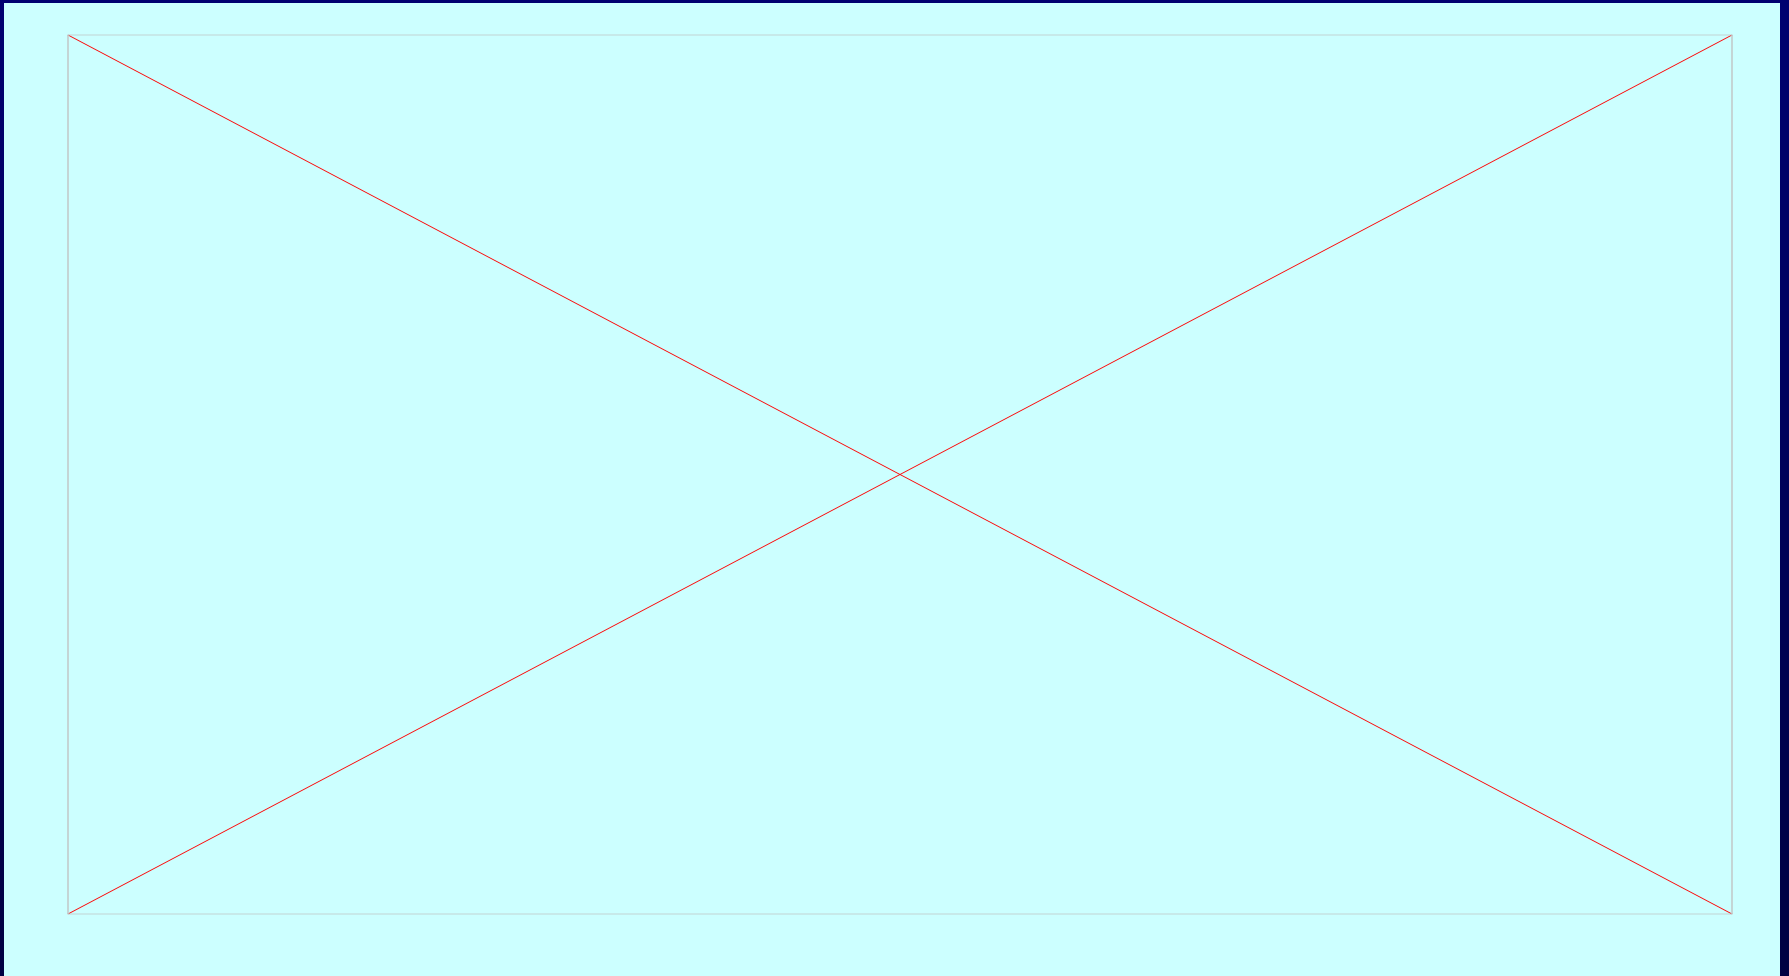

Structural testing

- Sometime called white-box testing.
- Derivation of test cases according to program structure. Knowledge of the program is used to identify additional test cases.
- Objective is to exercise all program statements (not all path combinations).

Structural testing


Binary search - equiv. partitions

- Pre-conditions satisfied, key element in array.
- Pre-conditions satisfied, key element not in array.
- Pre-conditions unsatisfied, key element in array.
- Pre-conditions unsatisfied, key element not in array.
- Input array has a single value.
- Input array has an even number of values.
- Input array has an odd number of values.

Binary search equiv. partitions



Binary search - test cases

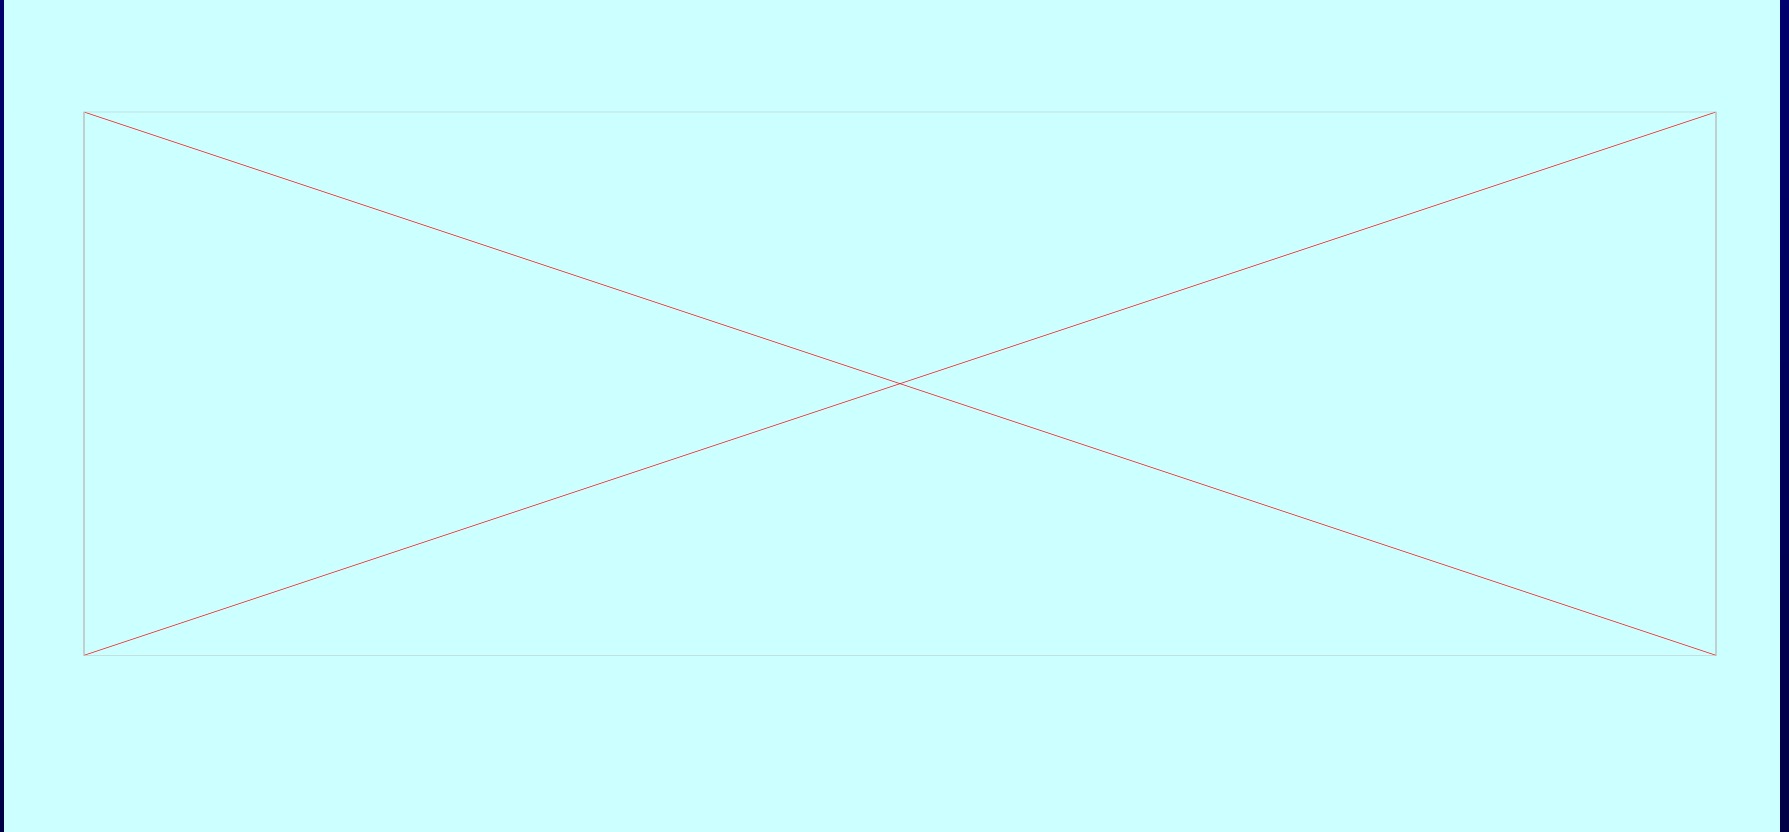

Path testing

- The objective of path testing is to ensure that the set of test cases is such that each path through the program is executed at least once.
- The starting point for path testing is a program flow graph that shows nodes representing program decisions and arcs representing the flow of control.
- Statements with conditions are therefore nodes in the flow graph.

Binary search flow graph



Independent paths

- 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 14
- 1, 2, 3, 4, 5, 14
- 1, 2, 3, 4, 5, 6, 7, 11, 12, 5, ...
- 1, 2, 3, 4, 6, 7, 2, 11, 13, 5, ...
- Test cases should be derived so that all of these paths are executed
- A dynamic program analyser may be used to check that paths have been executed

Test automation

- Testing is an expensive process phase. Testing workbenches provide a range of tools to reduce the time required and total testing costs.
- Systems such as Junit support the automatic execution of tests.
- Most testing workbenches are open systems because testing needs are organisation-specific.
- They are sometimes difficult to integrate with closed design and analysis workbenches.

A testing workbench



Testing workbench adaptation

- Scripts may be developed for user interface simulators and patterns for test data generators.
- Test outputs may have to be prepared manually for comparison.
- Special-purpose file comparators may be developed.

Key points

- Testing can show the presence of faults in a system; it cannot prove there are no remaining faults.
- Component developers are responsible for component testing; system testing is the responsibility of a separate team.
- Integration testing is testing increments of the system; release testing involves testing a system to be released to a customer.
- Use experience and guidelines to design test cases in defect testing.

Key points

- Interface testing is designed to discover defects in the interfaces of composite components.
- Equivalence partitioning is a way of discovering test cases - all cases in a partition should behave in the same way.
- Structural analysis relies on analysing a program and deriving tests from this analysis.
- Test automation reduces testing costs by supporting the test process with a range of software tools.