

EXPERIMENT 7

#exp 7\src\App.css

```
body {  
    margin: 0;  
    font-family: Arial, sans-serif;  
}  
.header {  
    background: #2d7be5;  
    color: white;  
    text-align: center;  
    padding: 25px;  
    font-size: 25px;  
}  
.navbar {  
    background: #222;  
    color: white;  
    display: flex;  
    justify-content: space-between;  
    padding: 10px 20px;  
    font-size: 25px;  
}  
.navbar a {  
    color: white;  
    text-decoration: none;  
    margin-left: 15px;  
}  
.container {  
    display: flex;  
    padding: 40px;  
    background: #eee;  
}  
.column {  
    flex: 1;
```

```
padding: 20px;
}
.footer {
background: #333;
color: white;
text-align: center;
padding: 15px;
position: fixed;
width: 100%;
bottom: 0;
}
```

#exp 7\src\App.jsx

```
import { StrictMode } from 'react'
import { createRoot } from 'react-dom/client'
import './App.css'
```

```
function Student({ name, course, marks }) {
  return (
    <div className="student-card">
      <h2>{name}</h2>
      <p>Course: {course}</p>
      <p>Marks: {marks}</p>
    </div>
  )
}
```

```
function App() {
  return (
    <div className="app-container">
      <h1 className="app-title">Student Information</h1>
      <Student name="Rahul Sharma" course="CSE" marks={80} />
      <Student name="Anita Verma" course="IT" marks={92} />
      <Student name="Rohan Gupta" course="Electronics" marks={78} />
    </div>
  )
}
```

```

    <p>
      NAME: PRIYANSHU KUMAR <br />
      ROLL.NO: 2503201000871 <br />
      SECTION: CSE 26
    </p>
  </div>
)
}
export default App

```

[#exp 7\src\index.css](#)

```

body{
  text-align: center;
  margin: 0;
  padding: 0;
}

```

[#exp 7\src\main.jsx](#)

```

import { StrictMode } from 'react'
import { createRoot } from 'react-dom/client'
import './index.css'
import App from './App.jsx'

createRoot(document.getElementById('root')).render(
  <StrictMode>
    <App />
  </StrictMode>,
)

```

EXPERIMENT 8

#exp 8\src\App.css

```
* {  
  margin: 0;  
  padding: 0;  
  box-sizing: border-box;  
}  
  
body {  
  font-family: 'Inter', 'Segoe UI', sans-serif;  
  background: #0f172a;  
  min-height: 100vh;  
  display: flex;  
  justify-content: center;  
  align-items: center;  
  padding: 24px;  
  color: #ffffff;  
}  
  
.container {  
  width: 100%;  
  max-width: 720px;  
  min-height: 520px;  
  background: #1e293b;  
  border: 1px solid rgba(255,255,255,0.08);  
  border-radius: 8px;  
  display: flex;  
  justify-content: center;  
  align-items: center;  
  padding: 24px;  
  box-shadow: 0 10px 25px rgba(0,0,0,0.25);  
}  
  
.card {  
  width: 100%;
```

```
max-width: 460px;
background: #111827;
border: 1px solid #334155;
border-radius: 8px;
padding: 40px;
text-align: center;
box-shadow: 0 8px 20px rgba(0,0,0,0.2);
}
h1 {
font-size: 36px;
font-weight: 700;
margin-bottom: 24px;
color: #ffffff;
}
h2 {
font-size: 72px;
font-weight: 700;
color: #38bdf8;
margin: 24px 0;
}
.button-container {
display: flex;
justify-content: center;
gap: 16px;
flex-wrap: wrap;
margin-top: 24px;
}
button {
background: #38bdf8;
color: #082f49;
border: none;
padding: 14px 22px;
border-radius: 8px;
font-size: 15px;
```

```
font-weight: 700;
cursor: pointer;
}
.reset-btn {
margin-top: 20px;
background: #ef4444;
color: white;
}
@media(max-width: 768px) {
.container {
min-height: auto;
padding: 20px;
}
.card {
padding: 28px;
}
h1 {
font-size: 28px;
}
h2 {
font-size: 56px;
}
.button-container {
flex-direction: column;
}
button {
width: 100%;
}
}
```

```
import { useState } from "react";
import "./App.css";
function App() {
  const [count, setCount] = useState(0);
  return (
    <div className="container">
      <div className="card">
        <h1>React Counter Application</h1>
        <h2>{count}</h2>
        <div className="button-container">
          <button onClick={() => setCount(count + 1)}>
            Increment (+)
          </button>
          <button onClick={() => setCount(count - 1)}>
            Decrement (-)
          </button>
        </div>
        <button
          className="reset-btn"
          onClick={() => setCount(0)}
        >
          Reset
        </button>
        <br />
        <br />
        <div><p>NAME: PRIYANSHU KUMAR<br />
          ROLL.NO: 2503201000871 <br />
          SECTION: CSE 26 <br />
        </p></div>
      </div>
    </div>
  );
}
```

```
);  
}  
export default App;
```

#exp 8\src\main.jsx

```
import { StrictMode } from 'react'  
import { createRoot } from 'react-dom/client'  
import './index.css'  
import App from './App.jsx'  
  
createRoot(document.getElementById('root')).render(  
  <StrictMode>  
    <App />  
  </StrictMode>,  
)
```


EXEPERIMENT 9

#exp 9\src\App.css

```
* {  
  margin: 0;  
  padding: 0;  
  box-sizing: border-box;  
}  
  
body {  
  font-family: 'Inter', 'Segoe UI', sans-serif;  
  background: #0f172a;  
  min-height: 100vh;  
  display: flex;  
  justify-content: center;  
  align-items: center;  
  padding: 24px;  
  color: #fff;  
}  
  
.container {  
  width: 100%;  
  max-width: 460px;  
  padding: 36px;  
  background: #1e293b;  
  border: 1px solid rgba(255,255,255,0.08);  
  border-radius: 8px;  
  box-shadow: 0 10px 25px rgba(0,0,0,0.25);  
}  
  
.container h1 {  
  text-align: center;  
  font-size: 30px;  
  font-weight: 700;
```

```
margin-bottom: 28px;
color: #ffffff;
}
form {
display: flex;
flex-direction: column;
gap: 6px;
}

label {
font-size: 13px;
font-weight: 600;
color: #cbd5e1;
margin-top: 12px;
margin-bottom: 6px;
}

input {
width: 100%;
padding: 14px 16px;
font-size: 15px;
color: #fff;
background: #0f172a;
border: 1px solid #334155;
border-radius: 8px;
outline: none;
}

input::placeholder {
color: #94a3b8;
}

input:focus {
border-color: #38bdf8;
}
```

```
.error {
  font-size: 12px;
  color: #f87171;
  margin-top: 4px;
}

button[type="submit"] {
  margin-top: 24px;
  padding: 14px;
  font-size: 15px;
  font-weight: 700;
  color: #082f49;
  background: #38bdf8;
  border: none;
  border-radius: 8px;
  cursor: pointer;
}

.apiData {
  margin-top: 28px;
  padding-top: 12px;
  border-top: 1px solid #334155;
}

.apiData h2 {
  font-size: 18px;
  text-align: center;
  margin-bottom: 18px;
  color: #ffffff;
}

.apiData p {
  background: #0f172a;
  border-left: 4px solid #38bdf8;
  border-radius: 8px;
```

```
padding: 16px;
font-size: 15px;
color: #e2e8f0;
line-height: 2;
}
```

```
.user-label {
  font-weight: 700;
  color: #38bdf8;
}
```

#exp 9\src\App.jsx

```
import { useState } from 'react'
import './App.css'
```

```
function App(){
  const [name, setName] = useState("")
  const [email, setEmail] = useState("")
  const [password, setPassword] = useState("")
  const [errors, setErrors] = useState({})
  const [registeredUser, setRegisteredUser] = useState(null)

  const handleSubmit = (e) => {
    e.preventDefault();
    let formErrors = {};

    if (name.trim() === "") {
      formErrors.name = "Name is required"
    }

    if (!email.includes("@")) {
      formErrors.email = "Enter a valid email address"
    }

    if (password.length < 6) {
      formErrors.password = "Password must be at least 6 characters"
    }
  }
}
```

```
}
```

```
setErrors(formErrors);
```

```
if (Object.keys(formErrors).length === 0) {
```

```
  setRegisteredUser({ name, email });
```

```
  setName("");
```

```
  setEmail("");
```

```
  setPassword("");
```

```
  setErrors({});
```

```
}
```

```
}
```

```
return (
```

```
<div className="container">
```

```
<h1>Registration Form</h1>
```

```
<form onSubmit={handleSubmit}>
```

```
  <label>Name</label>
```

```
  <input
```

```
    type="text"
```

```
    placeholder="Enter your name"
```

```
    value={name}
```

```
    onChange={(e) => setName(e.target.value)}
```

```
{errors.name && <p className="error">{errors.name}</p>}
```

```
<label>Email</label>
```

```
<input
```

```
  type="email"
```

```
  placeholder="Enter your email"
```

```
  value={email}
```

```
  onChange={(e) => setEmail(e.target.value)}
```

```
{errors.email && <p className="error">{errors.email}</p>}
```

```
<label>Password</label>
```

```
<input
```

```
  type="password"
```

```
  placeholder="Enter your password"
```

```
  value={password}
```

```
  onChange={(e) => setPassword(e.target.value)}
```

```
{errors.password && <p className="error">{errors.password}</p>}
```

```
<button type="submit">Register</button>
```

```
</form>
```

```
{registeredUser && (
```

```
  <div className="apiData">
```

```
    <h2>Registered User</h2>
```

```
    <p>
```

```
      <span className="user-label">Name:</span> {registeredUser.name}<br/>
```

```
      <span className="user-label">Email:</span> {registeredUser.email}
```

```
    </p>
```

```
  </div>
```

```
)} <br />
```

```
<div className="container">
```

```
  <p>
```

```
    NAME: PRIYANSHU KUMAR <br />
```

```
    ROLL.NO: 2503201000871 <br />
```

```
    SECTION: CSE 26 <br />
```

```
  </p>
```

```
</div>
```

```
</div>
```

```
);
```

```
}
```

```
export default App;
```

#exp 9\src\index.css

```
* {  
  box-sizing: border-box;  
  margin: 0;  
  padding: 0;  
}
```

```
body {  
  background-color: #f0f2f5;  
  font-family: 'Segoe UI', Roboto, sans-serif;  
  min-height: 100vh;  
}
```

```
#root {  
  min-height: 100vh;  
  display: flex;  
  flex-direction: column;  
}
```

#exp 9\src\main.jsx

```
import { StrictMode } from 'react'  
import { createRoot } from 'react-dom/client'  
import './index.css'  
import App from './App.jsx'  
  
createRoot(document.getElementById('root')).render(  
  <StrictMode>  
    <App />  
  </StrictMode>,  
)
```

EXPERIMENT 1

#exp 1\1.html

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Document</title>

  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css" rel="stylesheet">

  <link rel="stylesheet" href="style.css">

</head>

<body>

  <h1 class="text-center text-primary">My Website</h1>

  <nav class="navbar navbar-expand-lg navbar-light bg-dark navbar-dark">

    <div class="container-fluid">

      <a class="navbar-brand" href="#">My Website</a>

      <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarNav"

        aria-controls="navbarNav" aria-expanded="false" aria-label="Toggle navigation">

        <span class="navbar-toggler-icon"></span>

      </button>

      <div class="collapse navbar-collapse" id="navbarNav">

        <ul class="navbar-nav">

          <li class="nav-item">

            <a class="nav-link active" aria-current="page" href="#">Home</a>

          </li>

          <li class="nav-item">

            <a class="nav-link" href="#">About</a>

          </li>

        </ul>

      </div>

    </div>

  </nav>

</body>

</html>
```



```

        </li>
        <li class="nav-item">
            <a class="nav-link" href="#">Contact</a>
        </li>
    </ul>
</div>
</div>
</nav>
<div class="container">
    <div class="column">
        <h2>Column 1</h2>
        <p>This is the first column. On small devices the column occupies full width, while on
            medium and large devices it occupies half width using Bootstrap grid classes.</p>
    </div>
    <div style="border-left: 3px solid black; height: 200px;"></div>
    <div class="column">
        <h2>Column 2</h2>
        <p>This is the second column. Bootstrap grid system helps to create responsive
            layout.</p>
    </div>
</div>
<div class="footer">
    NAME: PRIYANSHU KUMAR <br>ROLL.NO: 2503201000871 <br>SECTION: CSE 26
</div>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js"></script>
</body>

</html>

```

#exp 1\style.css

```

body {
    margin: 0;
    font-family: Arial, sans-serif;
}

```

```
.header {  
    background: #2d7be5;  
    color: white;  
    text-align: center;  
    padding: 25px;  
    font-size: 25px;  
}
```

```
.navbar {  
    background: #222;  
    color: white;  
    display: flex;  
    justify-content: space-between;  
    padding: 10px 20px;  
    font-size: 25px;  
}
```

```
.navbar a {  
    color: white;  
    text-decoration: none;  
    margin-left: 15px;  
}
```

```
.container {  
    display: flex;  
    padding: 40px;  
    background: #eee;  
}
```

```
.column {  
    flex: 1;  
    padding: 20px;  
}
```

```
.footer {  
  background: #333;  
  color: white;  
  text-align: center;  
  padding: 15px;  
  position: fixed;  
  width: 100%;  
  bottom: 0;  
}
```

EXEPERIMENT 2

```
<!DOCTYPE html>

<html>

<head>

  <title>TechStore</title>

  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">

  <link rel="stylesheet" href="style.css">

</head>

<body>

  <nav class="navbar navbar-expand-lg navbar-dark bg-dark">
    <div class="container">
      <a class="navbar-brand" href="#">TechStore</a>
      <button class="navbar-toggler" data-bs-toggle="collapse" data-bs-target="#menu">
        <span class="navbar-toggler-icon"></span>
      </button>
      <div class="collapse navbar-collapse" id="menu">
        <ul class="navbar-nav ms-auto">
          <li class="nav-item"><a class="nav-link" href="#">Home</a></li>
          <li class="nav-item"><a class="nav-link" href="#">Products</a></li>
          <li class="nav-item"><a class="nav-link" href="#">About</a></li>
          <li class="nav-item"><a class="nav-link" href="#">Contact</a></li>
        </ul>
      </div>
    </div>
  </nav>

  <div class="container mt-5">
    <div class="row">

      <div class="col-lg-4 col-md-6 col-12 mb-4">
```

```
<div class="card">
```

```
  
```

```
  <div class="card-body">
```

```
    <h5>Laptop</h5>
```

```
    <p>High performance laptop</p>
```

```
    <h6>₹50,000 <span class="badge bg-success">New</span></h6>
```

```
    <button class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#m1">View
      Details</button>
```

```
  </div>
```

```
</div>
```

```
</div>
```

```
<div class="col-lg-4 col-md-6 col-12 mb-4">
```

```
  <div class="card">
```

```
    
```

```
    <div class="card-body">
```

```
      <h5>Mobile</h5>
```

```
      <p>Latest smartphone</p>
```

```
      <h6>₹30,000 <span class="badge bg-danger">Sale</span></h6>
```

```
      <button class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#m2">View
        Details</button>
```

```
    </div>
```

```
  </div>
```

```
</div>
```

```
<div class="col-lg-4 col-md-6 col-12 mb-4">
```

```
  <div class="card">
```

```
    
```

```
    <div class="card-body">
```

```
      <h5>Headphones</h5>
```

```
      <p>Noise cancelling</p>
```

```
      <h6>₹5,000 <span class="badge bg-success">New</span></h6>
```

```
        <button class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#m3">View
        Details</button>
    </div>
</div>
</div>

</div>
</div>
<div class="modal fade" id="m1">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header">
                <h5>Laptop Details</h5>
                <button class="btn-close" data-bs-dismiss="modal"></button>
            </div>
            <div class="modal-body">
                16GB RAM, SSD, Fast performance
            </div>
            <div class="modal-footer">
                <button class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
            </div>
        </div>
    </div>
</div>
</div>
```

```
<div class="modal fade" id="m2">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header">
                <h5>Mobile Details</h5>
                <button class="btn-close" data-bs-dismiss="modal"></button>
            </div>
            <div class="modal-body">
                High camera quality smartphone
```

```

</div>

<div class="modal-footer">

    <button class="btn btn-secondary" data-bs-dismiss="modal">Close</button>

</div>

</div>

</div>

</div>

<div class="modal fade" id="m3">

    <div class="modal-dialog">

        <div class="modal-content">

            <div class="modal-header">

                <h5>Headphones Details</h5>

                <button class="btn-close" data-bs-dismiss="modal"></button>

            </div>

            <div class="modal-body">

                Best sound quality with bass

            </div>

            <div class="modal-footer">

                <button class="btn btn-secondary" data-bs-dismiss="modal">Close</button>

            </div>

        </div>

    </div>

</div>

</div>

<div>

<div class="bg-dark text-white text-center p-3">

    <p>NAME: PRIYANSHU KUMAR <br>ROLL.NO: 2503201000871 <br>SECTION: CSE 26</p>

</div>

<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js">

</script>

</body>

</html>

```

```
<div class="modal fade" id="m3">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <h5>Headphones Details</h5>
        <button class="btn-close" data-bs-dismiss="modal"></button>
      </div>
      <div class="modal-body">
        Best sound quality with bass
      </div>
      <div class="modal-footer">
        <button class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
      </div>
    </div>
  </div>
</div>
```

```
<footer class="bg-dark text-white text-center p-3">
  <p>NAME: PRIYANSHU KUMAR <br>ROLL.NO: 2503201000871 <br>SECTION: CSE 26</p>
</footer>

<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js">
</script>
```

</body>

</html>

#exp 2\style.css

```
body{
background:#ffffff;
}

.card:hover{
transform: scale(1.05);
transition: 0.3s;
}

.card{
background-color: rgb(0, 0, 0);
color: rgb(255, 255, 255);
text-align: center;
}

footer{
margin-top:50px;
position: relative;
bottom: 0;
width: 100%;
}
```


EXEPERIMENT 3

#exp 3\exp3.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Health Care Plus</title>
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <script src="https://cdn.tailwindcss.com"></script>
</head>
<body class="bg-gray-200 font-sans">
  <header class="bg-gradient-to-r from-slate-600 to-indigo-400 text-white p-4">
    <div class="flex justify-between items-center">
      <h1 class="text-xl font-bold">Health Care Plus</h1>
      <nav class="space-x-4 text-sm">
        <a href="#" class="hover:text-gray-200">Home</a>
        <a href="#" class="hover:text-gray-200">Programs</a>
        <a href="#" class="hover:text-gray-200">Trainers</a>
        <a href="#" class="hover:text-gray-200">Contact</a>
      </nav>
    </div>
  </header>
  <section class="bg-gradient-to-r from-sky-200 to-indigo-400 text-white text-center py-16">
    <h2 class="text-4xl font-bold mb-4">
      Transform Your Body & Mind
    </h2>
    <p class="mb-6 text-lg">
      Join Health Care Plus today and achieve your health goals with expert trainers.
    </p>
    <button class="bg-gray-200 text-gray-700 px-6 py-2 rounded-md font-semibold hover:bg
white">
```

Join Now

</button> </section>

<section class="py-12 px-6">

<h3 class="text-3xl font-bold text-center mb-10">

Our Programs

</h3>

<div class="grid grid-cols-1 md:grid-cols-2 lg:grid-cols-3 gap-6">

<div class="bg-gray-100 p-6 rounded-lg shadow text-center">

<h4 class="text-red-600 font-bold mb-2">

Weight Training </h4>

<p>

Build strength and muscle with guided weight training programs.

</p></div>

<div class="bg-gray-100 p-6 rounded-lg shadow text-center">

<h4 class="text-red-600 font-bold mb-2">

Yoga Classes

</h4>

<p>

Improve flexibility and mental wellness through yoga sessions.

</p> </div>

<div class="bg-gray-100 p-6 rounded-lg shadow text-center">

<h4 class="text-red-600 font-bold mb-2">

Diet Plans

</h4>

<p>

Personalized diet plans to complement your fitness routine.

</p></div></div>

</section>

<footer class="bg-gradient-to-r from-sky-300 to-indigo-400 text-black text-center py-6">

<p>NAME: PRIYANSHU KUMAR
ROLL.NO: 2503201000871
SECTION: CSE 26</p>

</footer>

</body>

</html>

React Counter Application

0

Increment (+)

Decrement (-)

Reset

NAME: PRIYANSHU KUMAR
ROLLNO: 2503201000871
SECTION: CSE 26

React Counter Application



5

Increment (+)

Decrement (-)

Reset

NAME: PRIYANSHU KUMAR
ROLLNO: 2503201000871
SECTION: CSE 26

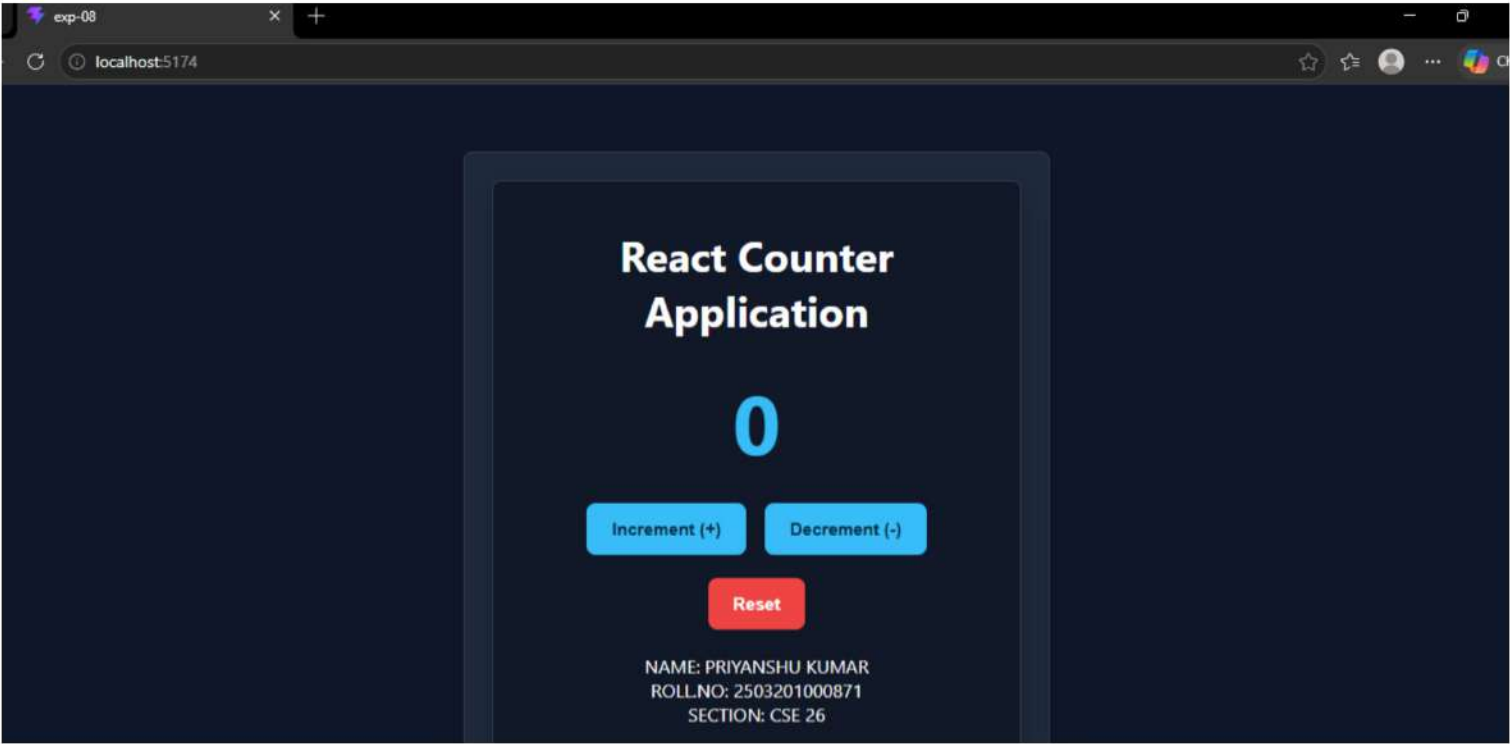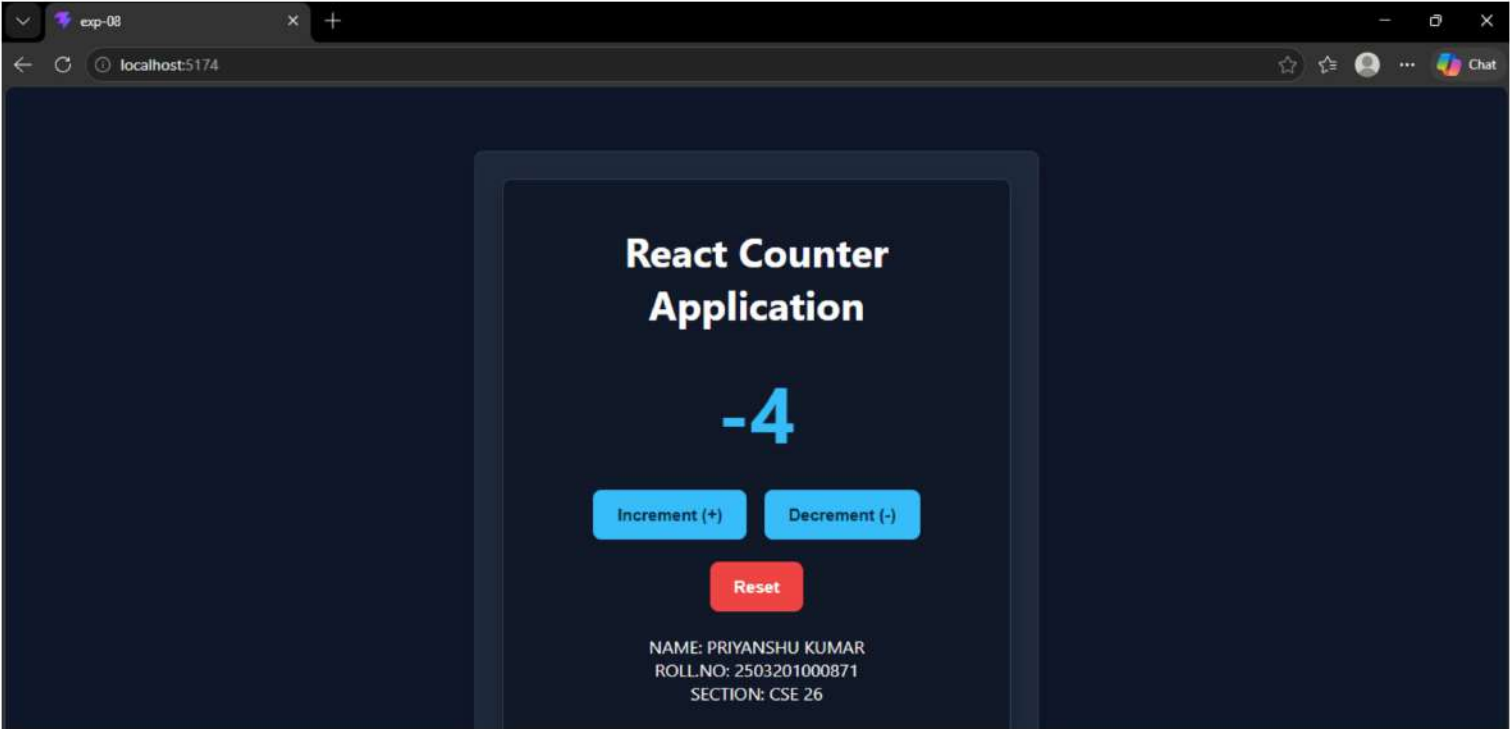

Registration Form

Name

priyanshu

Email

example@example.com

Password

••••••

Register

NAME: PRIYANSHU KUMAR
ROLL.NO: 2503201000871
SECTION: CSE 26

Enter your name

Email

Enter your email

Password

Enter your password

Register

Registered User

Name: priyanshu

Email: example@example.com

NAME: PRIYANSHU KUMAR
ROLL.NO: 2503201000871
SECTION: CSE 26

Student Information

Rahul Sharma

Course: CSE

Marks: 80

Anita Verma

Course: IT

Marks: 92

Rohan Gupta

Course: Electronics

Marks: 78

NAME: PRIYANSHU KUMAR
ROLL.NO: 2503201000871
SECTION: CSE 26

Registration Form

Name

Enter your name

Email

Enter your email

Password

Enter your password

Register

NAME: PRIYANSHU KUMAR
ROLL.NO: 2503201000871
SECTION: CSE 26

My Website

- My Website
- Home
- About
- Contact

Column 1

This is the first column. On small devices the column occupies full width, while on medium and large devices it occupies half width using Bootstrap grid classes.

Column 2

This is the second column. Bootstrap grid system helps to create responsive layout.



Laptop

High performance laptop

₹50,000 New

[View Details](#)



Mobile

Latest smartphone

₹30,000 Sale

[View Details](#)




Headphones

Noise cancelling

₹5,000 New

[View Details](#)

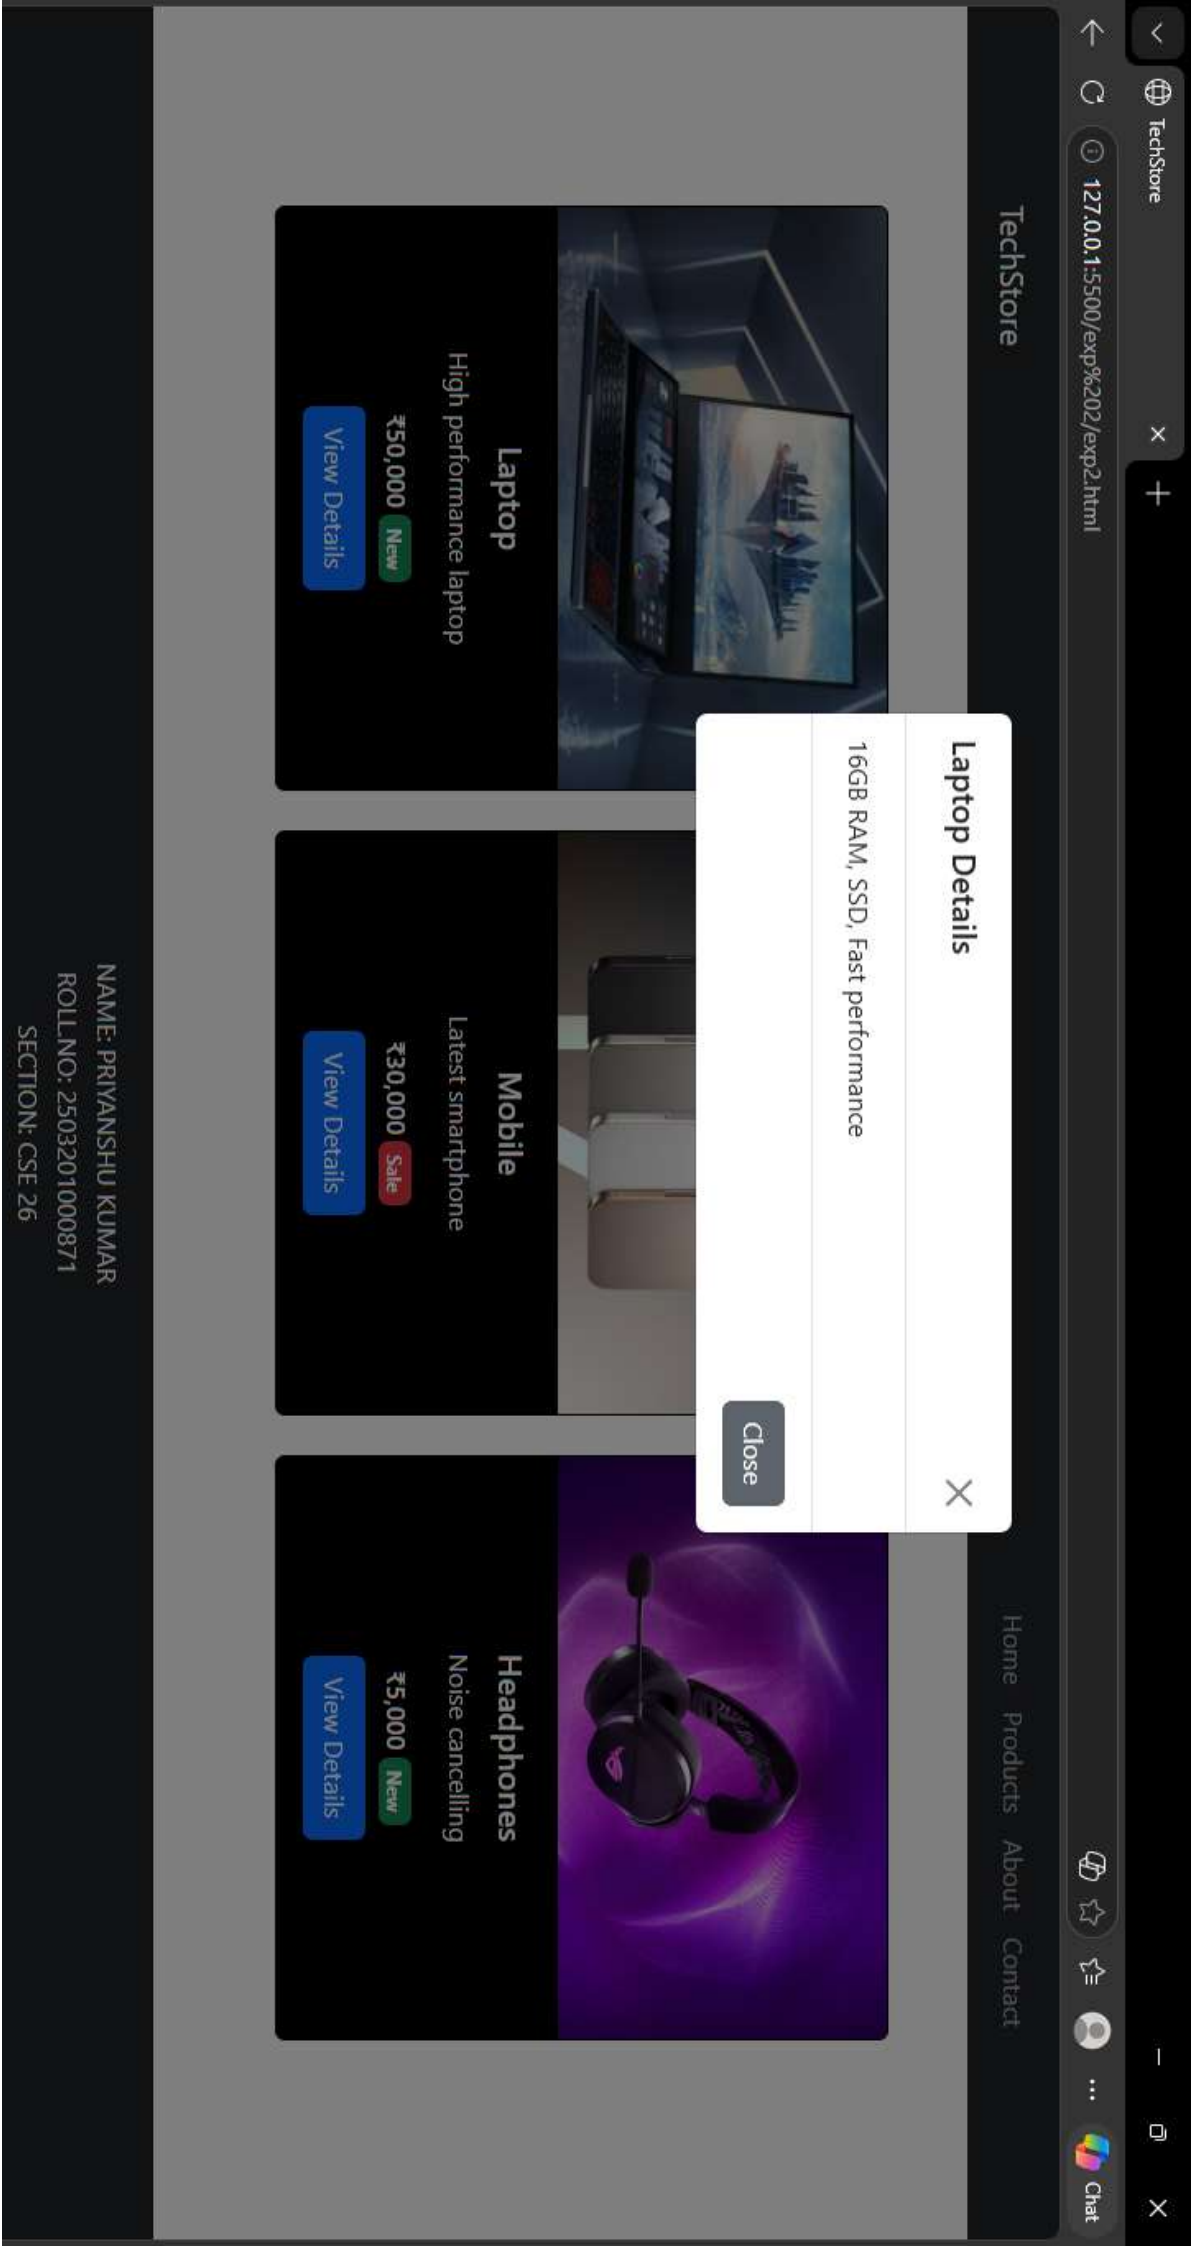

Transform Your Body & Mind

Join Health Care Plus today and achieve your health goals with expert trainers.

Join Now

Our Programs

Weight Training

Build strength and muscle with guided weight training programs.

Yoga Classes

Improve flexibility and mental wellness through yoga sessions.

Diet Plans

Personalized diet plans to complement your fitness routine.

NAME: PRIYANSHU KUMAR
ROLL NO: 2503201000871
SECTION: CSE 26