

Configuration of Global Filters

Where to get the list of options per dropdown

Athena/UI/qry_agentlist.sql
Athena/UI/qry_phonelist.sql
Athena/UI/qry_queuelist.sql

Dropdown populated by query results from
qry_queuelist.sql

Dropdown populated by query results from
qry_agentlist.sql

Dropdown populated by query results from
qry_phonelist.sql

Start Date

End Date

Queues

Agents

Phone (DID)

Apply


Reset

Each query will return **item_display** and **item_value**.

Results (62)			Copy	Download results CSV
Search rows				
#	item_display	item_value		
1	BasicQueue	1c8b59c5-5148-4bb6-9be4-798e04ab5710		
2	CA DUI ENG	1695ce0f-1ec9-4a48-85f3-26ff4bffba61		
3	CA DUI SPA	477d6586-31ab-4699-a607-2808f8bba4de		
4	CA Emergency VM ENG	b48ddfec-b504-40df-a008-e4cd41c1b711		
5	CA Emergency VM SPA	10218eb2-6714-4f61-95b7-27089dffab77		
6	CA New Case ENG	1edfrcfrc-barc-48bd-ba2a-378b63e26aa9		

Your droplist must display the value in **item_display**, then **item_value** associated with those selections must be passed to the queries as an argument to the JSON Parameters.

For example: If multiple Queues are selected from the global filter.

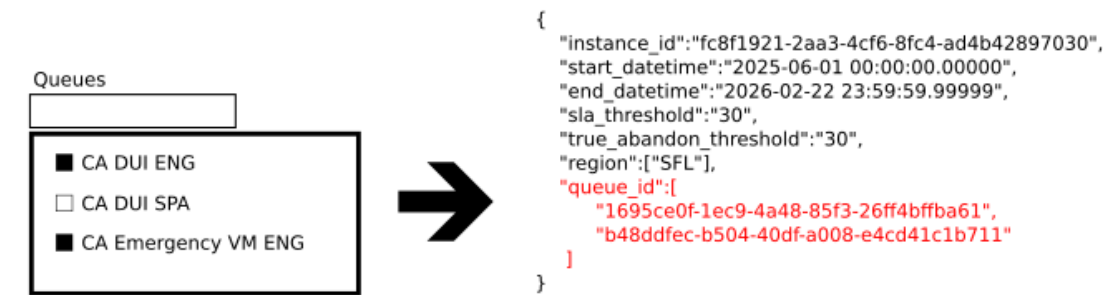

If user changes selection any dropdown on the global controls will also require users to click **Apply**. The app will reconnect to Athena to download new information.

Queue Matrices

Uses these queries

Athena/answered/qry_answered_service_level.sql
Athena/answered/qry_total_answered_calls.sql
Athena/unanswered/qry_abandoned_service_level.sql
Athena/unanswered/qry_total_unanswered_calls.sql

The queries do not support agent parameter.

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.00000",
  "end_datetime":"2026-02-22 23:59:59.99999",
  "queue_id":[
    "uid","uid"
  ],
  "did":[
    "phone","phone"
  ],
  "region":[
    "region"
  ]
}
```

So the global controls on this page must hide or grey-out the agents dropdown (it will not be used).

Dropdown populated by query results from
qry_queuelist.sql

Dropdown populated by query results from
qry_agentlist.sql

Dropdown populated by query results from
qry_phonelist.sql

Start Date

End Date

Queues

Agents

Phone (DID)

Apply

Reset

Queue Distribution

Uses these query:

Athena/distribution/qry_distby_drilldown.sql
Athena/distribution/qry_distbyday.sql
Athena/distribution/qry_distbydid.sql
Athena/distribution/qry_distbyhour.sql
Athena/distribution/qry_distbymonth.sql
Athena/distribution/qry_distbyqueue.sql
Athena/distribution/qry_distbystate.sql
Athena/distribution/qry_distbyweek.sql

All Queries support all parameters

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.00000",
  "end_datetime":"2026-02-22 23:59:59.99999",
  "sla_threshold":"30",
  "true_abandon_threshold":"30",
  "agent_id":[
    "uid","uid"
  ],
  "queue_id":[
    "uid","uid"
  ],
  "did":[
    "phone","phone"
  ],
  "region":[
    "region"
  ]
}
```

So global controls will have all dropdowns active

Dropdown populated by query results from

qry_queuelist.sql

Dropdown populated by query results from

qry_agentlist.sql

Dropdown populated by query results from

qry_phonelist.sql

Start Date

End Date

Queues

Agents

Phone (DID)

Apply

Reset

Answered Calls

Uses these query

Athena/answered/qry_answeredbyagent.sql
Athena/answered/qry_answeredbyqueue.sql
Athena/answered/qry_answeredbydid.sql

All Queries support all parameters

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.00000",
  "end_datetime":"2026-02-22 23:59:59.99999",
  "agent_id":[
    "uid","uid"
  ],
  "queue_id":[
    "uid","uid"
  ],
  "did":[
    "phone","phone"
  ],
  "region":[
    "region"
  ]
}
```

So global controls will have all dropdowns active

		Dropdown populated by query results from qry_queuelist.sql	Dropdown populated by query results from qry_agentlist.sql	Dropdown populated by query results from qry_phonelist.sql	
Start Date 	End Date 	Queues 	Agents 	Phone (DID) 	Apply Reset

Unanswered Calls

Uses these query

Athena/unanswered/qry_unansweredbydid.sql
Athena/unanswered/qry_unansweredbyqueue.sql

The queries do not support agent parameter.

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.00000",
  "end_datetime":"2026-02-22 23:59:59.99999",
  "queue_id":[
    "uid","uid"
  ],
  "did":[
    "phone","phone"
  ],
  "region":[
    "region"
  ]
}
```

So the global controls on this page must hide or grey-out the agents dropdown (it will not be used).

		Dropdown populated by query results from qry_queuelist.sql	Dropdown populated by query results from qry_agentlist.sql	Dropdown populated by query results from qry_phonelist.sql		
Start Date	End Date	Queues	Agents	Phone (DID)	Apply	Reset

Agent Matrices

Pending.
SQL scripts need to be created.

For now just plugin the global controls as is. We modify it later

		Dropdown populated by query results from qry_queuelist.sql	Dropdown populated by query results from qry_agentlist.sql	Dropdown populated by query results from qry_phonelist.sql		
Start Date	End Date	Queues	Agents	Phone (DID)	Apply	Reset

Agent Activity Analysis

Uses this query

Athena/agent/qry_agent_pause_detail.sql

This query only support agent parameter

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.000000",
  "end_datetime":"2026-02-22 23:59:59.999999",
  "agent_id":[
    "uid","uid"
  ],
  "region":[
    "region"
  ]
}
```

So queue and did must be hidden or greyed-out in the global controls.

Dropdown
populated by
query results from
qry_queuelist.sql

Dropdown
populated by
query results from
qry_agentlist.sql

Dropdown
populated by
query results from
qry_phonelist.sql

Start Date

End Date

Queues

Agents

Phone (DID)

Apply

Reset

Agent Performance

Uses this query

Athena/agent/qry_agent_call_disposition.sql

This query does not support did parameter

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.00000",
  "end_datetime":"2026-02-22 23:59:59.99999",
  "agent_id":[
    "uid","uid"
  ],
  "queue_id":[
    "uid","uid"
  ],
  "region":[
    "region"
  ]
}
```

So the global controls on this page must hide or grey-out the DID dropdown (it will not be used).

		Dropdown populated by query results from qry_queuelist.sql	Dropdown populated by query results from qry_agentlist.sql	Dropdown populated by query results from qry_phonelist.sql		
Start Date	End Date	Queues	Agents	Phone (DID)	Apply	Reset

Agent Availability

Uses this query

Athena/agent/qry_agent_avail.sql

This query does not support did parameter

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.00000",
  "end_datetime":"2026-02-22 23:59:59.99999",
  "agent_id":[
    "uid","uid"
  ],
  "queue_id":[
    "uid","uid"
  ],
  "region":[
    "region"
  ]
}
```

So the global controls on this page must hide or grey-out the DID dropdown (it will not be used).

		Dropdown populated by query results from qry_queuelist.sql	Dropdown populated by query results from qry_agentlist.sql	Dropdown populated by query results from qry_phonelist.sql		
Start Date	End Date	Queues	Agents	Phone (DID)	Apply	Reset

Transfer Analysis

Uses this query

Athena/answered/qry_answered_transfers.sql

The query support all parameters

```
{
  "instance_id":"fc8f1921-2aa3-4cf6-8fc4-ad4b42897030",
  "start_datetime":"2025-06-01 00:00:00.00000",
  "end_datetime":"2026-02-22 23:59:59.99999",
  "agent_id":[
    "uid","uid"
  ],
  "queue_id":[
    "uid","uid"
  ],
  "did":[
    "phone","phone"
  ],
  "region":[
    "region"
  ]
}
```

So global controls will have all dropdowns active

		Dropdown populated by query results from qry_queuelist.sql	Dropdown populated by query results from qry_agentlist.sql	Dropdown populated by query results from qry_phonelist.sql	
Start Date 	End Date 	Queues 	Agents 	Phone (DID) 	Apply Reset