Small edits, large models: How Wikipedia advocacy shapes LLM values

Brazilek J[*,1] Navas M[*]
Gnauck A[2]

[1]Compassion Aligned Machine Learning (CaML) [2]Pro-Animal Wikipedians (PAW)
[*]Equal contribution Navas M: Independent researcher

Abstract

Can a small group of volunteers shape how AI systems discuss animal welfare, just by editing Wikipedia? We show that they can. Wikipedia appears in nearly every major language model training dataset and is weighted more heavily than web-crawled text. The Pro-Animal Wikipedians (PAW), a group of advocates who add sourced animal welfare content to relevant articles, have made 125 edits across 115 pages. Using gradient-based data attribution (Bergson; Lucia and Belrose 2026; MAGIC; Ilyas and Engstrom 2025), we traced how these edits influence language model behavior. TrackStar retrieval attribution on Llama 3.1 8B found that PAW-edited sections made up 68% of the highest-attributed documents for animal welfare queries ($p < 0.0001$) but only 52% for unrelated queries about the same companies ($p = 0.53$): the model links PAW content specifically to animal welfare topics, not to the entities in general. MAGIC counterfactual influence estimation on Llama-3.2-1B (validated at $\rho = 0.81$–0.95, $p \leq 0.005$) confirmed that PAW content causally shifts the model's animal welfare predictions more than control content does. When we fine-tuned separate models on PAW content versus control content, each model performed better specifically on the type of text it was trained on, with no crossover benefit: the PAW-trained model cut perplexity on animal welfare text from 12.4 to 8.4, while the control-trained model cut perplexity on control text from 16.1 to 11.4. A small, coordinated Wikipedia editing campaign therefore measurably shapes how language models handle the topics those edits address, making Wikipedia editing a practical, low-cost way for advocacy organizations to influence AI systems.

1 Introduction

Language models are becoming a primary way people get information. For advocacy organizations, this raises a practical question: can you influence what these models say about your cause? We show that Wikipedia editing is one way to do it. Wikipedia appears in nearly every major training dataset used to build language models (The Pile, RedPajama, Dolma, and others) and is given more weight than web-crawled sources because of its quality and breadth [Gao et al., 2020, Soldaini et al., 2024, Weber et al., 2024]. This means that what Wikipedia says about a topic feeds directly into what language models say about it.

This creates an opportunity. Wikipedia has always been a place where small groups of dedicated editors shape how topics are presented [Yasseri et al., 2012]. Organized editing campaigns by civil society groups, political movements, and PR firms are common, ranging from state-backed takeovers of entire language editions to corporate reputation management [DiStaso, 2013, Kharazian et al., 2024]. What has gone mostly unnoticed is that these editing efforts now have a second effect: they shape the training data of language models, which in turn shape how millions of people get information. For advocacy organizations with limited budgets, this raises a concrete question: does editing Wikipedia actually change what AI systems say?

We study this phenomenon in the domain of animal welfare. The Pro-Animal Wikipedians (PAW) have conducted sustained editing of Wikipedia articles related to the use and perceptions of animal exploitation in articles about fast-food, animal sentience and politics. Using revision histories, we isolate the textual changes attributable to this group and quantify their downstream influence on language model behavior using gradient-based data attribution.

We employ Bergson [Lucia and Belrose, 2026], an open-source library implementing TrackStar [Chang et al., 2024], to trace how individual Wikipedia edits influence model predictions. TrackStar works at the scale of billion-parameter models and corpora over 160 billion tokens, letting us go beyond surface-level keyword overlap and measure whether specific edits actually shift what a model says about animal welfare. This matters because the training examples that most influence a model's outputs are often not the ones that most obviously contain the relevant information [Chang et al., 2024].

1.1 Why

Animal advocacy organizations have limited resources and must choose their interventions carefully. Lobbying, public campaigns, and corporate outreach are familiar tools, but the rise of language models has created a new channel of influence that most organizations have not yet explored. If AI systems shape public understanding of animal welfare, then the data those systems learn from becomes a lever for change, and Wikipedia, as the most trusted and heavily weighted text source in model training, is the most accessible lever available. PAW is a loose coalition of editors who add sourced information about animal exploitation to relevant Wikipedia articles. Their edits are factual and follow Wikipedia's editorial policies, but they deliberately foreground animal welfare in articles about fast-food chains, animal sentience, and related topics.

This matters because LLMs trained on Wikipedia do not simply memorize articles; they learn associations, framings, and the relative salience of topics from the distribution of text they see. If a Wikipedia article on a fast-food chain includes a section on animal welfare controversies, models trained on that article learn to associate the brand with those controversies. If that section is absent, the association is weaker or missing. The question is whether these editorial choices have a measurable downstream effect, and if so, what kind of content drives it.

The stakes are real. Billions of people will use AI-powered systems in the coming years, and those systems will shape how they think about food, farming, and animals. If 125 Wikipedia edits by a handful of volunteers can measurably shift how a language model handles animal welfare, that is one of the cheapest and most scalable interventions available to the advocacy community: no technical expertise required, no API access, no budget beyond the time of committed editors. This paper measures that signal for the first time and confirms it exists.

1.2 Contributions

We make three contributions. First, we show for the first time that a real Wikipedia editing campaign (125 edits by a small group of volunteers) measurably and selectively influences language model behavior on the topics those edits address. Second, we confirm this with three independent methods (retrieval attribution, counterfactual training influence, and fine-tuning ablation), each showing that the effect is specific to animal welfare content and does not spill over to unrelated topics. Third, we frame Wikipedia editing as a practical, low-cost intervention for advocacy organizations: one that requires no technical infrastructure, no model access, and produces effects that carry through automatically whenever models are retrained on Wikipedia.

2 Related Work

This work sits at the intersection of three areas: data attribution for language models, Wikipedia as a site of organized editing, and the growing body of work on how training data affects model behavior.

Data attribution methods try to answer the question: which training examples caused a model to produce a given output? Influence functions [Koh and Liang, 2017] were the first practical approach but are too expensive to run on large language models. TrackStar [Chang et al., 2024] solved this by computing gradient similarity between training documents and queries, making attribution feasible for billion-parameter models over large corpora. MAGIC [Ilyas and Engstrom, 2025] goes further by backpropagating through the full training process to estimate counterfactual influence: what would change if a document were removed from training? Both are implemented in the Bergson library [Lucia and Belrose, 2026]. Other approaches include TRAK [Park et al., 2023] and the data-subset method of Ilyas et al. [2022], but these require training hundreds or thousands of models, making them impractical at scale. We chose TrackStar and MAGIC because they give complementary evidence (one measures similarity, the other measures causation) within a single tool.

Wikipedia is a standard component of language model training data. It appears in The Pile [Gao et al., 2020], RedPajama [Weber et al., 2024], Dolma [Soldaini et al., 2024], and the training data for GPT-3 [Brown et al., 2020] and LLaMA [Touvron et al., 2023], among others, and is given extra weight in most of these. Meanwhile, research on Wikipedia itself has long documented how its content is shaped by organized groups. Yasseri et al. [2012] mapped edit wars on controversial topics. Kharazian et al. [2024] showed how a small group captured governance of the Serbo-Croatian editions. Corporate PR editing is widespread [DiStaso, 2013]. These two facts (Wikipedia is a key training source, and its content is shaped by organized editing) have not been connected empirically before this work.

A related line of work studies how training data composition affects model behavior. Data poisoning research [Wallace et al., 2021, Carlini et al., 2023] shows that injecting small amounts of manipulated data can steer model outputs. Our setting is different: PAW's edits are not adversarial injections. They are factual, policy-compliant Wikipedia contributions that foreground animal welfare. We show that this kind of legitimate, values-driven editing, not just adversarial attacks, shapes what models learn, which matters for how advocacy organizations think about influencing AI.

3 Methods

3.1 Dataset Construction

PAW's tracked editing activity spans 125 edits across 115 Wikipedia articles. For the attribution experiments we needed within-article pairing: each AW section matched to a non-AW section from the same page, controlling for article popularity, writing quality, and topic domain. Of the 115 pages, 31 contained both a clearly delineated AW section and a suitable non-AW control section of comparable length (e.g., company history, financial performance, store locations). Some articles lacked a non-AW section entirely (the PAW edit constituted most of the article's content), and others had no cleanly separable AW passage (the edit was an insertion within a mixed-topic section). From the 31 qualifying pages we drew 36 pairs (some pages yielded multiple distinct AW sections, such as Trader Joe's with separate entries on cage-free eggs, sustainability, and animal welfare). This produced a balanced dataset of 72 sections.

For MAGIC and the fine-tuning ablation, within-article pairing is not required because these methods measure a different quantity: how much a document's presence in training causally affects query loss. The control set need only represent typical Wikipedia text without animal welfare content. We therefore extracted AW text from all 125 tracked edits across 115 pages; after

removing 7 entries with empty content fields, this yielded 118 AW sections from 108 unique pages. We paired these with 118 random chunks from WikiText-103 (seed 42) as controls, producing a 236-document dataset. Using unrelated Wikipedia text rather than pre-PAW versions of the same articles is deliberate: pre-PAW content from the same pages would share entities and partial topic overlap with the AW sections, weakening the separation between conditions. Our design guards against confounds from text quality or length differences: if controls were simply worse text, AW documents would dominate attribution for all queries, not just animal welfare queries.

Two query sets were used to probe attribution: 80 animal welfare queries (e.g., "What is Aldi's animal welfare policy?") and 90 general queries about the same entities (e.g., "How many stores does Aldi have?"). The general queries serve as a negative control: if attribution signals are genuinely topic-specific, AW content should not be preferentially attributed to queries that mention the same companies but ask about unrelated matters.

3.2 TrackStar Retrieval Attribution

TrackStar [Chang et al., 2024] computes gradient similarity between training documents and queries to estimate retrieval-based attribution. For each query, it ranks every training document by how strongly the document's training gradient aligns with the query's gradient, producing a score that reflects semantic relevance as learned by the model. We ran TrackStar via Bergson on Llama 3.1 8B using the paired 72-document dataset against both query sets.

3.3 MAGIC Training Influence

MAGIC goes beyond retrieval similarity by backpropagating through the full training history. It fine-tunes a model on the document set, records optimizer checkpoints at each step, then traces backwards to compute how much each document's gradient contributed to the model's loss on a given query. The resulting score estimates the counterfactual: how would query loss change if this document were removed from training?

We fine-tuned Llama-3.2-1B with LoRA (rank 32, targeting q_proj and v_proj, alpha 64) on the full 236-document dataset (118 AW + 118 WikiText-103 controls) for one epoch with a polynomial learning rate schedule (peak lr $= 4 \times 10^{-4}$, 25% warmup), AdamW optimizer ($\beta_1 = 0.95$, $\beta_2 = 0.975$), weight decay 0.01, batch size 2, and fp32 precision. MAGIC validation uses leave-subset-out retraining with 10 subsets to verify that predicted influence scores correlate with actual counterfactual loss changes. We ran MAGIC twice: once with the 118 AW sections as queries and once with the 118 control sections as queries.

3.4 Fine-Tuning Ablation

To test whether different training content produces measurable differences in model behavior, we fine-tuned two separate Llama-3.2-1B models using the same LoRA configuration: one on the 118 AW sections and one on the 118 control sections. We then measured how well each model predicted both text sets, testing whether each model performs better specifically on the type of content it was trained on.

4 Results and Discussion

All three methods point to the same conclusion: PAW's Wikipedia edits influence how language models handle animal welfare topics, with no effect on unrelated queries about the same companies.

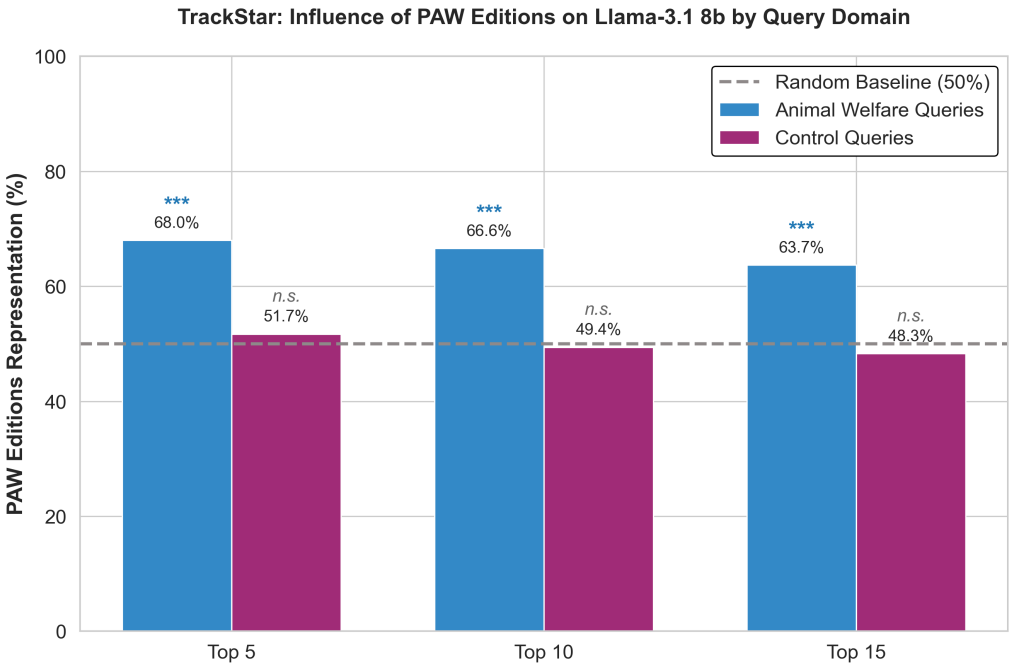

Figure 1: Domain-specific influence of PAW Wikipedia editions. Comparative analysis of training data influence in Llama-3.1 using TrackStar. PAW editions are significantly overrepresented in the highest-scoring documents for animal welfare topics ($p < 0.0001$), while their influence on control topics remains consistent with the random baseline ($p > 0.05$). Dashed line shows chance level (50%).

4.1 TrackStar Retrieval Attribution

We applied Bergson's TrackStar method to a balanced dataset of 72 Wikipedia sections (36 animal welfare, 36 control sections paired from the same articles) and measured retrieval-based attribution scores across 80 animal welfare queries and 90 general queries.

For animal welfare queries, AW sections were overrepresented among the highest-scoring documents: 68.0% of top-5 results ($p < 0.0001$, one-sample t-test against the 50% base rate), 66.6% of top-10 ($p < 0.0001$), and 63.7% of top-15 ($p < 0.0001$). In 64 of 80 queries, AW content dominated the top-5. Mean attribution scores were higher for AW sections (0.549) than control sections (0.444; Mann-Whitney U, $p < 0.0001$).

To ensure that the observed influence was specific to the domain of animal welfare and not a systemic bias of the attribution method, we conducted a control experiment using the 90 general-topic queries. For these control queries, the representation of PAW-edited documents in the top ranks did not significantly deviate from the 50% baseline (Top-5: 51.7%, $p = 0.528$; Top-10: 49.4%, $p = 0.772$; Top-15: 48.3%, $p = 0.227$; one-sample t-test). This contrast confirms that the high influence scores recorded for PAW editions are content-dependent and specific to animal welfare topics, and rules out the possibility that the signal comes from PAW sections simply being longer or better written.

4.2 MAGIC Training Influence Attribution

MAGIC goes further than TrackStar by tracing influence through the full training process, estimating how much each document causally contributes to the model's predictions. We fine-tuned Llama-3.2-1B on the full 236-document dataset (118 AW sections from 108 PAW-edited pages + 118 WikiText-103 controls) and measured how much each document influenced prediction quality.

Figure 2 plots each training document's MAGIC influence score for animal welfare queries (x-axis) against general queries (y-axis). PAW-edited sections describing concrete corporate commitments (Eataly signing the European Chicken Commitment, Kraft Heinz committing to source higher-welfare breeds, Kroger pledging cage-free eggs, Olive Garden phasing out battery cages) cluster on the far right, showing strong selective influence on animal welfare predictions with little effect on general queries. By contrast, PAW edits that simply report scorecard ratings ("received a score of 0 out of 100 from the Humane World Action Fund") or describe political positions had minimal influence on either query type. Edits describing broken commitments, such as Chick-fil-A backtracking on its cage-free pledge, also showed low influence.

The pattern suggests that the model absorbs specific, action-oriented welfare language more readily than evaluative or political framing. This is a practical finding for advocates: Wikipedia edits describing what companies have committed to do appear to shape LLM outputs more than edits reporting how organizations have rated them.

MAGIC validation through leave-subset-out retraining (10 subsets) confirmed these scores are reliable (Spearman $\rho = 0.81$ for animal welfare queries, $\rho = 0.95$ for general queries, $p \leq 0.005$).

Several control sections also showed high influence on animal welfare queries. These were not random: the most influential control documents came from the same Wikipedia pages as high-influence PAW edits. Darden Restaurants' "Red Lobster sale" section, Eataly's "Origin" section, and The Cheesecake Factory's "Founding and early years" all appeared among the top-scoring controls for animal welfare queries, each sharing a page with a PAW-edited animal welfare section. One control section, Marine shrimp farming's "Slaughter methods," contained welfare-relevant content (describing concerns about shrimp slaughter practices) despite not being a PAW edit. This pattern suggests that PAW edits do more than make their own sections influential: they create entity-level associations in the model, so that other content about the same companies gets pulled into animal welfare contexts too. A single PAW edit on the Eataly page makes the model associate *all* Eataly content more strongly with animal welfare. This amplification effect means that 125 edits may have a larger footprint than the raw document count suggests.

4.3 Fine-Tuning Ablation

The ablation produced a clean separation. The model trained on PAW content had a perplexity of 8.4 on animal welfare text, compared to 12.4 for the model trained on control content: it was 32% better at predicting PAW-style text. Going the other direction, the control-trained model had a perplexity of 11.4 on control text versus 16.1 for the PAW-trained model: 29% better on its own domain. Against the unmodified base model (perplexity 11.9 on AW text, 15.5 on control text), each fine-tuned model improved on its own training content while leaving the other essentially unchanged. This confirms that the attribution signal MAGIC detects is real: training on animal welfare content specifically improves how the model handles animal welfare, and training on control content specifically improves how it handles control text.

5 Limitations

Our attribution experiments used Llama 3.1 8B (TrackStar) and Llama 3.2 1B (MAGIC, ablation). These are smaller than models like GPT-4 or Claude, but the key point is that those frontier models were also trained on Wikipedia, meaning PAW's edits are already in their training data. We demonstrate the mechanism at scales where attribution is computationally feasible; the next section argues that the effect persists, and likely strengthens, at frontier scale. The MAGIC and ablation experiments used all 125 PAW edits (118 after cleaning); TrackStar used a 36-pair within-article subset. Future work with topic-matched controls (animal welfare text not written by PAW) could tease apart whether the signal comes from PAW's specific framing

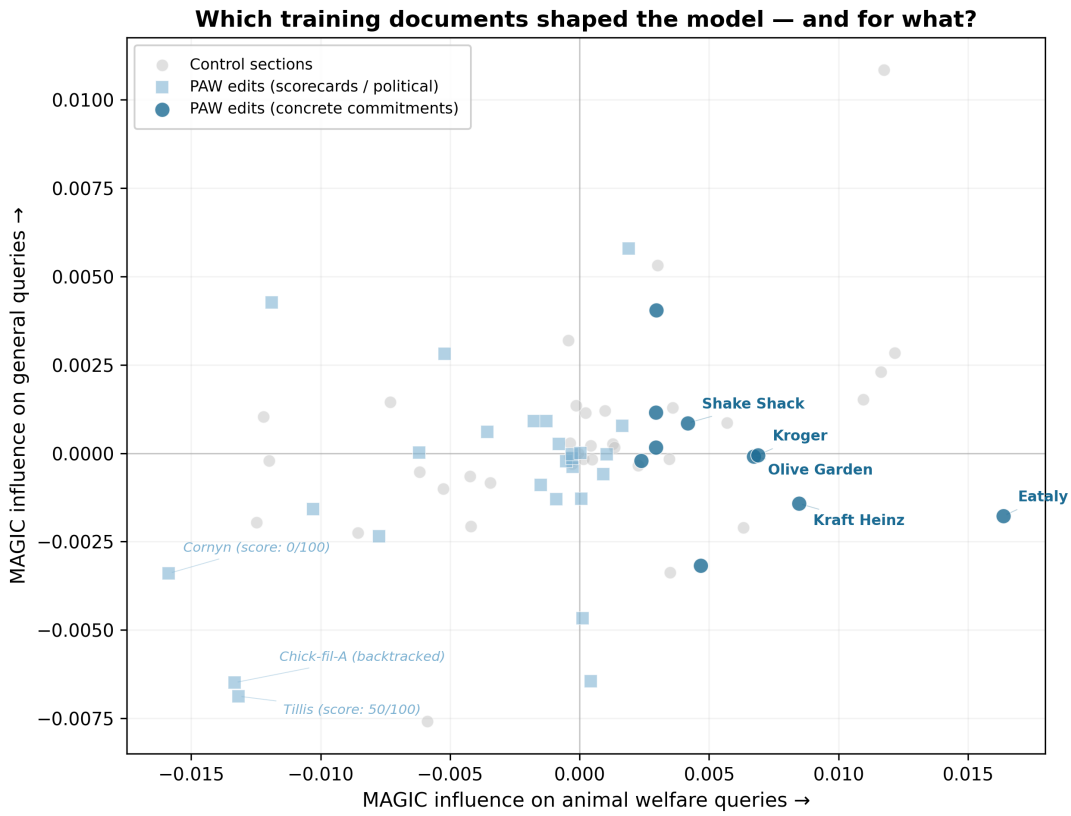

Figure 2: MAGIC counterfactual influence scores for 72 training documents. Each point is one document; x-axis shows influence on animal welfare queries, y-axis on general queries. Dark circles are PAW edits describing concrete welfare commitments; light squares are PAW edits with scorecard ratings or political framing; grey circles are control sections. Concrete commitments (right side) selectively influence animal welfare predictions without affecting general knowledge, while scorecard-style edits (left side) have little influence on either.

or from animal welfare content more broadly. We also measure influence on model prediction quality, not on what a chatbot actually says in conversation; bridging that gap is important future work. Finally, MAGIC was run with a single random seed for the training-order shuffle (Bergson default, seed = 42); per-document influence scores depend on the order documents appear during fine-tuning. The headline AW-vs-control separation is large enough to be robust to seed noise, but the precise ranking of individual high-influence documents may shift under a different shuffle.

6 Why This Already Applies to Frontier Models

GPT-4, Claude, Gemini, and every other frontier model trained on web data has already seen Wikipedia, including the pages PAW edited. The influence we measure here is not hypothetical; it is already baked into the models people use today. The only question is whether the signal gets diluted below a meaningful threshold in a much larger training corpus. We argue it does not.

In theory, a single document's influence shrinks with total training data, roughly $O(1/N)$ where N is the number of tokens. But several factors work against simple dilution:

First, Wikipedia is upweighted in every known pretraining mixture. The Pile applies a $\sim$3$\times$ weight; RedPajama and Dolma use 2–5$\times$; and multi-epoch training means Wikipedia text may be seen 3–4 times across training. If we denote the upweighting factor as w and the number

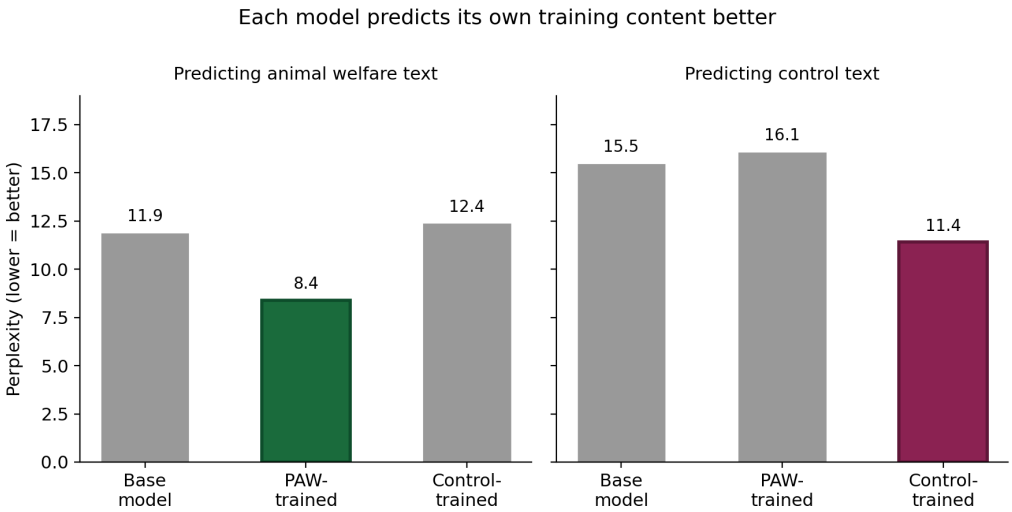

Figure 3: Fine-tuning ablation. Each model performs better on the type of text it was trained on. The PAW-trained model is 32% better (lower perplexity) on animal welfare text; the control-trained model is 29% better on control text.

of epochs as e, the effective contribution scales as $O(w \cdot e/N)$. For a frontier model trained on 15T tokens with $w = 3$ and $e = 3$, the dilution relative to our 1B-model setup (trained on $\sim$1T tokens with $w \cdot e \approx 1$) is roughly $15\text{T}/(3 \cdot 3 \cdot 1\text{T}) \approx 1.7\times$, far less than the $15\times$ that the raw token ratio suggests.

Second, the information PAW edits introduce is not unique to Wikipedia. The same corporate welfare commitments, backtracked pledges, and NGO criticisms appear in news coverage, industry trade publications, corporate press releases, and advocacy reports, all of which end up in Common Crawl and thus in pretraining corpora. This means PAW edits are reinforced by corroborating text from other sources. A model trained on 15 trillion tokens has seen Kroger's cage-free backtrack not only on Wikipedia but in Grocery Dive, Supermarket News, and Mercy for Animals press releases. Rather than a single signal that dilutes with scale, the PAW-edited content sits within a broader cluster of semantically similar documents that collectively push the model toward the same associations. Larger models have more capacity to retain these per-document associations: empirical work shows that larger models memorize more training examples, not fewer [Carlini et al., 2023]. The practical effect is that Wikipedia's role shifts from sole source to authoritative anchor within a reinforcing cluster.

Third, PAW edits are not isolated documents; they modify articles that already contain substantial context about the same entities. The model encounters the PAW-edited content embedded within pages about McDonald's, KFC, Trader Joe's, etc., creating associations between these high-traffic entities and animal welfare framings. This contextual embedding means the edits influence not just direct recall but the broader associative structure of the model's knowledge.

Taken together, the real dilution from our experimental setup to frontier models is on the order of 2–5$\times$, not the 15–30$\times$ that raw data volume would suggest. Our measured effects are large enough that a 2–5$\times$ reduction still leaves a meaningful signal. And since frontier models have already been trained on the Wikipedia pages PAW edited, that signal is already present in the models millions of people use daily. The practical implication is immediate: PAW's 125 edits have already shaped how frontier language models handle animal welfare topics. Scaling up to several hundred well-placed edits (well within the capacity of a small volunteer group) would strengthen this influence further with each new model training run.

7 Acknowledgements and Disclosures

This research was conducted at Compassion Aligned Machine Learning (CaML). We thank the Pro-Animal Wikipedians for providing access to their editing records and for their sustained work improving animal welfare coverage on Wikipedia. Compute for the MAGIC and ablation experiments was provided via RunPod. The Bergson library by Quintin Lucia and Nora Belrose at EleutherAI made the data attribution experiments possible.

Disclosure: The authors are affiliated with animal welfare research organizations. PAW's Wikipedia edits are factual, policy-compliant contributions that have survived standard editorial review. This paper documents the downstream influence of those edits on language models; it does not advocate for any particular editorial content. The fine-tuned models and dataset are publicly available at `https://huggingface.co/datasets/CompassioninMachineLearning/paw-wikipedia-attribution`.

References

Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in Neural Information Processing Systems*, 33:1877–1901, 2020.

Nicholas Carlini, Matthew Jagielski, Christopher A Choquette-Choo, Daniel Paleka, Will Pearce, Hyrum Anderson, Andreas Terzis, Kurt Thomas, and Florian Tramèr. Poisoning web-scale training datasets is practical. *arXiv preprint arXiv:2302.10149*, 2023.

Tyler A. Chang, Dheeraj Rajagopal, Tolga Bolukbasi, Lucas Dixon, and Ian Tenney. Scalable influence and fact tracing for large language model pretraining. *arXiv preprint arXiv:2410.17413*, 2024. doi: 10.48550/arXiv.2410.17413.

Marcia W. DiStaso. Perceptions of wikipedia by public relations professionals: A comparison of 2012 and 2013 surveys. Institute for Public Relations, 2013. URL `https://instituteforpr.org/perceptions-wikipedia-public-relations-professionals-comparison-2012-2013-surveys/`.

Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. The pile: An 800gb dataset of diverse text for language modeling. *arXiv preprint arXiv:2101.00027*, 2020. doi: 10.48550/arXiv.2101.00027.

Andrew Ilyas and Logan Engstrom. MAGIC: Near-optimal data attribution for deep learning. *arXiv preprint arXiv:2504.16430*, 2025. URL `https://arxiv.org/abs/2504.16430`.

Andrew Ilyas, Sung Min Park, Logan Engstrom, Guillaume Leclerc, and Aleksander Madry. Datamodels: Predicting predictions from training data. *arXiv preprint arXiv:2202.00622*, 2022.

Zarine Kharazian, Kate Starbird, and Benjamin Mako Hill. Governance capture in a self-governing community: A qualitative comparison of the Croatian, Serbian, Bosnian, and Serbo-Croatian wikipedias. *Proceedings of the ACM on Human-Computer Interaction*, 8(CSCW1): 1–26, 2024. doi: 10.1145/3637338.

Pang Wei Koh and Percy Liang. Understanding black-box predictions via influence functions. In *International Conference on Machine Learning*, pages 1885–1894, 2017.

Quintin Lucia and Nora Belrose. EleutherAI/bergson: Mapping out the "memory" of neural nets with data attribution. GitHub, 2026. URL `https://github.com/EleutherAI/bergson`.

Sung Min Park, Kristian Georgiev, Andrew Ilyas, Guillaume Leclerc, and Aleksander Madry. TRAK: Attributing model behavior at scale. *arXiv preprint arXiv:2303.14186*, 2023.

Luca Soldaini, Rodney Kinney, Akshita Bhagia, Dustin Schwenk, David Atkinson, Russell Authur, Ben Bogin, Khyathi Chandu, Jennifer Dumas, Yanai Elazar, et al. Dolma: An open corpus of three trillion tokens for language model pretraining research. *arXiv preprint arXiv:2402.00159*, 2024. doi: 10.48550/arXiv.2402.00159.

Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. LLaMA: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.

Eric Wallace, Tony Z Zhao, Shi Feng, and Sameer Singh. Concealed data poisoning attacks on NLP models. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 139–150, 2021.

Maurice Weber, Daniel Fu, Quentin Anthony, Yonatan Oren, Shane Adams, Anton Alexandrov, Xiaozhong Lyu, Huu Nguyen, Xiaozhe Yao, Virginia Adams, et al. Redpajama: An open dataset for training large language models. *arXiv preprint arXiv:2411.12372*, 2024. doi: 10.48550/arXiv.2411.12372.

Taha Yasseri, Robert Sumi, András Rung, András Kornai, and János Kertész. Dynamics of conflicts in wikipedia. *PLoS ONE*, 2012. doi: 10.1371/journal.pone.0038869.

A Query Examples and Data Availability

All datasets, queries, and fine-tuned models are publicly available at `https://huggingface.co/datasets/CompassioninMachineLearning/paw-wikipedia-attribution`. Below we list example queries from each set.

A.1 Animal Welfare Queries (80 total)

These queries ask about animal welfare policies, practices, or controversies related to specific entities covered by PAW edits. Examples:

- "What is McDonald's chicken welfare policy?"
- "Aldi animal welfare"
- "Chick-fil-A animal welfare"
- "Clorox animal testing"
- "Trader Joe's cage free eggs"
- "KFC animal welfare controversies"
- "What are the animal welfare concerns with Subway's supply chain?"
- "Starbucks animal welfare"
- "Dianne Feinstein Animal Welfare"
- "Wendy's animal welfare policy and practices"

A.2 General Queries (90 total)

These queries mention the same entities as the AW queries but ask about unrelated topics (company size, history, products). They serve as a negative control: if attribution is truly topic-specific, these queries should not preferentially retrieve animal welfare content. Examples:

- "How many stores does Aldi have?"
- "Chick-fil-A"
- "McDonald's franchise model"
- "Trader Joe's store locations"
- "KFC history and founding"
- "Starbucks revenue 2024"
- "Subway sandwich menu"
- "Wendy's number of employees"

The full query sets, both document datasets (72-section paired set and 236-document full set), and fine-tuned model weights are available at `https://huggingface.co/datasets/CompassioninMachineLearn` `paw-wikipedia-attribution`.